



MIDWEST SURVEYS
 LOGGING - PERFORATING - CONSULTING SERVICES
 P.O. Box 686, Osawatomie, KS 66064
 913.755.2128

GAMMA RAY / NEUTRON / CCL

File No.

Company: TDR Construction, Inc.

Well: McCoy No. - 1

Field: Paola - Rantoul

County: Franklin State: Kansas

Location: 2805' FSL & 1240' FEL

Other Services: Perforate

Sec. 32 Typ. 15s Rge. 21e

Perforation Datum: GL Elevation: 1043'

Log Measured From: GL K.B. NA D.F. NA G.L. 1043'

Drilling Measured From: GL

Date: 05-23-2014

Run Number: One

Depth Logger: 783.8

Bottom Logged Interval: 782.8

Top Log Interval: 20.0

Fluid Level: Full

Type Fluid: Water

Density / Viscosity: NA

Salinity - PPM Cl: NA

Max. Recorded Temp: NA

Estimated Cement Top: 0.0

Equipment No.: 107 Location: Osawatimie

BORE-HOLE RECORD				CASING RECORD			
RUN	BIT	FROM	TO	SIZE	WGT.	FROM	TO
One	9.875"	0.0	21.0	7.00"	17.0 #	0.0	21.0
Two	5.875"	21.0	890.0	2.875"	6.5 #	0.0	830.3
				Baffle	Set	At	786.0




<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
Town Oilfield Services, Inc.

Database File: mcoy1.db
 Dataset Pathname: pass1
 Presentation Format: gr-n-ccl
 Dataset Creation: Fri May 23 11:15:50 2014 by Log SCH 111116
 Charted by: Depth in Feet scaled 1:240

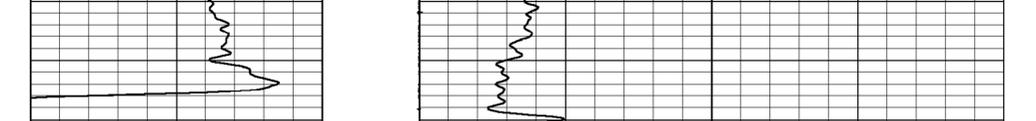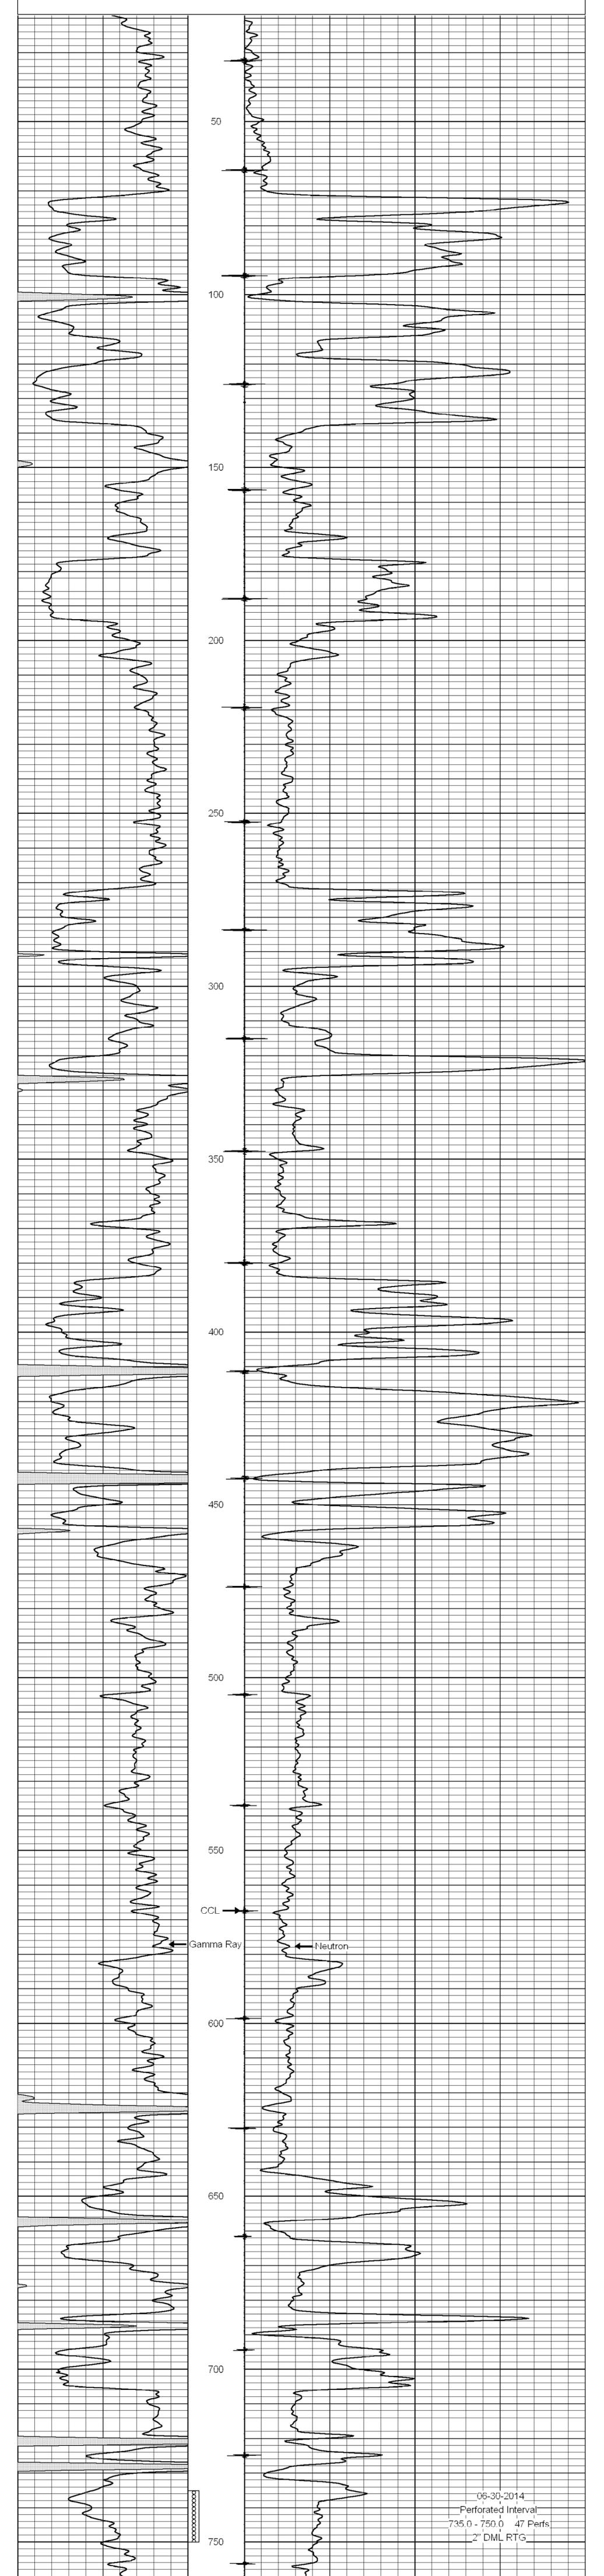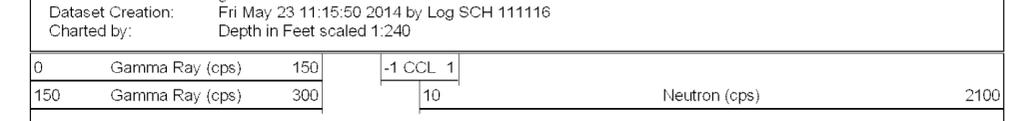

06-30-2014
 Perforated Interval
 735.0 - 750.0 47 Perfs
 2" DML RTG