



COMPENSATED DENSITY / NEUTRON LOG


Company	PHILLIPS EXPLORATION CO. L.C.		
Well	TG MILLER #1-4 SHR		
Field	WILDCAT		
County	TREGO		
State	KANSAS		
Company	PHILLIPS EXPLORATION COMPANY, L.C.		
Well	TG MILLER #1-4 SHR		
Field	WILDCAT		
County	TREGO		
State	KANSAS		
Location:	API # : 15-195-23007-0000		
Permanent Datum	GROUND LEVEL	Elevation	2573
Log Measured From	KELLY BUSHING	5' A.G.L.	
Drilling Measured From	KELLY BUSHING		
SEC 4	TWP 12S	RGE 25W	
DIL/MEL			
Elevation			
K.B. 2578			
D.F. 2576			
G.L. 2573			
Date	9/21/16		
Run Number	ONE		
Depth Driller	4520		
Depth Logger	4520		
Bottom Logged Interval	4496		
Top Log Interval	3400		
Casing Driller	8 5/8"@218'		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,200 PPM	
Density / Viscosity	9.5/60		
pH / Fluid Loss	10.5/7.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.500@95F		
Rmf @ Meas. Temp	.375@95F		
Rmc @ Meas. Temp	.600@95F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.393@121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	7:45 P.M.		
Maximum Recorded Temperature	121F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	PAT DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
COLLYER, KS. & I-70, 1N. TO STOP SIGN, 1/4E., N. INTO

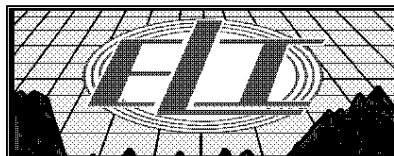



MAIN SECTION


Database File: 30773ddn.db
 Dataset Pathname: pass3.8
 Presentation Format: den_neu
 Dataset Creation: Wed Sep 21 21:16:13 2016 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		


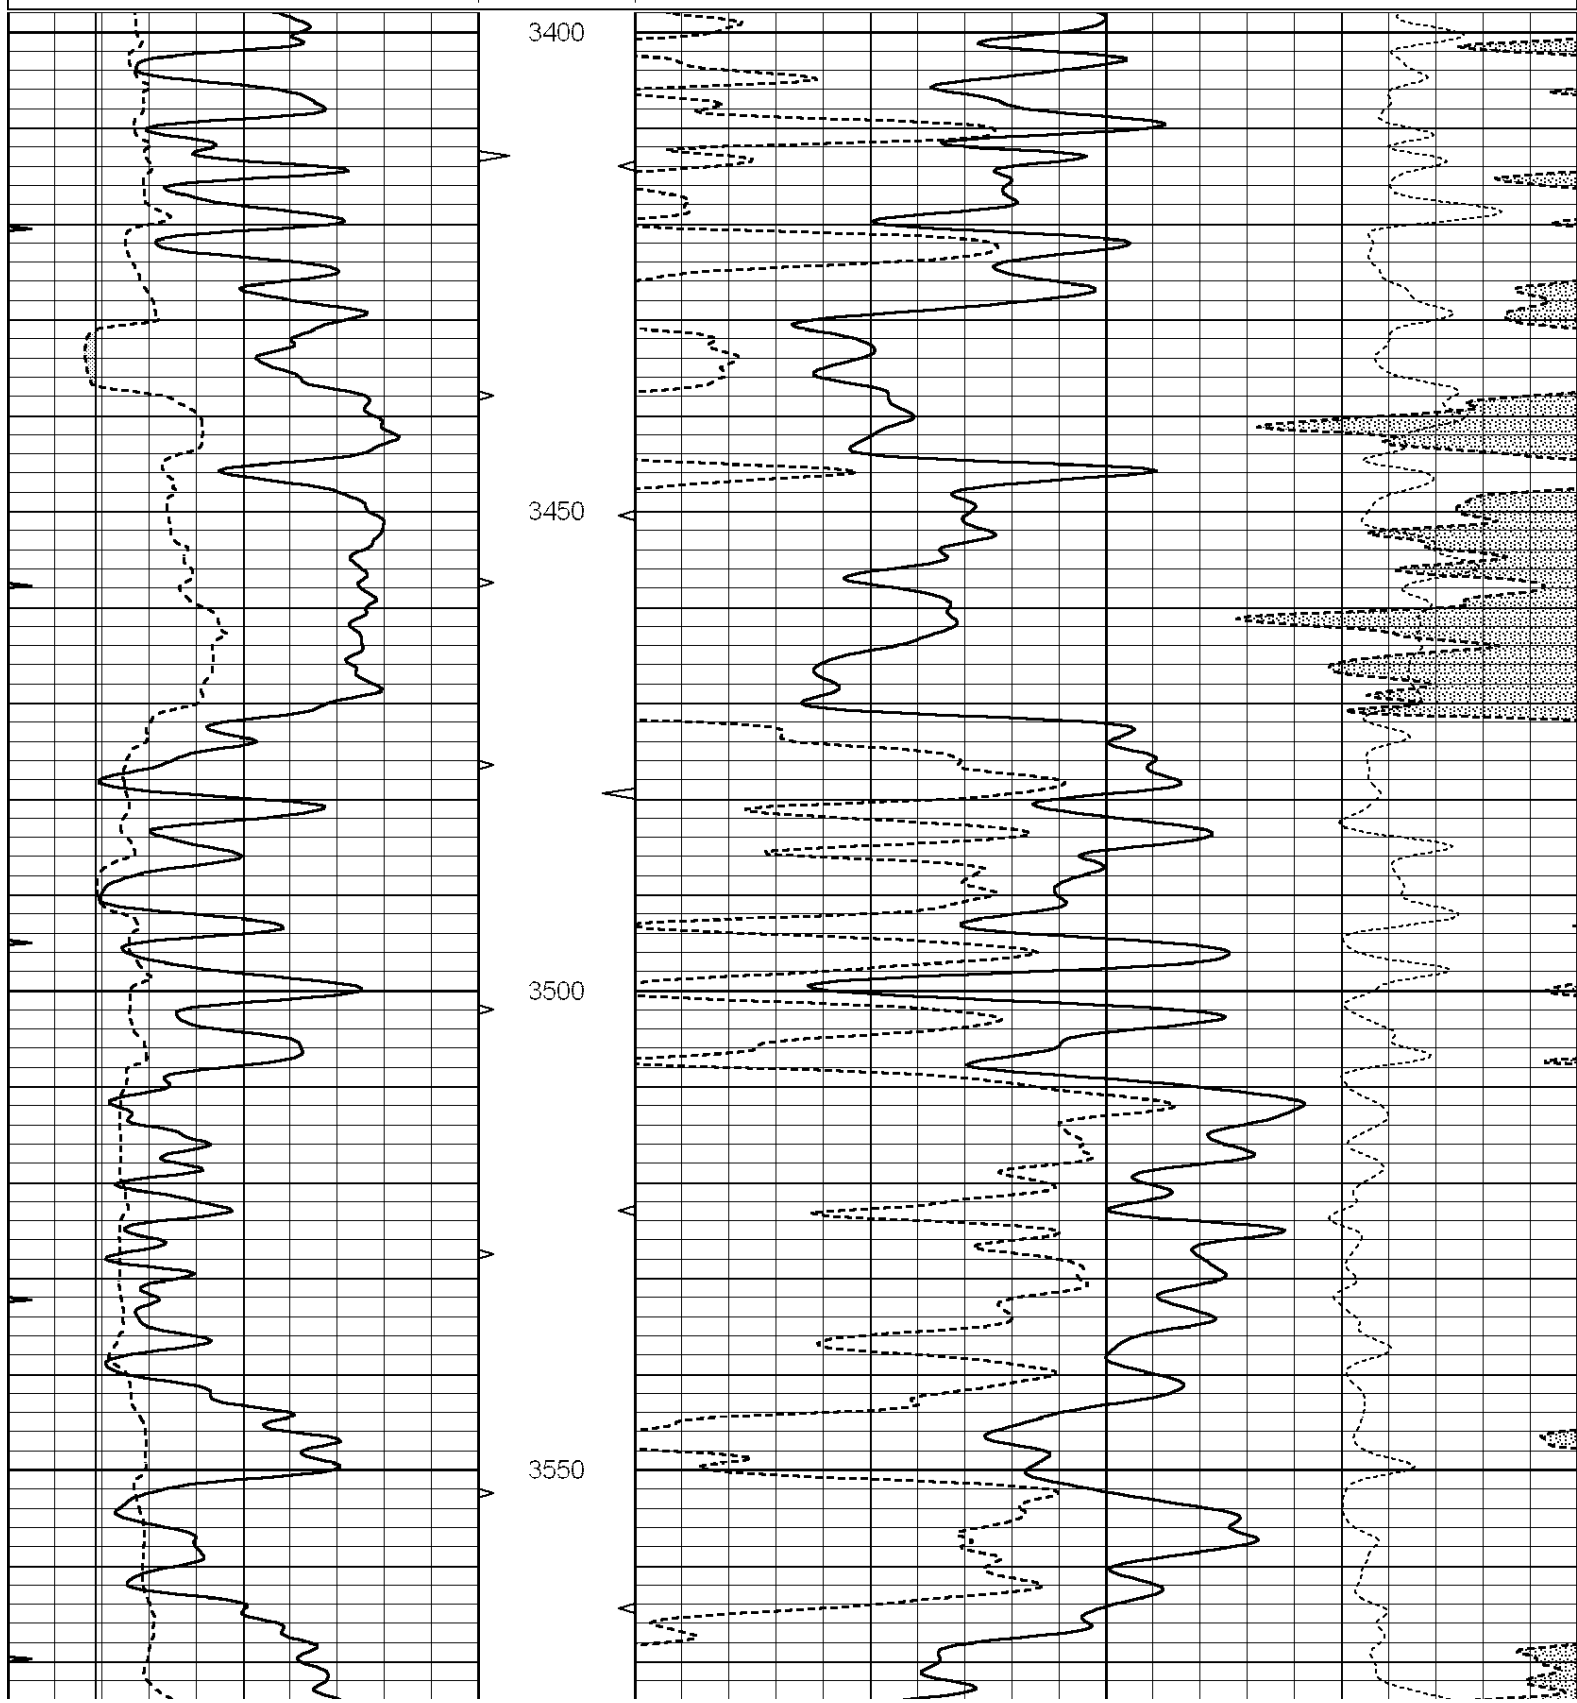


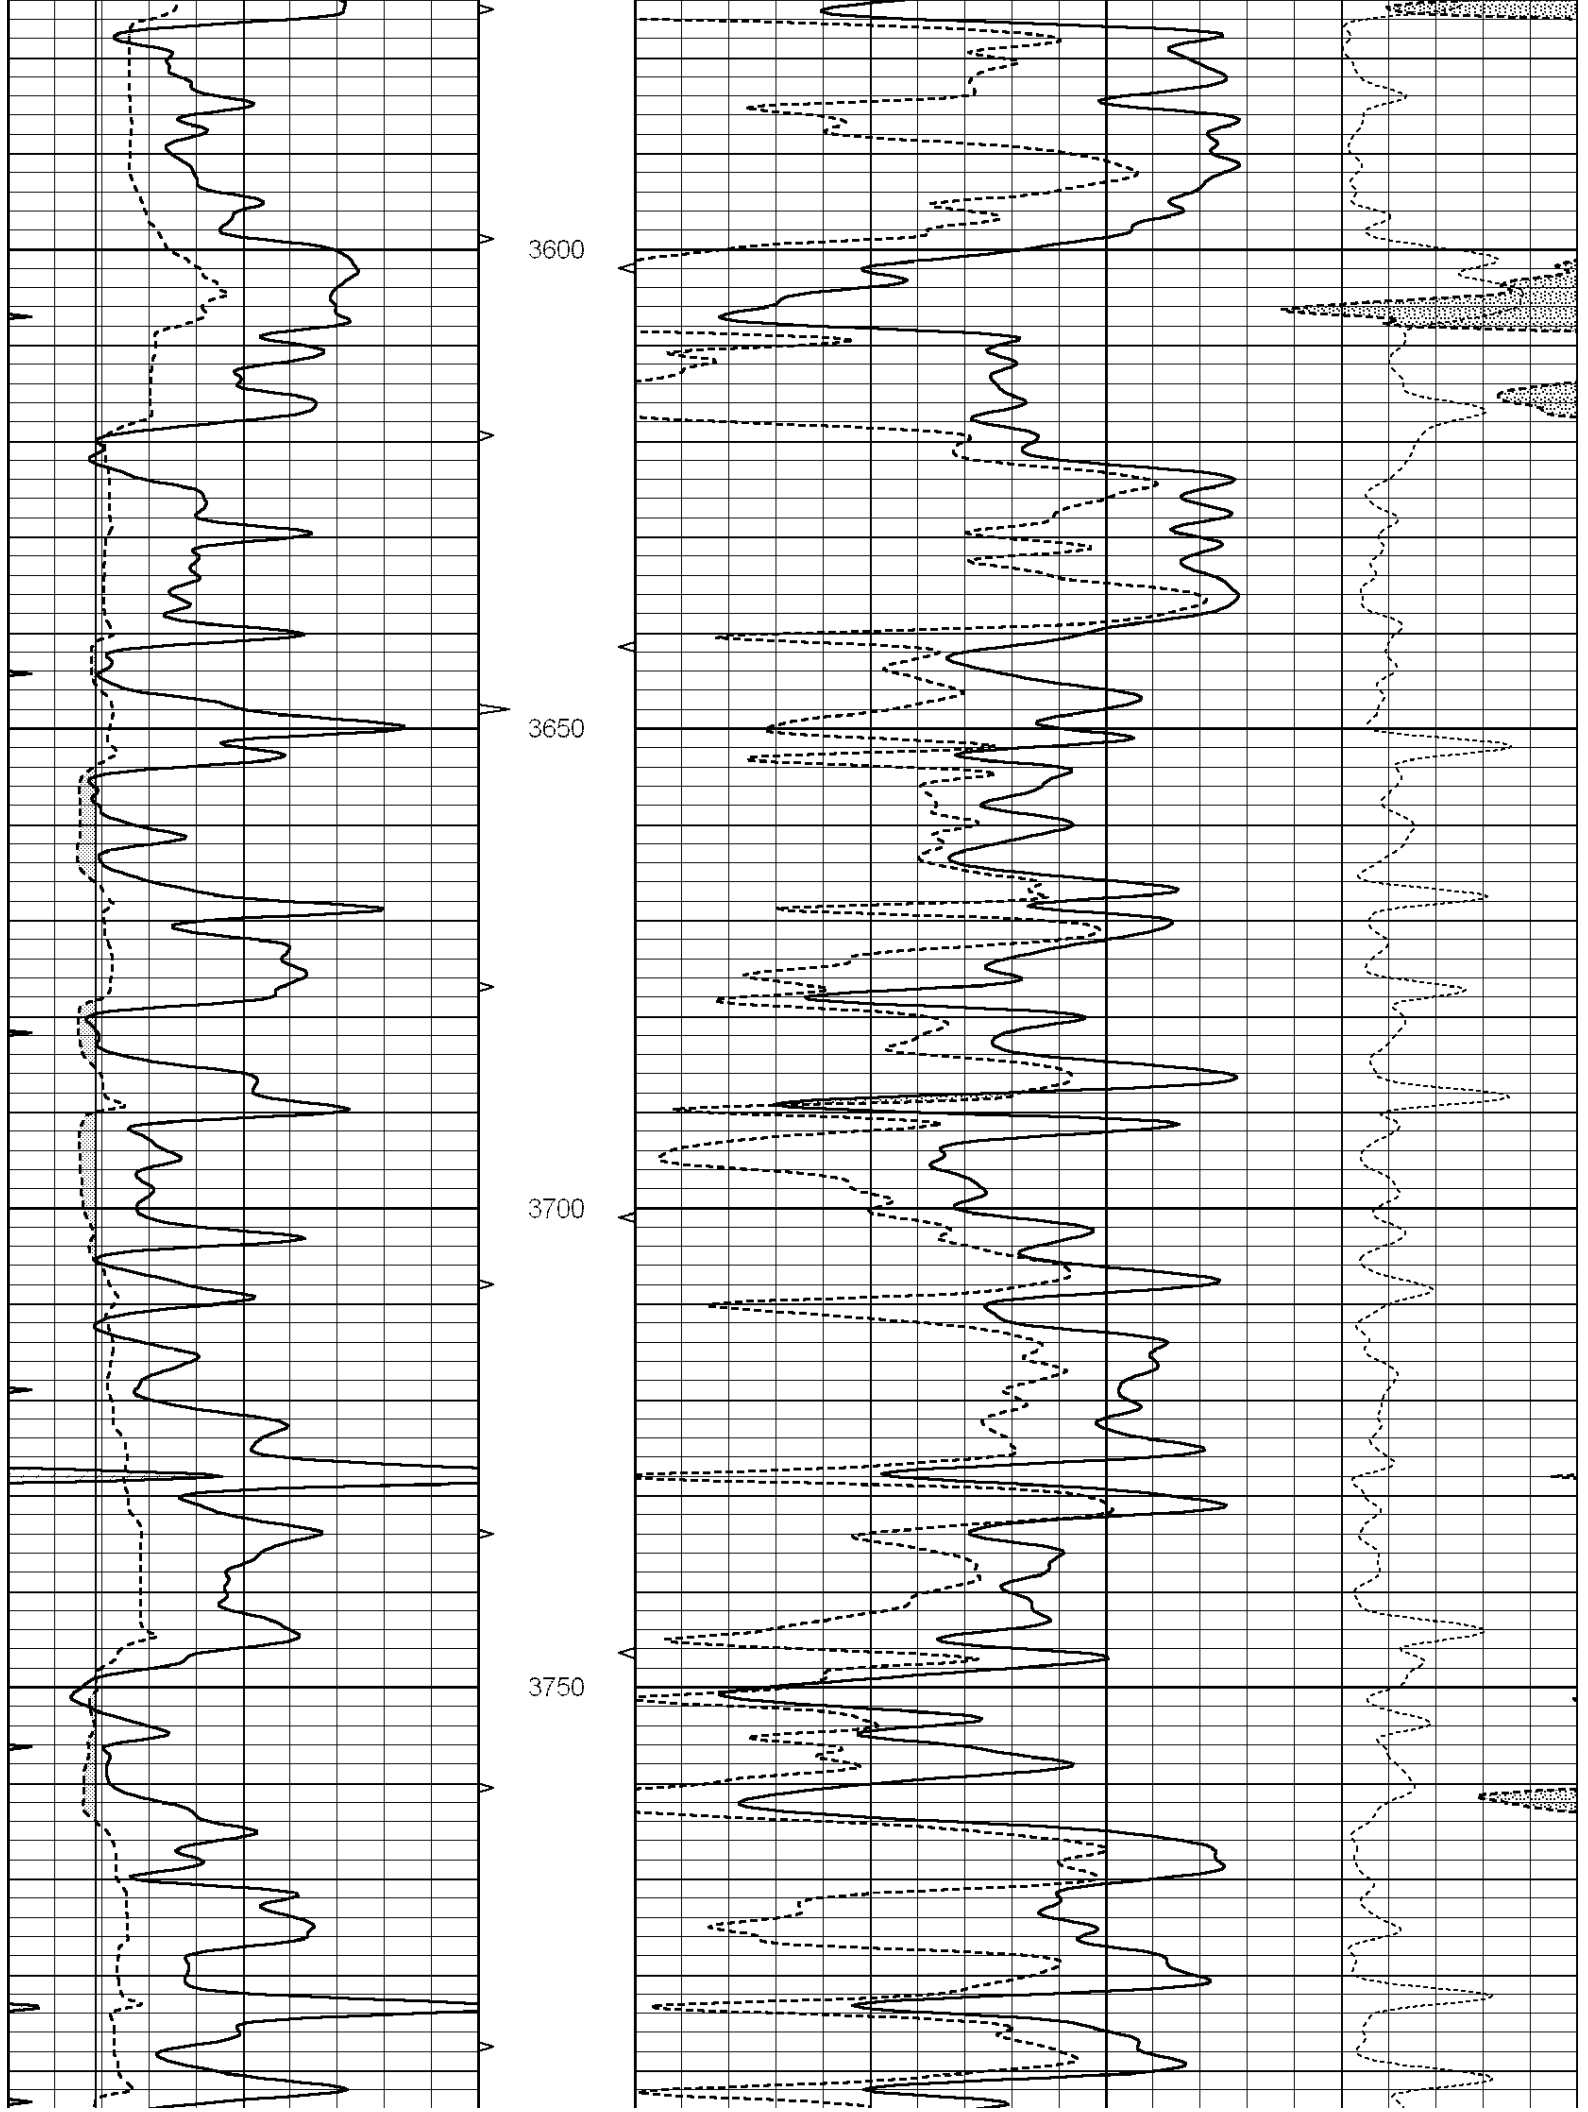

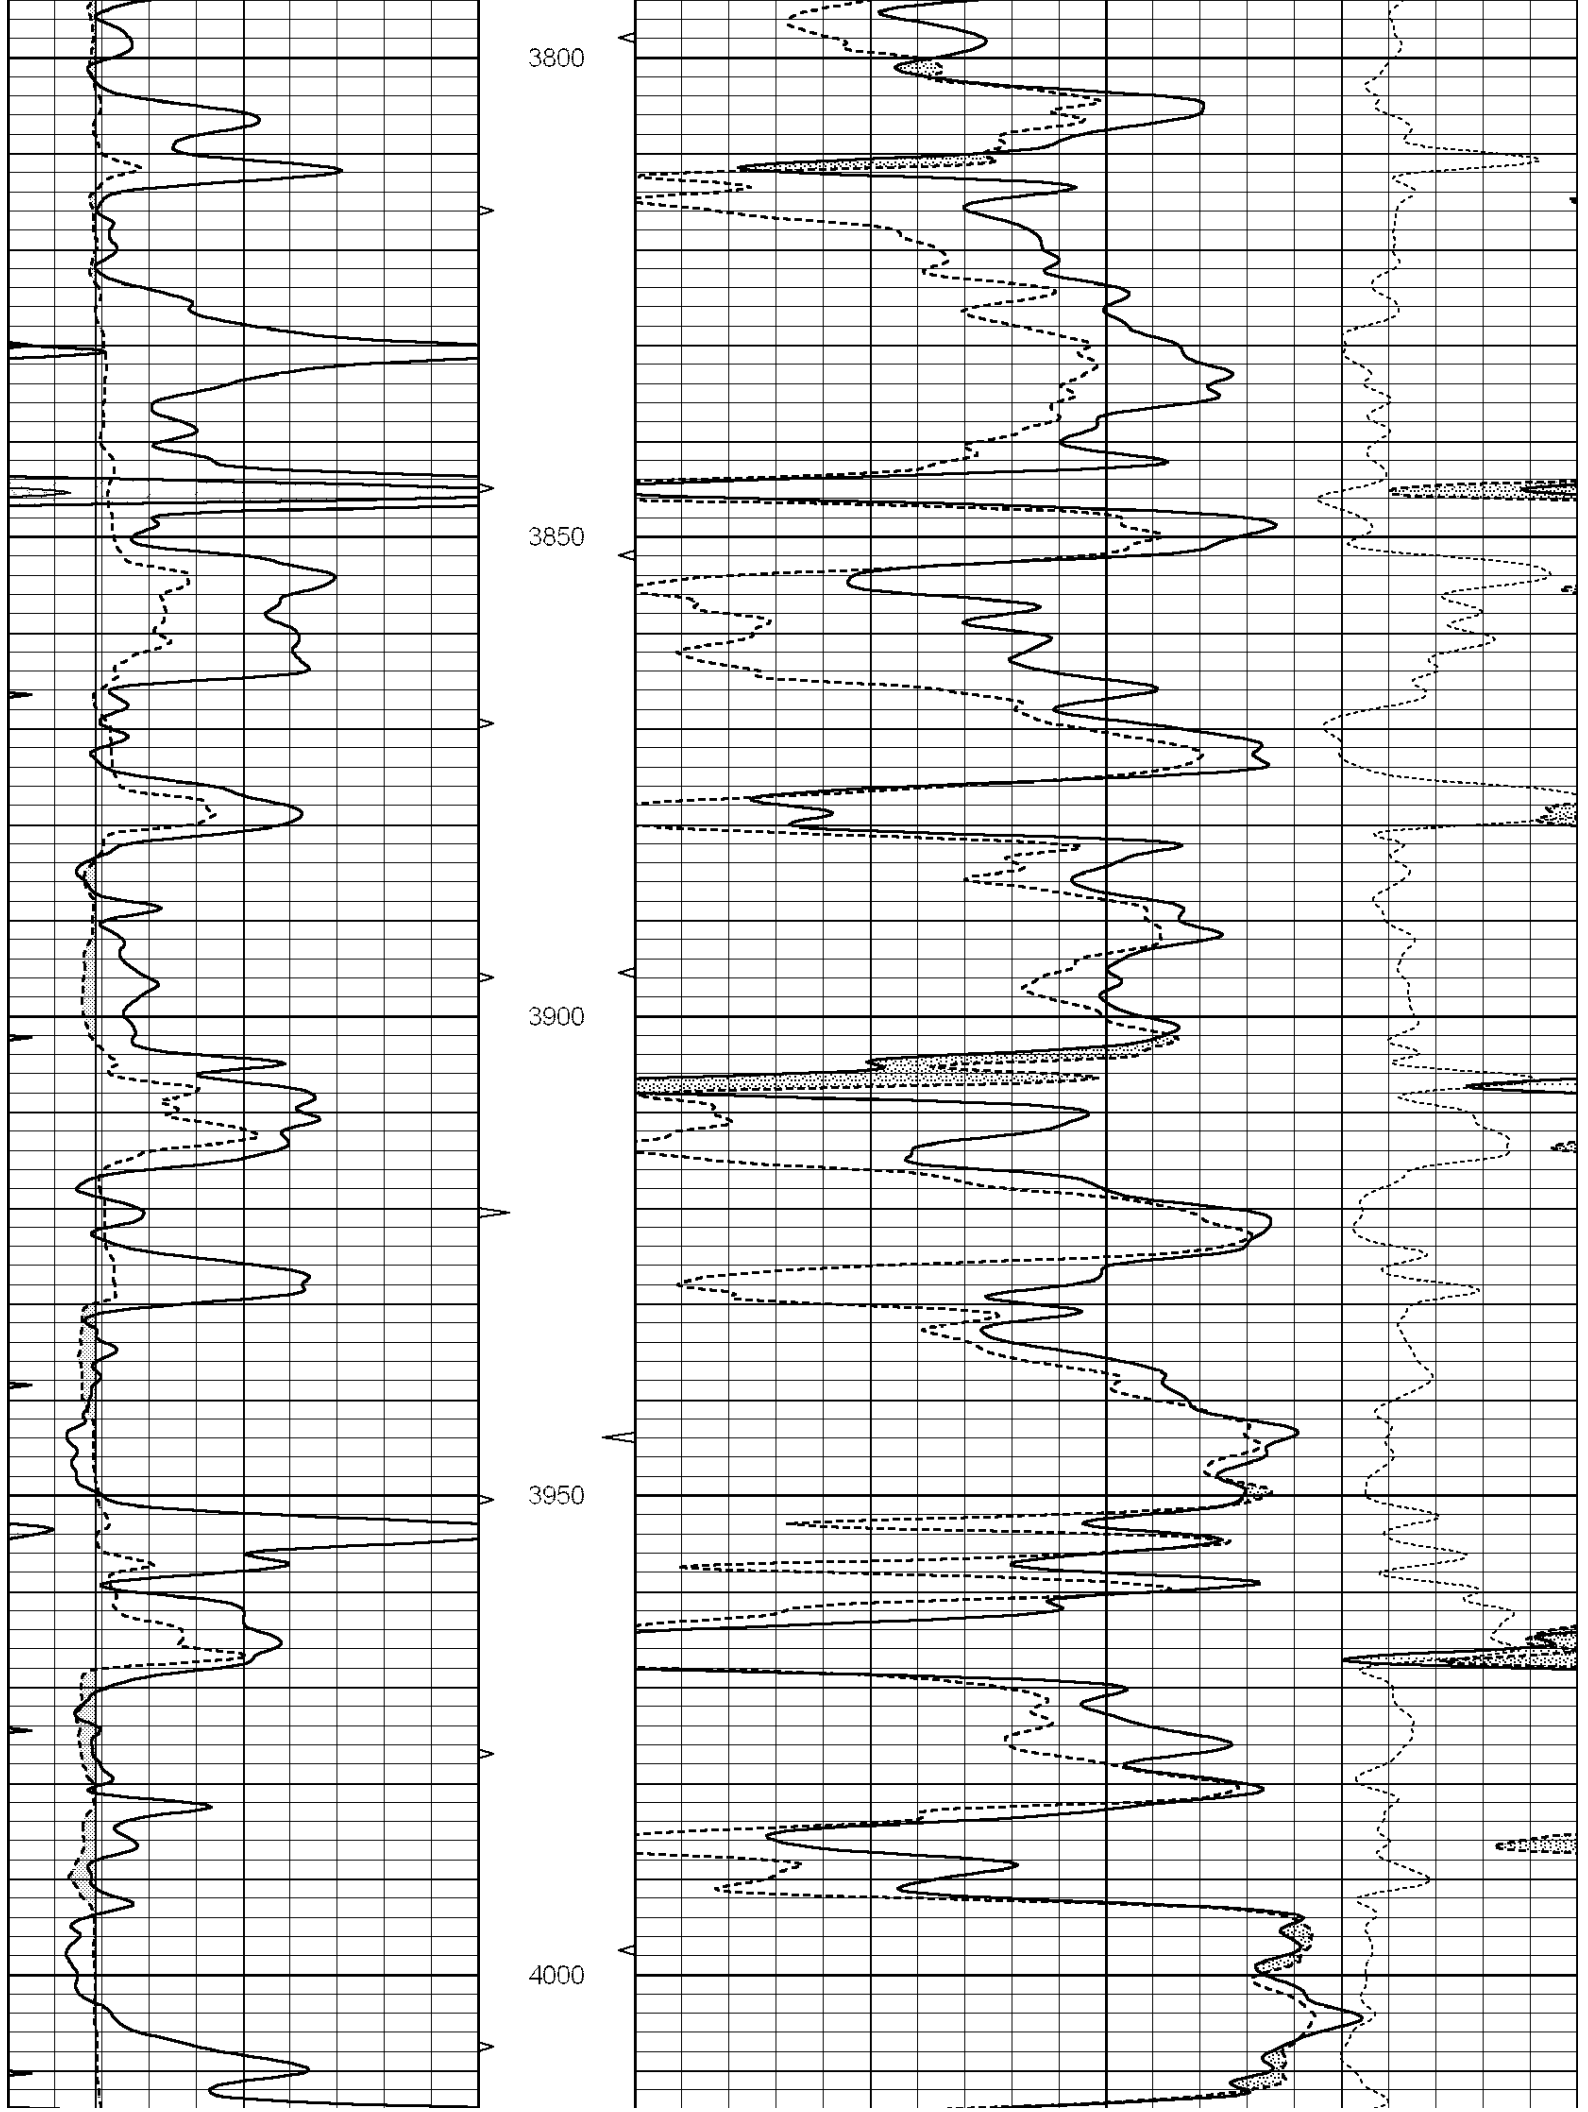

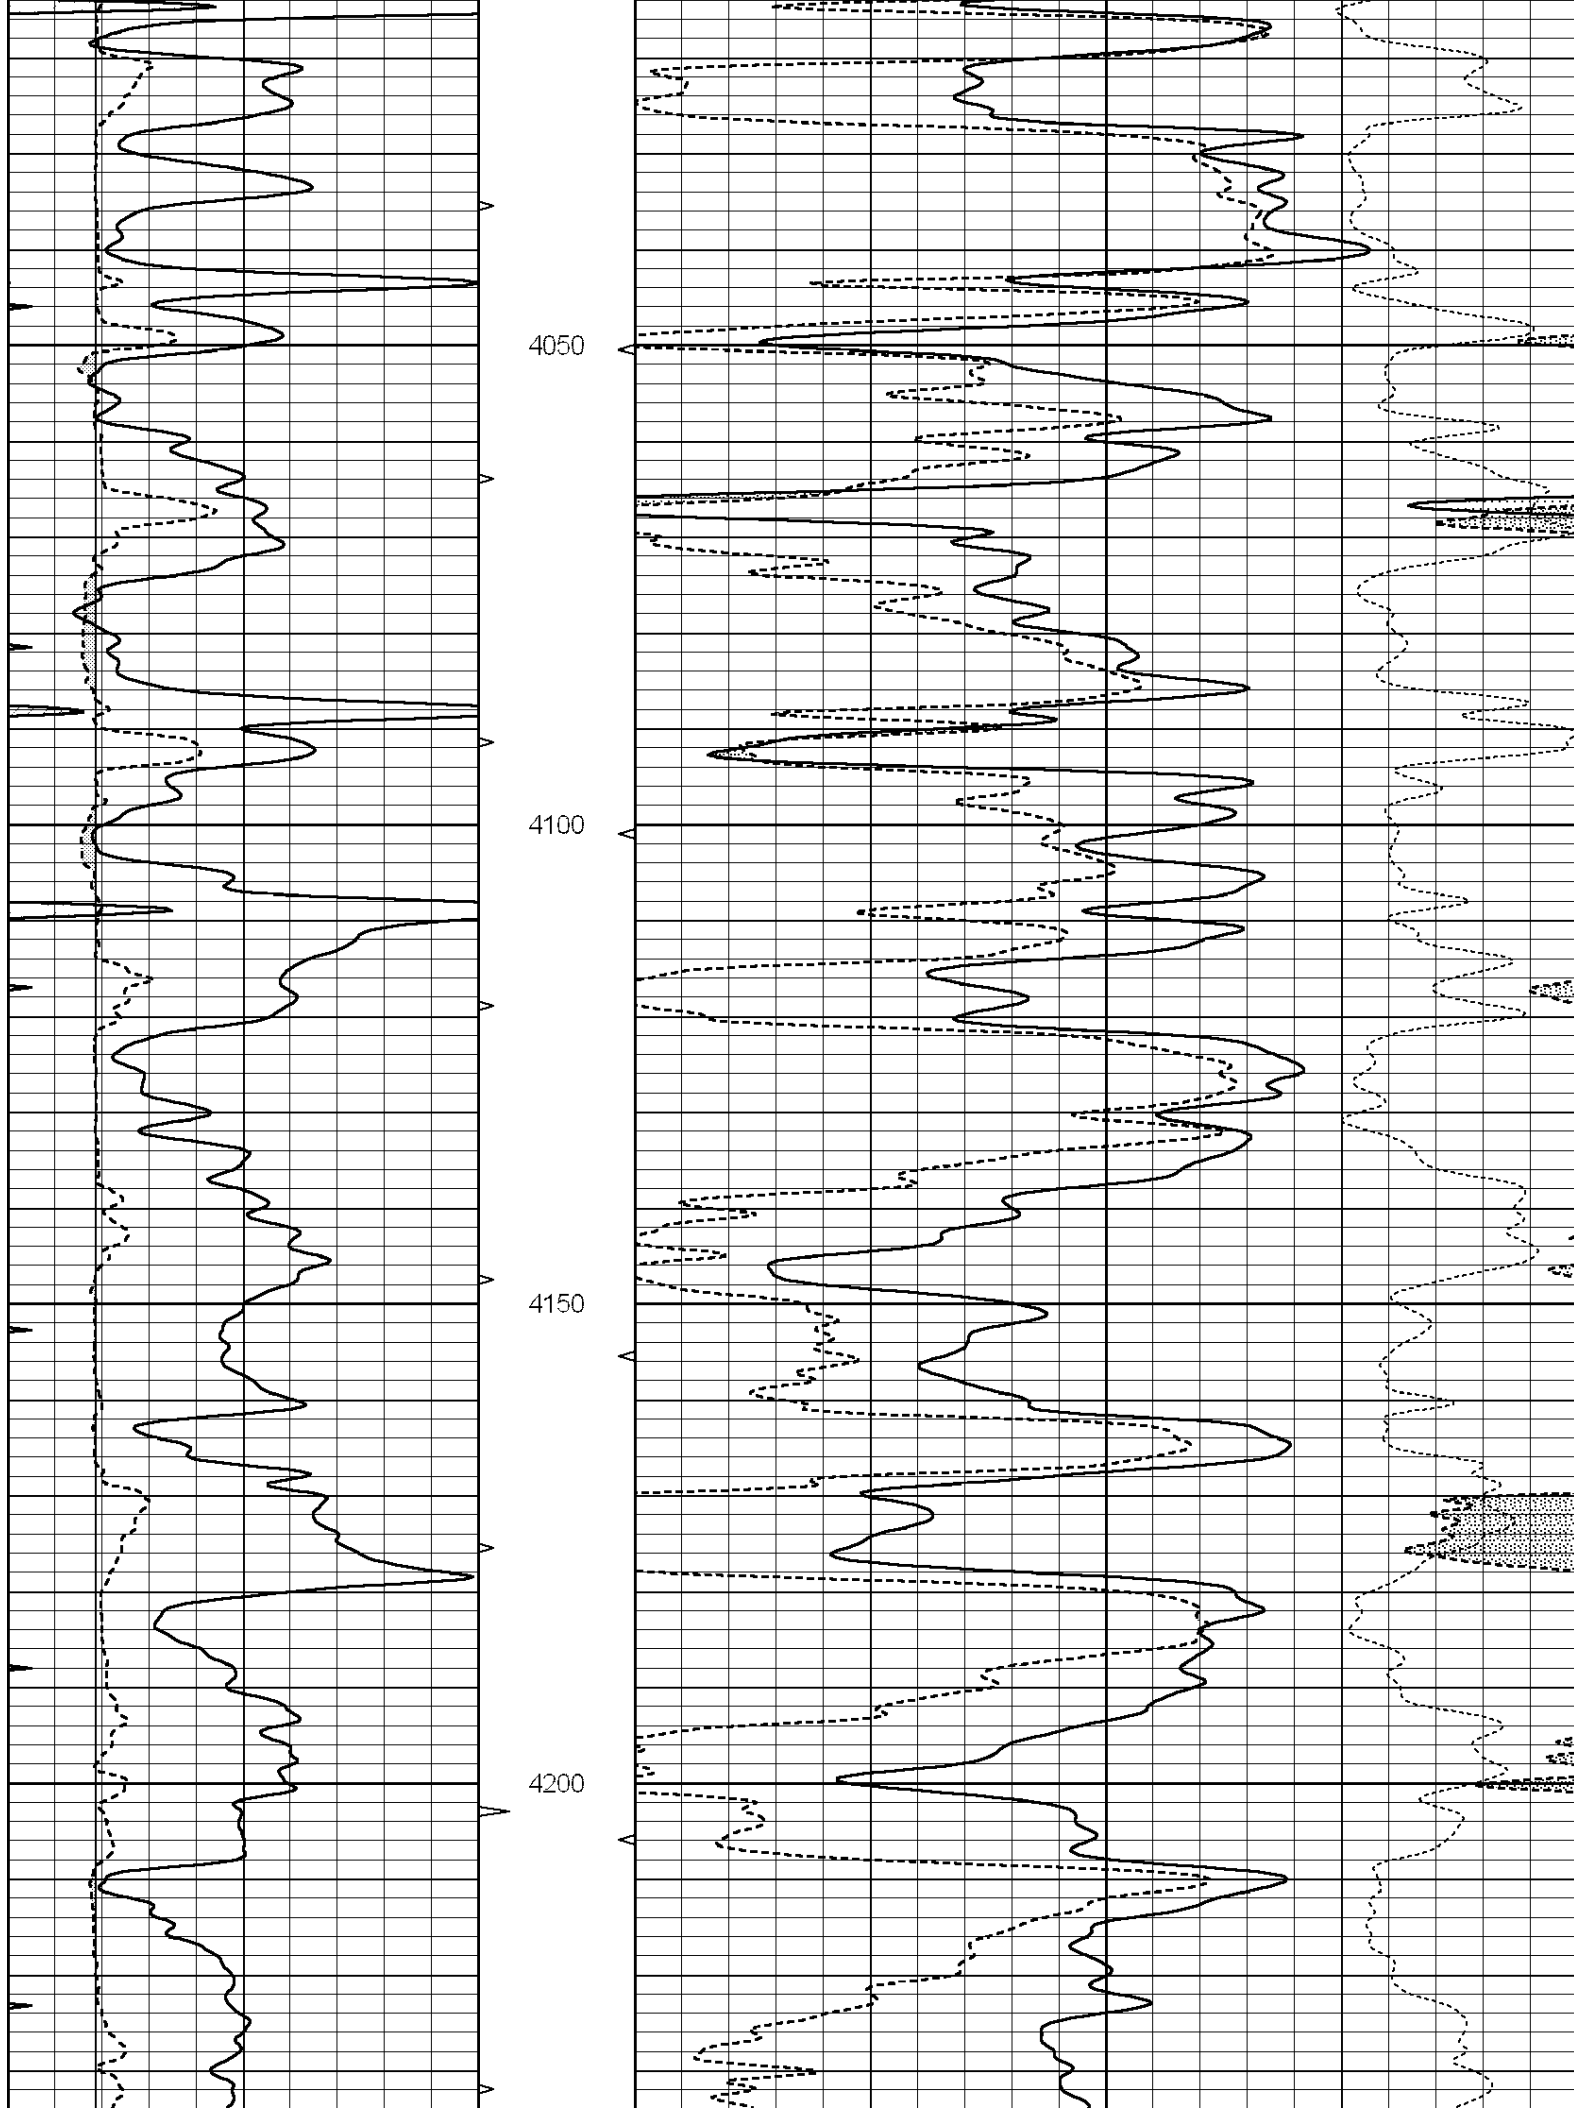

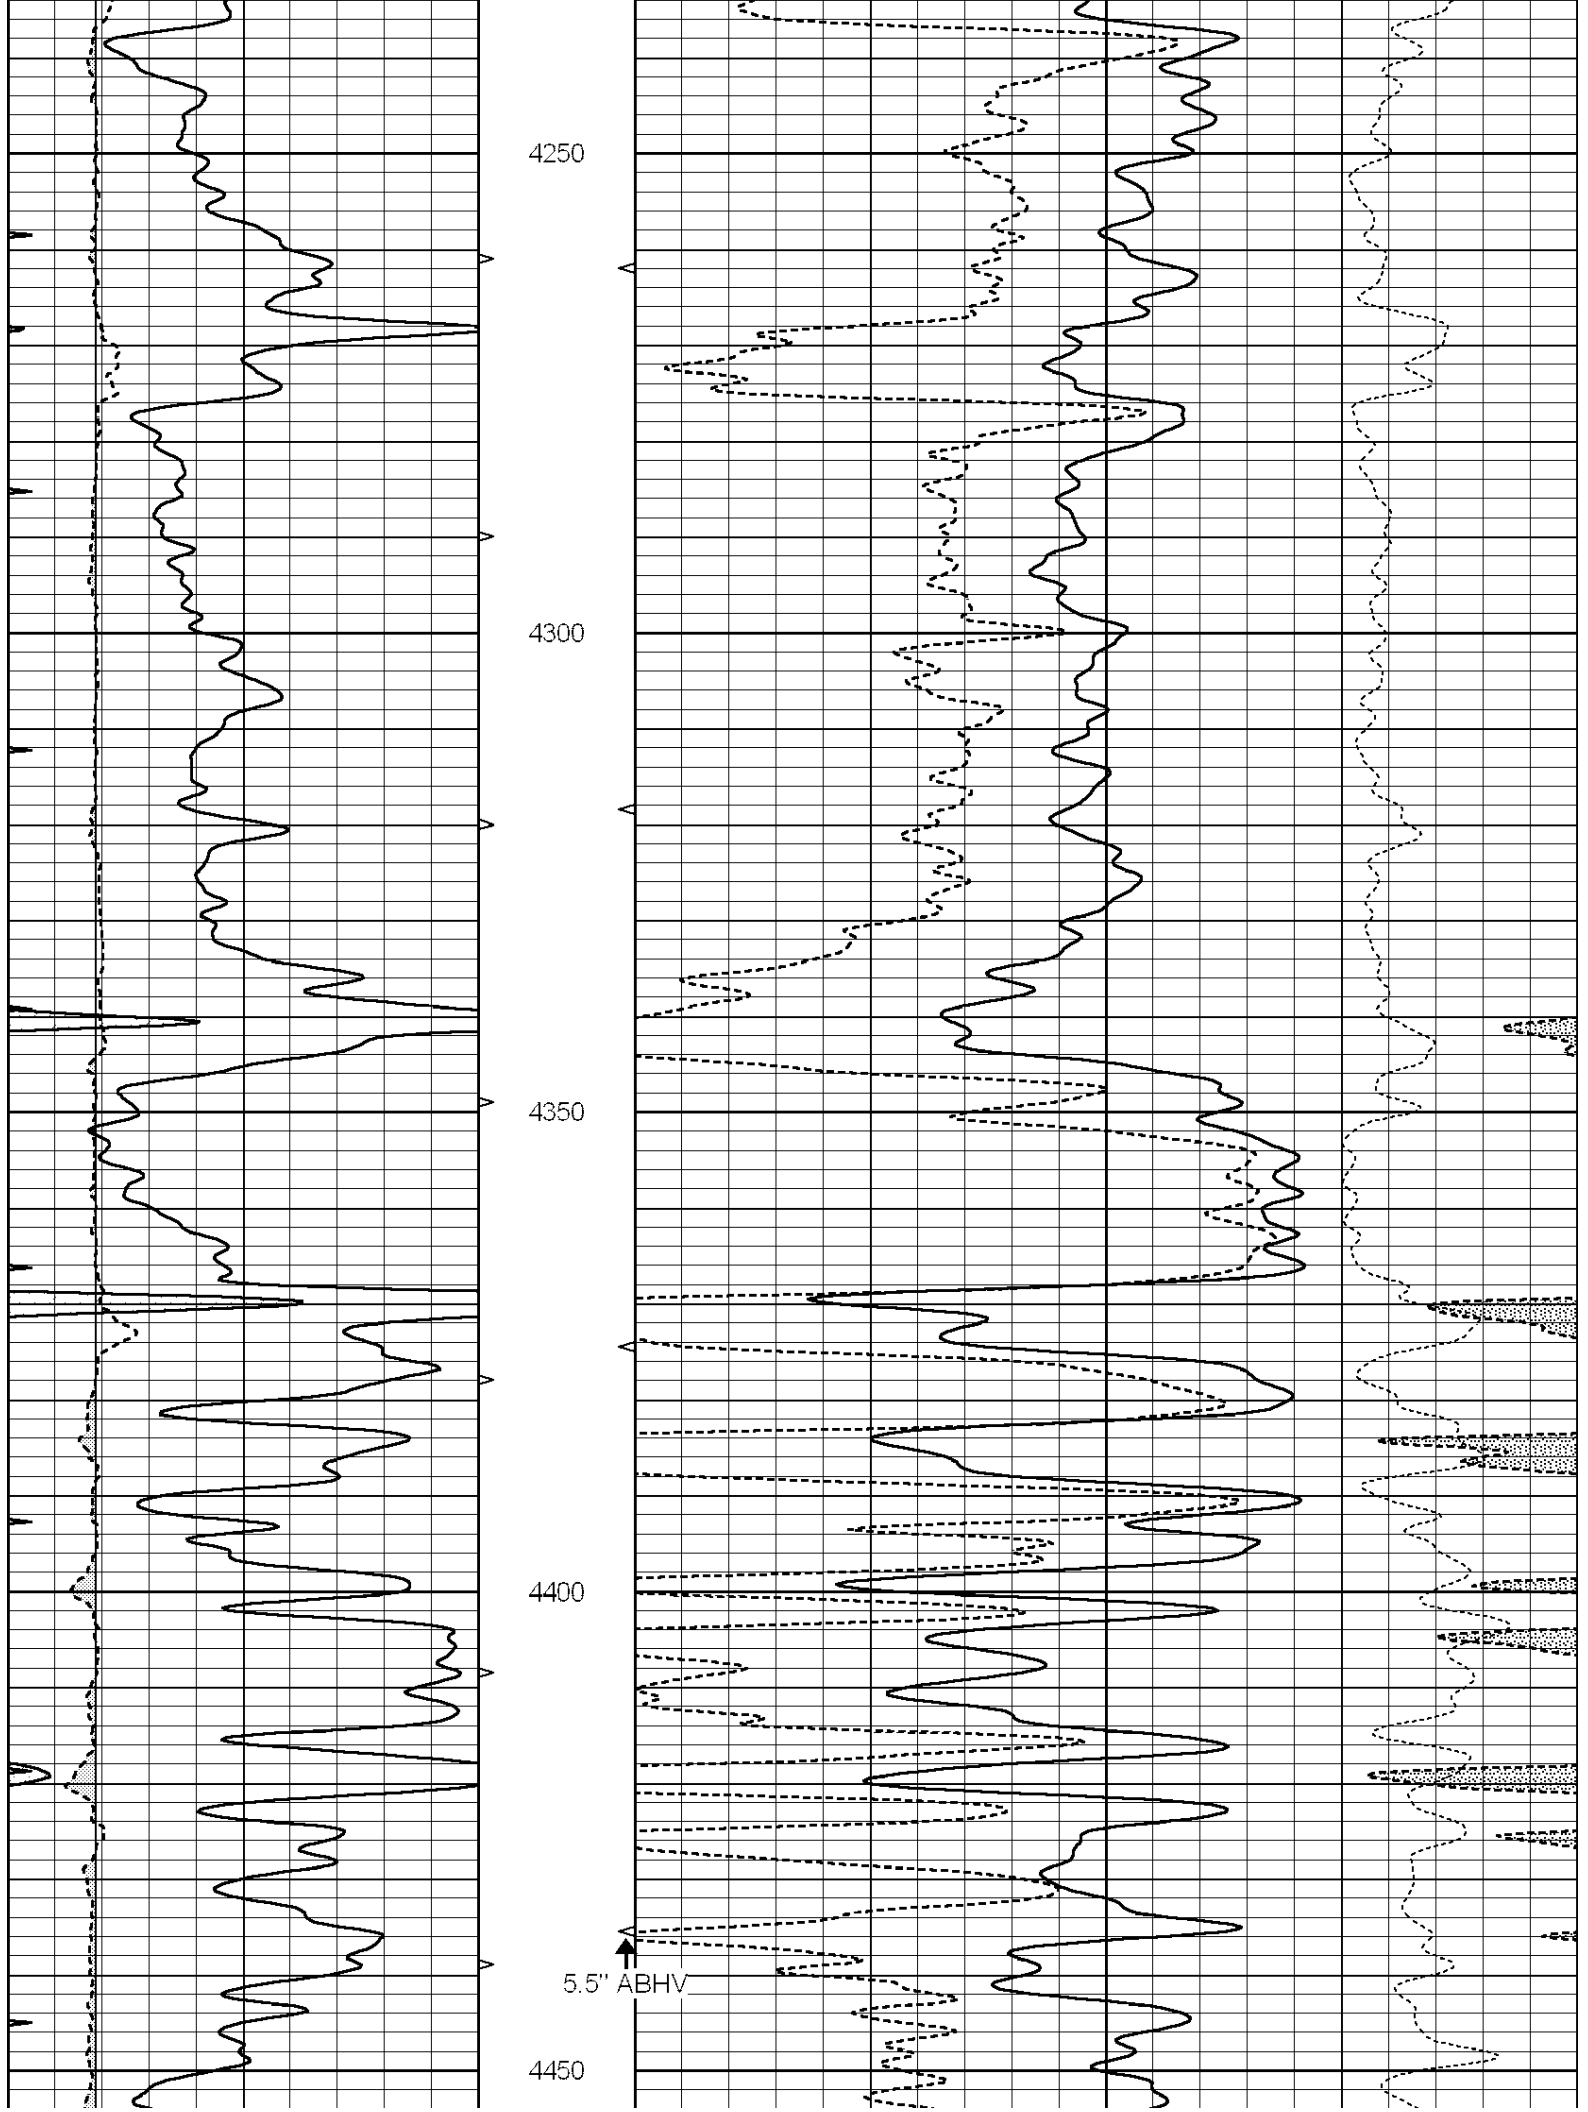

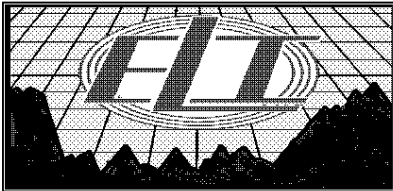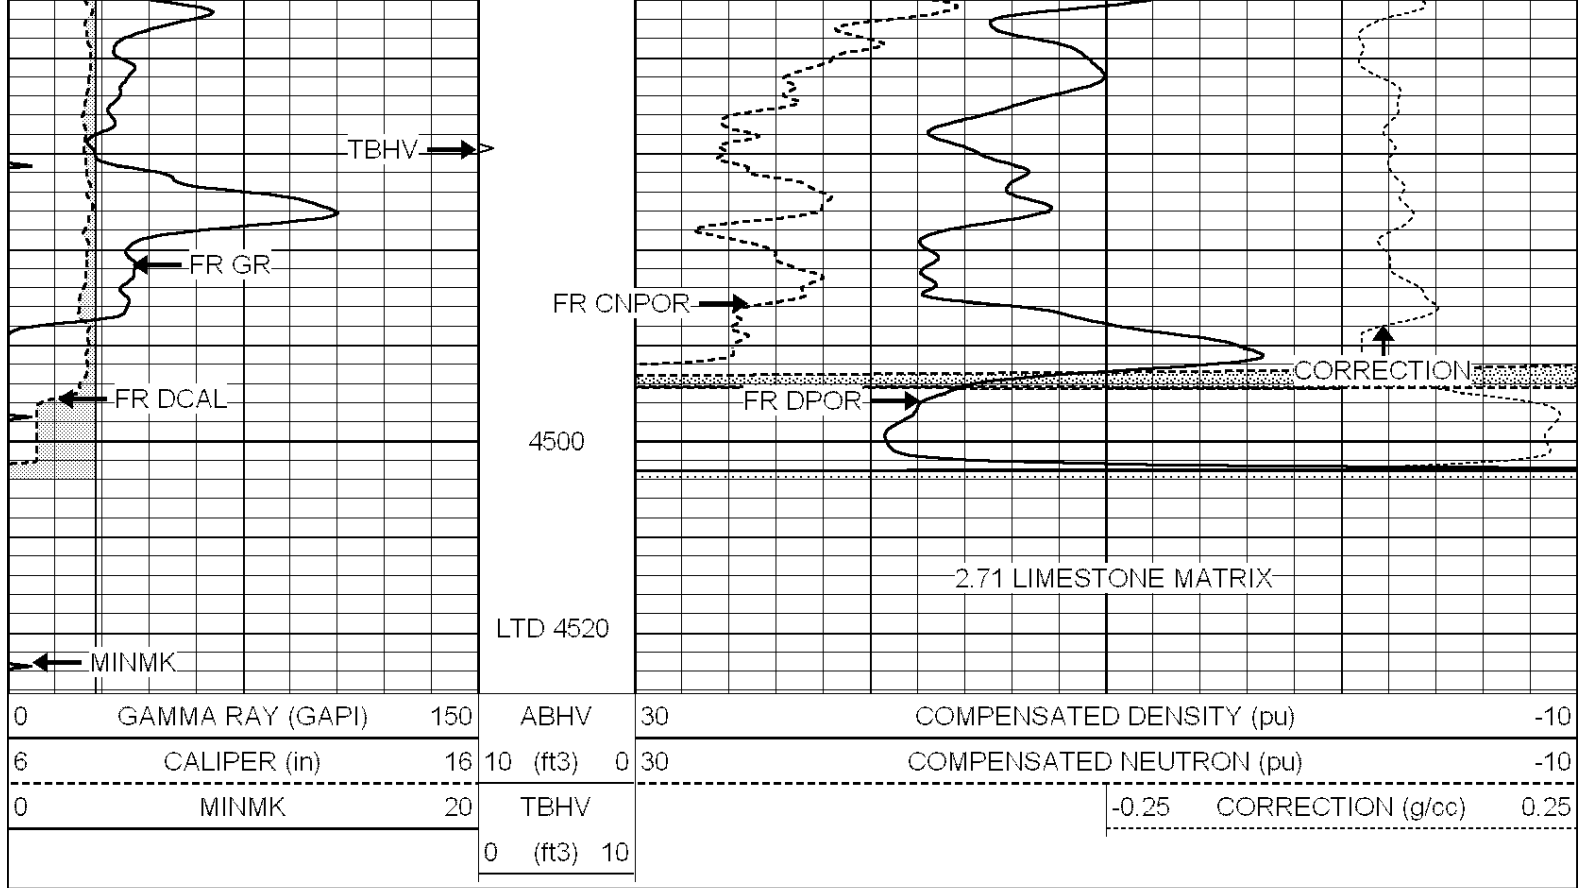



REPEAT SECTION

Database File: 30773ddn.db
 Dataset Pathname: pass2.4
 Presentation Format: den_neu
 Dataset Creation: Wed Sep 21 20:16:40 2016
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)			-10	
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)			-10

0	MINMK	20	TBHV				-0.25	CORRECTION (g/cc)	0.25
			0 (ft3)	10	-----				

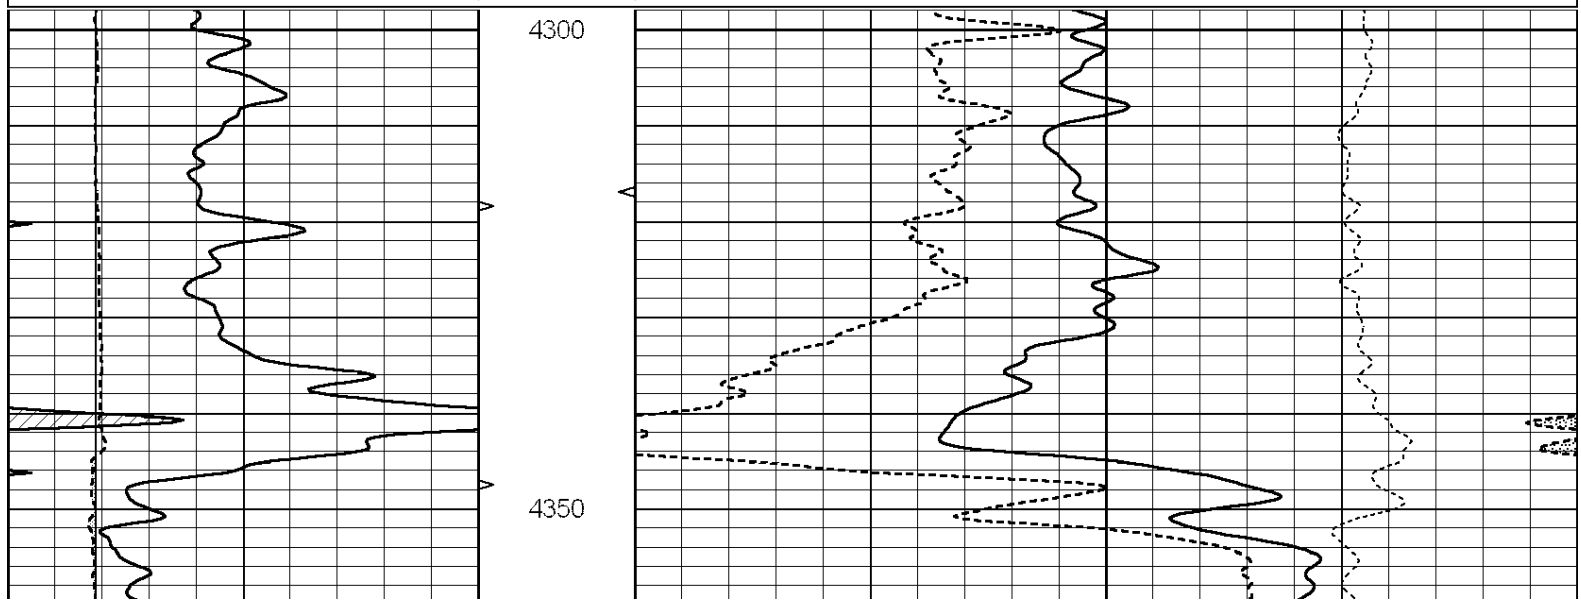

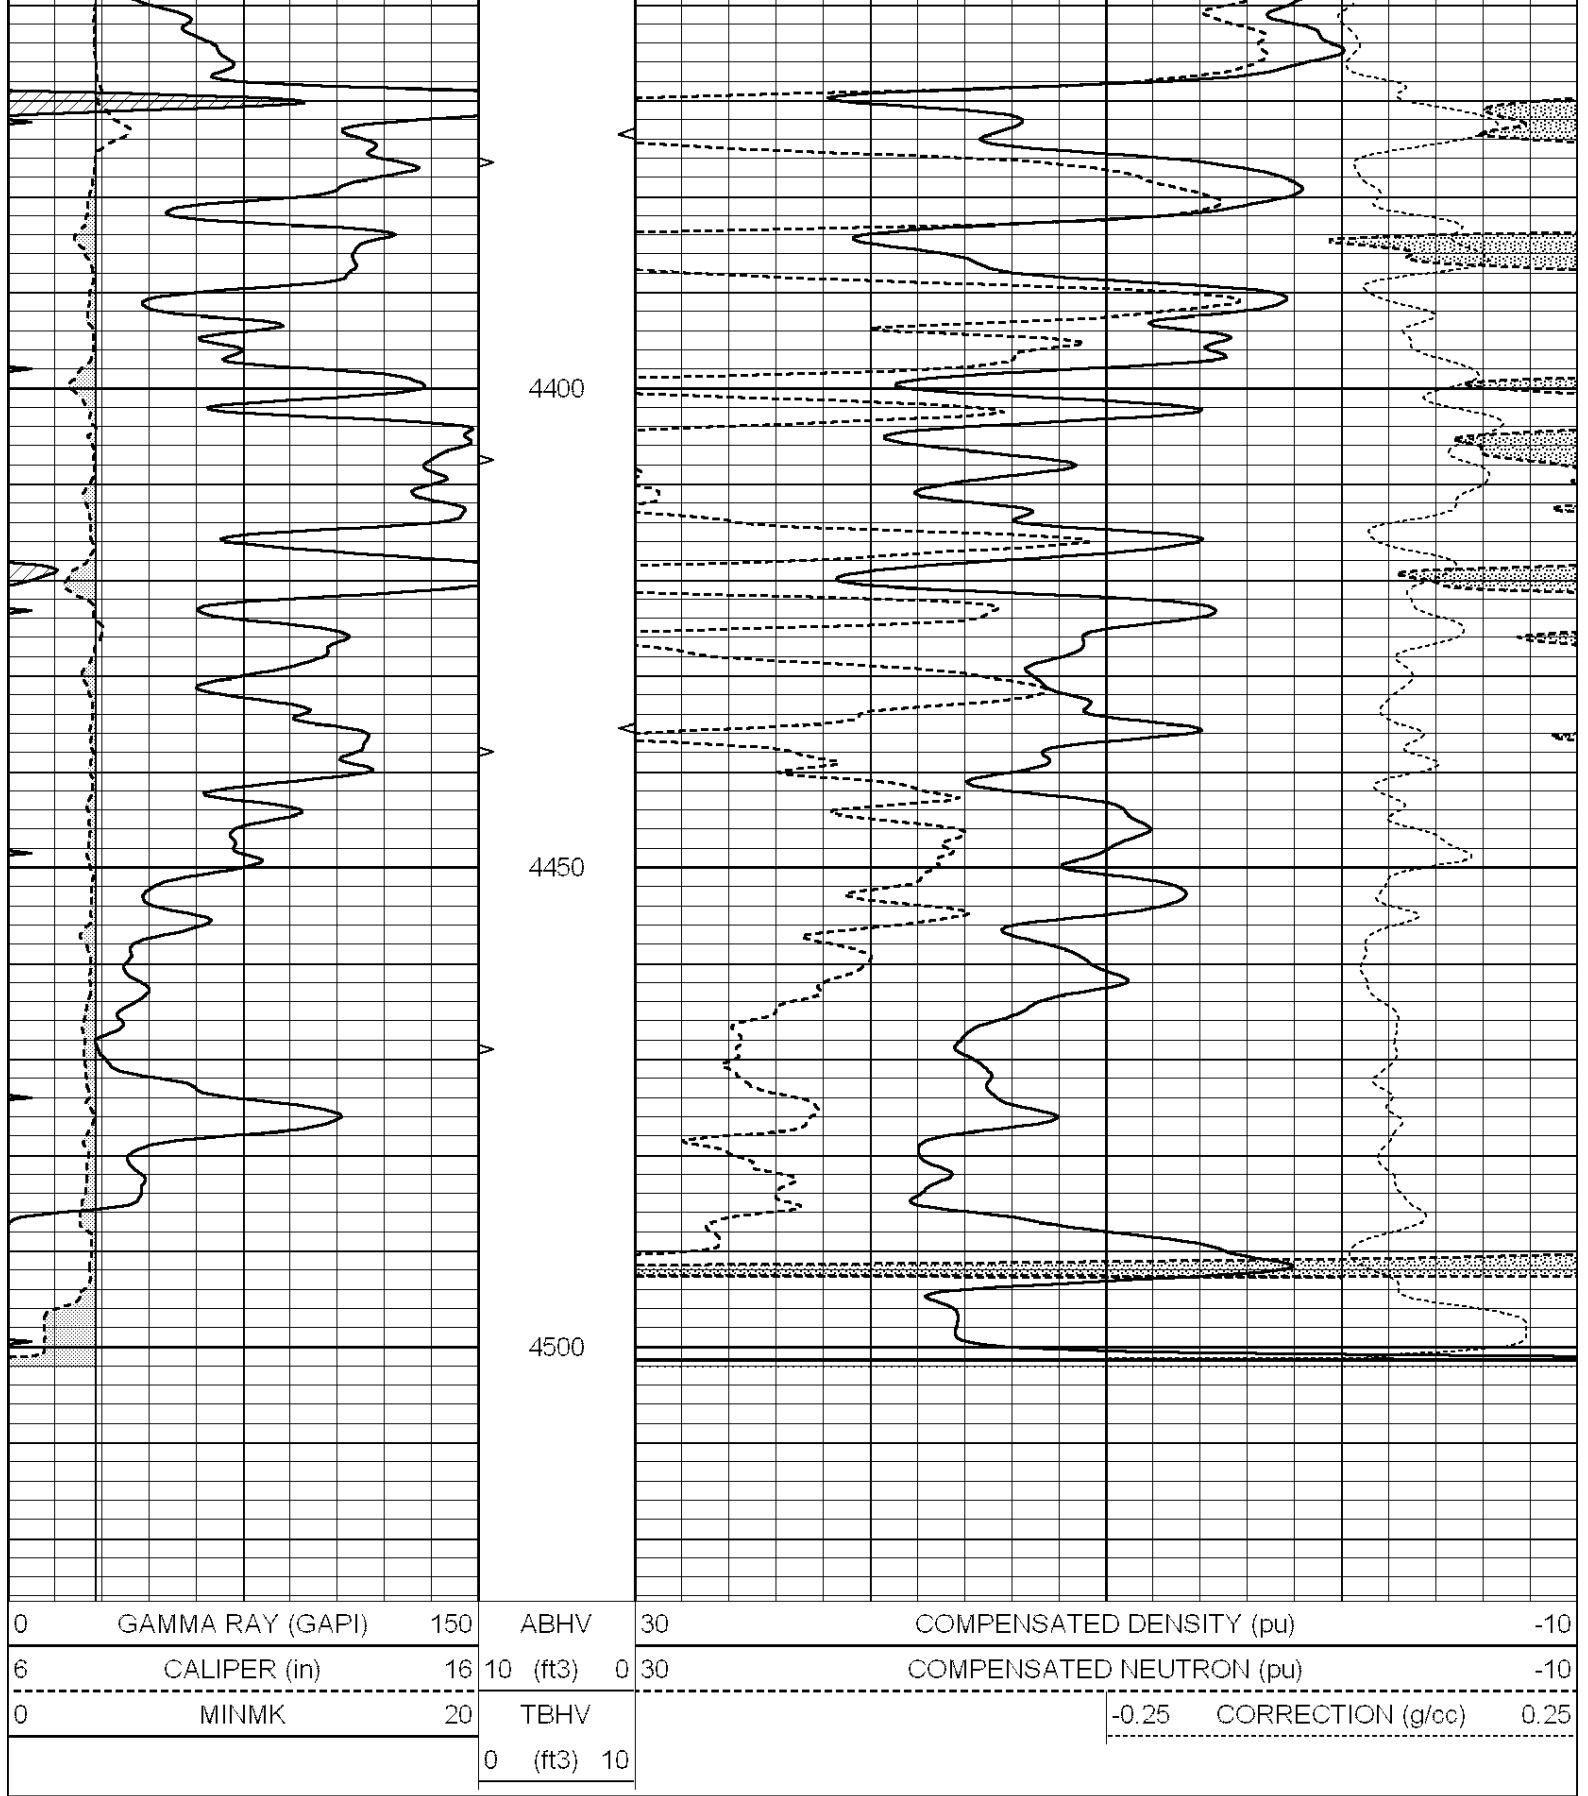

Calibration Report

Database File: 30773ddn.db
Dataset Pathname: pass3.8
Dataset Creation: Wed Sep 21 21:16:13 2016 by Calc SOC 120430

Dual Induction Calibration Report

Serial-Model:

PROBE7-DILG

Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	625.000	-2.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-43.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 003N				Model: PRB				

Master Calibration					Performed Mon Mar 14 08:48:13 2016			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	1751.3	11741.0	3857.3	12907.8				cps
Window 2	1589.4	9536.2	3267.6	10282.0				cps
Window 3	1413.4	6466.1	2463.2	6828.7				cps
Window 4	399.5	407.1	405.1	406.5				cps
Long Space	0.0	7946.7	1678.1	8692.6				cps
Short Space	2.2	3366.2	2134.1	3410.2				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 43.7	Rib Slope	: 0.954	Density/Spine Ratio			: 0.543	
Spine Angle	: 73.7	Spine Slope	: 3.412	Spine Intercept			: -18.7	

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
After Survey Verification				
Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
Compensated Neutron Calibration Report				
Serial Number:		070808		
Tool Model:		Probe		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				
Serial Number:	070558			
Tool Model:	OPEN_GR			
Performed:	Mon Aug 22 01:00:15 2016			
Calibrator Value:	1.0	GAPI		
Background Reading:	0.0	cps		
Calibrator Reading:	1.0	cps		
Sensitivity:	0.2800	GAPI/cps		