



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	VINCENT OIL CORP.	Company	VINCENT OIL CORPORATION
Well	KEOUGH #2-34	Well	KEOUGH #2-34
Field	MULBERRY CREEK	Field	MULBERRY CREEK
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-20944-0000	Other Services CDL/CNL/PE DIL/SON	
Permanent Datum	GROUND LEVEL	Elevation	2505
Log Measured From	KELLY BUSHING 10' A.G.L.		
Drilling Measured From	KELLY BUSHING		
	SEC 34 TWP 28S RGE 23W		
Date	10/27/14		
Run Number	TWO		
Depth Driller	5320		
Depth Logger	5321		
Bottom Logged Interval	5303		
Top Log Interval	4150		
Casing Driller	8 5/8"@644'		
Casing Logger	644'		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,800 PPM	
Density / Viscosity	9.1/52		
pH / Fluid Loss	10.5/9.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.50@80F		
Rmf @ Meas. Temp	0.38@80F		
Rmc @ Meas. Temp	0.60@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	0.31@128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	128F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF GRONEMEG		
Witnessed By	TOM DUNGEON		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments


THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
FORD, KS - SOUTH TO WILBORN RD - 5 MILES WEST TO RD 121
1 MILE NORTH - EAST INTO

Database File: 25902pe.db
Dataset Pathname: pass6.1
Presentation Format: _micro
Dataset Creation: Mon Oct 27 13:22:17 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

Charted by: _____		Depth in Feet scaled 1:2.15				
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

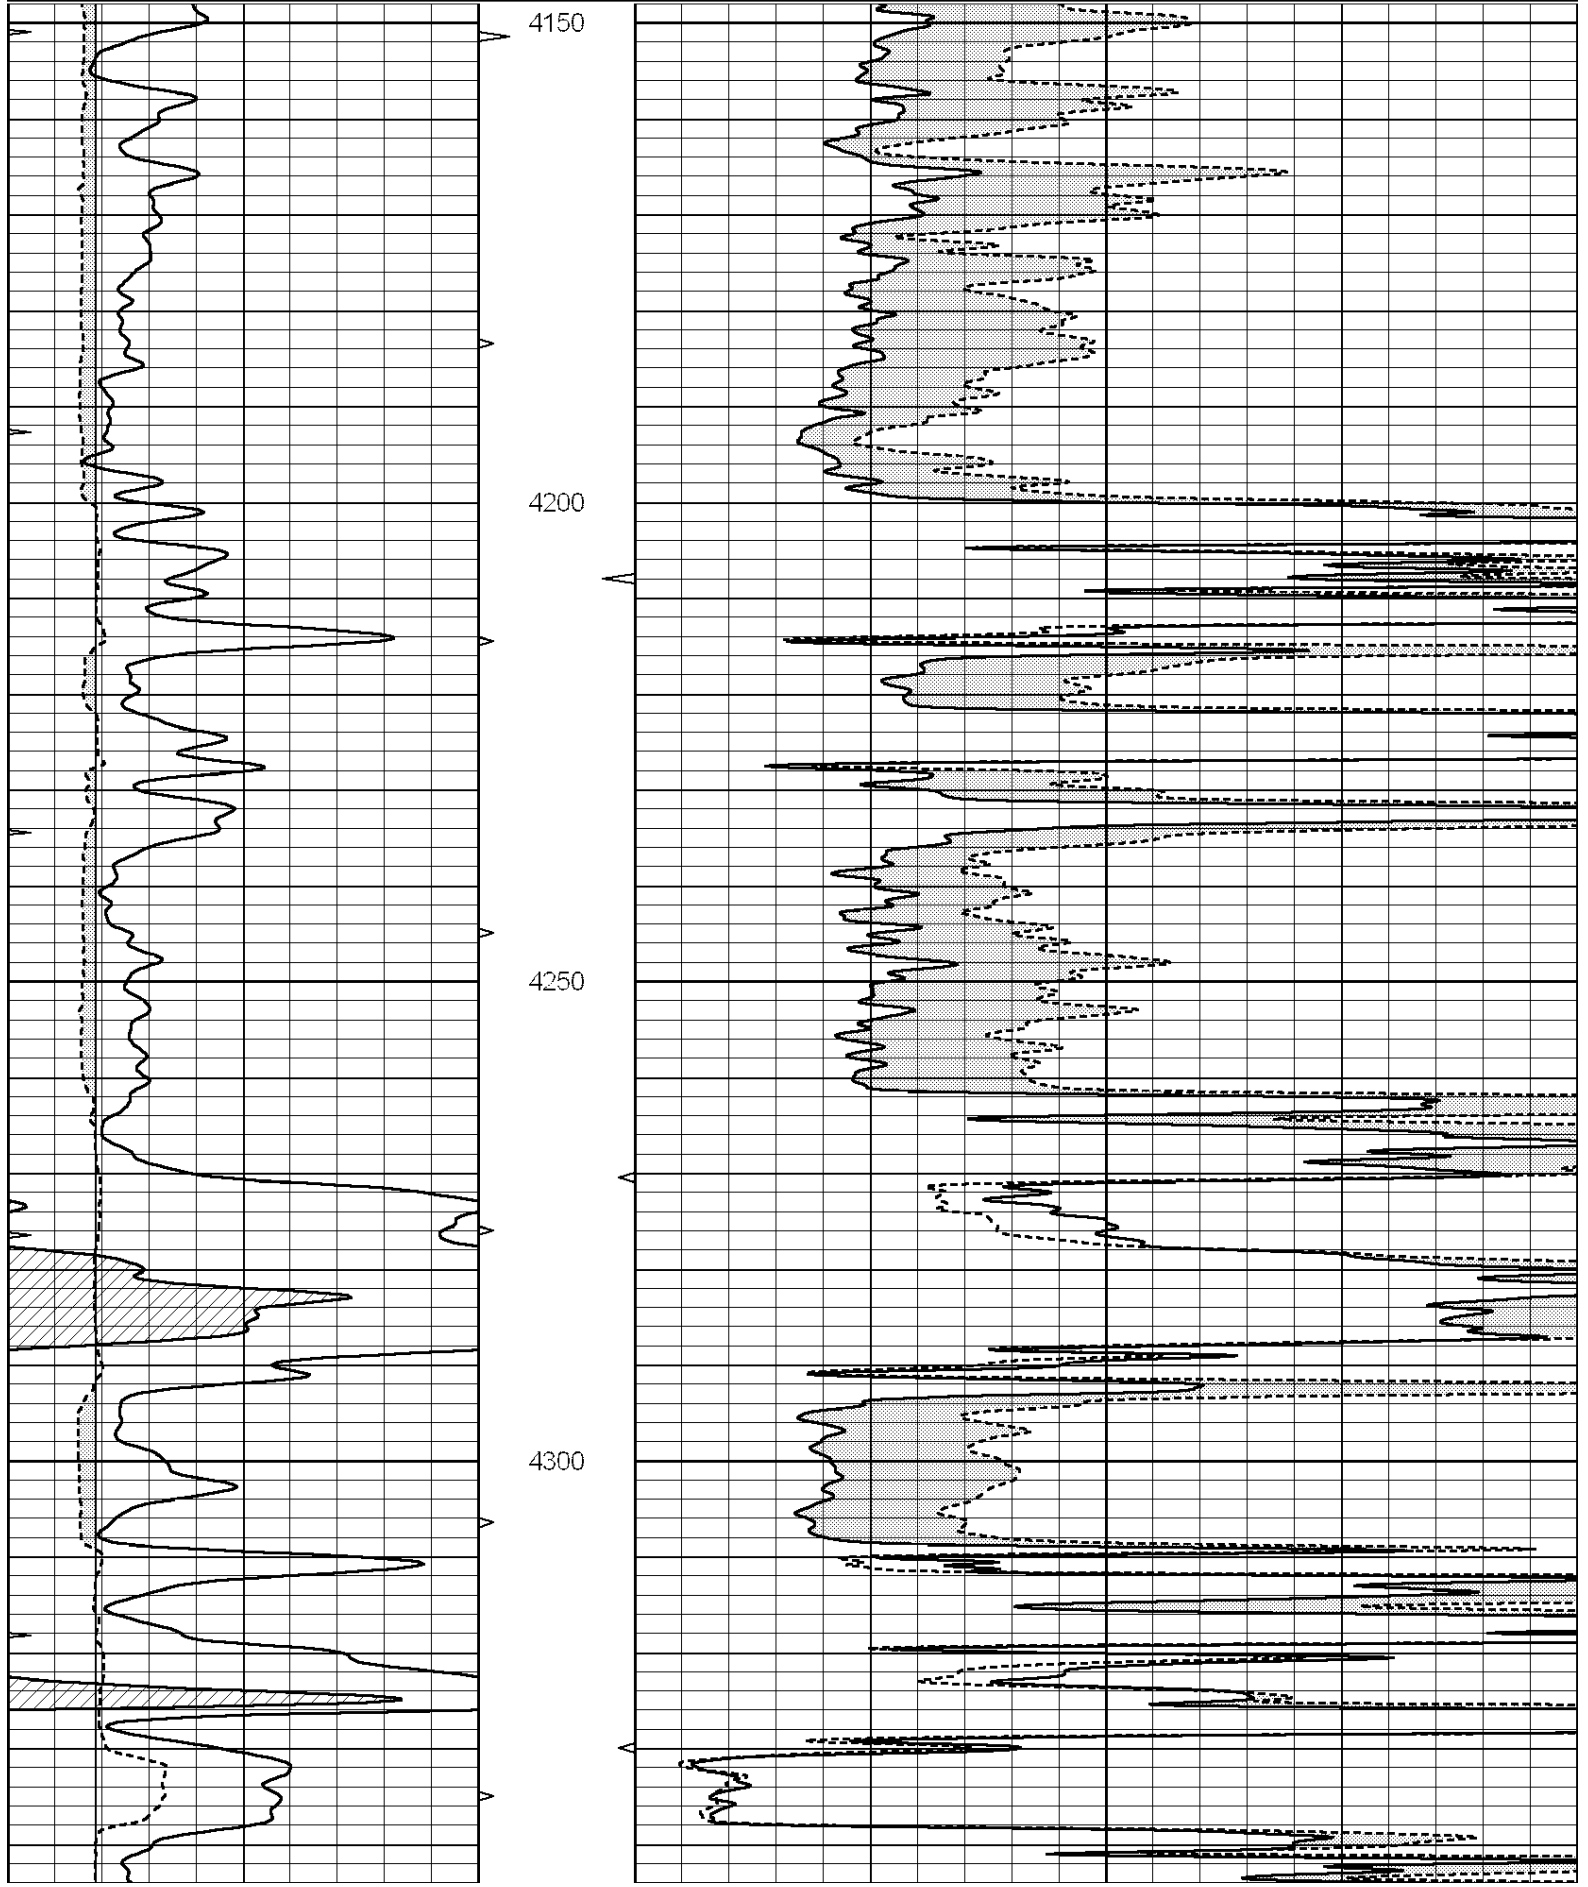

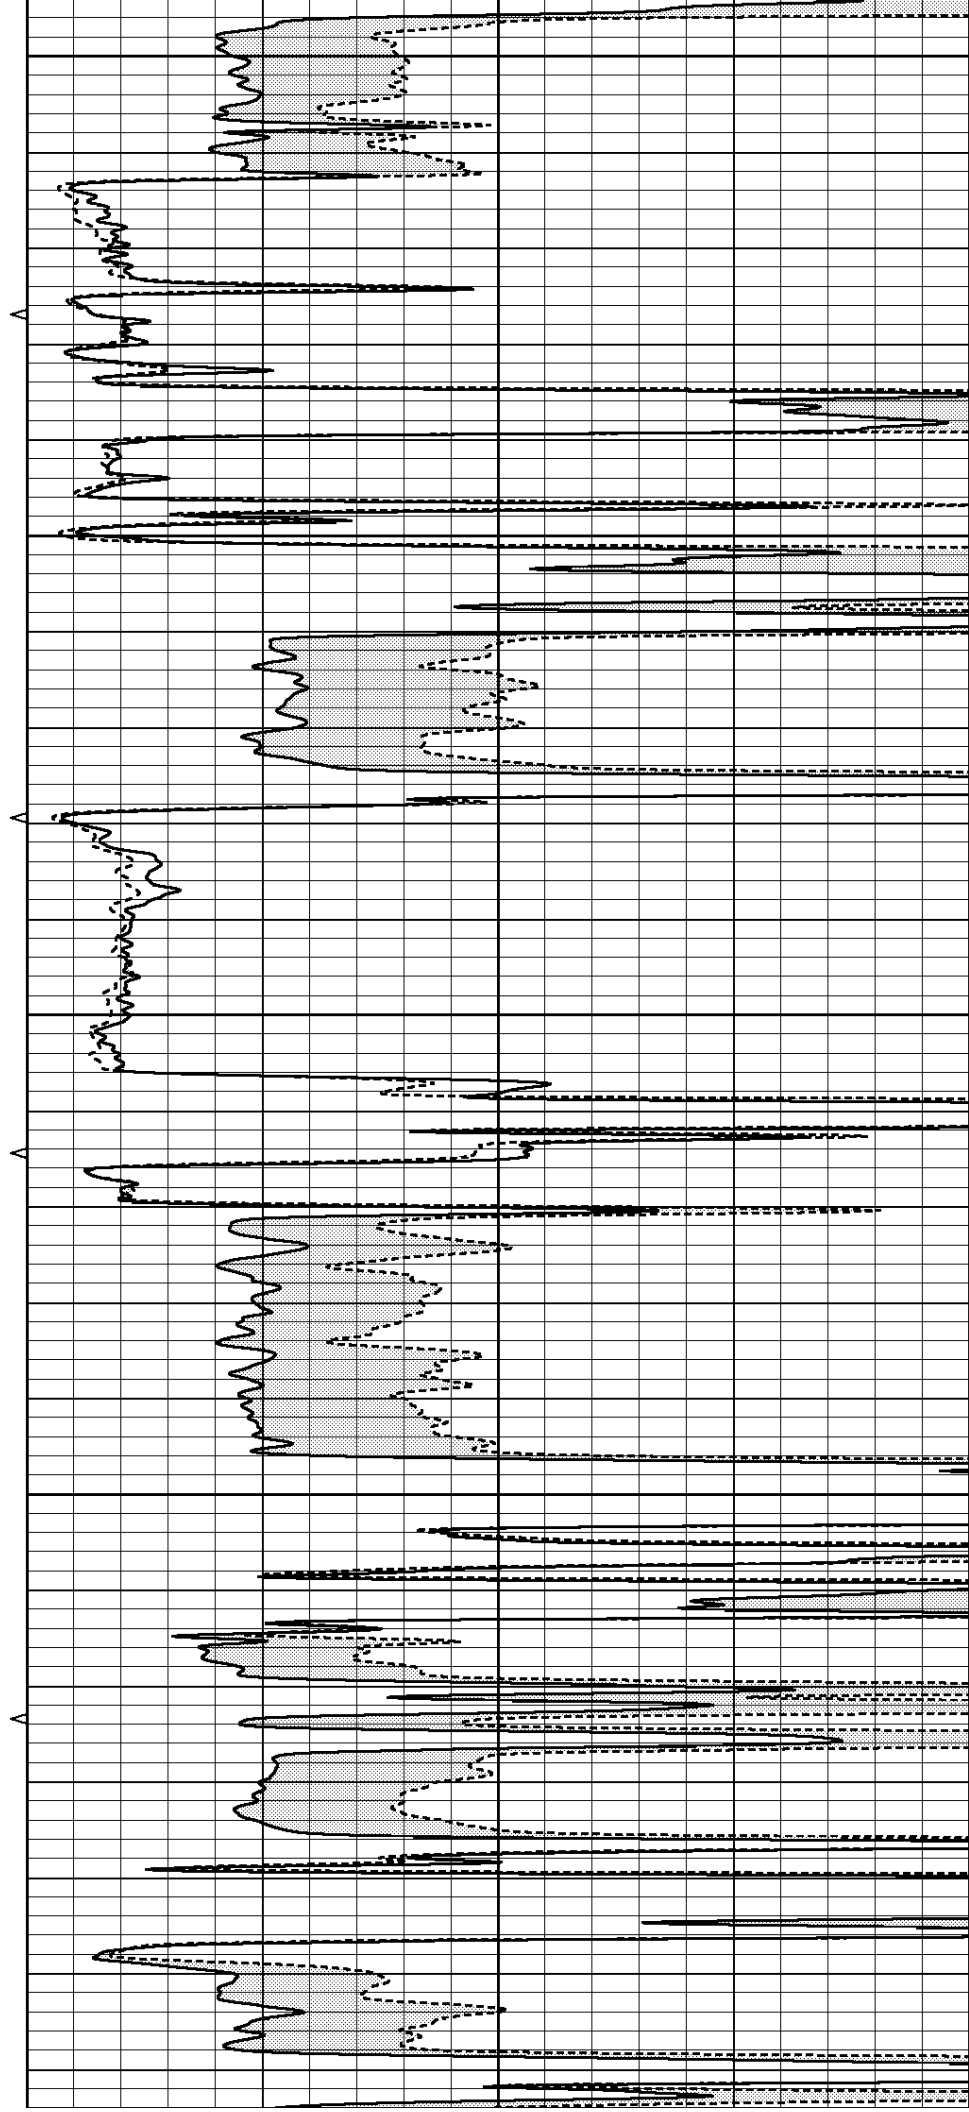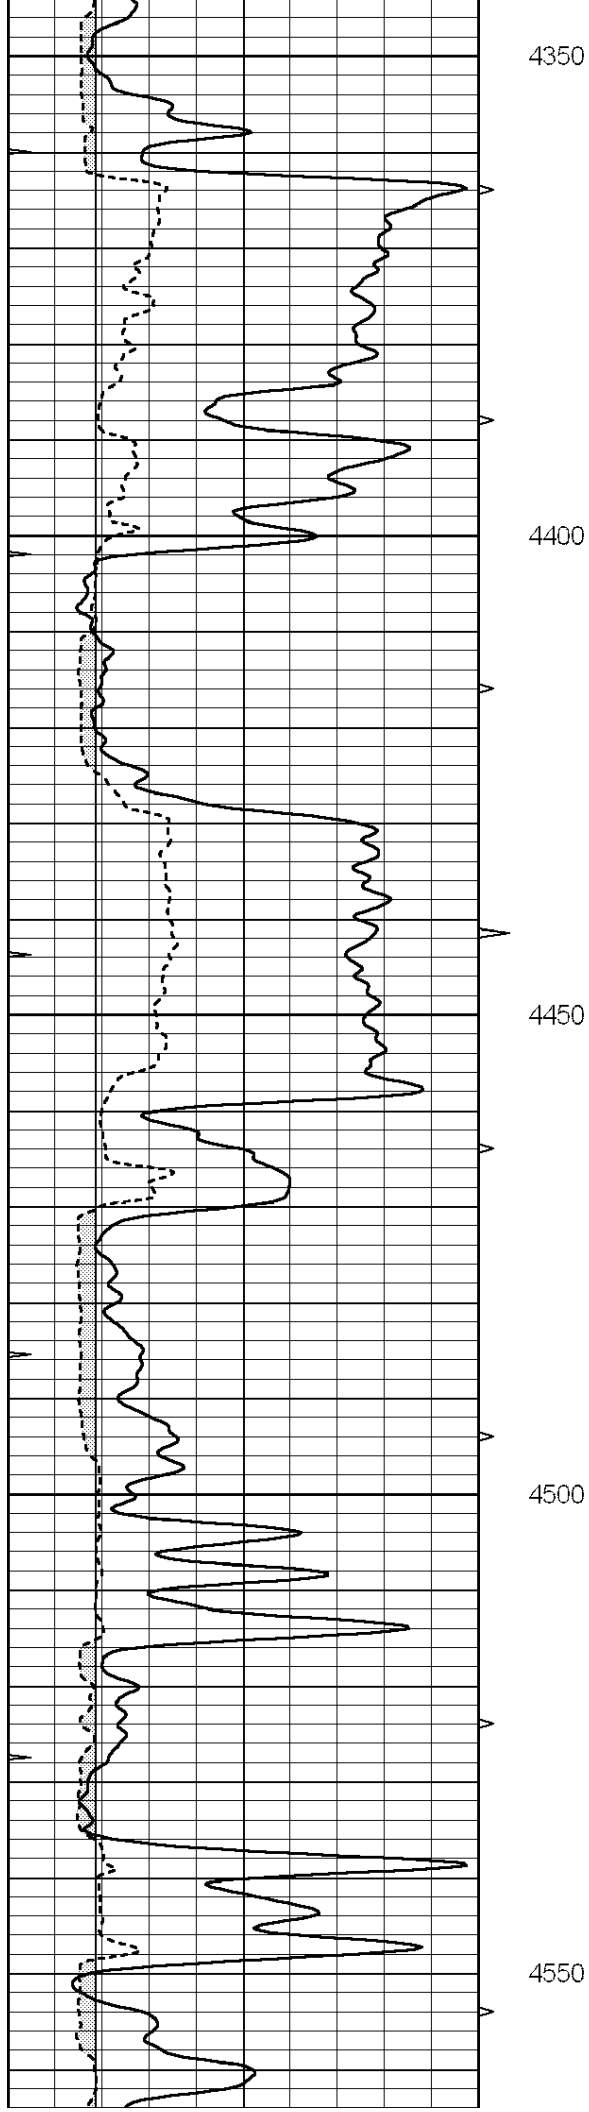

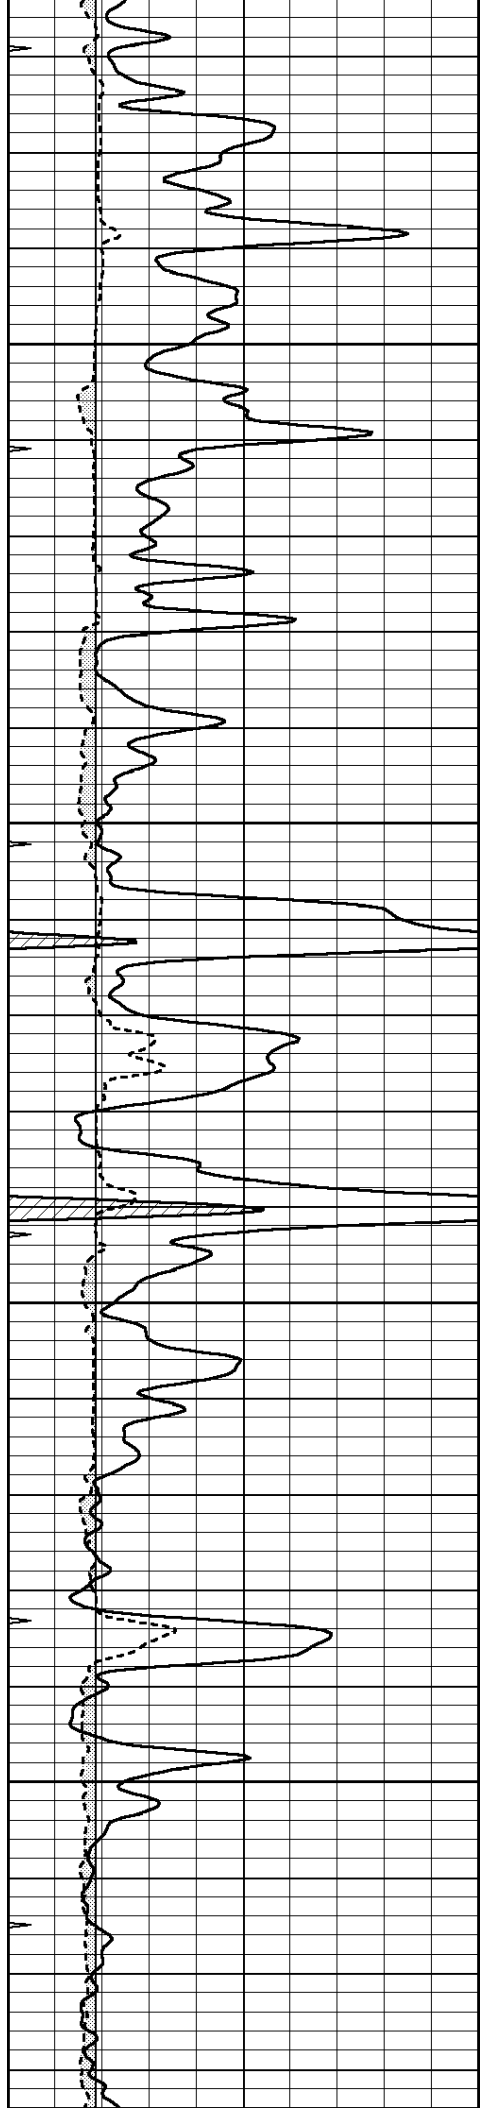




4600



4650


4700

4750

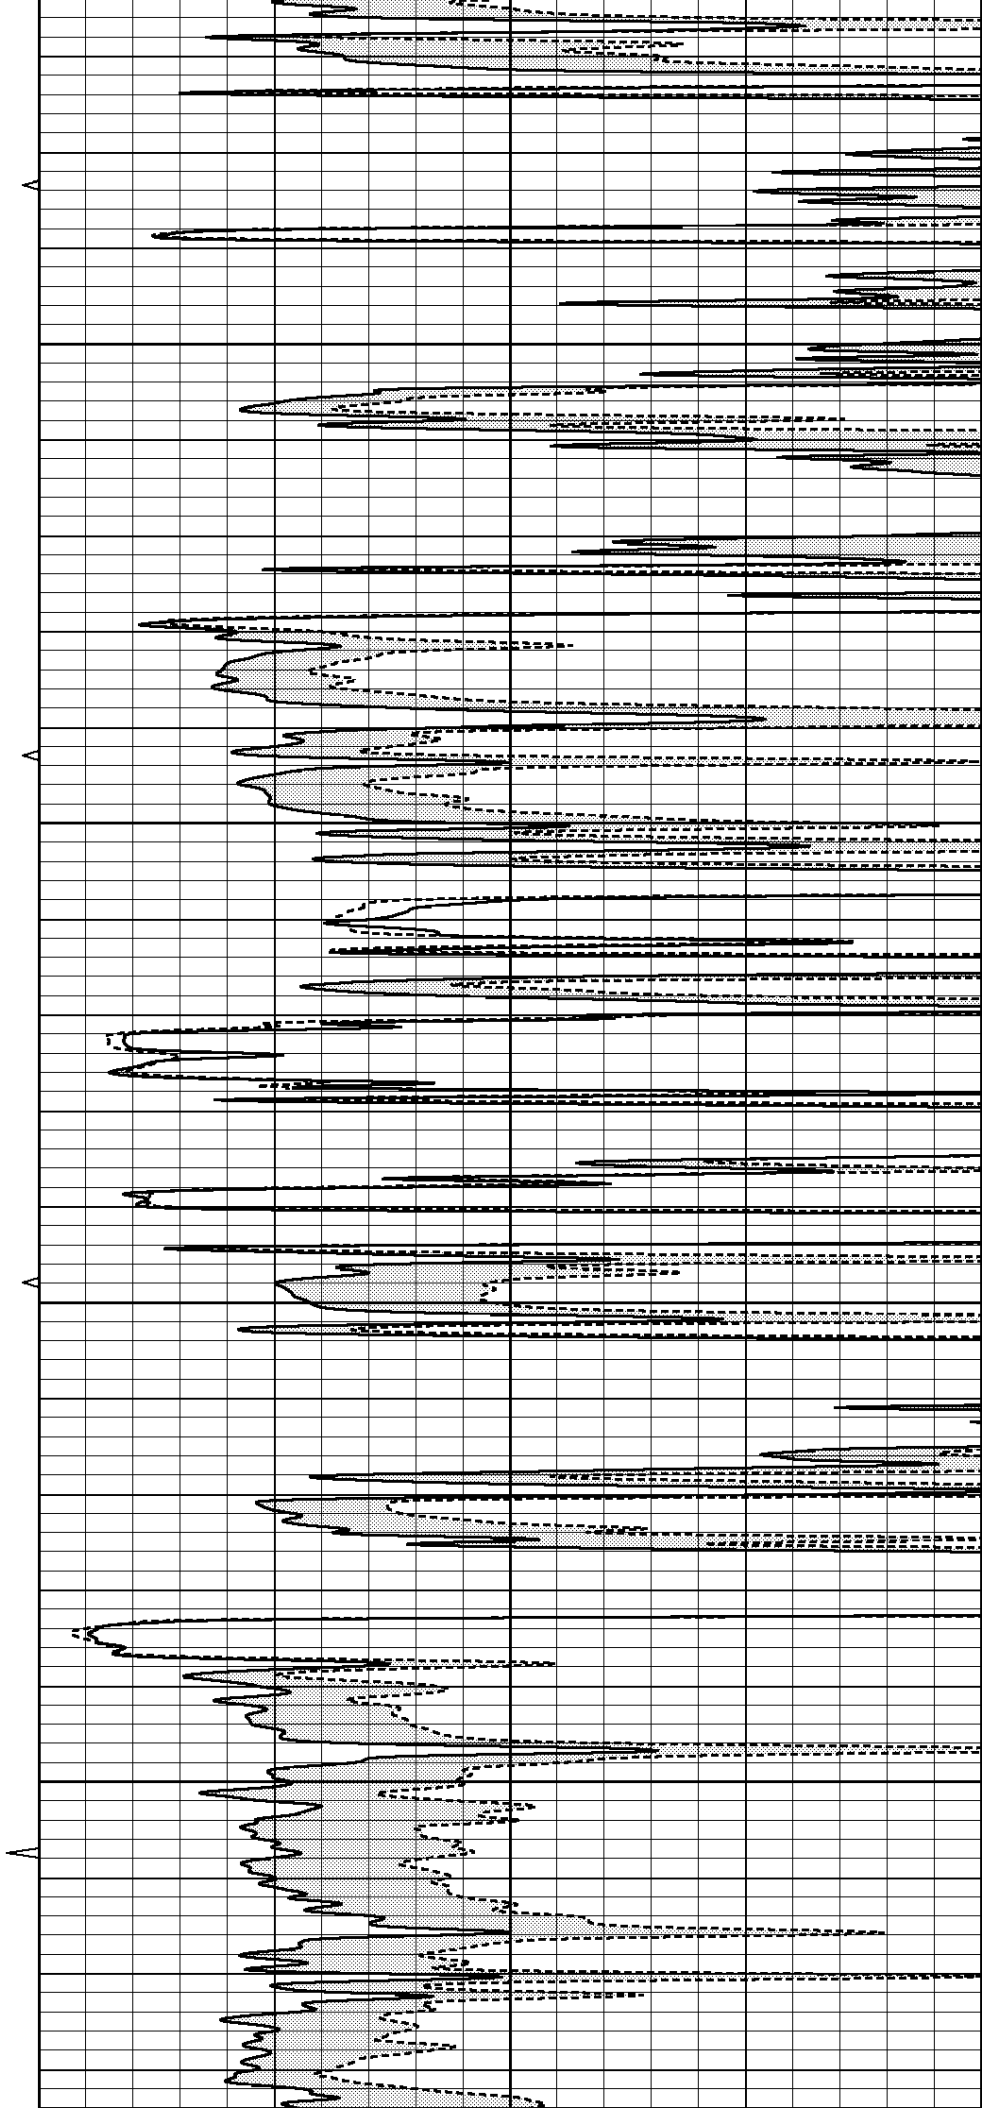

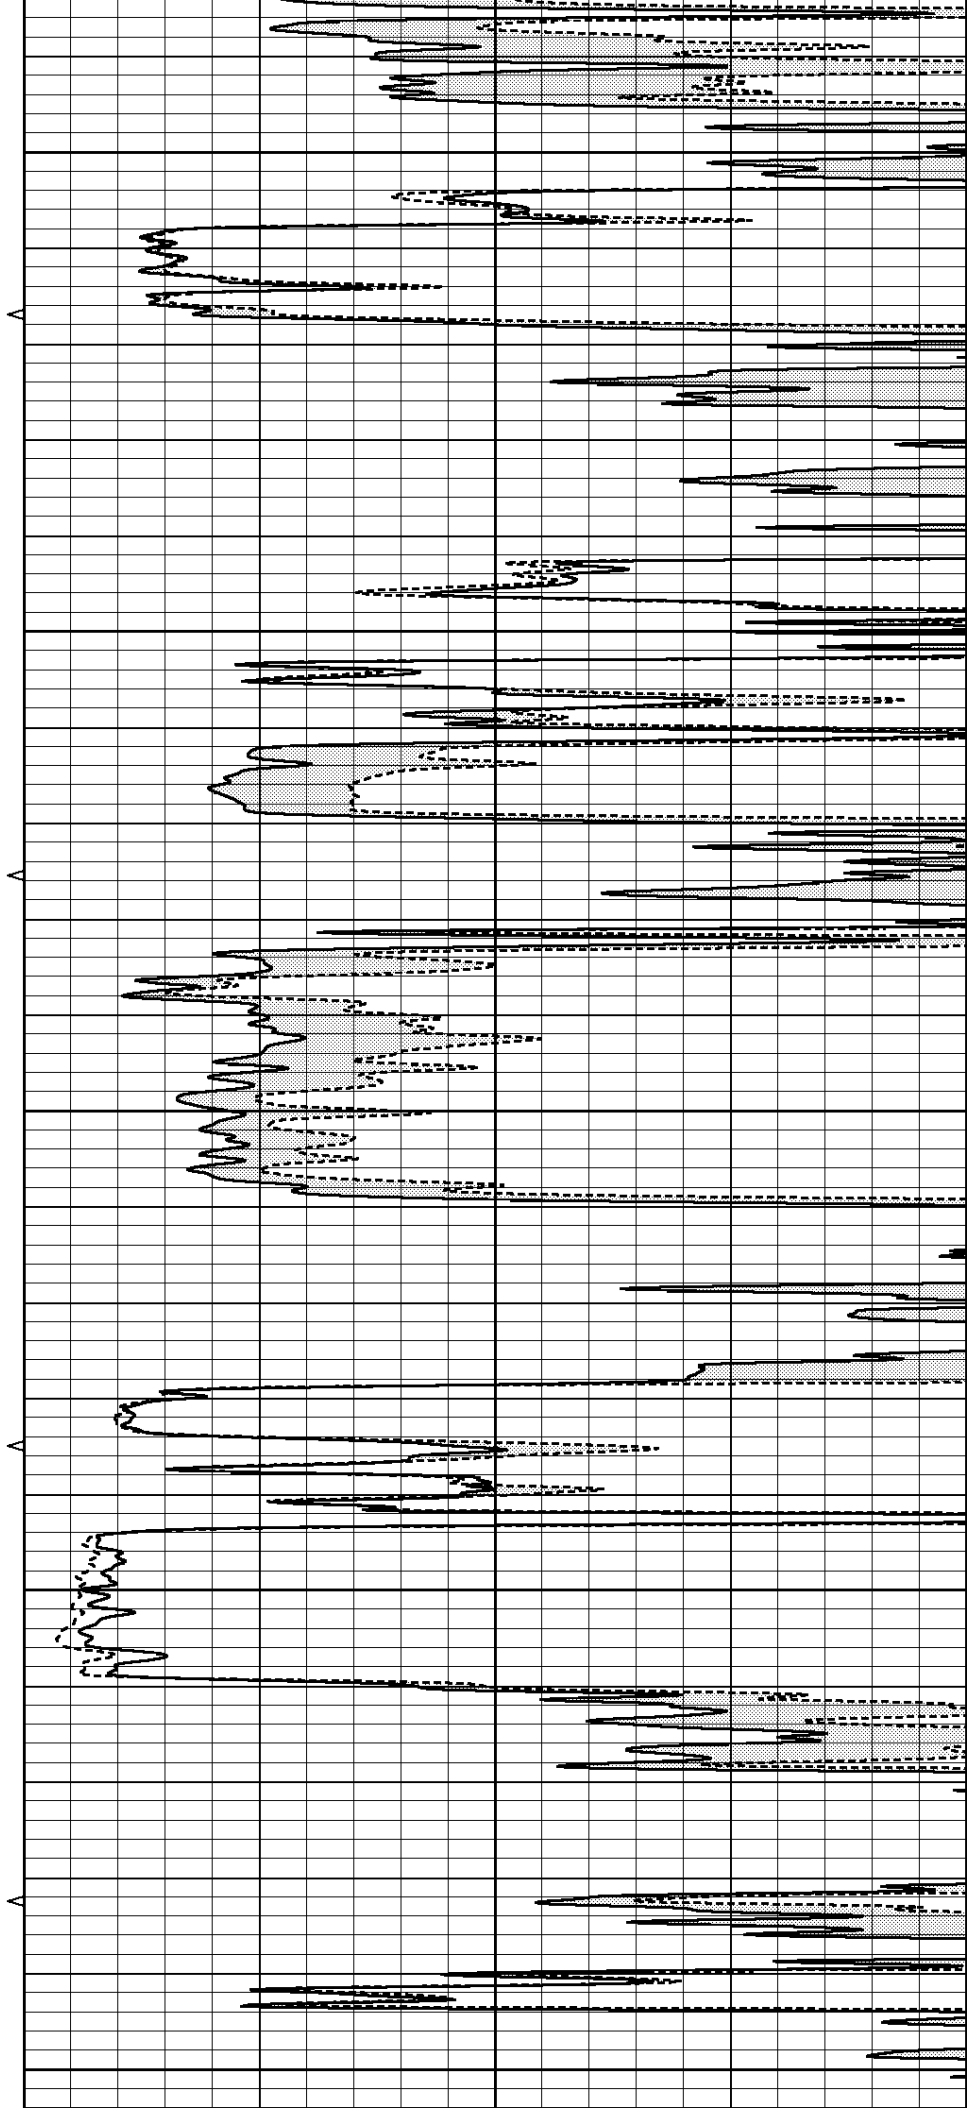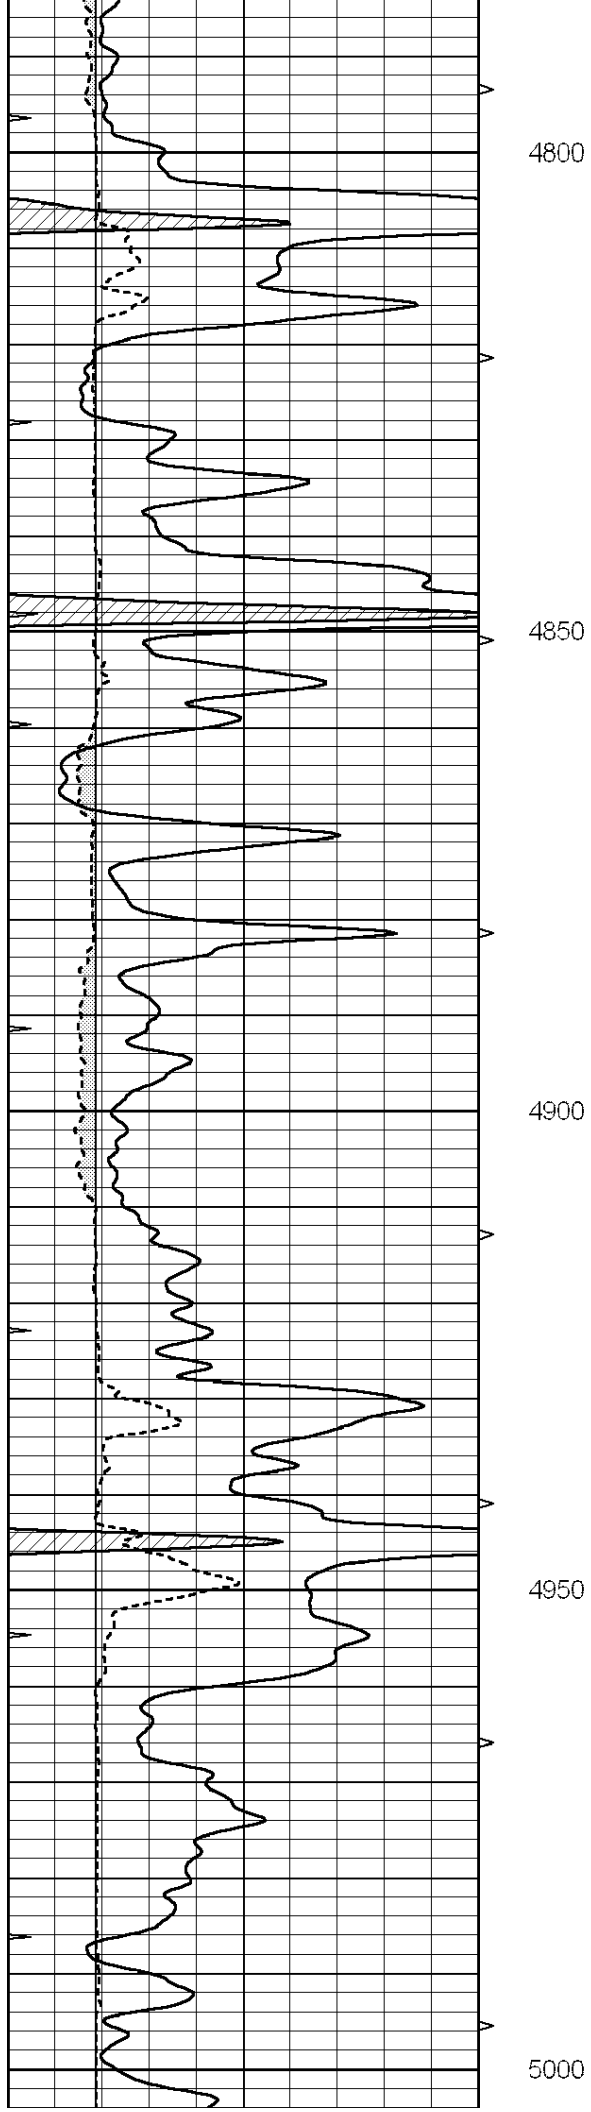

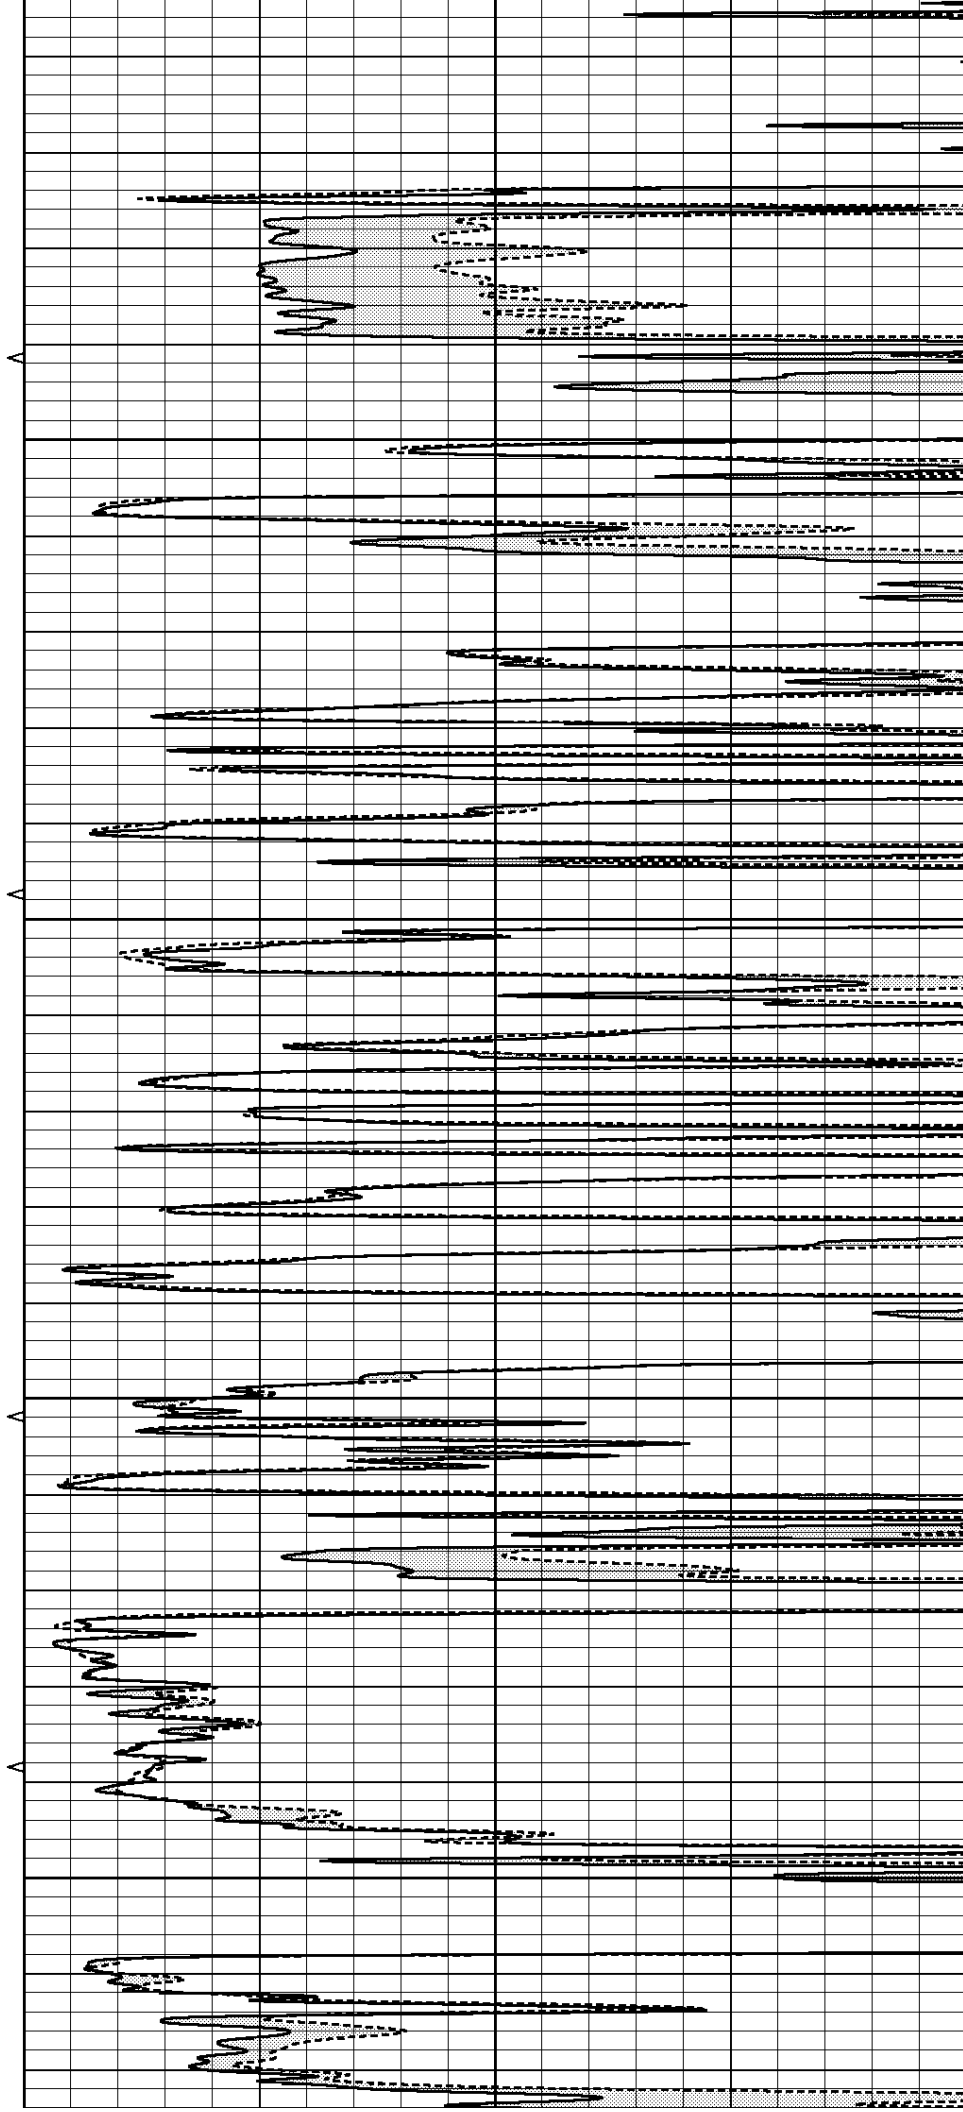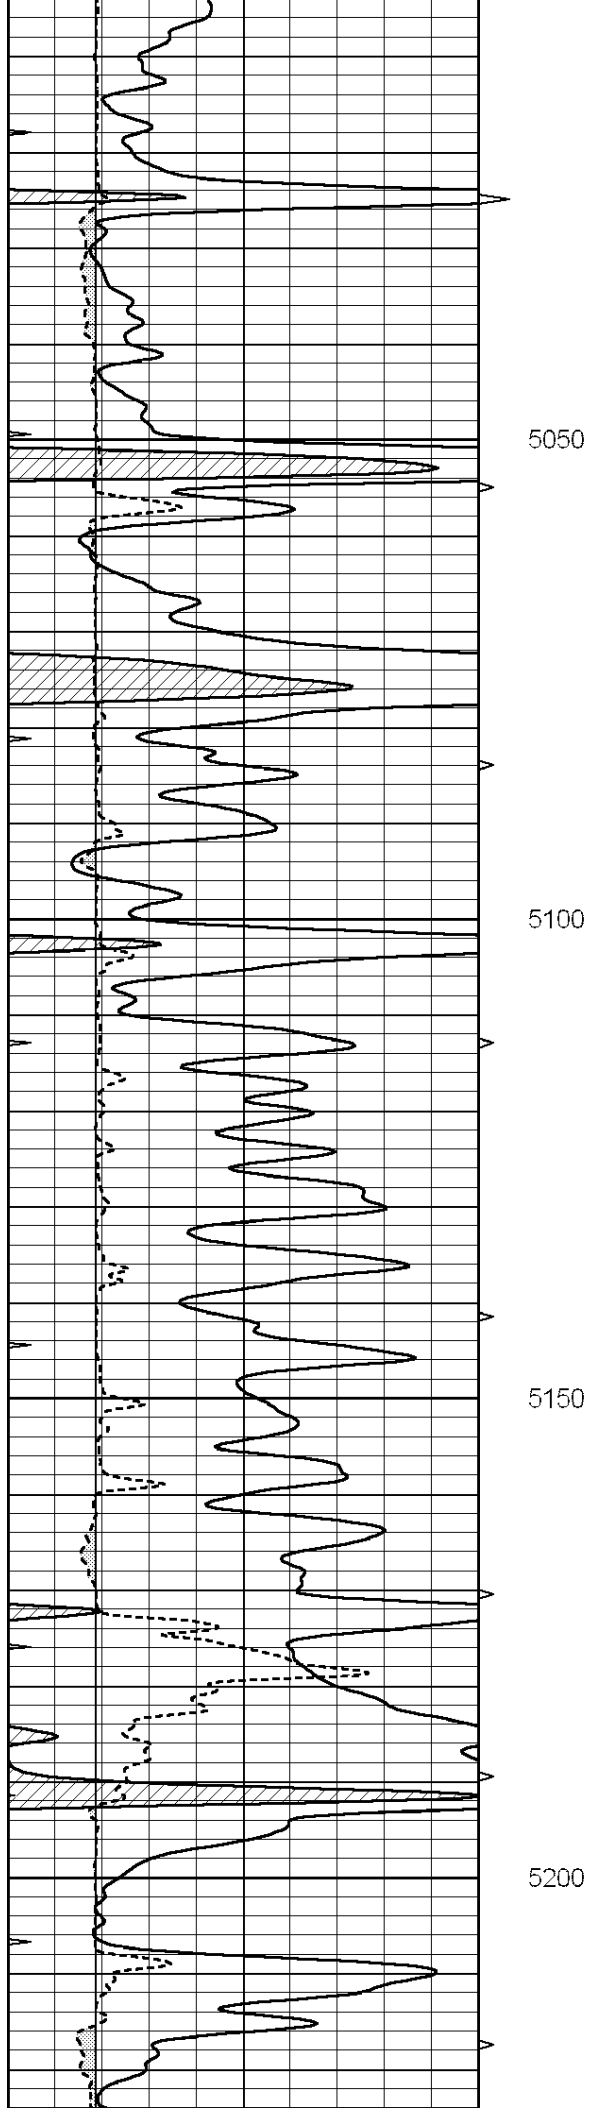

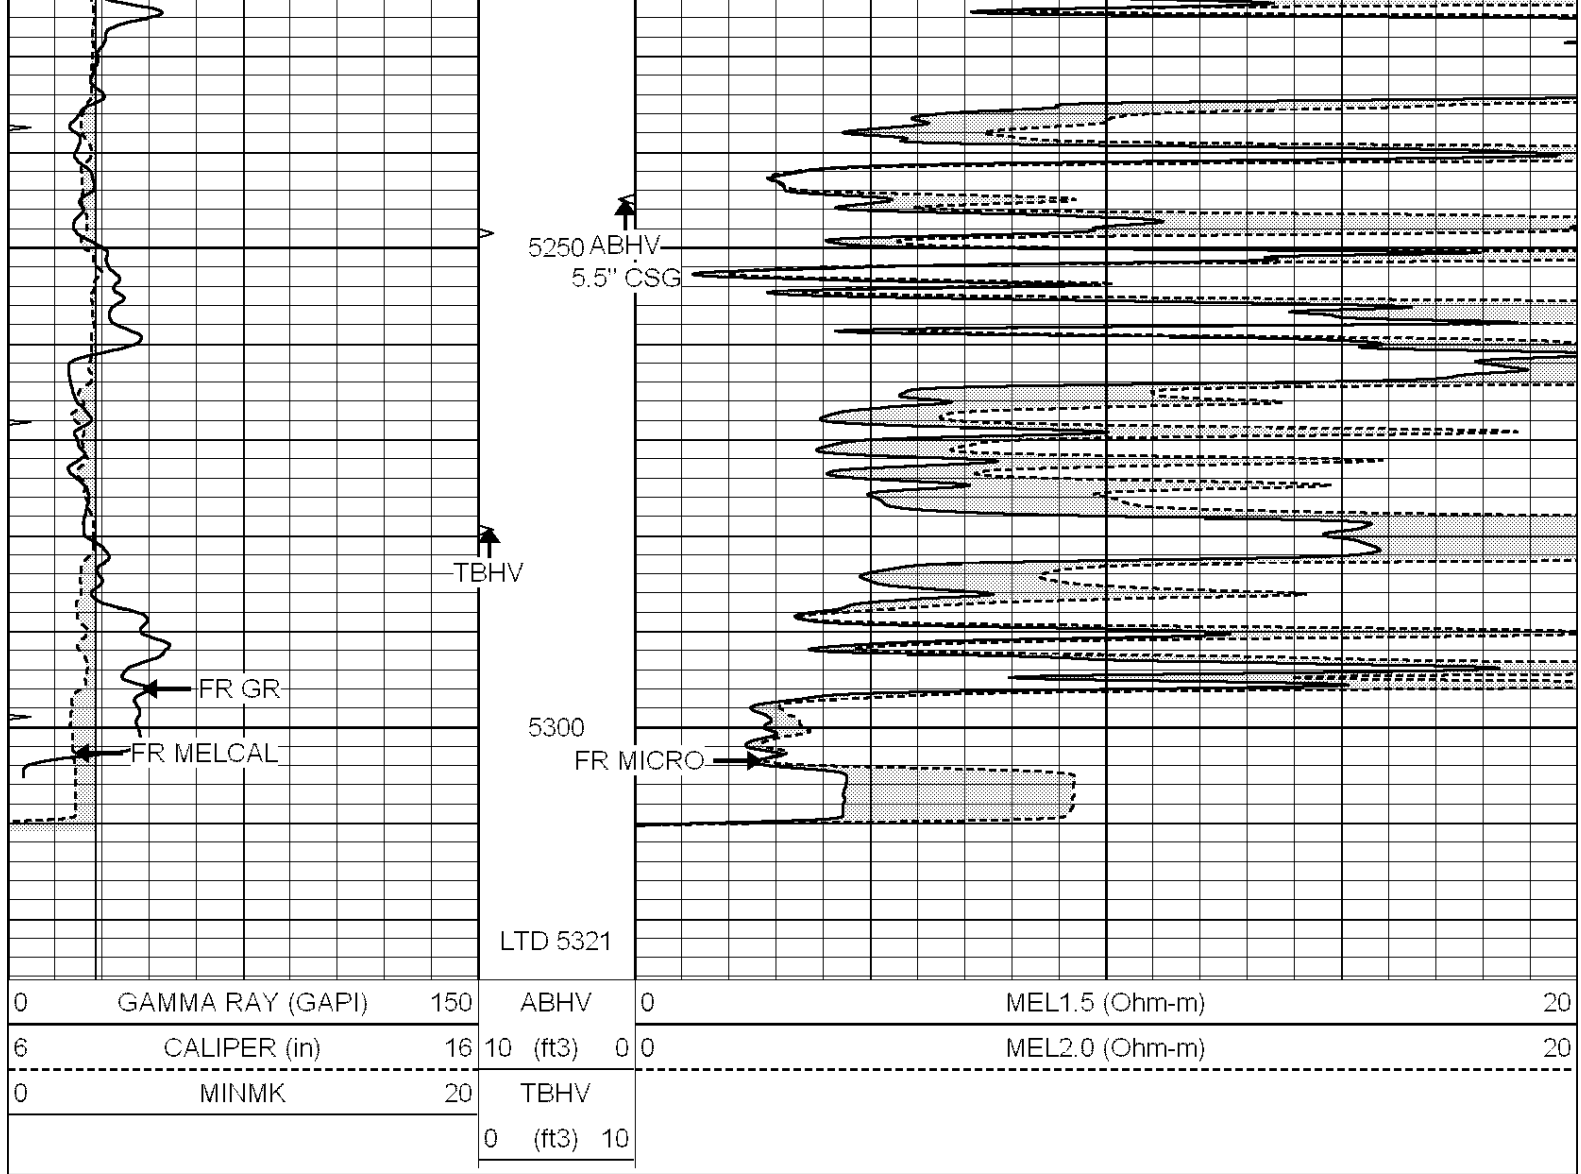



NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

REPEAT SECTION

Database File: 25902pe.db
Dataset Pathname: pass5.1
Presentation Format: _micro
Dataset Creation: Mon Oct 27 12:51:46 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

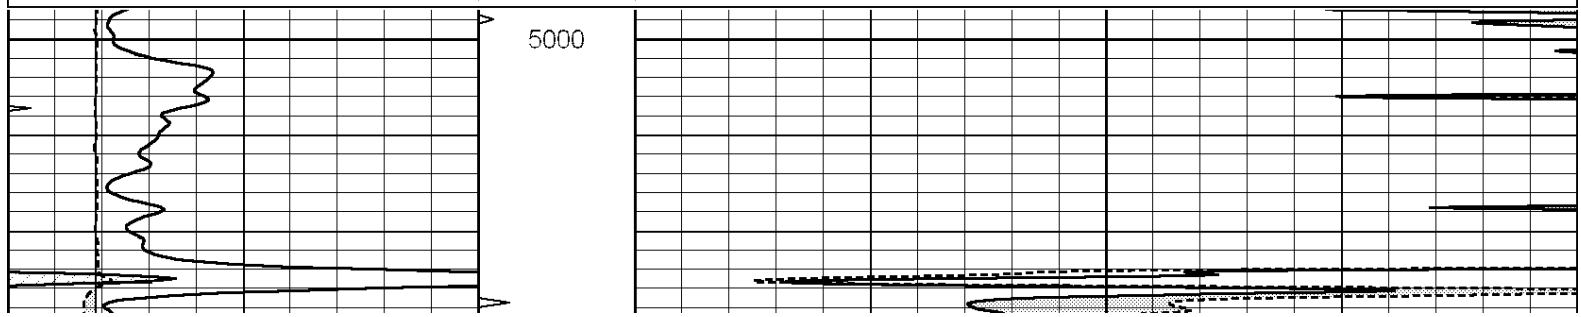

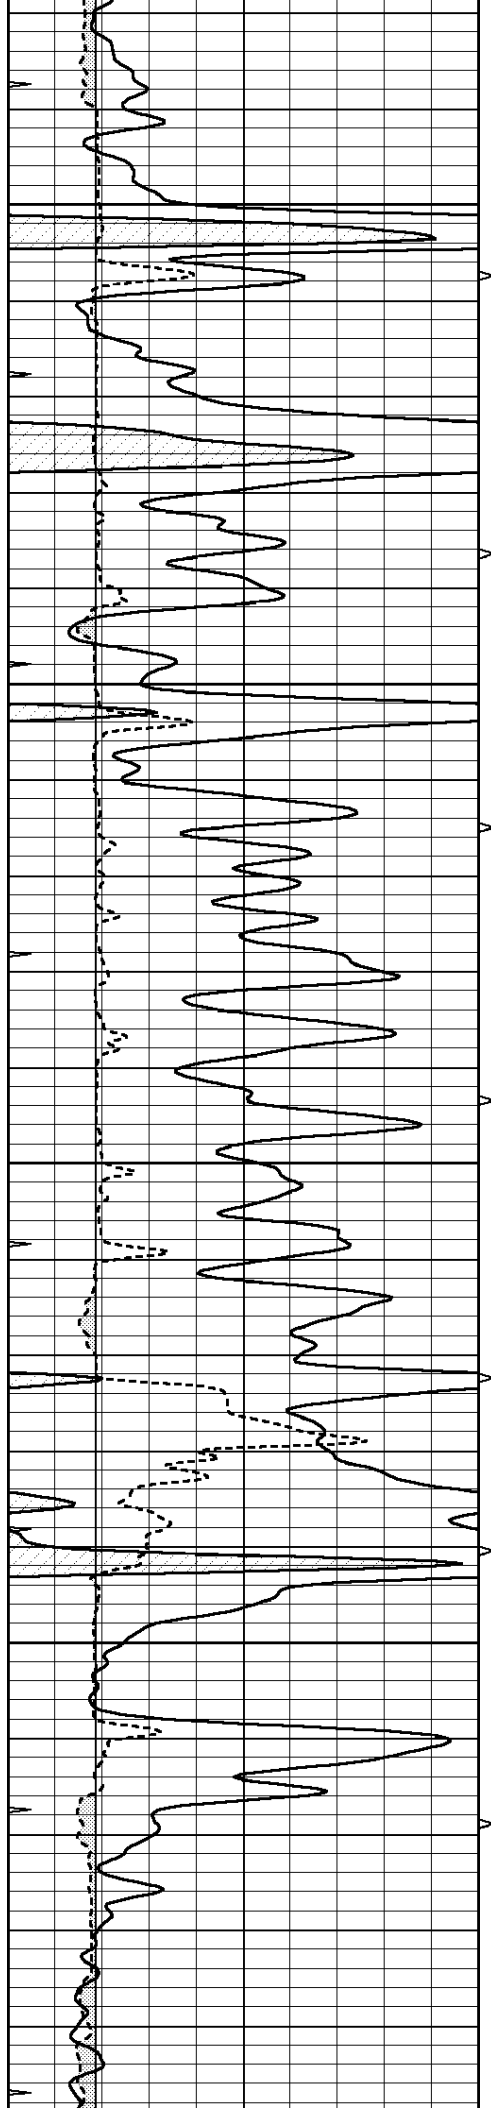



5050

5100

5150

5200

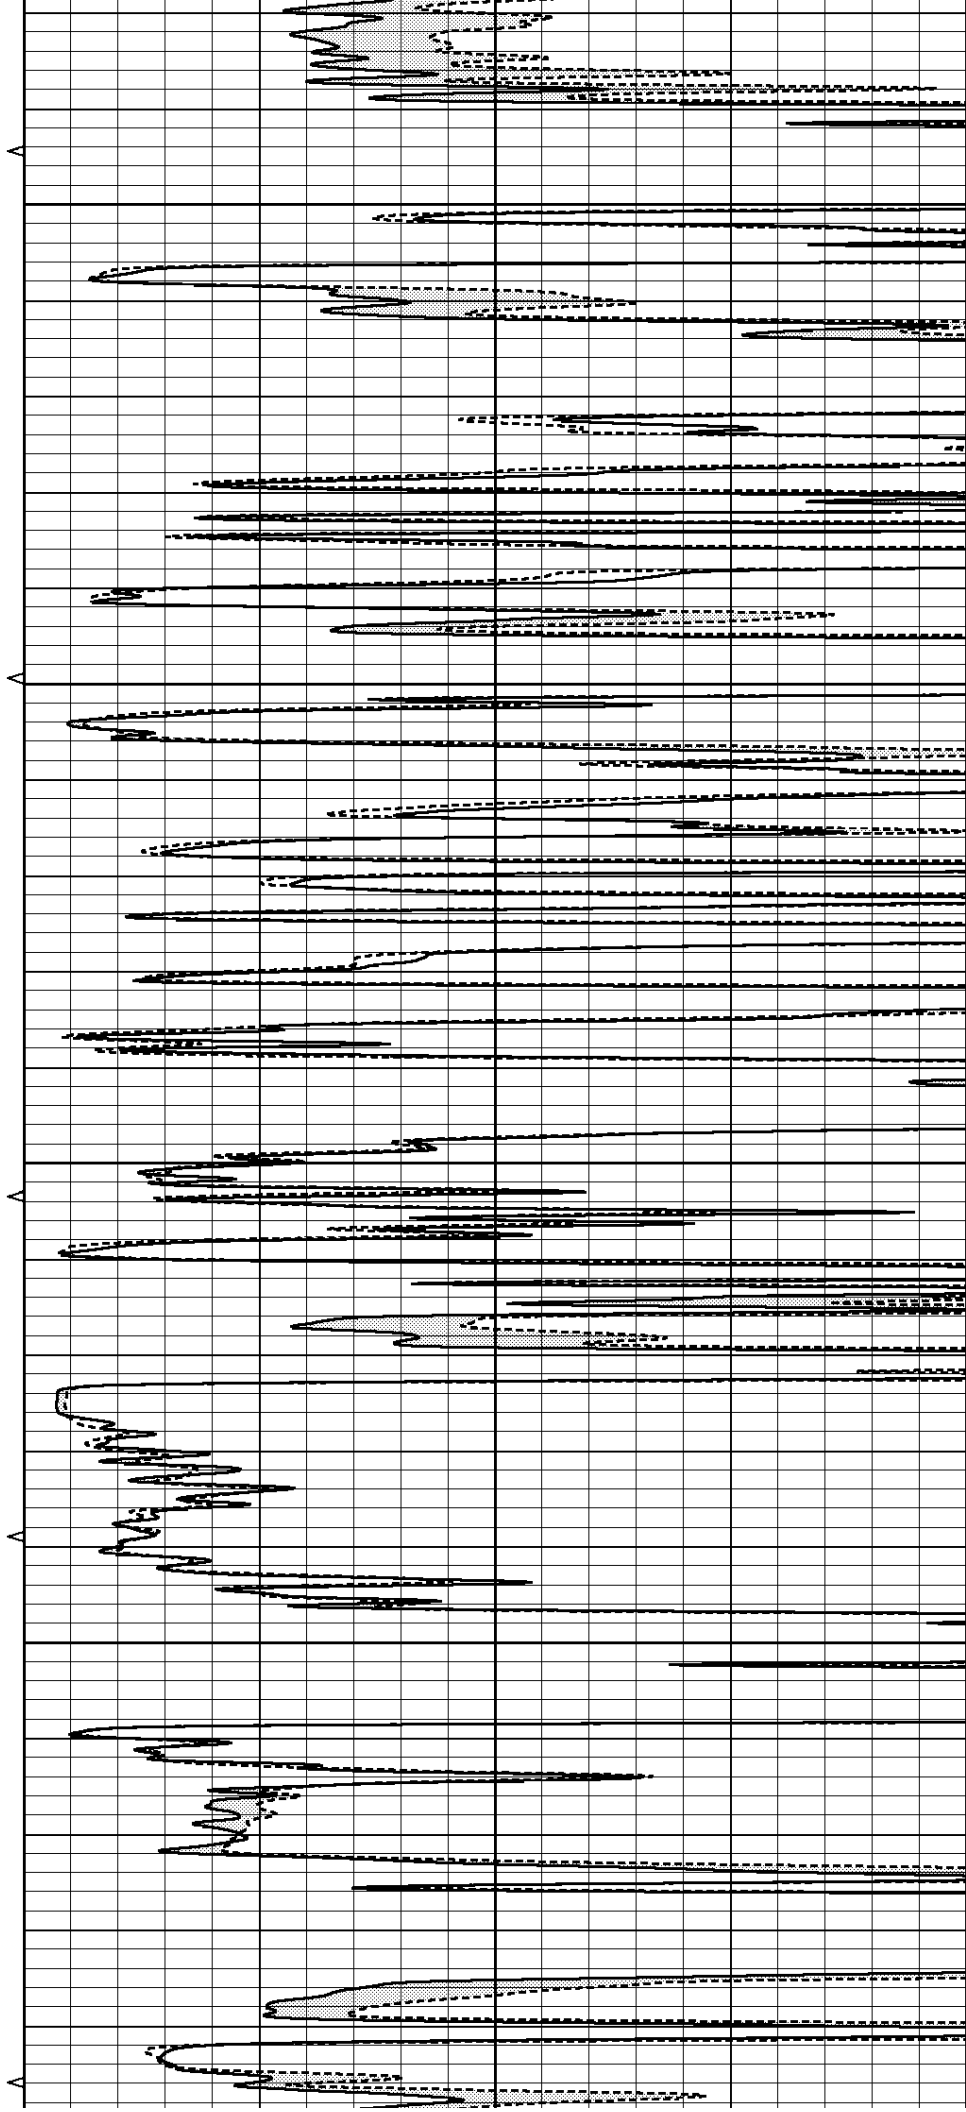

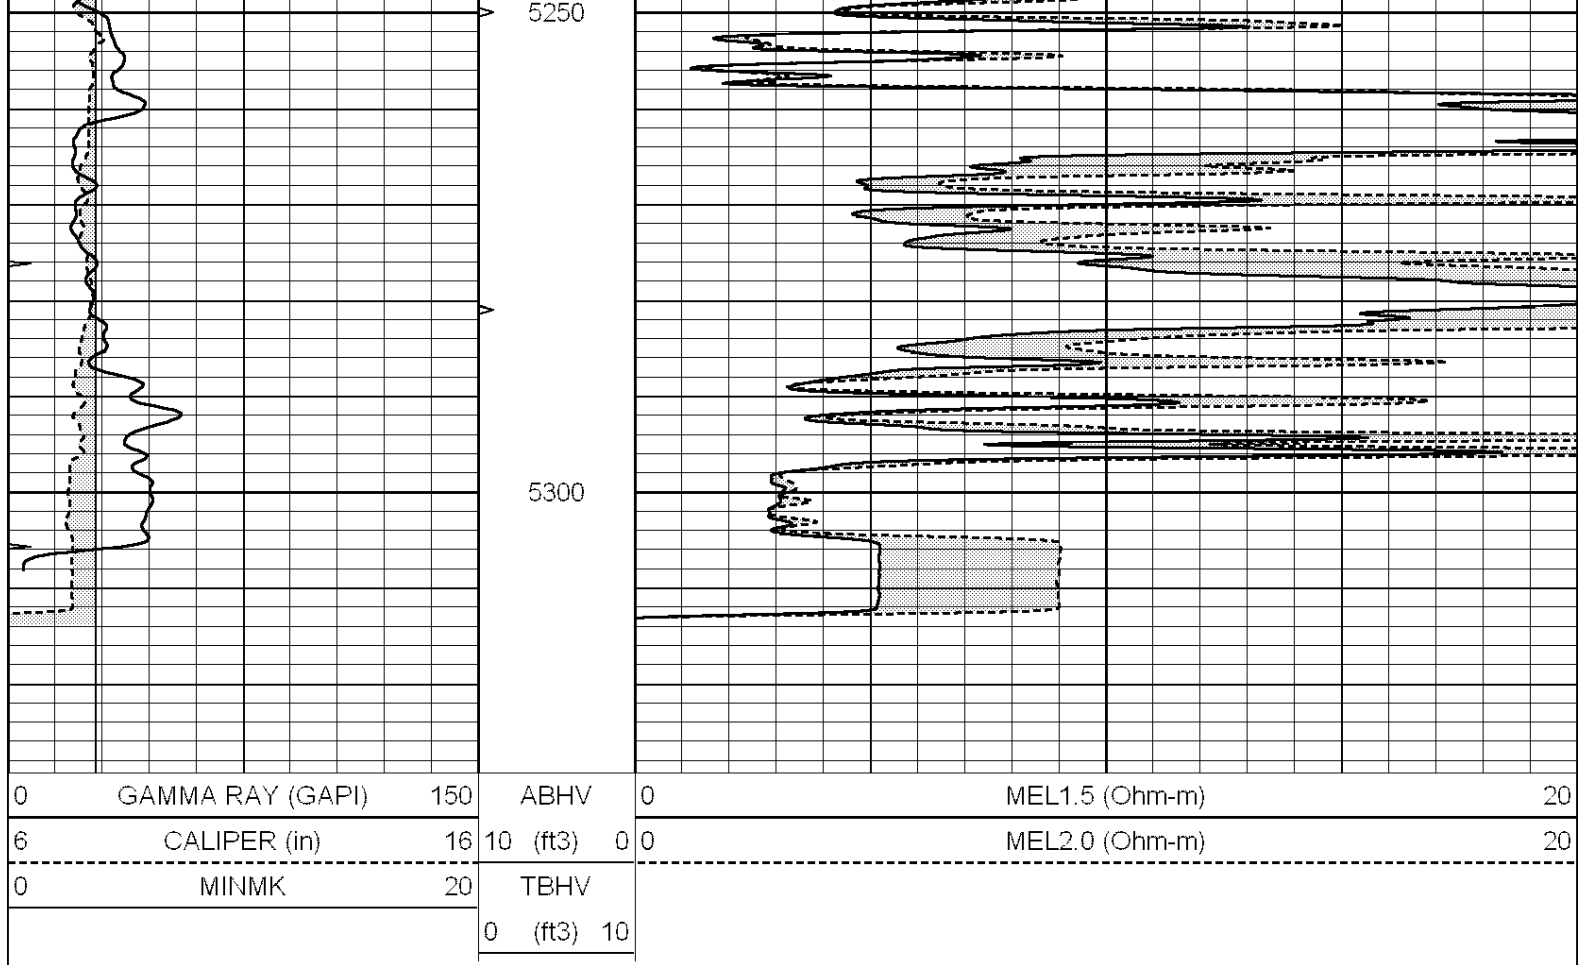

Calibration Report			
Database File:	25902pe.db		
Dataset Pathname:	pass6.1		
Dataset Creation:	Mon Oct 27 13:22:17 2014 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Mon Oct 20 14:15:13 2014		
Caliper Calibration:	Gain=3.567	Offset=2.645	
	Low Cal	High Cal	
References	7.900	15.000	
Readings	1.361	3.352	
1.5" Calibration:	Gain=40.000	Offset=-0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.269	
2" Calibration:	Gain=50.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.101	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Thu Oct 23 00:20:35 2014		

Calibrator value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2000	GAPI/cps