



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	TRANS PACIFIC OIL CORPORATION		
Well	LOHREY A #1-4		
Field	WILDCAT		
County	ELLIS	State	KANSAS
Location:	AP1 # : 15-051-26737-0000 1440' FSL & 950' FWL		Other Services CDL/CNL DIL/SON
Permanent Datum Log Measured From Drilling Measured From	SEC 4 TWP 11S RGE 18W	GROUND LEVEL Elevation KELLY BUSHING 7' A.G.L. KELLY BUSHING	Elevation K.B. 2062 D.F. 2060 G.L. 2055
Date	10/23/14		
Run Number	TWO		
Depth Driller	3637		
Depth Logger	3637		
Bottom Logged Interval	3619		
Top Log Interval	2900		
Casing Driller	8 5/8" @ 264		
Casing Logger	264		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3000 PPM	
Density / Viscosity	9.4/59		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.90 @ 75F		
Rmt @ Meas. Temp	.67 @ 75F		
Rmc @ Meas. Temp	1.08 @ 75F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.59 @ 113F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	113F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPELLUCCI		
Witnessed By	ALEX CHAPIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS:
HAYS, KS. - NORTH TO SALINE RIVER RD. - 1 1/2 WEST TO 240TH RD.
NORTH TO CURVE - EAST & SOUTH INTO



MAIN SECTION

Database File:

26215ddn.db

Dataset Pathname:

pass8.1

Presentation Format:

_micro


Dataset Creation:


Thu Oct 23 21:58:29 2014 by Calc Open-Cased 090629

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

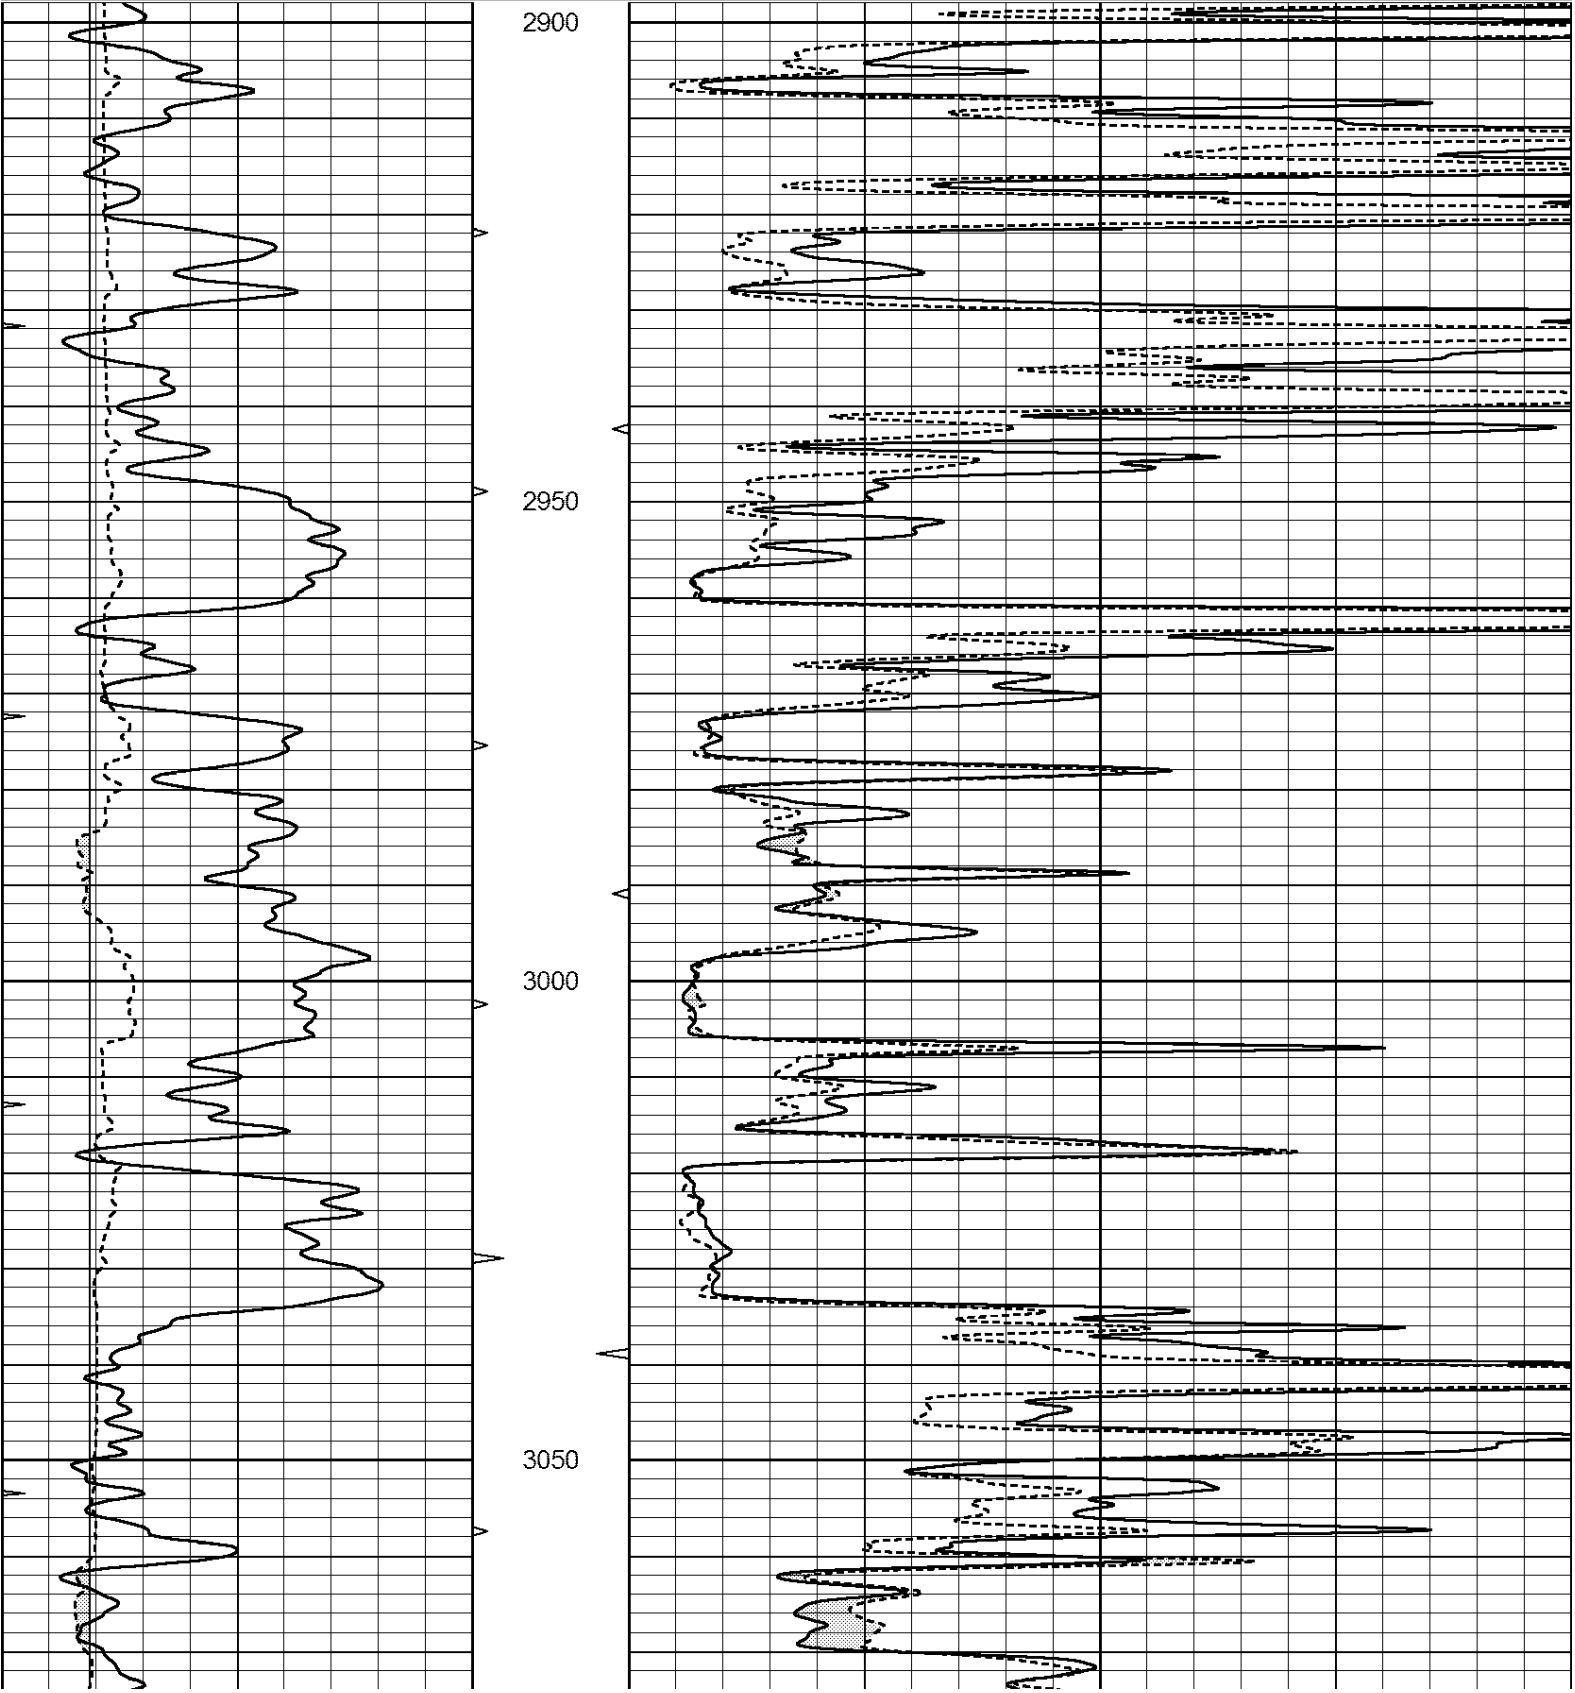

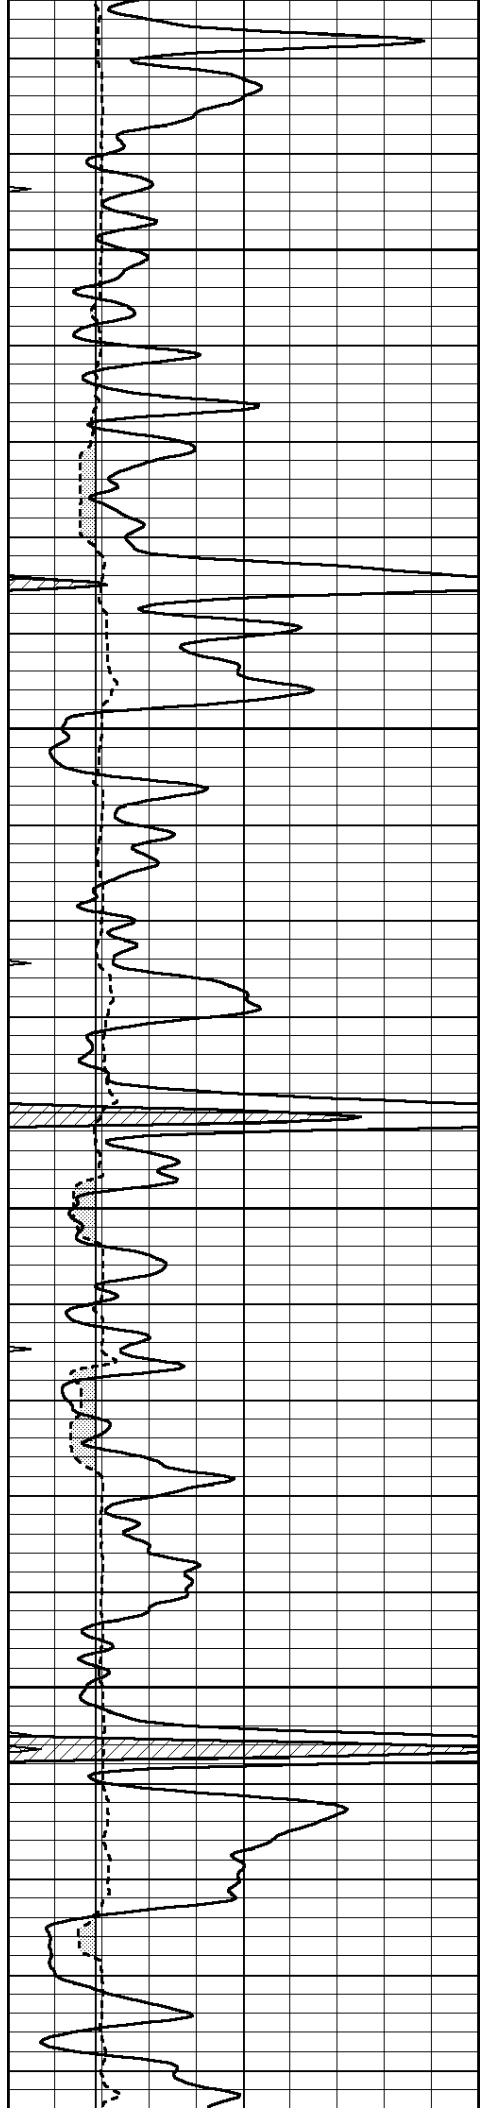



3100

3150

3200

3250

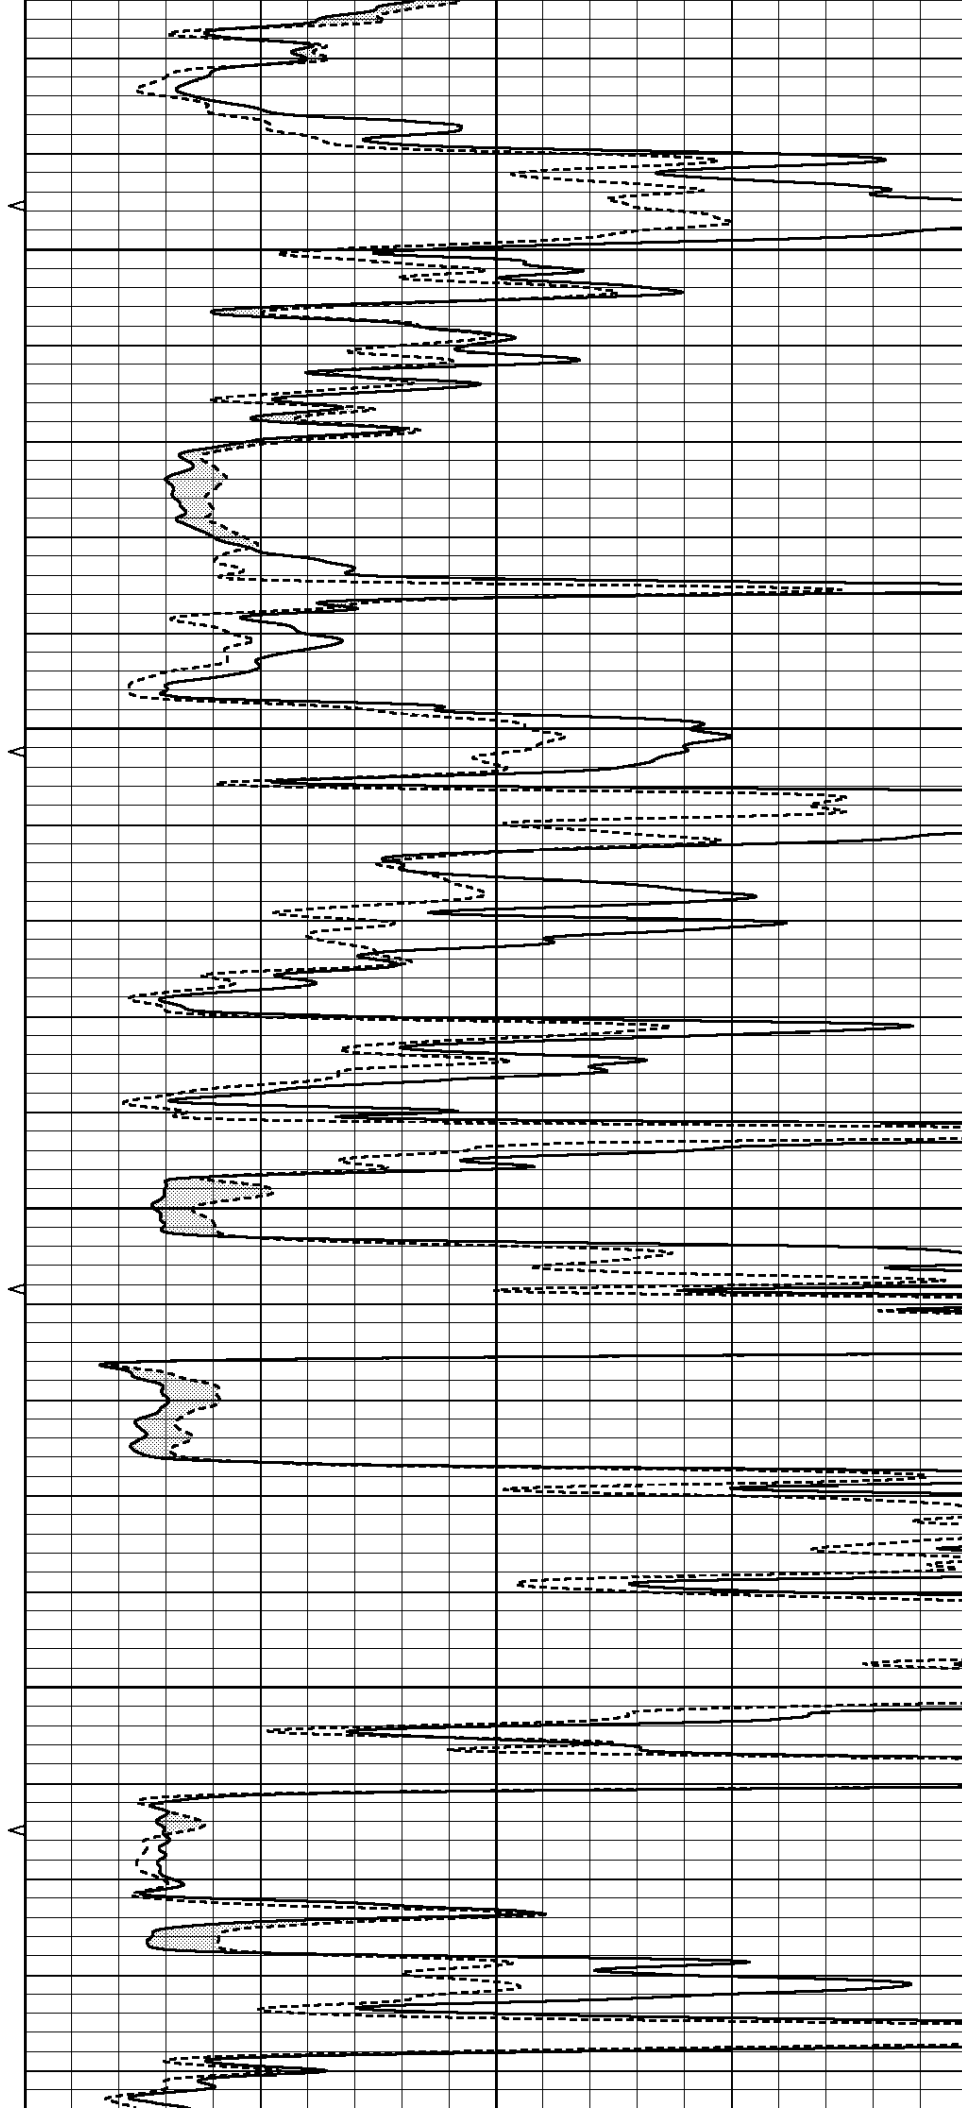

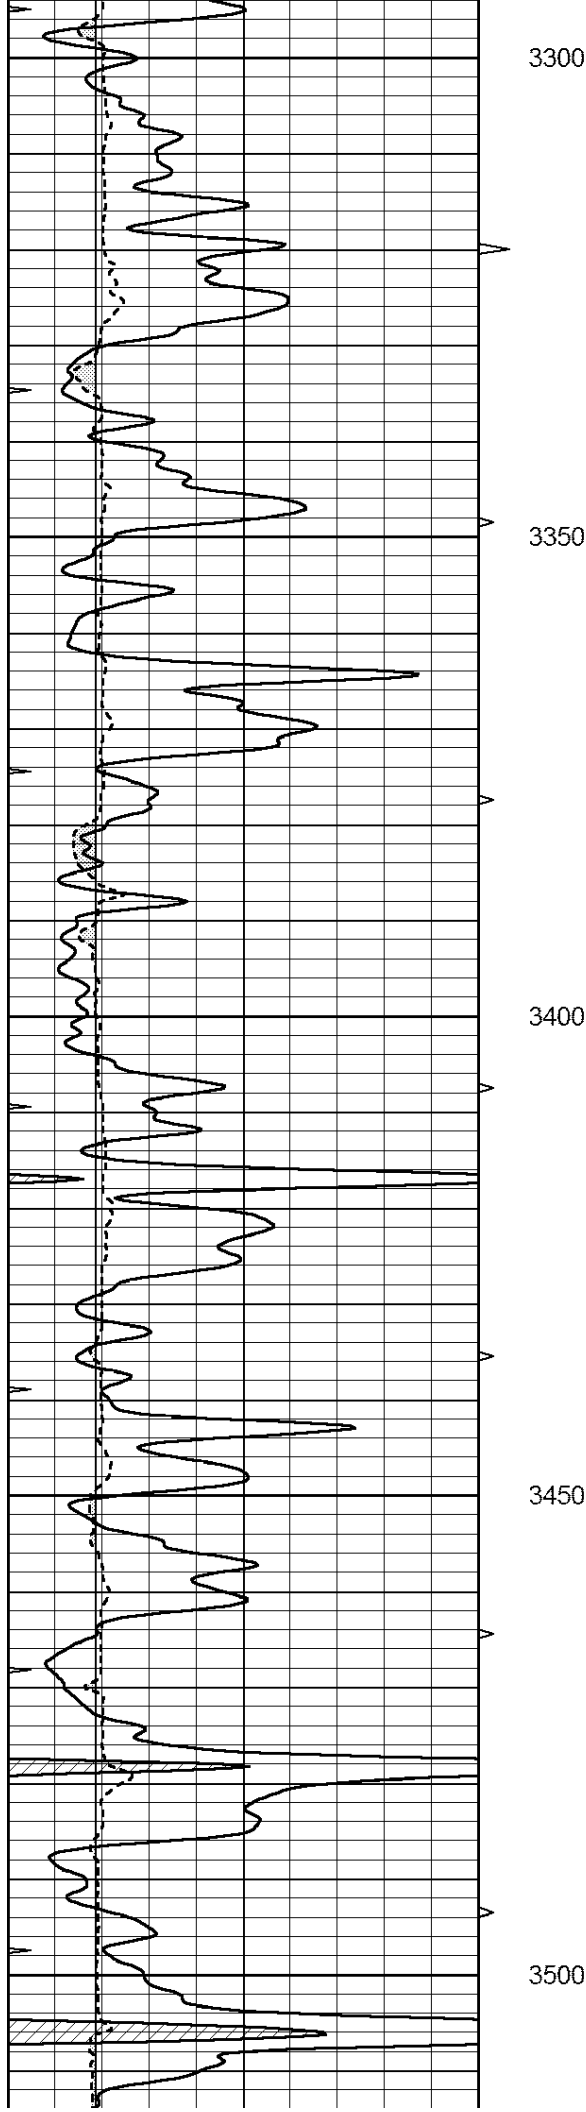


3300


3350

3400

3450

3500

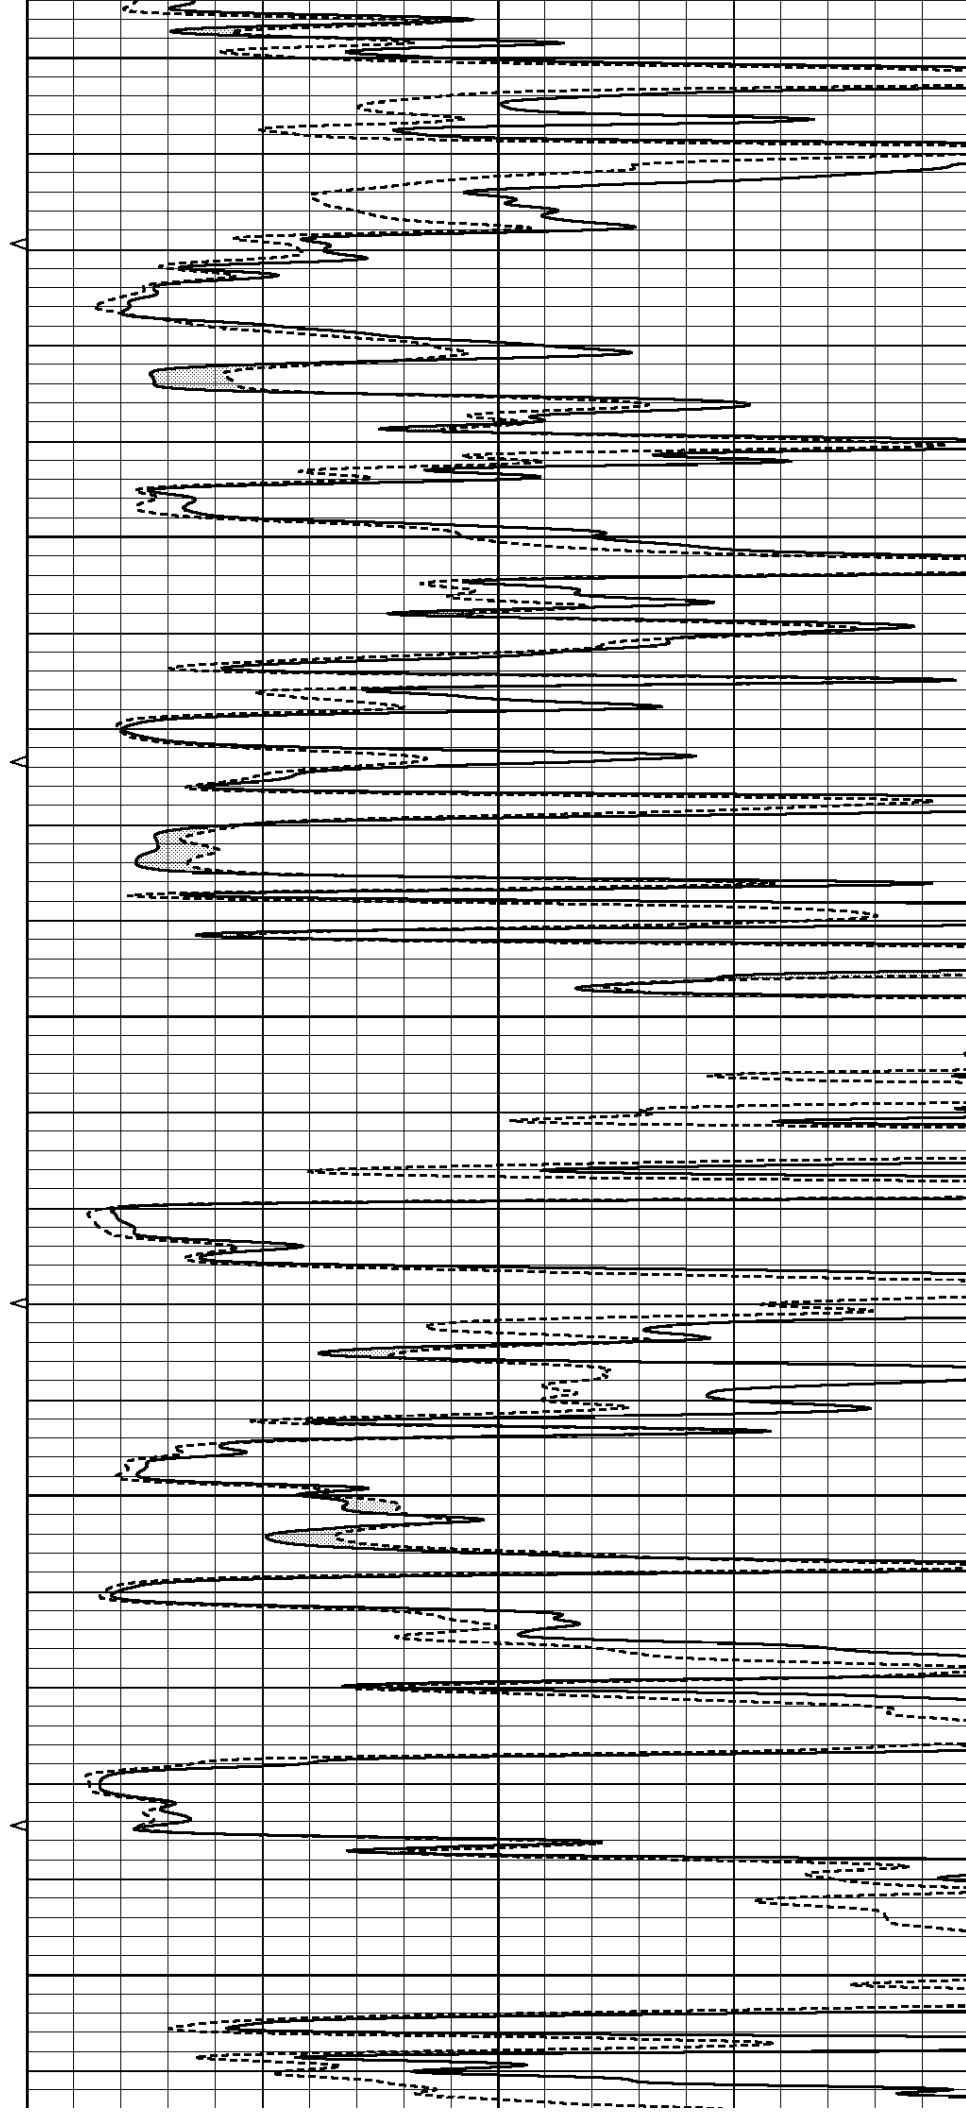

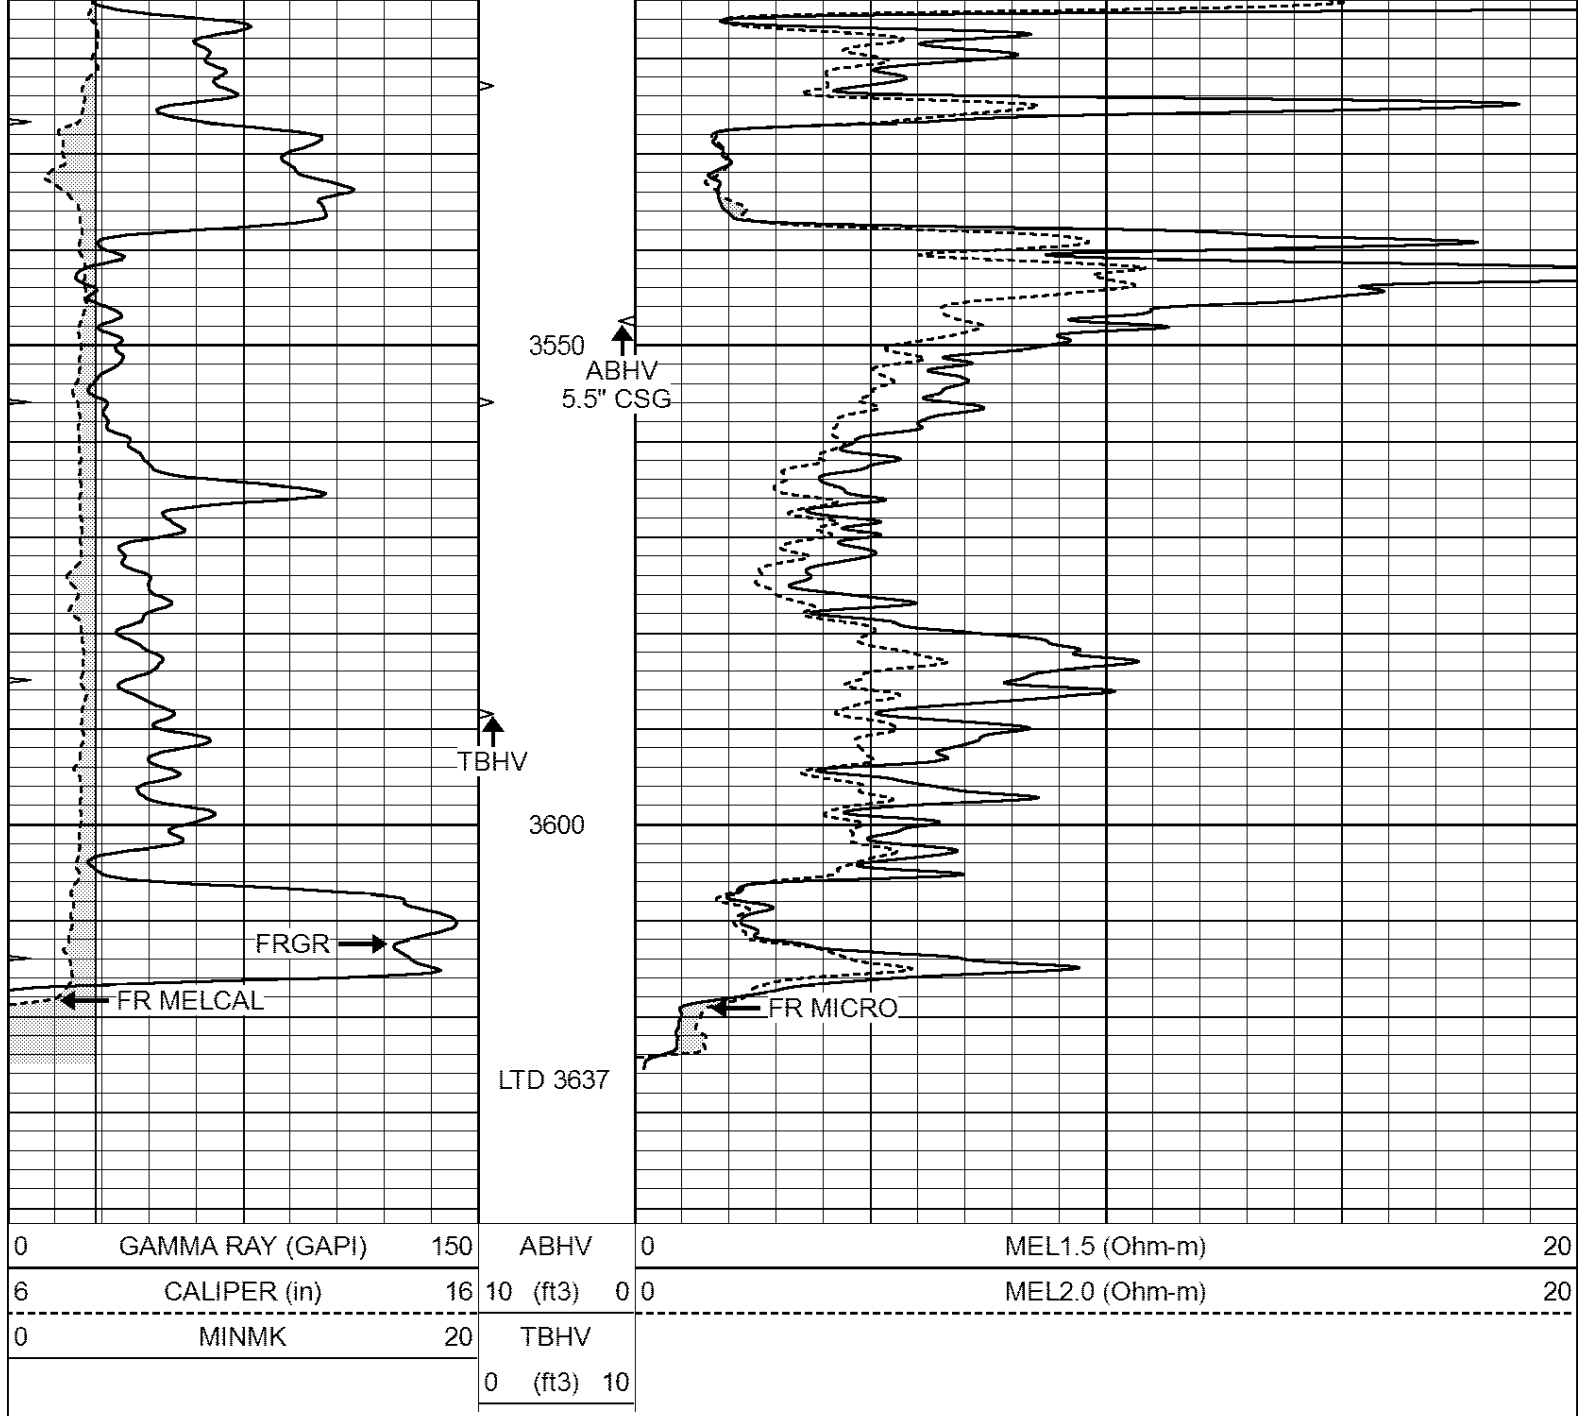


REPEAT SECTION

Database File: 26215ddn.db
 Dataset Pathname: pass7.1
 Presentation Format: _micro
 Dataset Creation: Thu Oct 23 21:56:16 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		



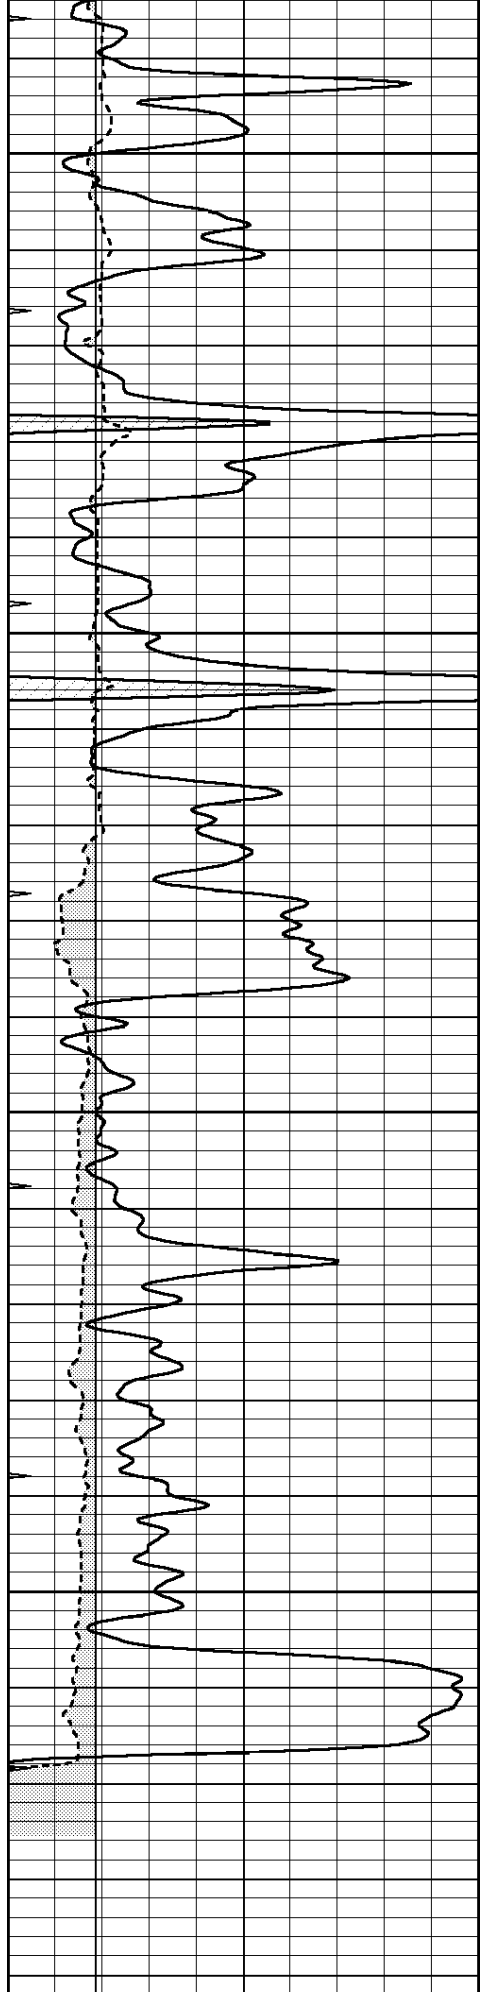

3450

3500

3550

3600

0 GAMMA RAY (GAPI) 150


6 CALIPER (in) 16

0 MINIMUM 20

ABHV

10 (ft3)

0 0

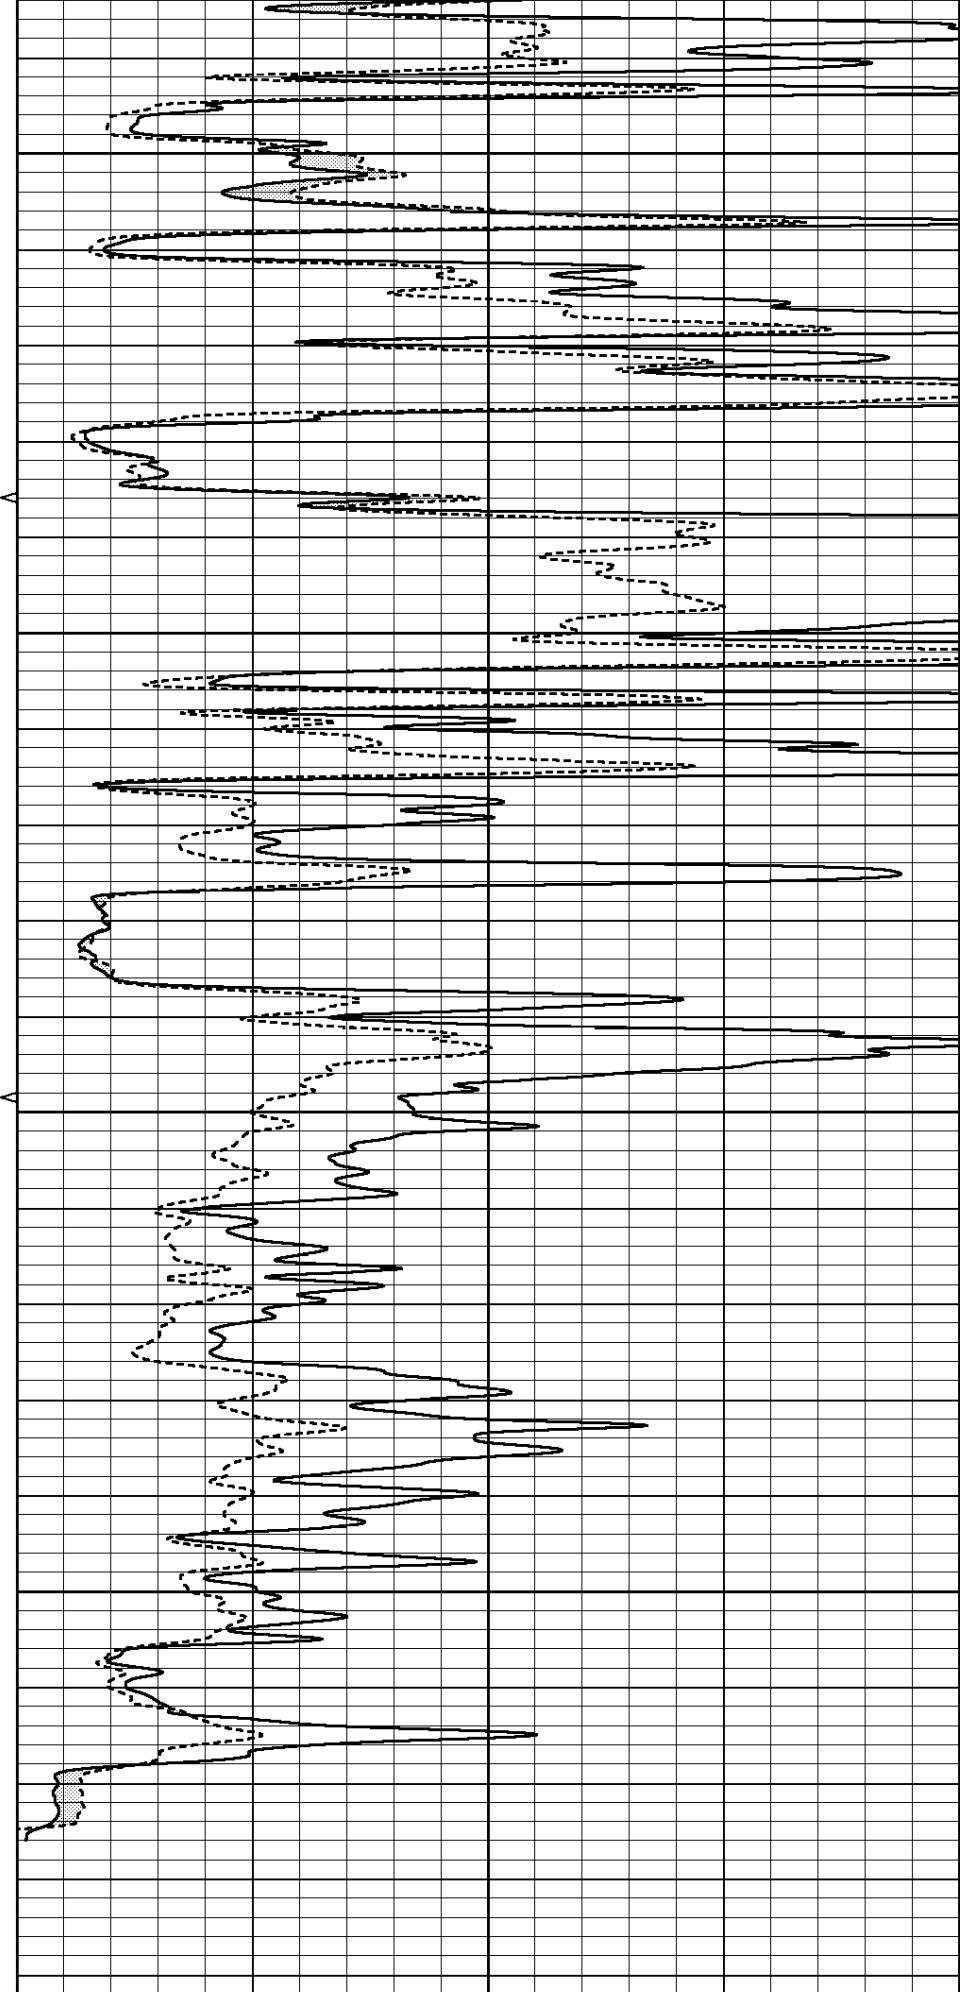

0 MEL1.5 (Ohm-m) 20

0 MEL2.0 (Ohm-m) 20

0 0

0	MINIMUM	20	10	FTIV
		0	(ft3)	10

Calibration Report

Database File: 26215ddn.db
Dataset Pathname: pass7.1
Dataset Creation: Thu Oct 23 21:56:16 2014 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO3
Tool Model: PROBE
Performed: Thu Nov 17 03:06:31 2011

Caliper Calibration: Gain=3.916 Offset=-9.071

References Low Cal High Cal
8.000 14.000
Readings 4.257 5.789

1.5" Calibration: Gain=130.000 Offset=0.200

References Low Cal High Cal
0.000 20.000
Readings 0.004 0.228

2" Calibration: Gain=195.553 Offset=-1.220

References Low Cal High Cal
0.000 20.000
Readings 0.005 0.175

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Sun Aug 17 15:23:09 2014

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.7000 GAPI/cps