Company:	GLOBE OPERATING, INC
Well:	DeVEERT #2
Field:	HUDSON
County:	STAFFORD
State:	KANSAS

MICRO LOG

Date:	03-Mar-2017
Surface Coordinates:	34 - 21S - 13W
	1980 FSL 1980 FWL
Permanent Datum:	GROUND ELEVATION
Elevation:	1878 ft above PERMANENT DATUM
Log Measured From:	KB, 10 ft above PERMANENT DATUM
Drilling Measured From:	KB
API Number:	15-185-23693-0000
Run Number:	ONE
Depth Driller:	3800 ft
Depth Logger:	3802 ft
Bottom Logged Interval:	3800 ft
Top Logged Interval:	2800 ft
Casing Driller Size at Depth:	8.625 in @ 221 ft
Casing Logger Size at Depth:	NONE
Bit Size:	7.875 in
Type Fluid in the Hole:	CHEMICAL
Density:	9.2 lb/gal
Viscosity:	55 s
Fluid Loss:	8.4 cc
Source of Sample:	FLOWLINE
Rm @ Measured Temp:	0.64 @ 72 degF
Rmf @ Measured Temp:	0.48 @ 72 degF
Rmc @ Measured Temp:	0.86 @ 72 degF
Source of Rmf/Rmc:	CALC
Rm @ BHT:	0.32 @ 120 degF
Time Since Circulation:	9 hours
Time Since Stop in Hole:	1.5 hours
Max. Recorded Temp:	120 degF
Equipment:	10-Mile
Recorded by:	Cale Scott
Witnessed by:	Chris Cox

Full Mnc ---

In interpretation our opinions based on inferences from electrical or other measurements are our opinion and do not guarantee the accuracy or correctness of any interpretation, and we shall not be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set forth in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HUDSON, KS. 300' S. THROUGH TREE ROW

MAIN SECTION

Database File: hd35ram.db
Dataset Pathname: pass5.3
Presentation Format: mcr-Main
Dataset Creation: Mon Mar 13 17:22:39 2017 by Cale SOC 1234567
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MELT 1 (Ohm-m) 40
0	CALIPER (in)	10.10	JRS	0.0	MEL 20 (Ohm-m) 40
	MEMM	20	TBHV		
		0	JRS	10	

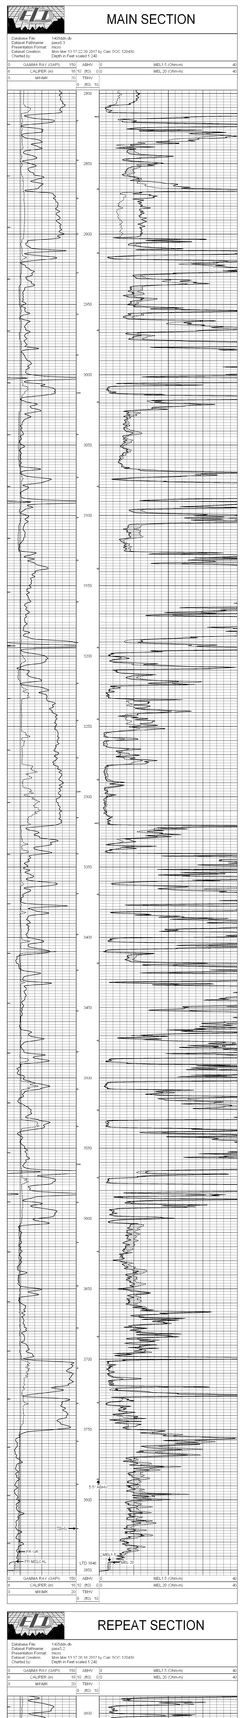

0	GAMMA RAY (GAPI)	150	ABHV	0	MELT 1 (Ohm-m) 40
0	CALIPER (in)	10.10	JRS	0.0	MEL 20 (Ohm-m) 40
	MEMM	20	TBHV		
		0	JRS	10	

REPEAT SECTION

Database File: hd35ram.db
Dataset Pathname: pass5.3
Presentation Format: mcr-Main
Dataset Creation: Mon Mar 13 17:39:38 2017 by Cale SOC 1234567
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MELT 1 (Ohm-m) 40
0	CALIPER (in)	10.10	JRS	0.0	MEL 20 (Ohm-m) 40
	MEMM	20	TBHV		
		0	JRS	10	



0	GAMMA RAY (GAPI)	150	ABHV	0	MELT 1 (Ohm-m) 40
0	CALIPER (in)	10.10	JRS	0.0	MEL 20 (Ohm-m) 40
	MEMM	20	TBHV		
		0	JRS	10	

Database File: hd35ram.db
Dataset Pathname: pass5.3
Dataset Creation: Mon Mar 13 17:22:39 2017 by Cale SOC 1234567

Calibration Report

MICRO Calibration Report

Serial Number	07001
Tool Model	Probe1
Performed	Mon Mar 13 17:16:26 2017

Caliper Calibration: Gain=3.120 Offset=1.520

	Low Cal	High Cal
References	4.250	10.000
Readings	4.700	10.500

1.5" Calibration: Gain=40.000 Offset=0.000

	Low Cal	High Cal
References	0.000	50.000
Readings	0.001	1.240

2" Calibration: Gain=40.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.279

Gamma Ray Calibration Report

Serial Number	07001G
Tool Model	GR8GLGR
Performed	Mon Mar 13 17:16:21 2017

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.2100 GAPI/cps