



MICRO LOG

Company		DIXON OPERATING CO., LLC.	
Well		SIEFKES #1 SWD OWWO	
Field		MIKES METEOR	
County		STAFFORD	
State		KANSAS	
Location:		API # : 15-185-23590-00-01	
SEC 34 TWP 22S RGE 12W		CDL/CNL DIL	
Permanent Datum Log Measured From		GROUND LEVEL Elevation 1833'	
Drilling Measured From		KELLY BUSHING 9' A.G.L. KELLY BUSHING Elevation 1840 G.L. 1833	
Date	07/28/17		
Run Number	TWO		
Depth Driller	4150		
Depth Logger	4154		
Bottom Logged Interval	4152		
Top Log Interval	3150		
Casing Driller	8 5/8@ 265		
Casing Logger	265		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 38000 PPM	
Density / Viscosity	9.1/50		
pH / Fluid Loss	7.0/NC		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80@86		
Rmt @ Meas. Temp	.60@86		
Rmc @ Meas. Temp	.96@86		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.58@117		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	117F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	BRUCE A. REED		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
HUDSON EAST TO 60 TH RD.
SOUTH TO 1 ST TANK BATTERY,
EAST INTO.







MAIN PASS


Database File: 1808ddn.db
Dataset Pathname: pass5M
Presentation Format: _micro
Dataset Creation: Fri Jul 28 18:36:13 2017 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3) 10			

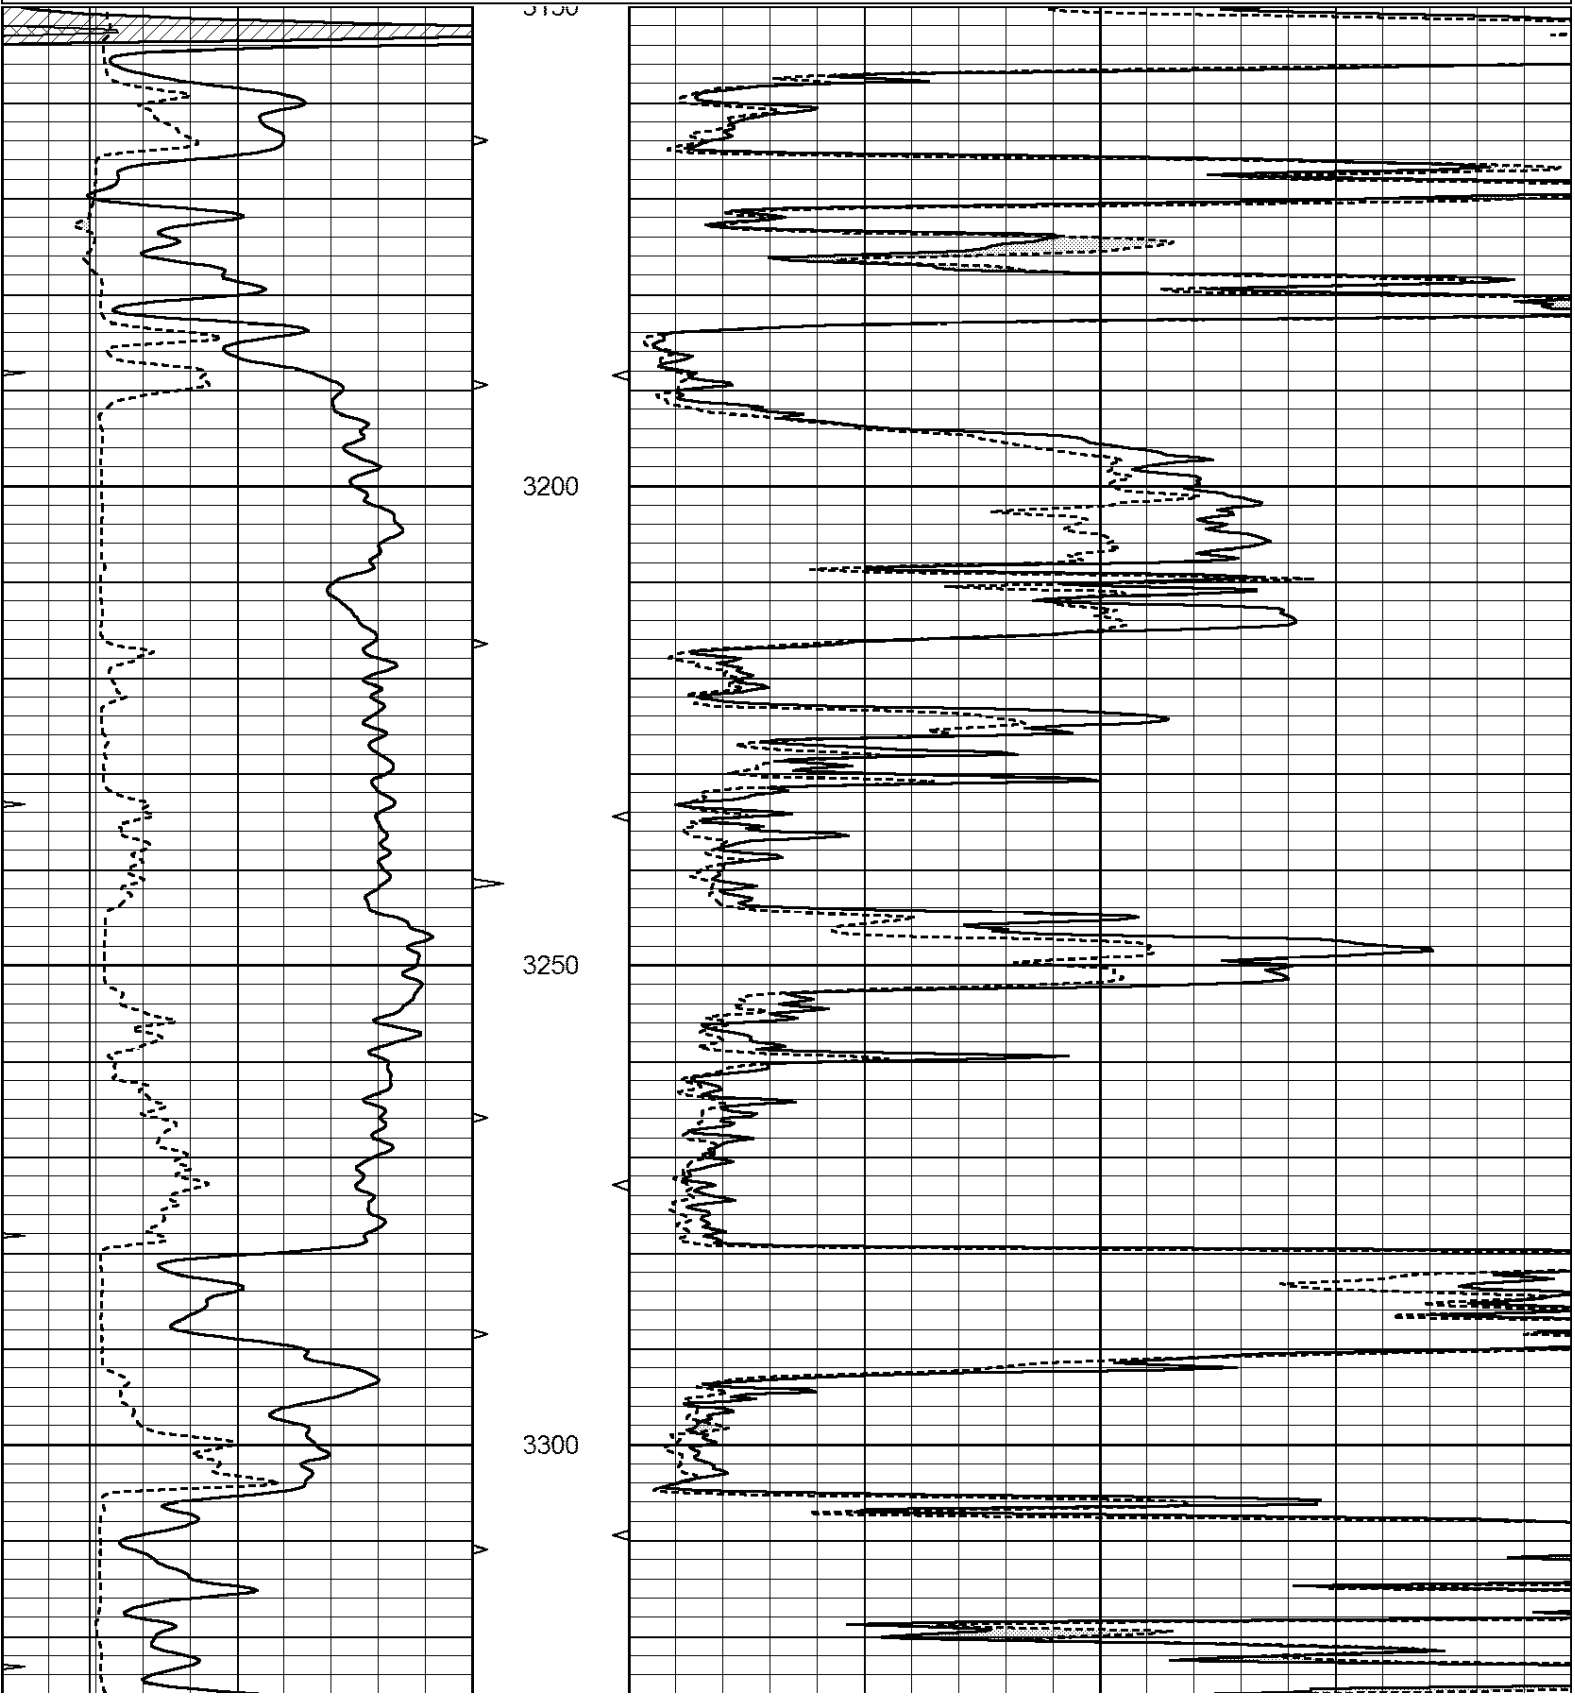

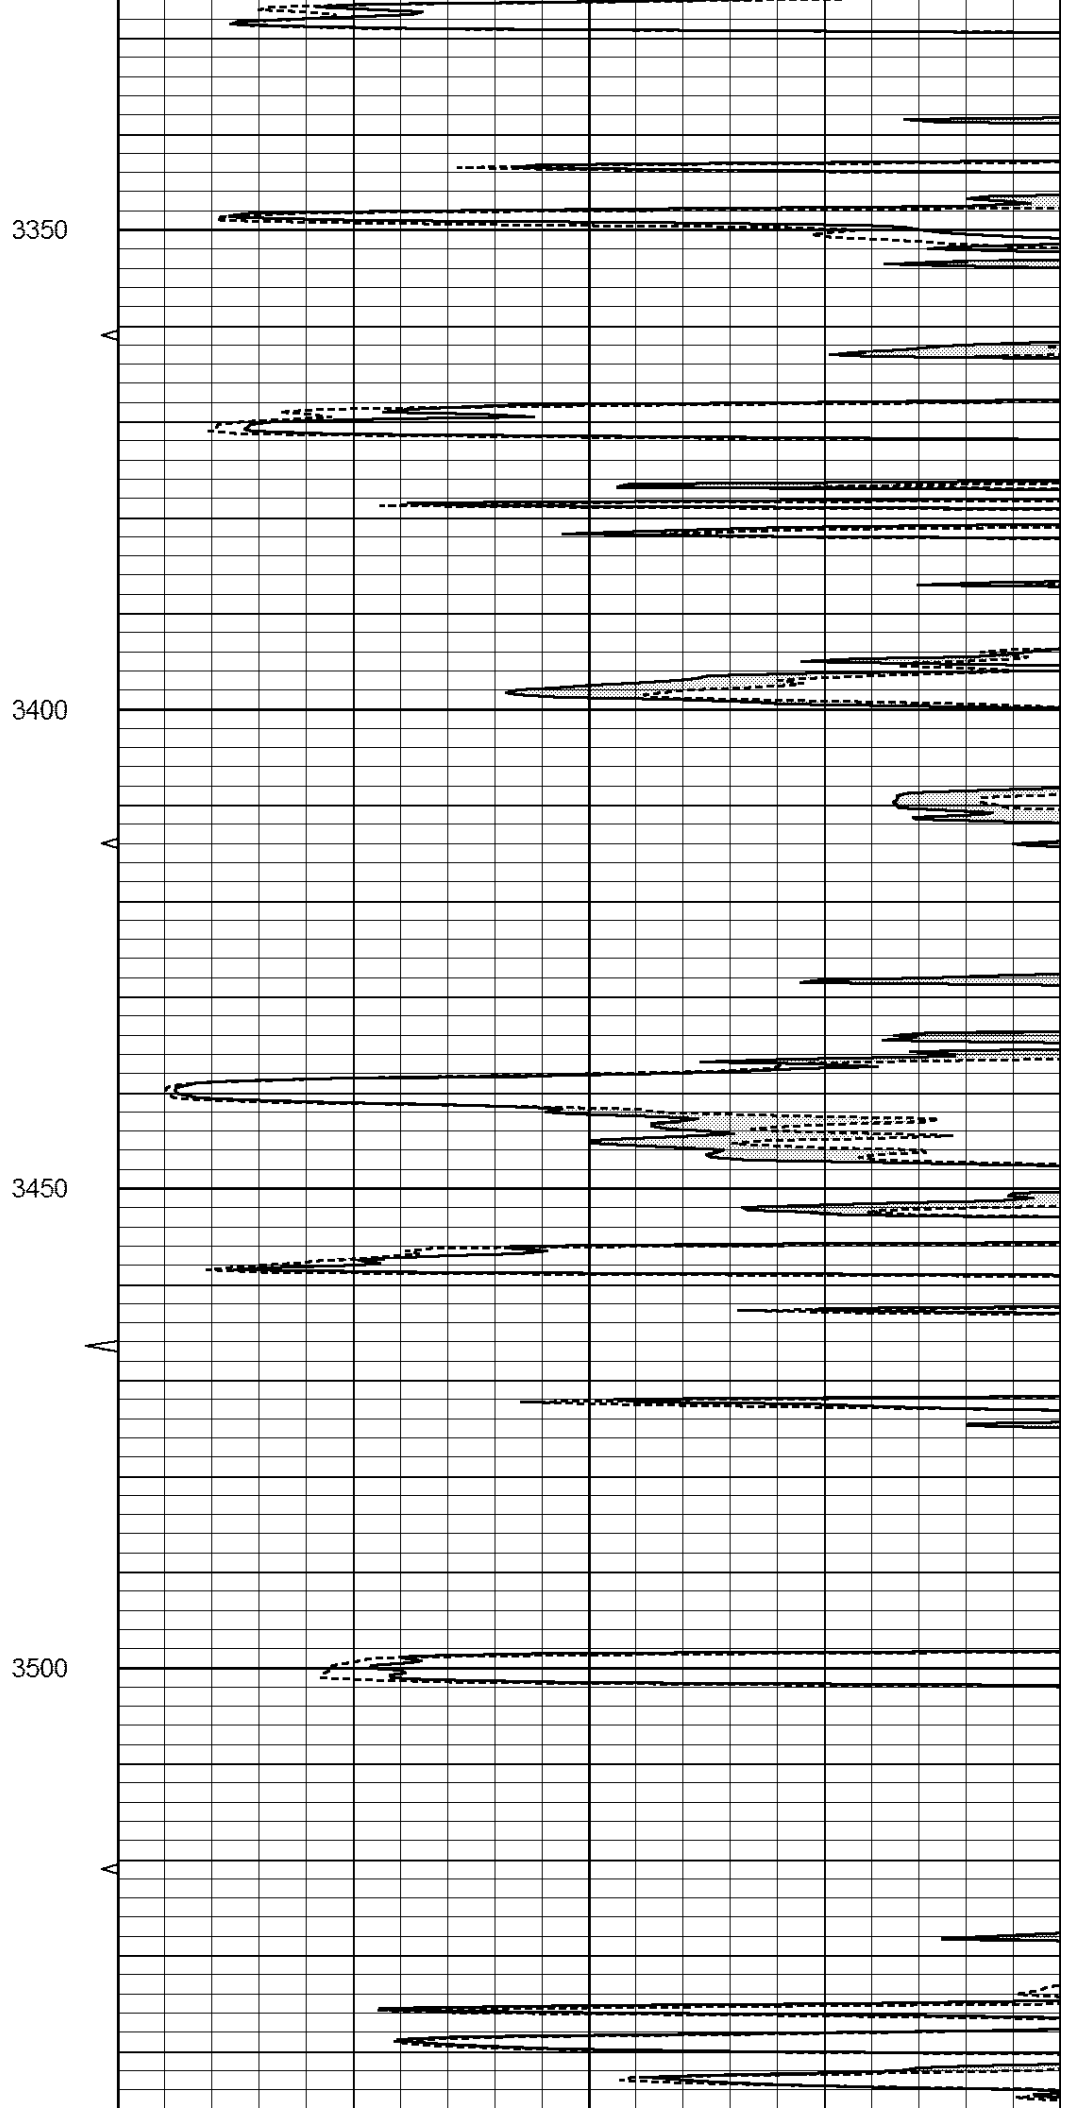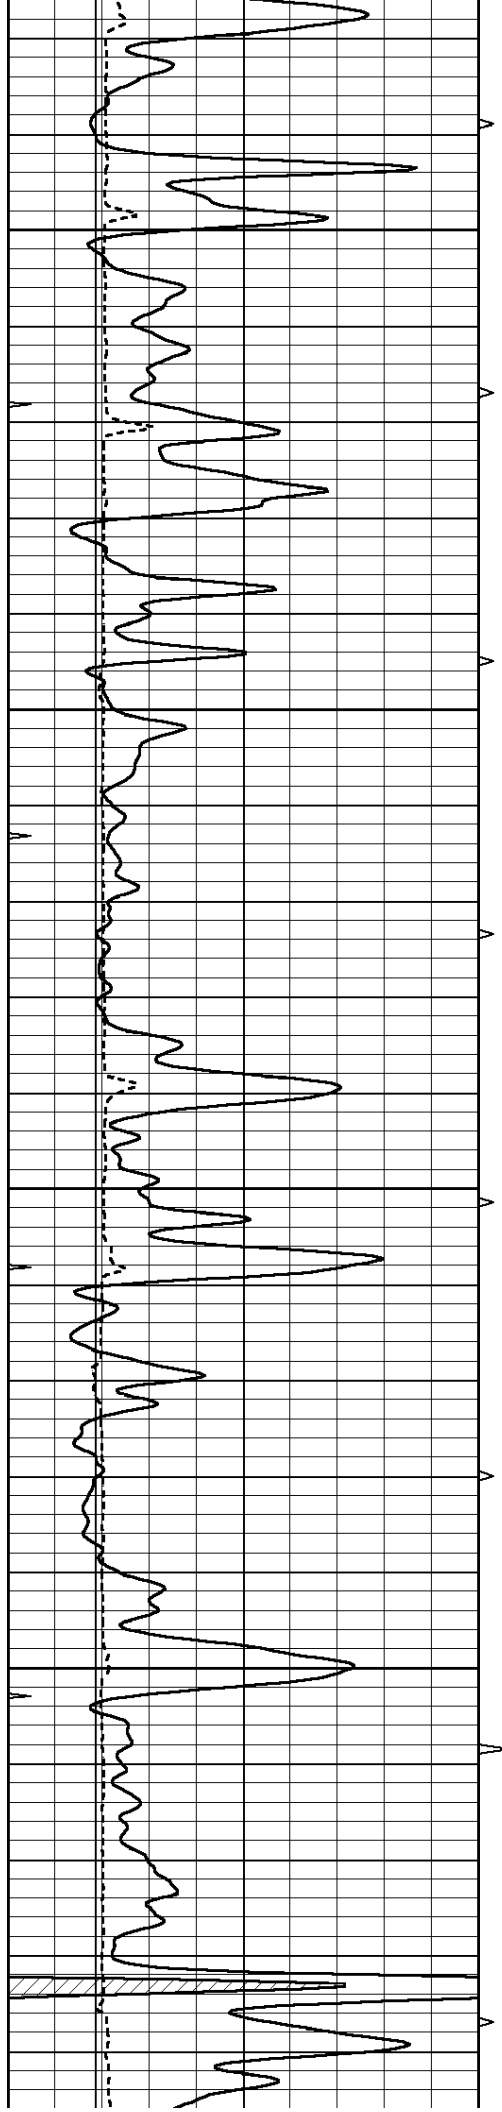

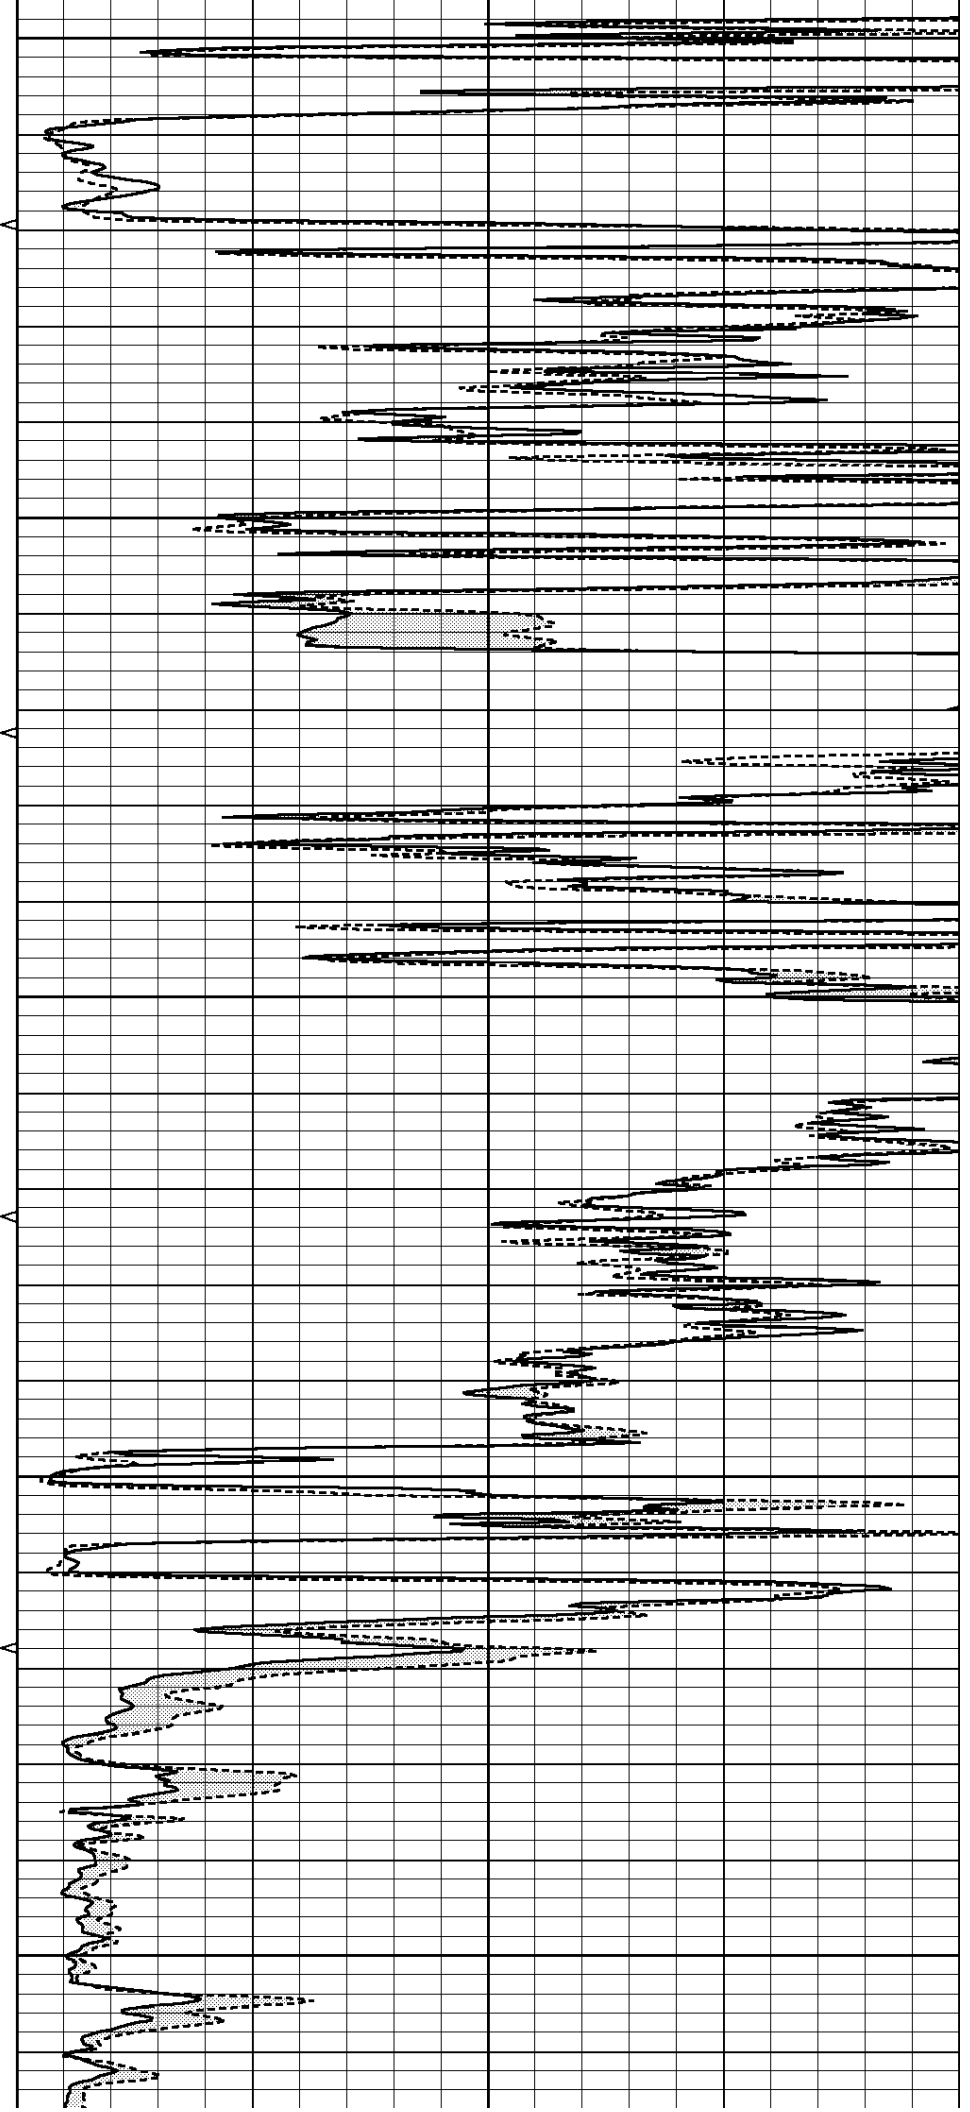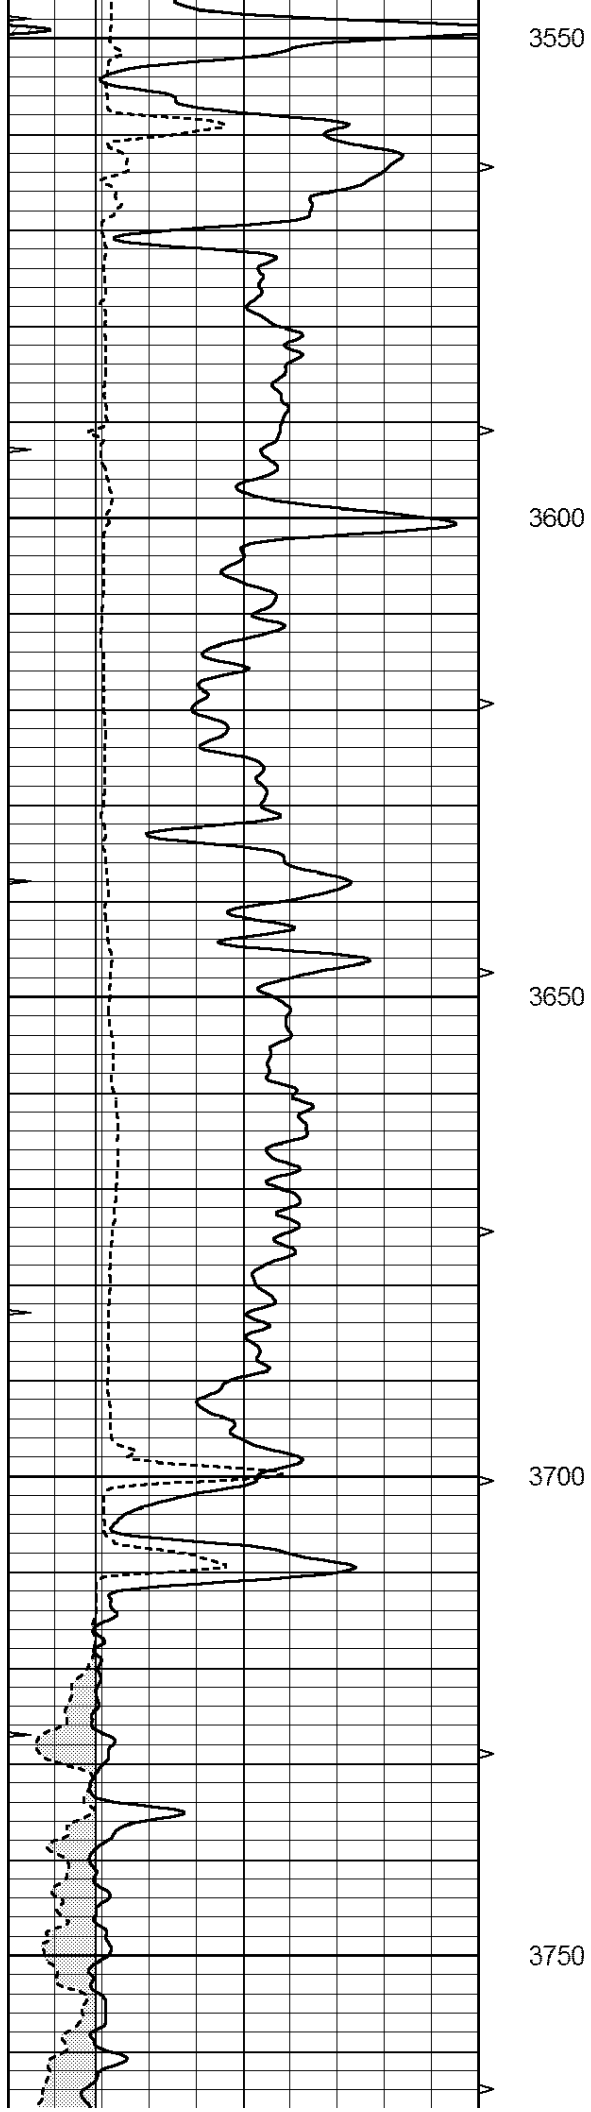

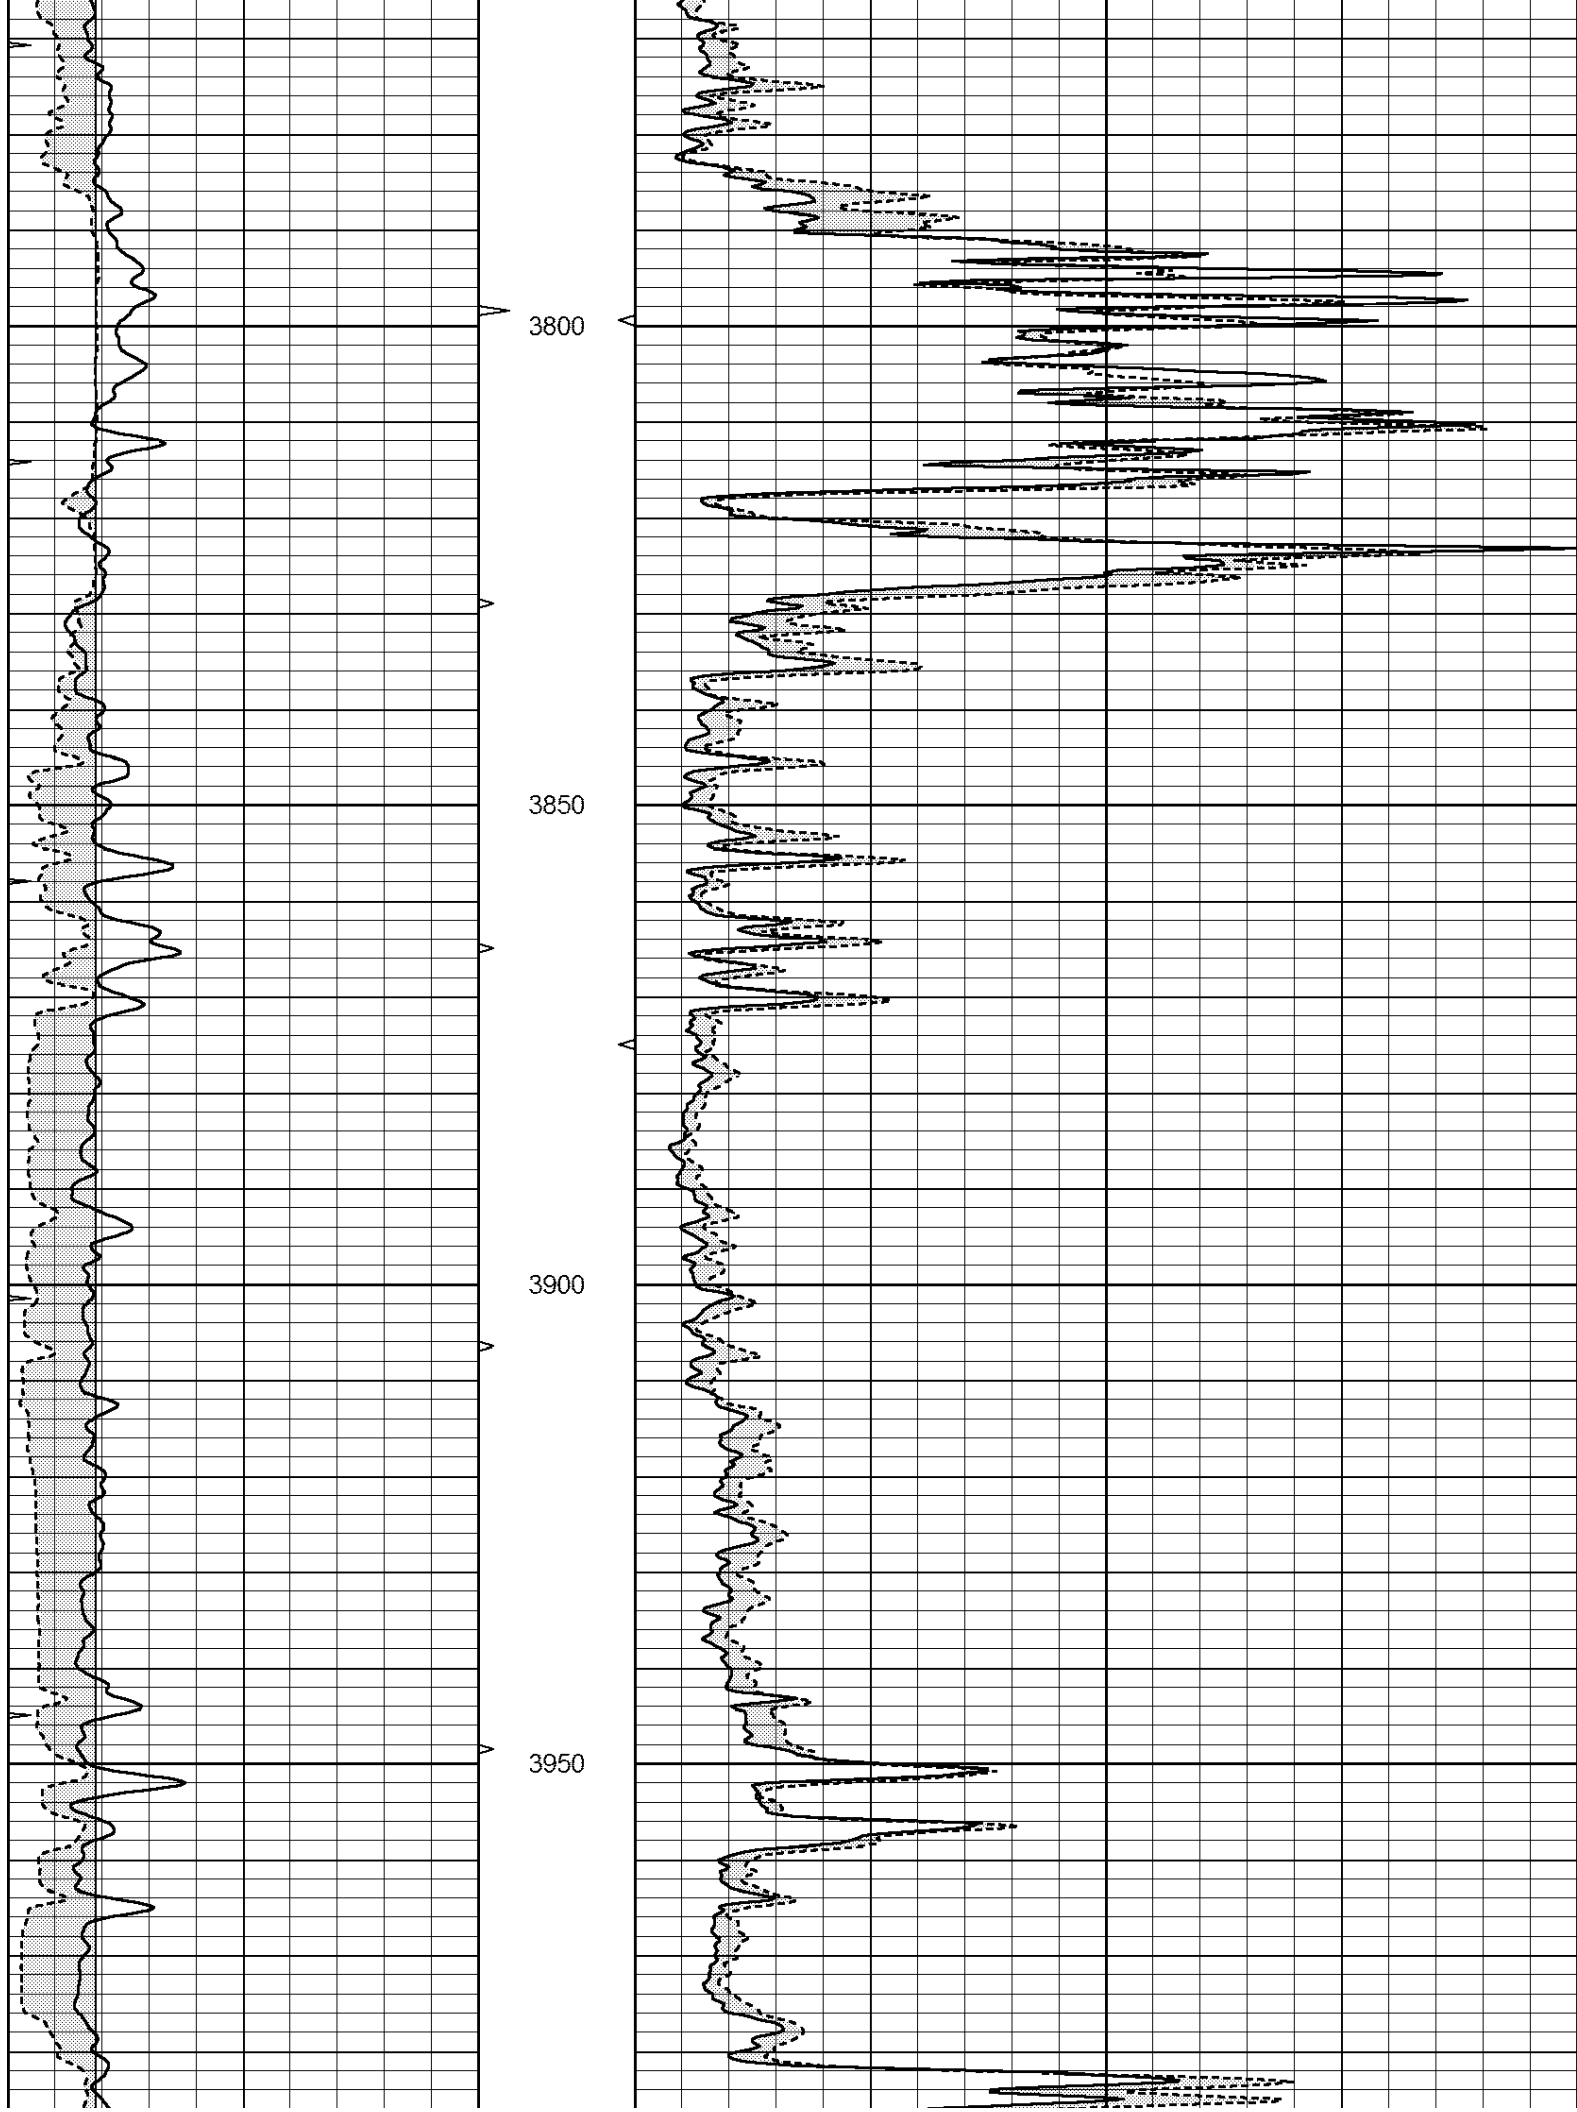


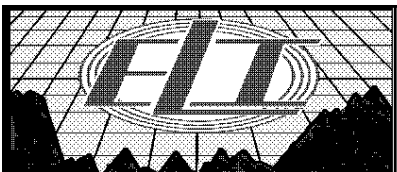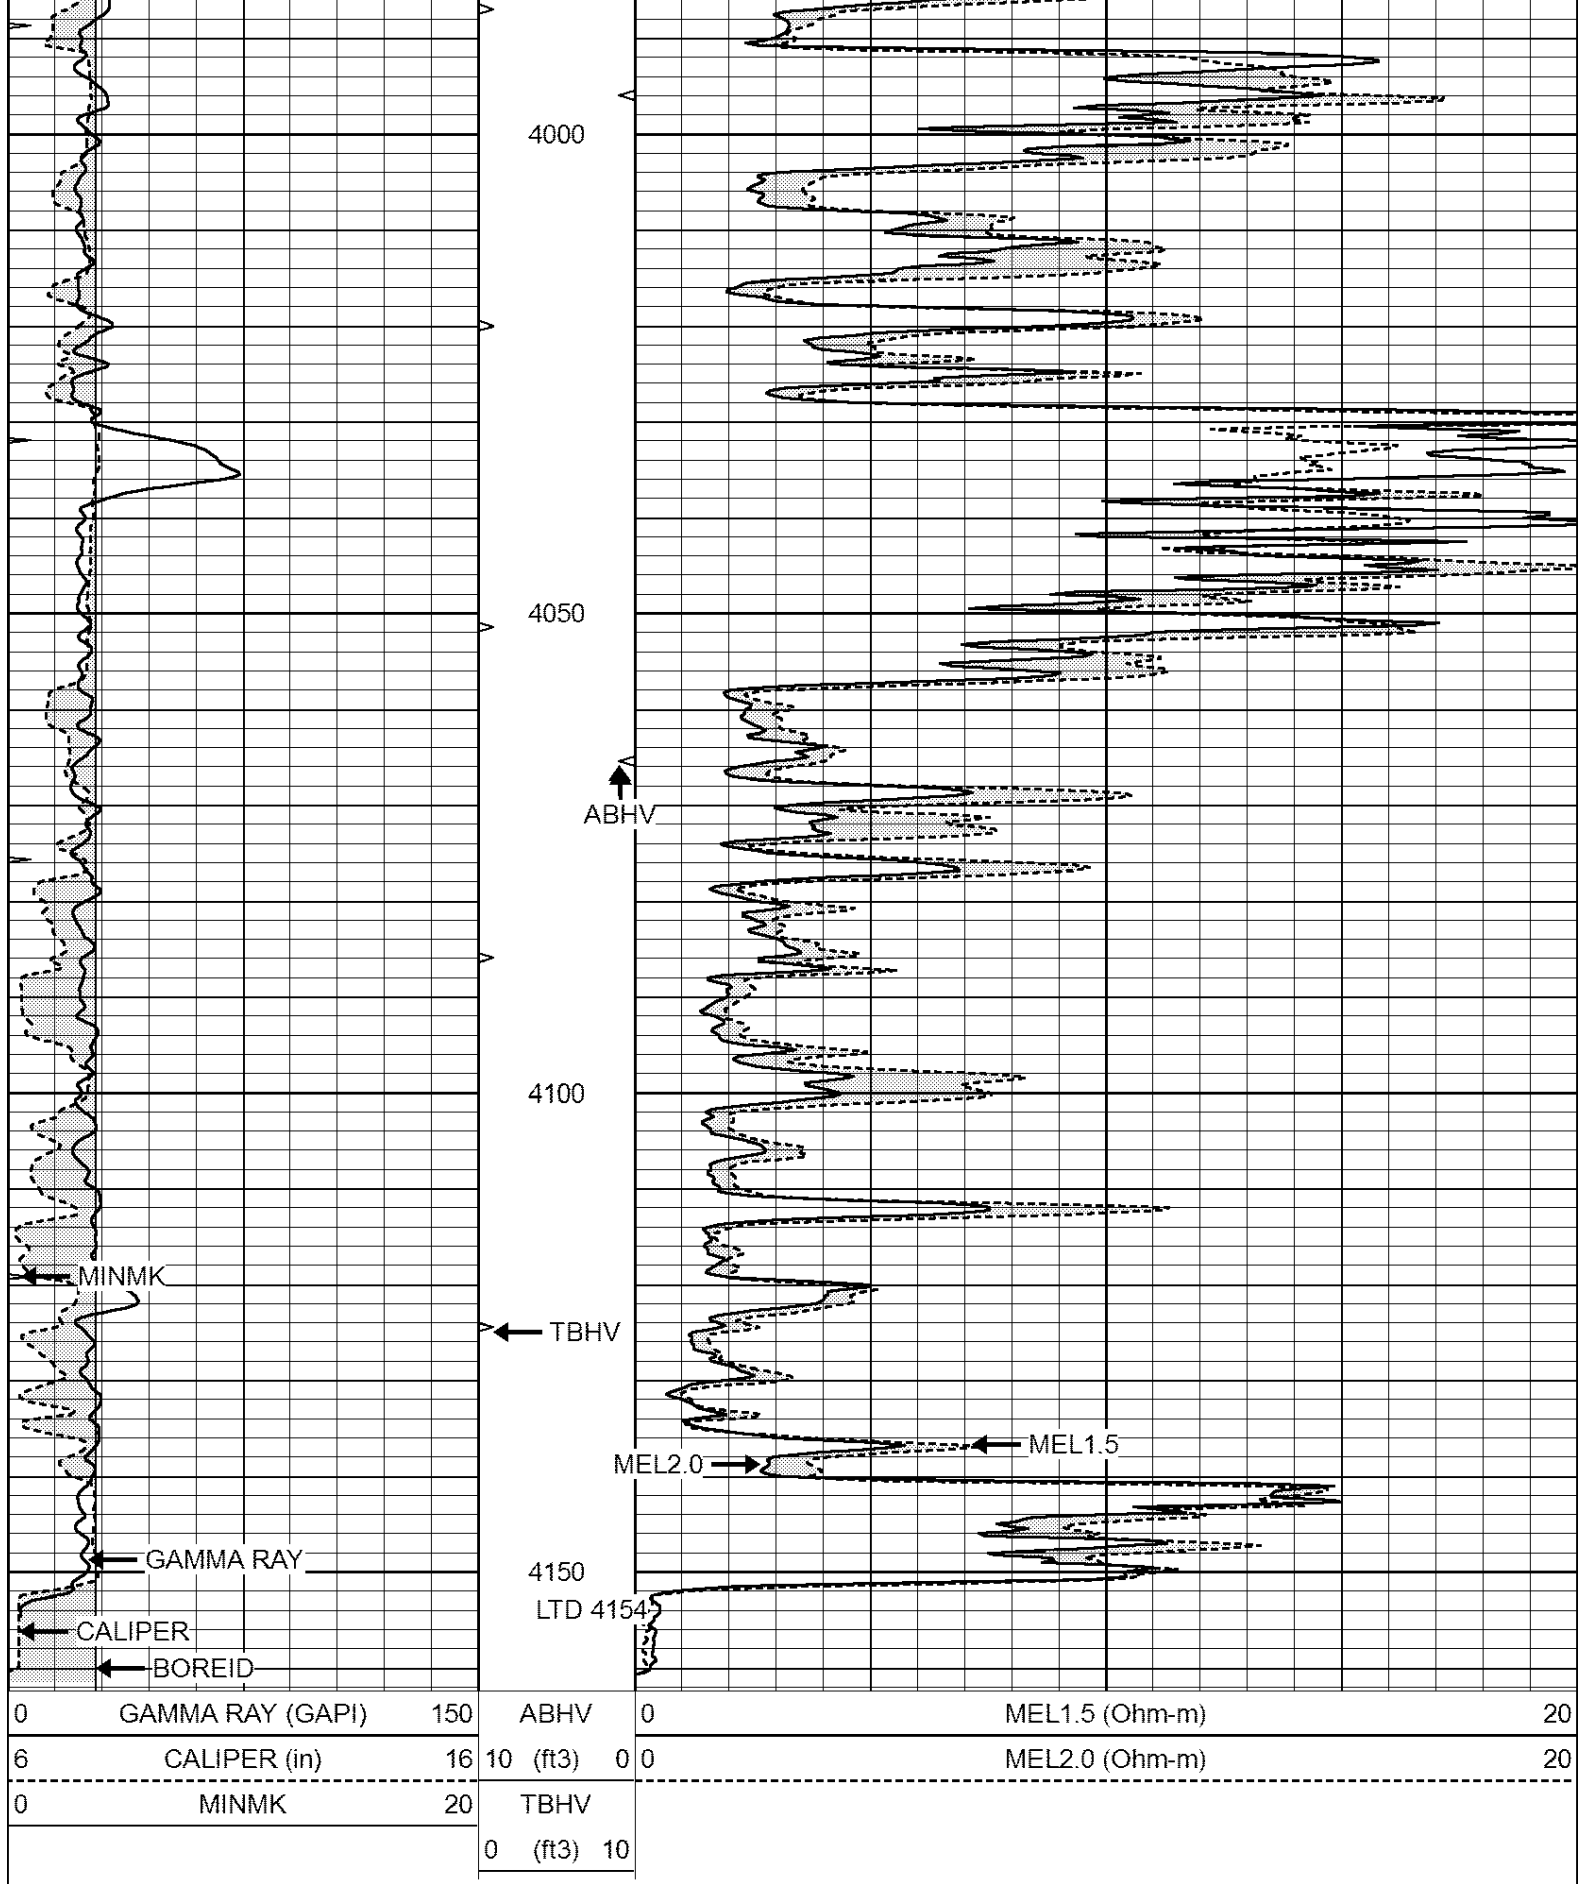


REPEAT SECTION

Database File: 1808ddn.db
Dataset Pathname: pass4M
Presentation Format: _micro
Dataset Creation: Fri Jul 28 18:40:49 2017 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3) 10			

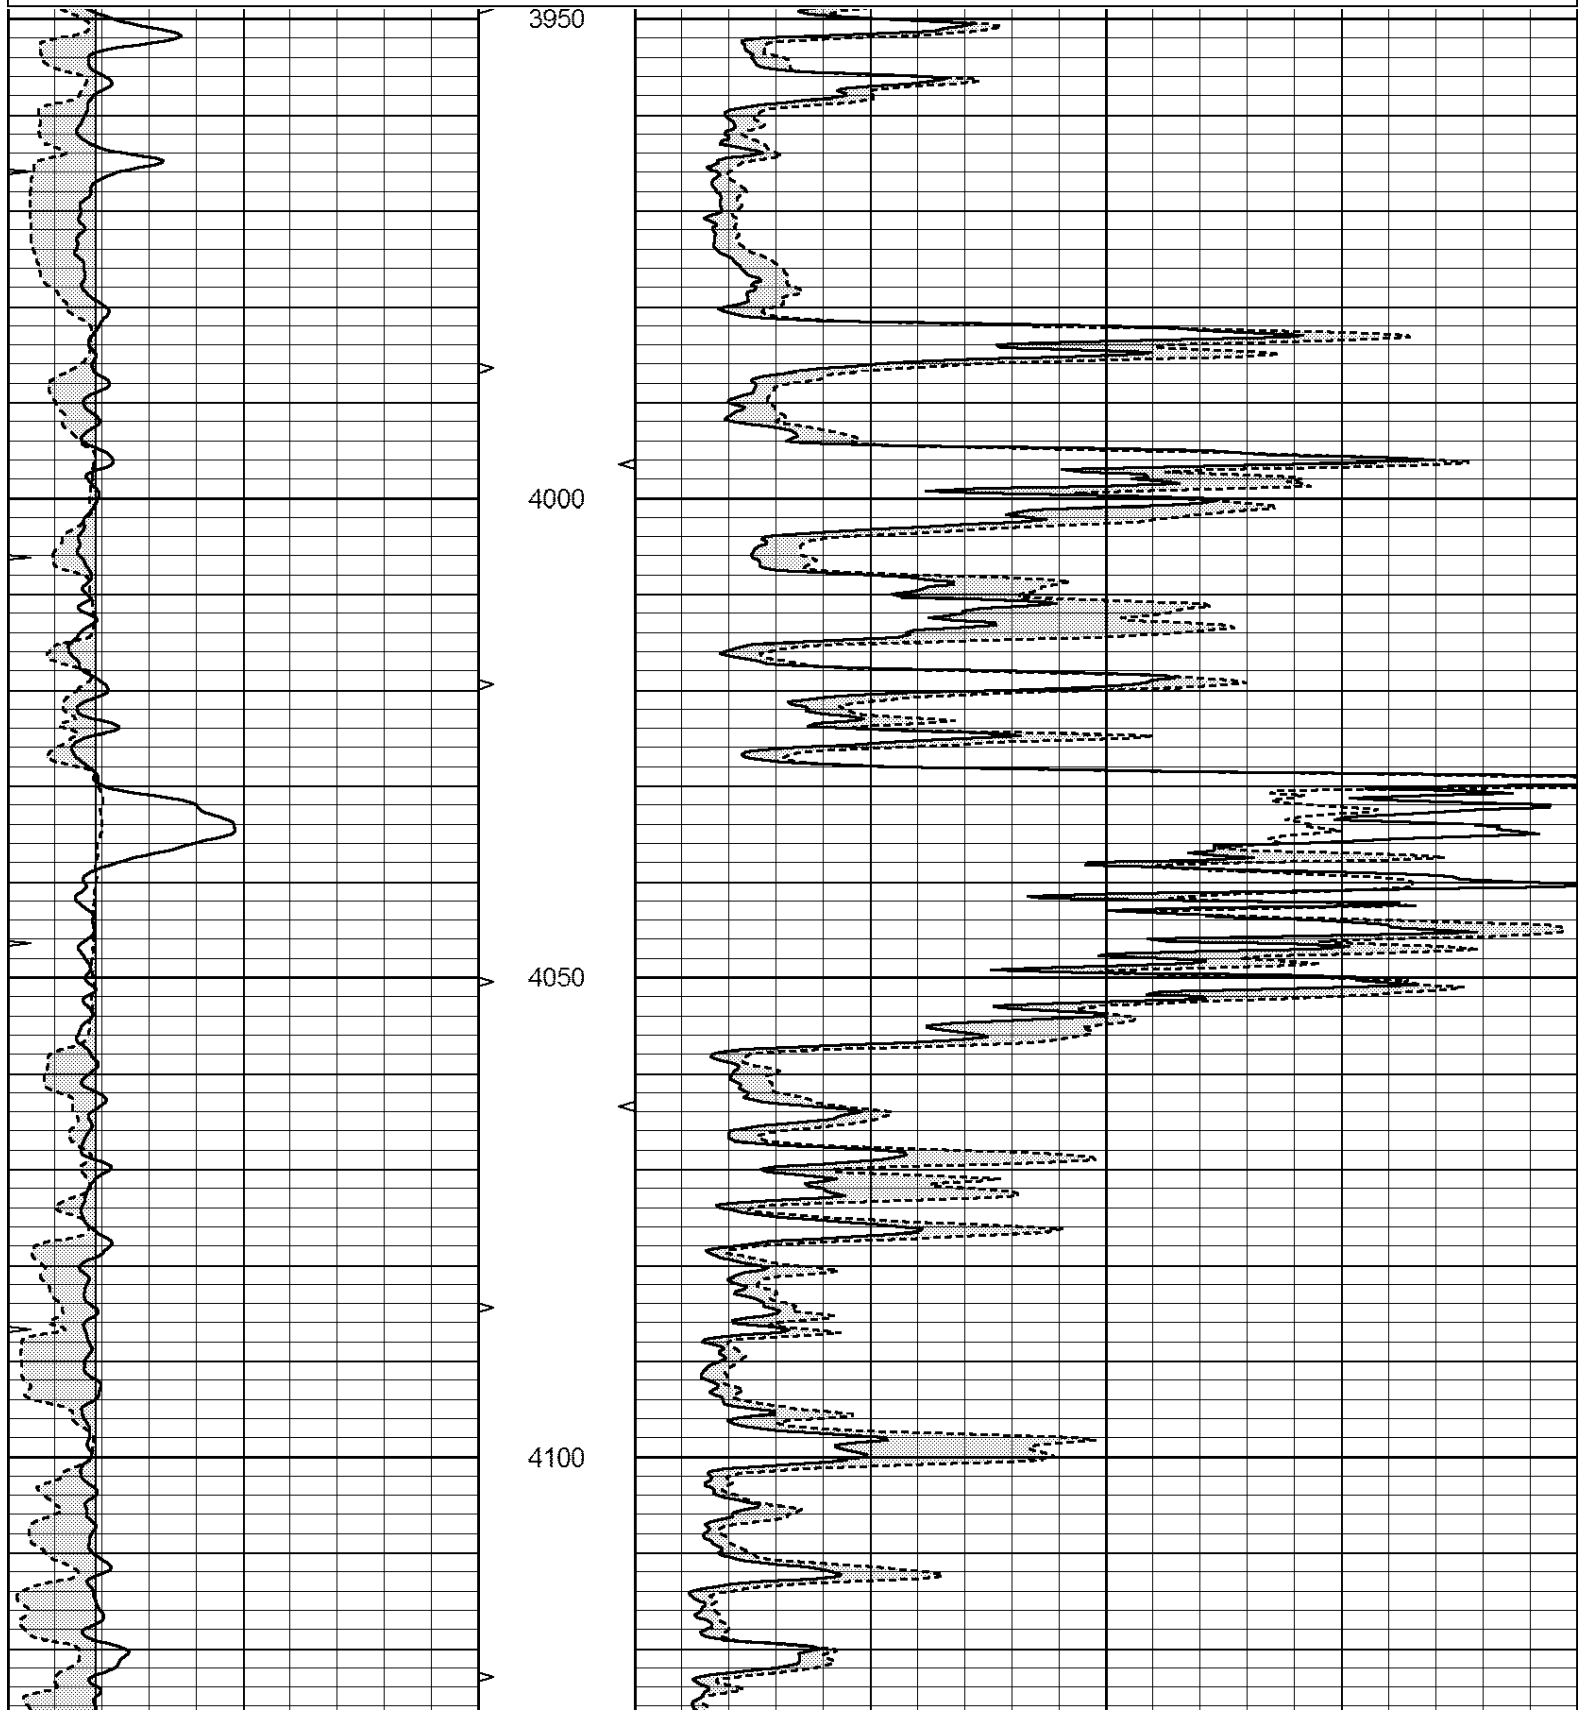

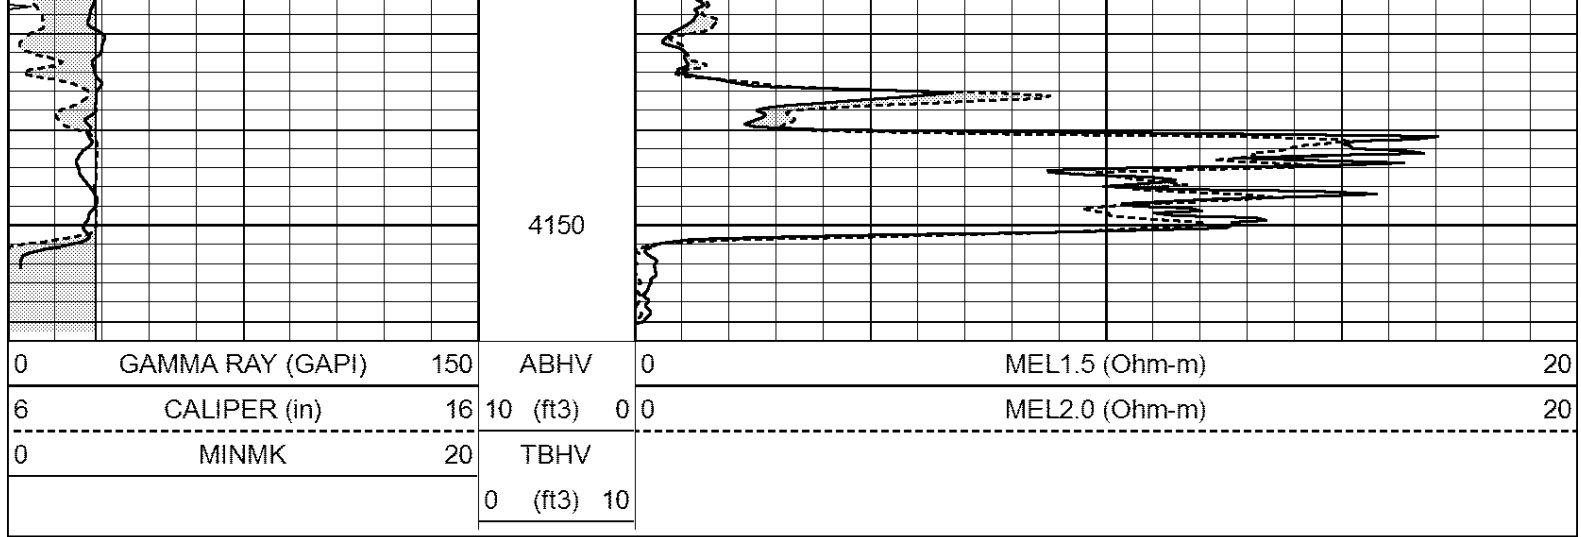

Calibration Report

Database File: 1808ddn.db
Dataset Pathname: pass4M
Dataset Creation: Fri Jul 28 18:40:49 2017 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number:	MICRO6	
Tool Model:	PROBE	
Performed:	Mon Apr 10 10:24:59 2017	
Caliper Calibration:	Gain=3.960	Offset=4.601
References	Low Cal	High Cal
Readings	7.000	14.000
	0.555	2.323
1.5" Calibration:	Gain=89.075	Offset=-0.400
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	1.196
2" Calibration:	Gain=87.000	Offset=-1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.006	0.913

Gamma Ray Calibration Report

Serial Number:	GR2	
Tool Model:	OPEN	
Performed:	Wed Jun 07 21:43:13 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3700	GAPI/cps