



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	VINCENT OIL CORPORATION	Company	VINCENT OIL CORPORATION
Well	IMEL #4-5	Well	IMEL #4-5
Field	KINGSDOWN NORTHWEST	Field	KINGSDOWN NORTHWEST
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-20964-00-00 1050' FSL & 455' FWL NE - NW - SW - SW	Other Services CNL/CDL/PE DIL/SON	
Permanent Datum	SEC 5 TWP 29S RGE 22W	Elevation	
Log Measured From	GROUND LEVEL Elevation 2524 KELLY BUSHING 13' A.G.L.	K.B. 2537 D.F. 2535 G.L. 2524	
Drilling Measured From	KELLY BUSHING		
Date	7-11-15		
Run Number	TWO		
Depth Driller	5400		
Depth Logger	5406		
Bottom Logged Interval	5391		
Top Log Interval	4250		
Casing Driller	8 5/8 @ 688'		
Casing Logger	686'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,800 PPM	
Density / Viscosity	9.2/48		
pH / Fluid Loss	9.0/11.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.30 @ 81F		
Rmf @ Meas. Temp	0.23 @ 81F		
Rmc @ Meas. Temp	0.36 @ 81F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	0.21 @ 129F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	129F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	IAN MABB		
Witnessed By	TOM DUDGEON		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS :FORD, KS - SOUTH TO WILDFIRE RD - EAST 1/4 MILE - NORTH INTO

Database File	26449pe8.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Sat Jul 11 15:04:33 2015
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

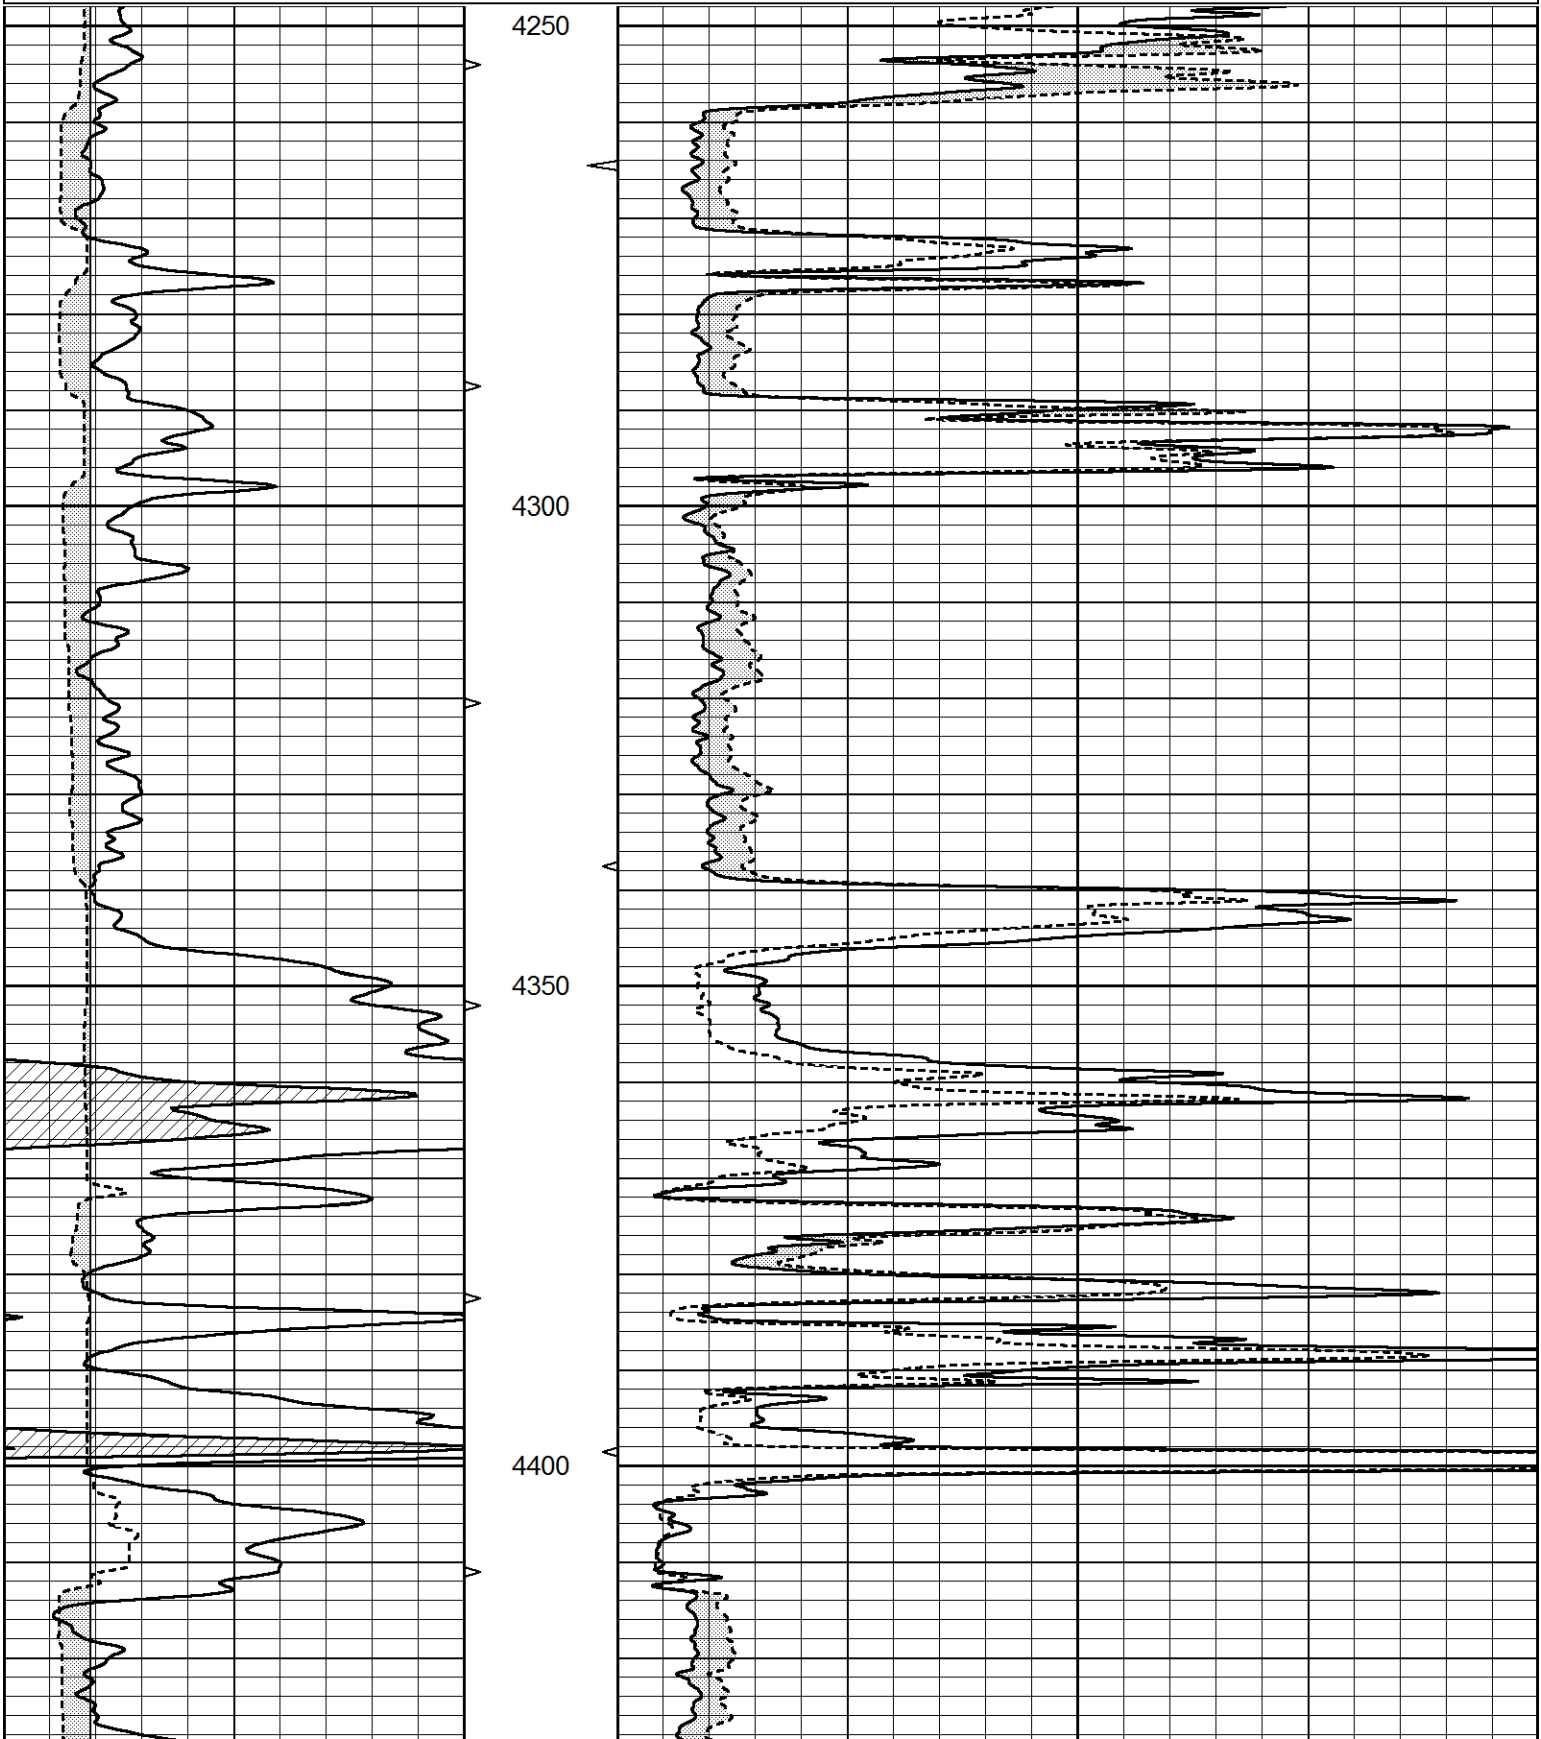

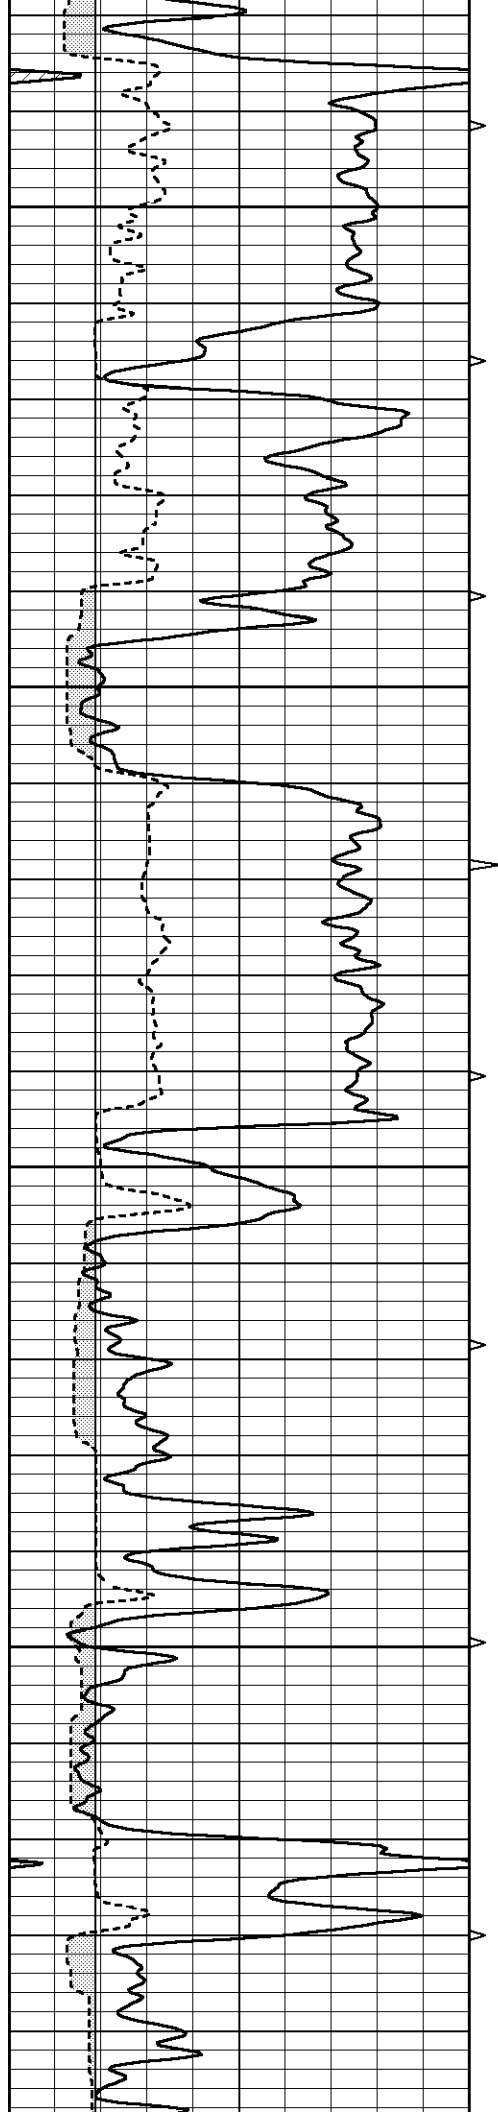



4450

4500

4550

4600

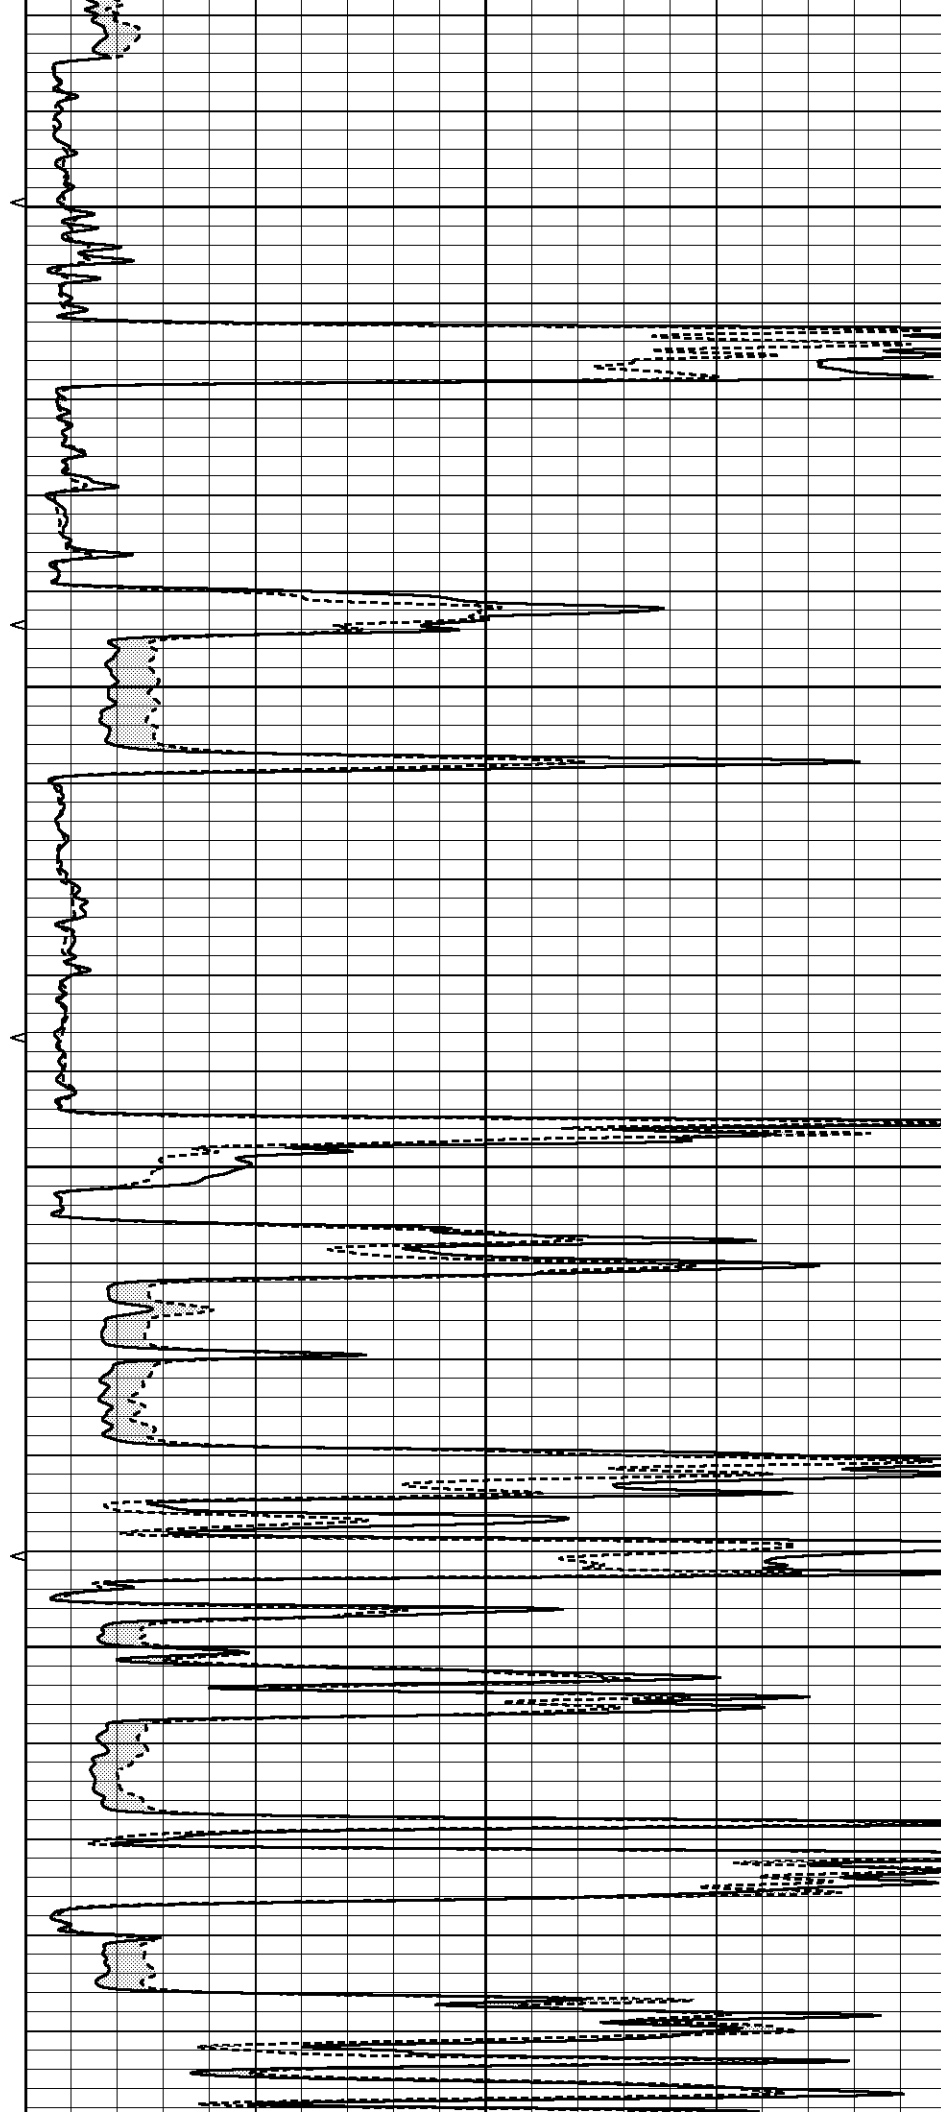

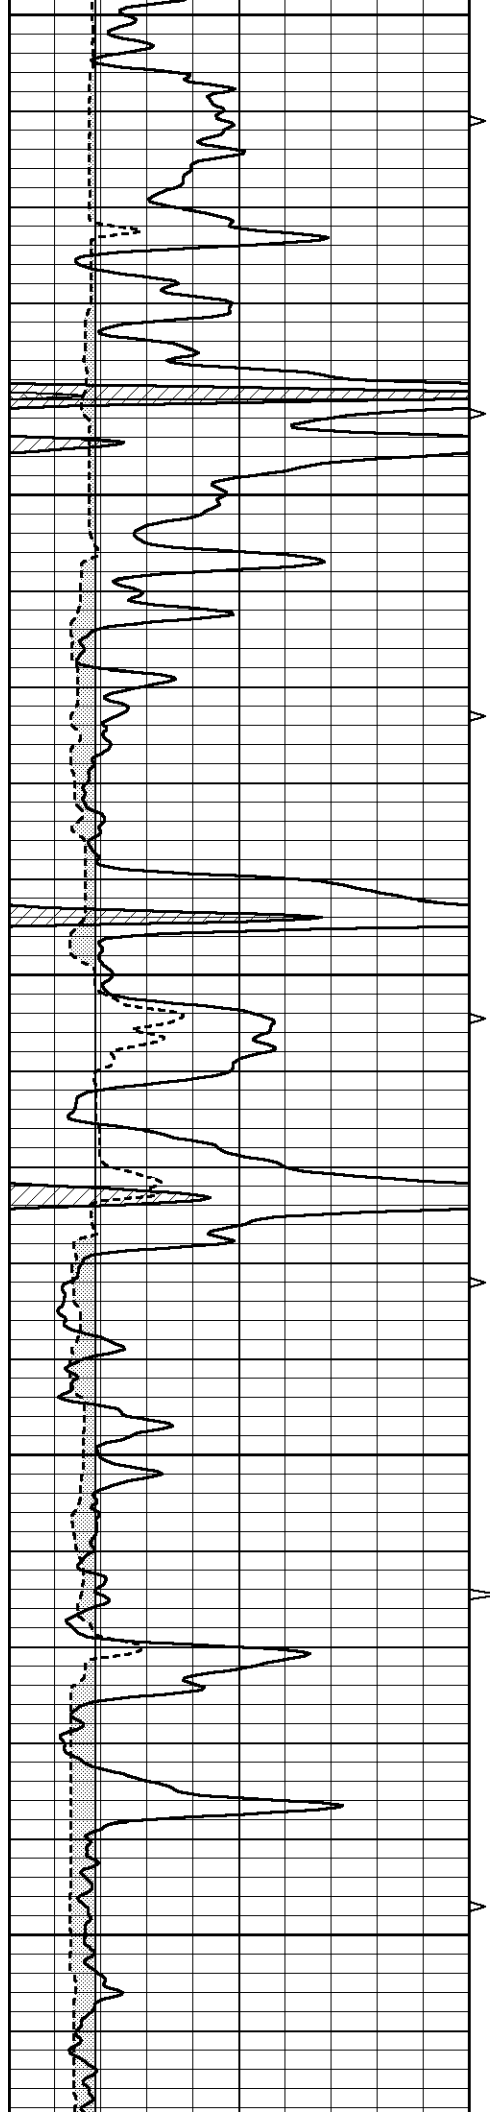


4650


4700

4750

4800

4850

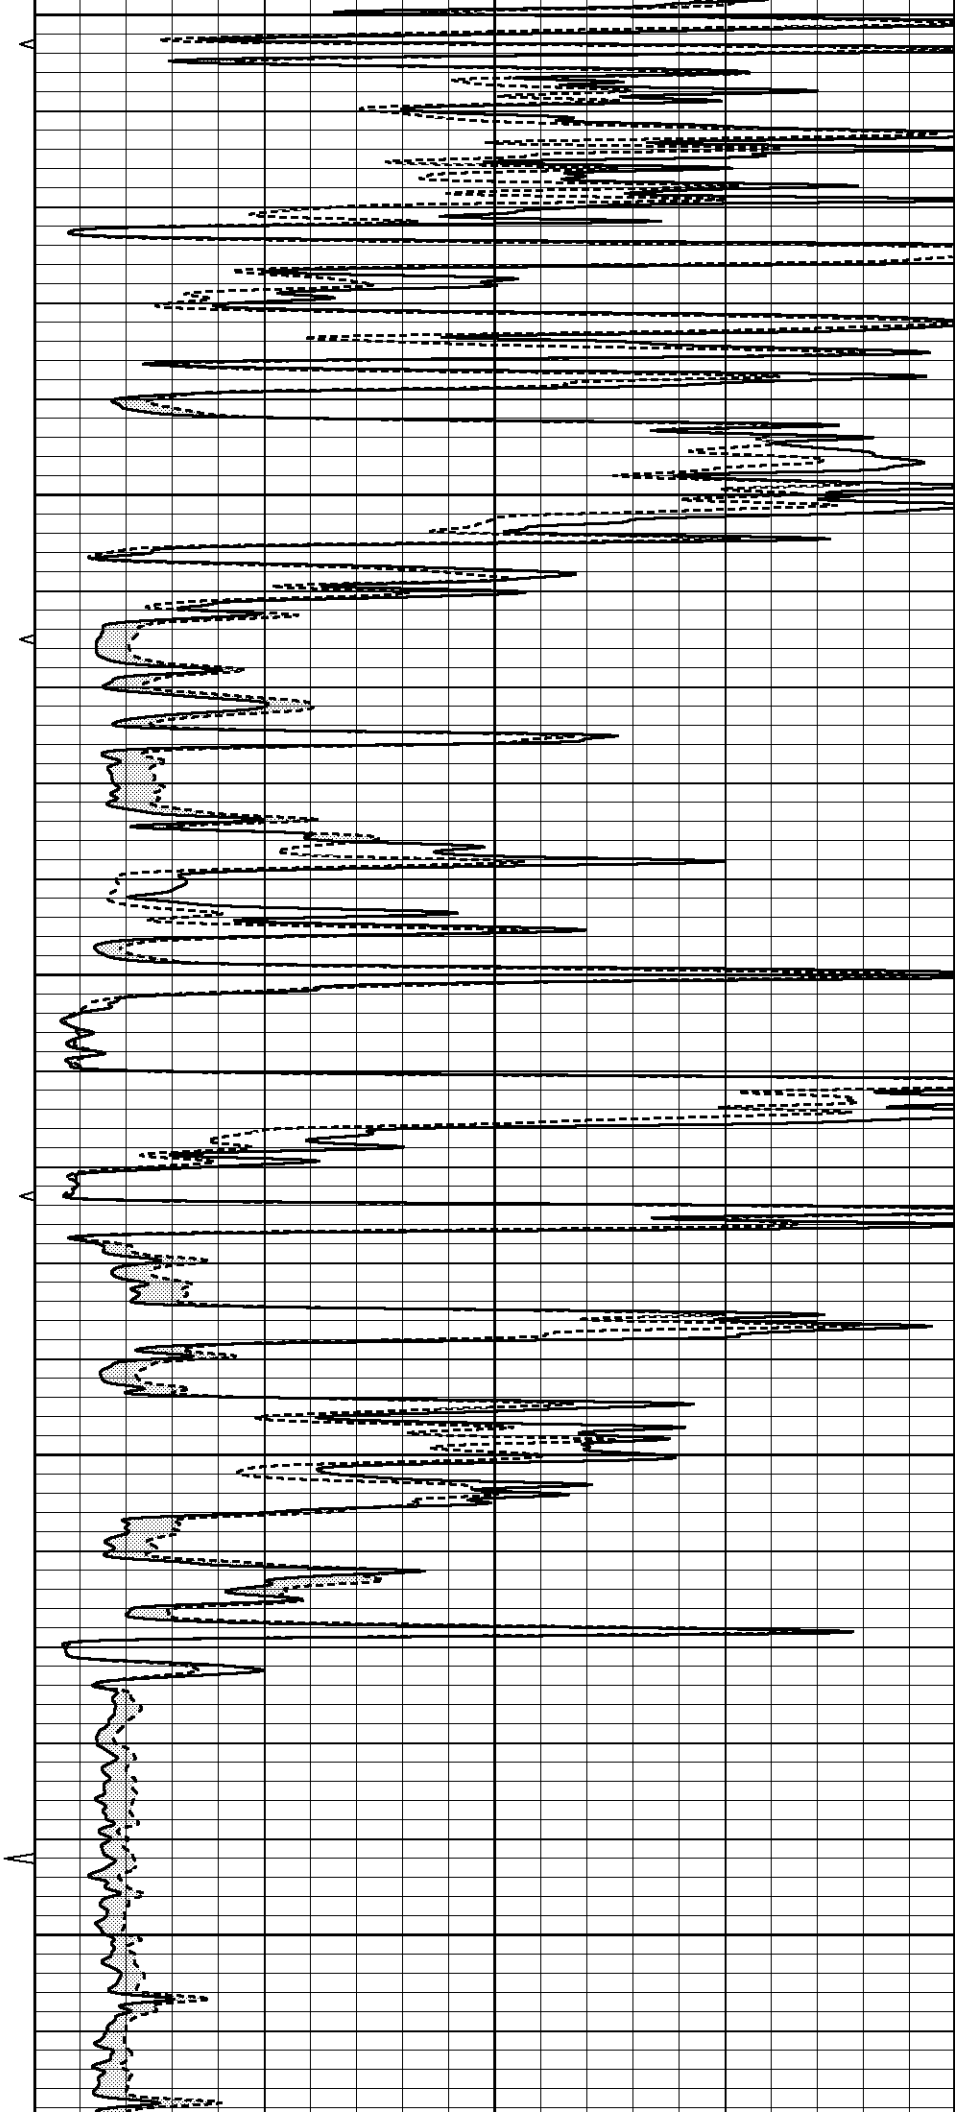

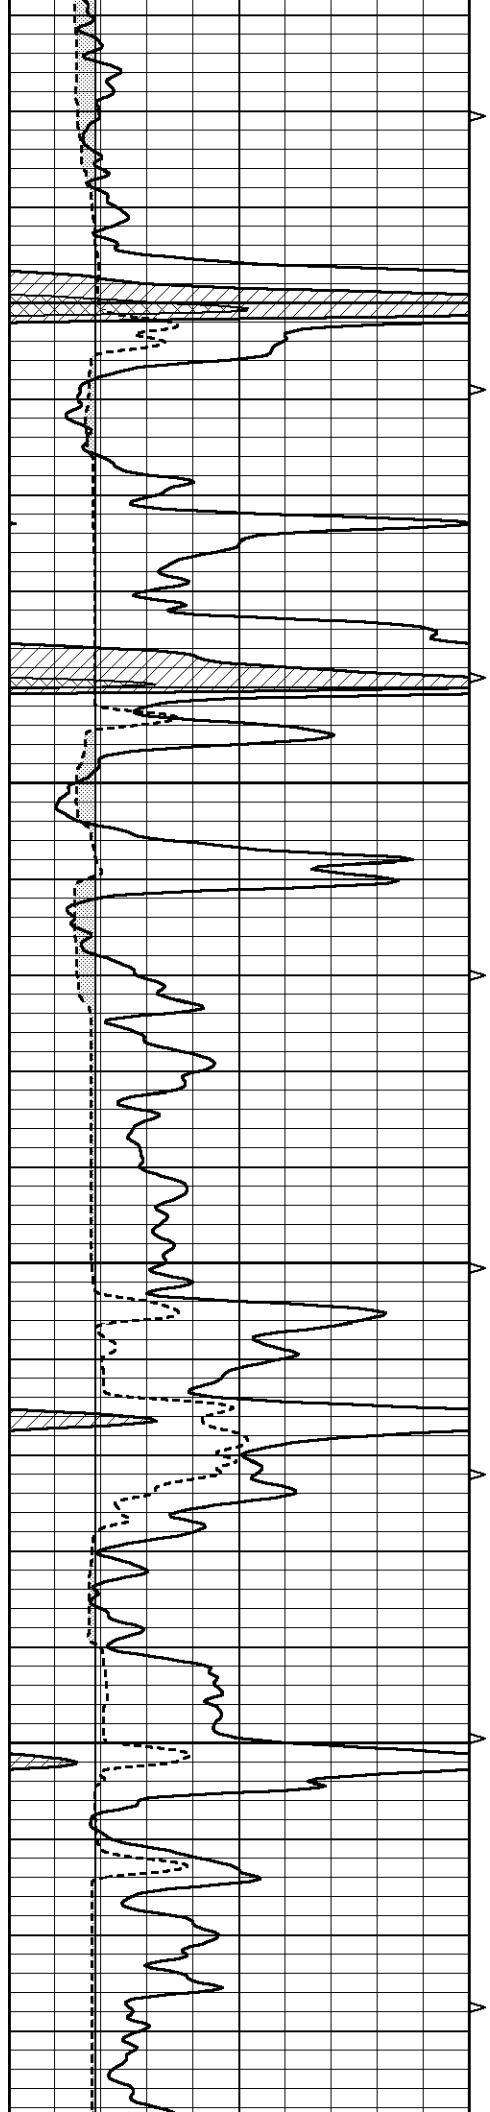



4900


4950

5000

5050

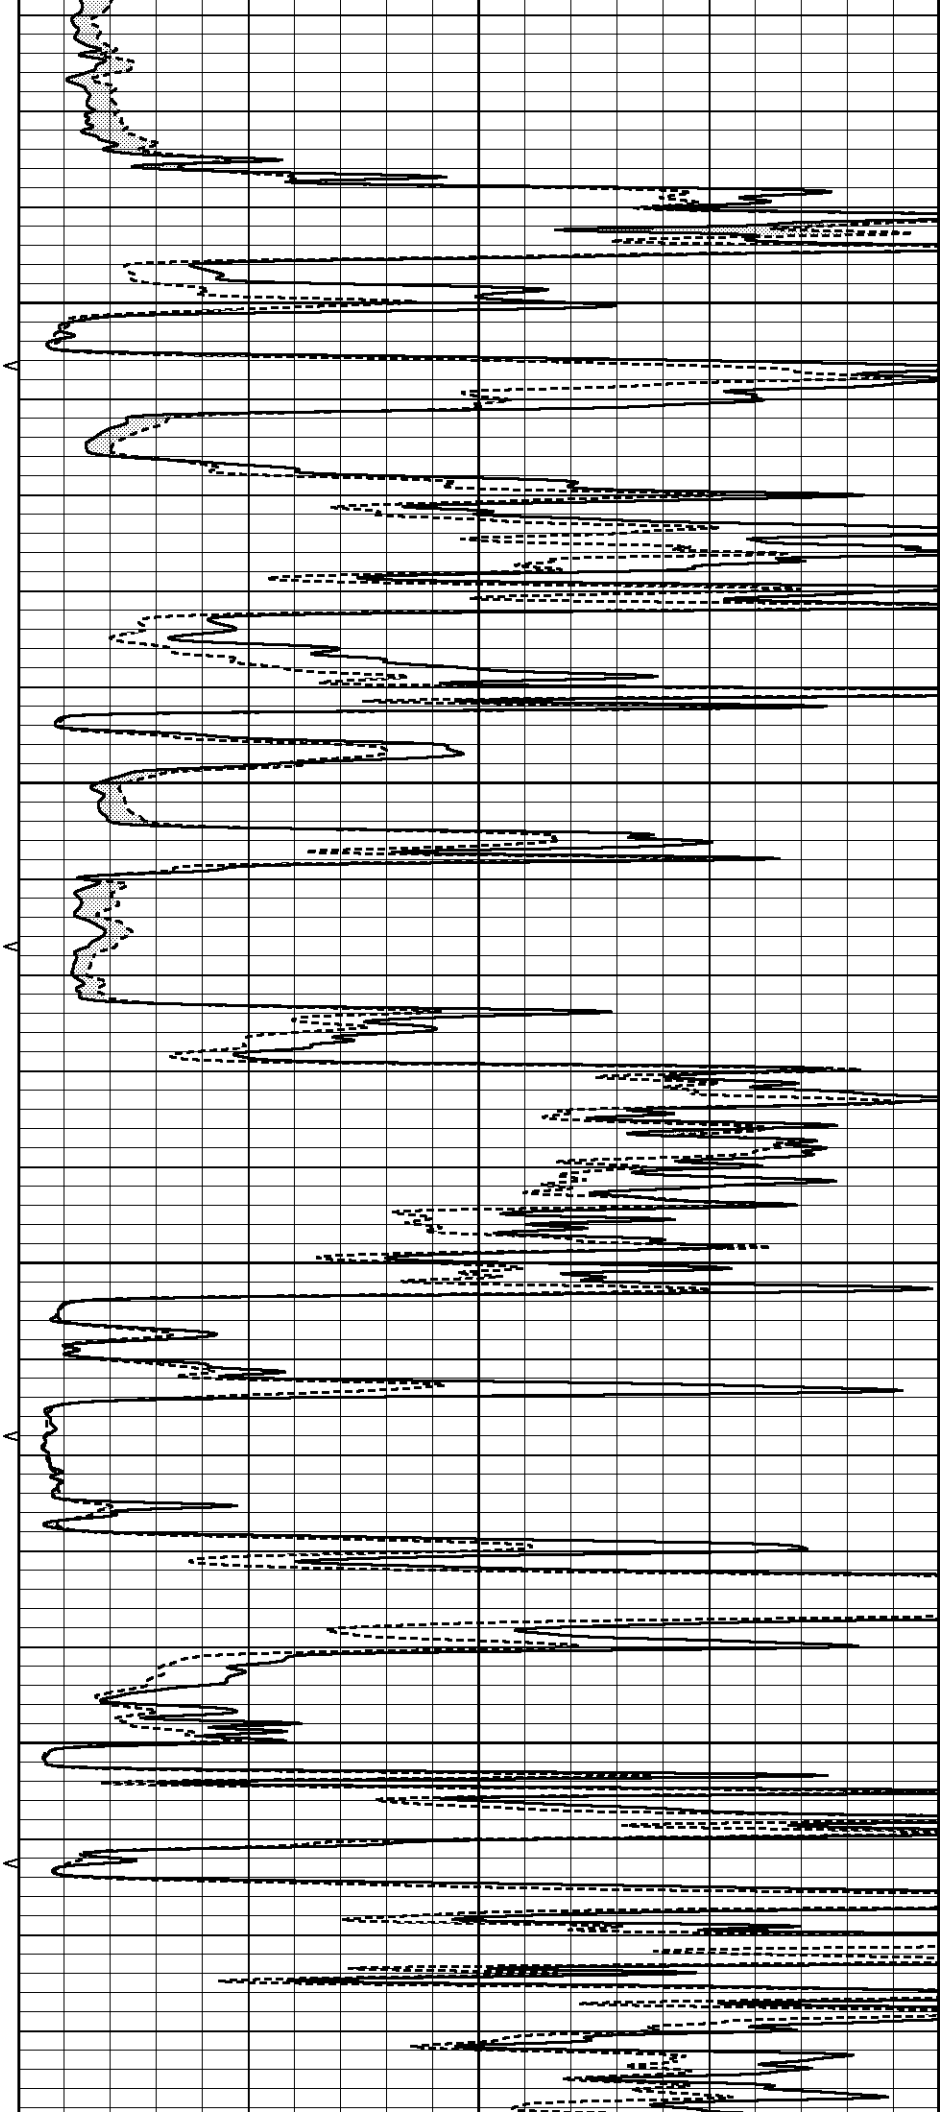

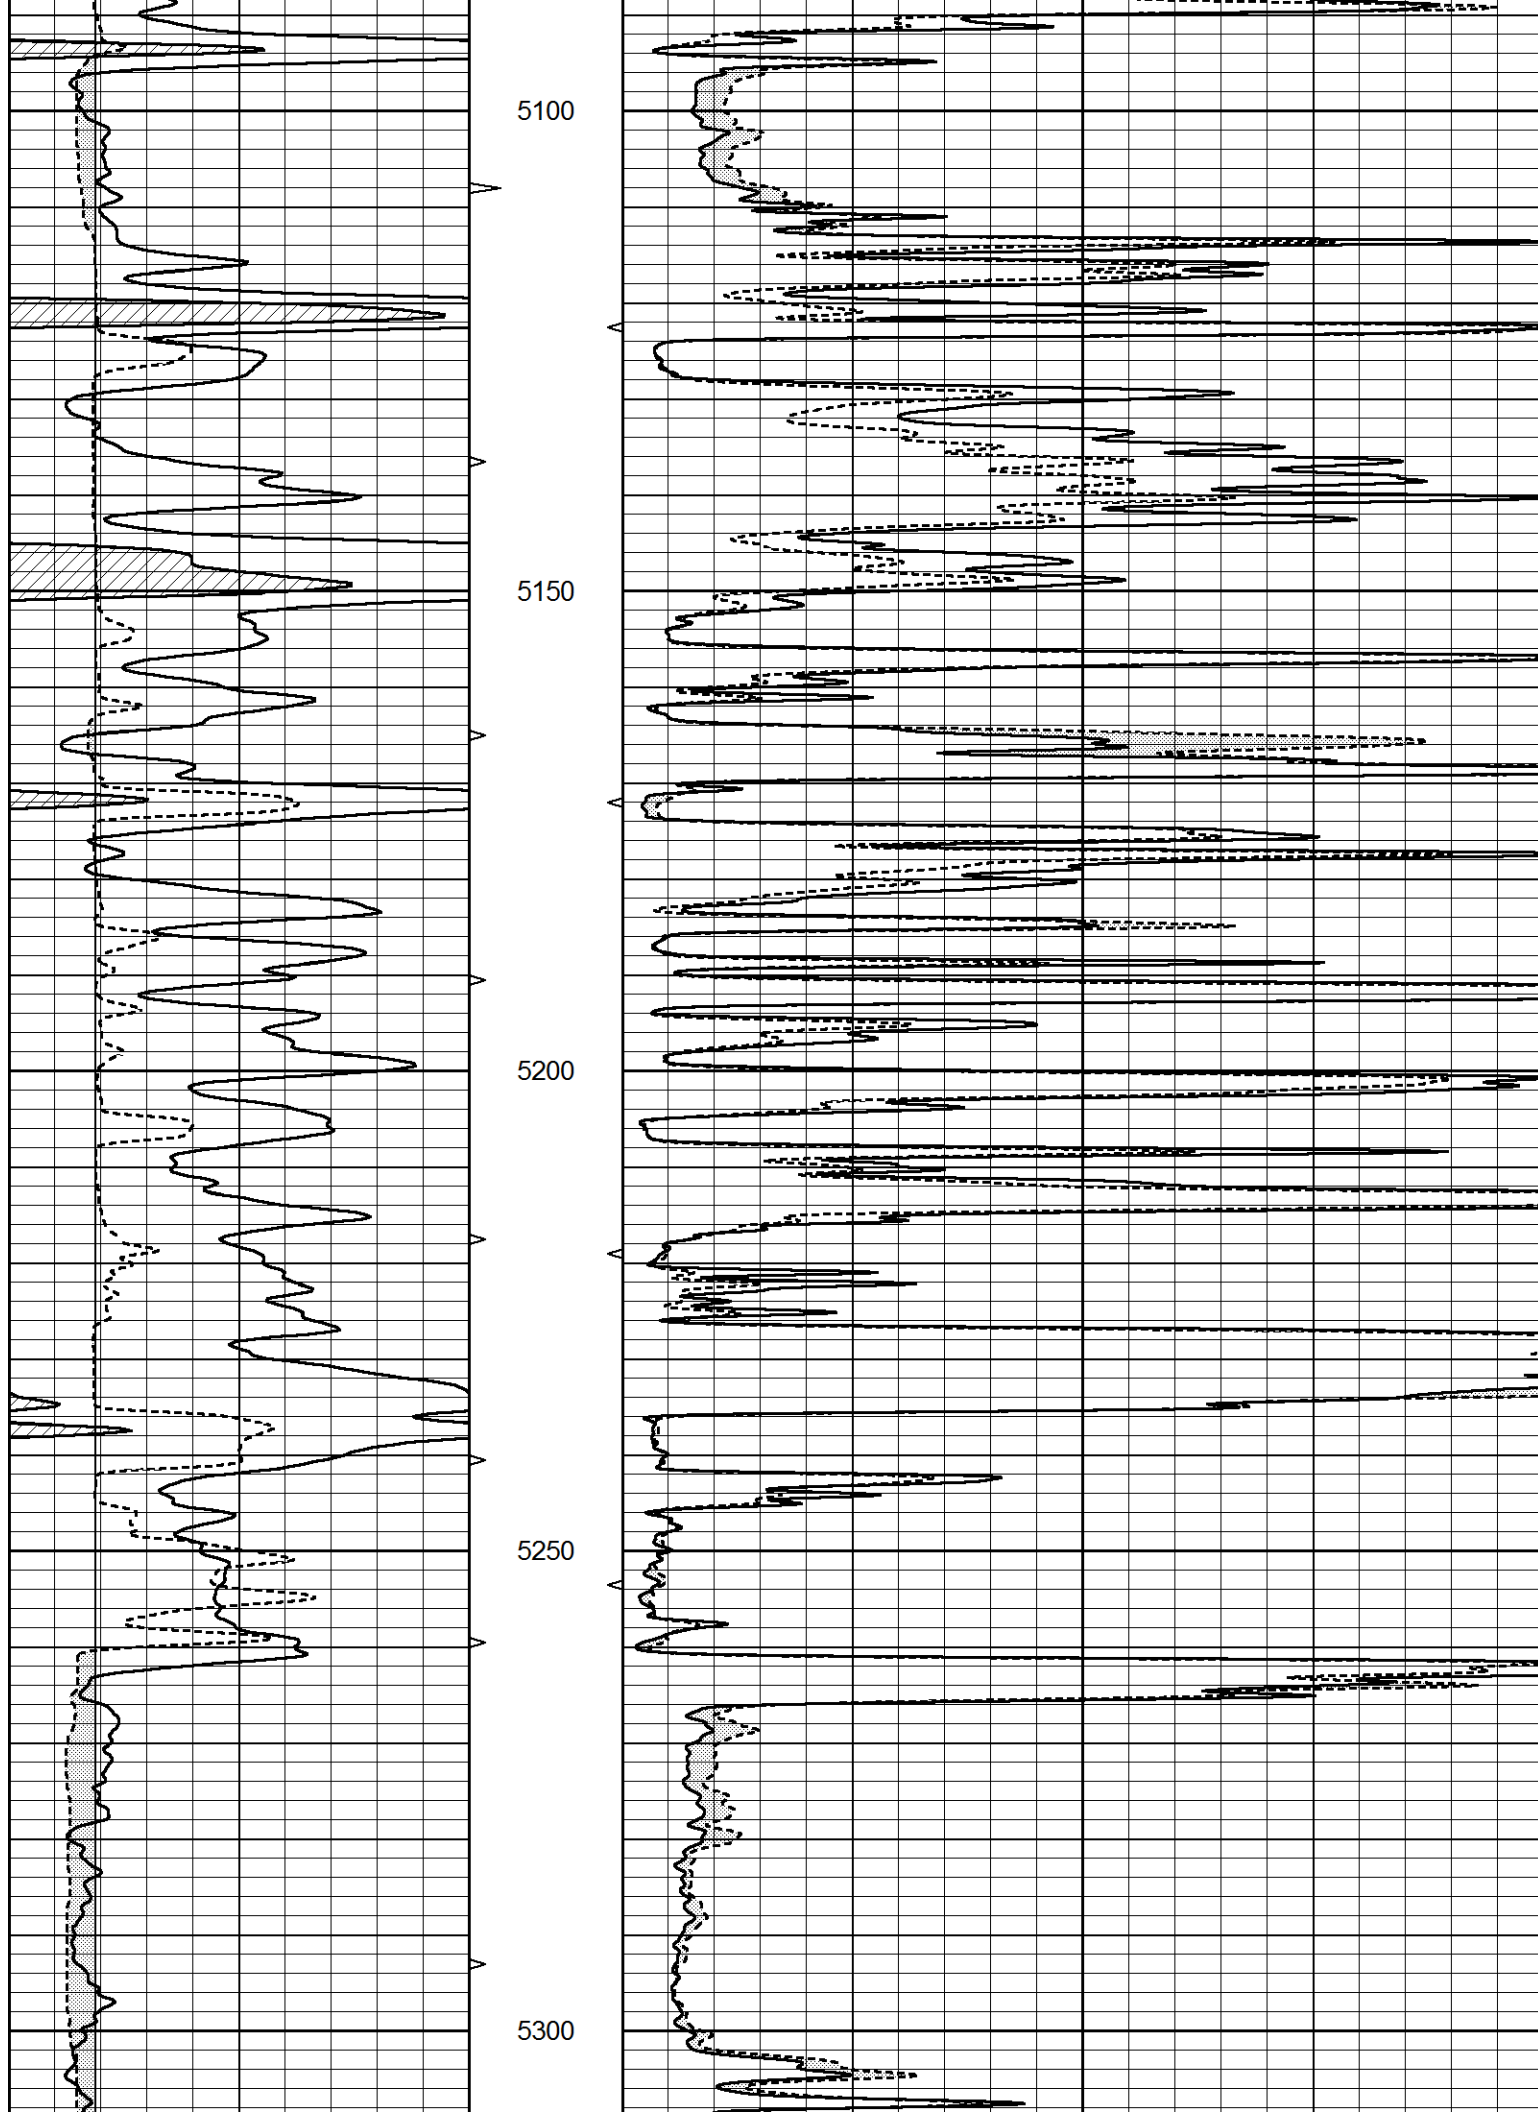


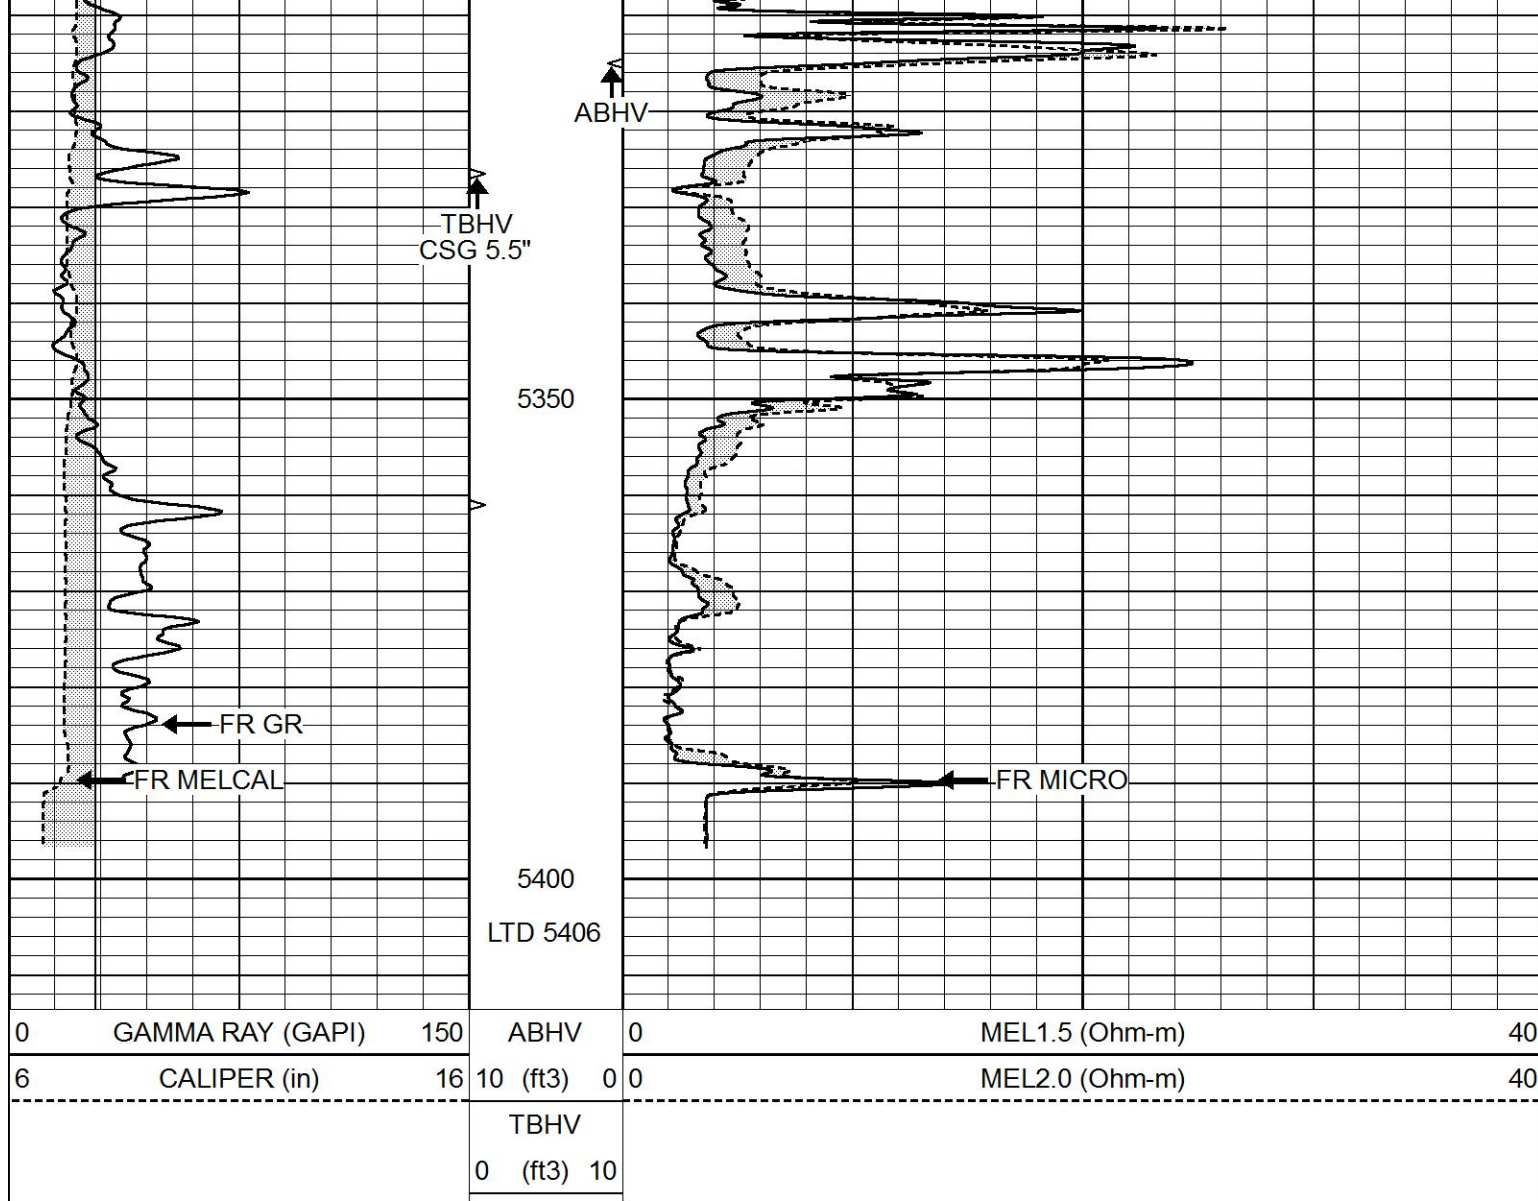



REPEAT SECTION

Database File 26449pe8.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Sat Jul 11 14:30:50 2015
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

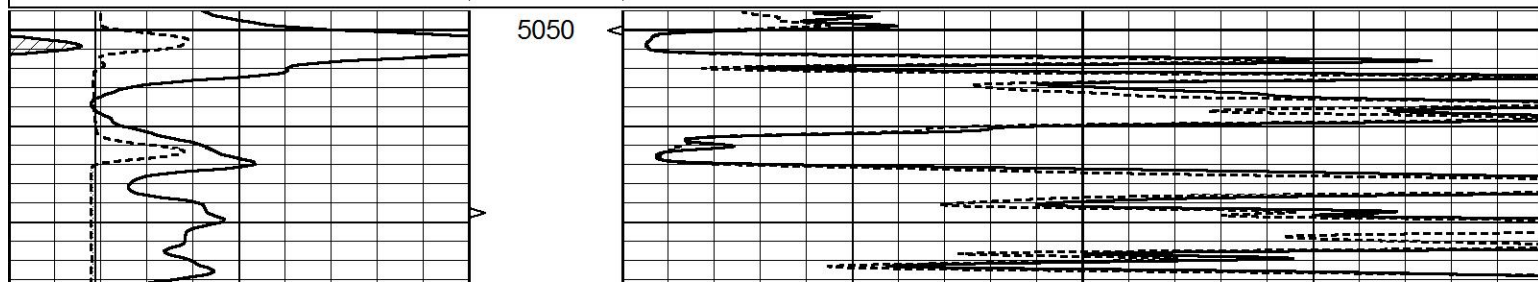

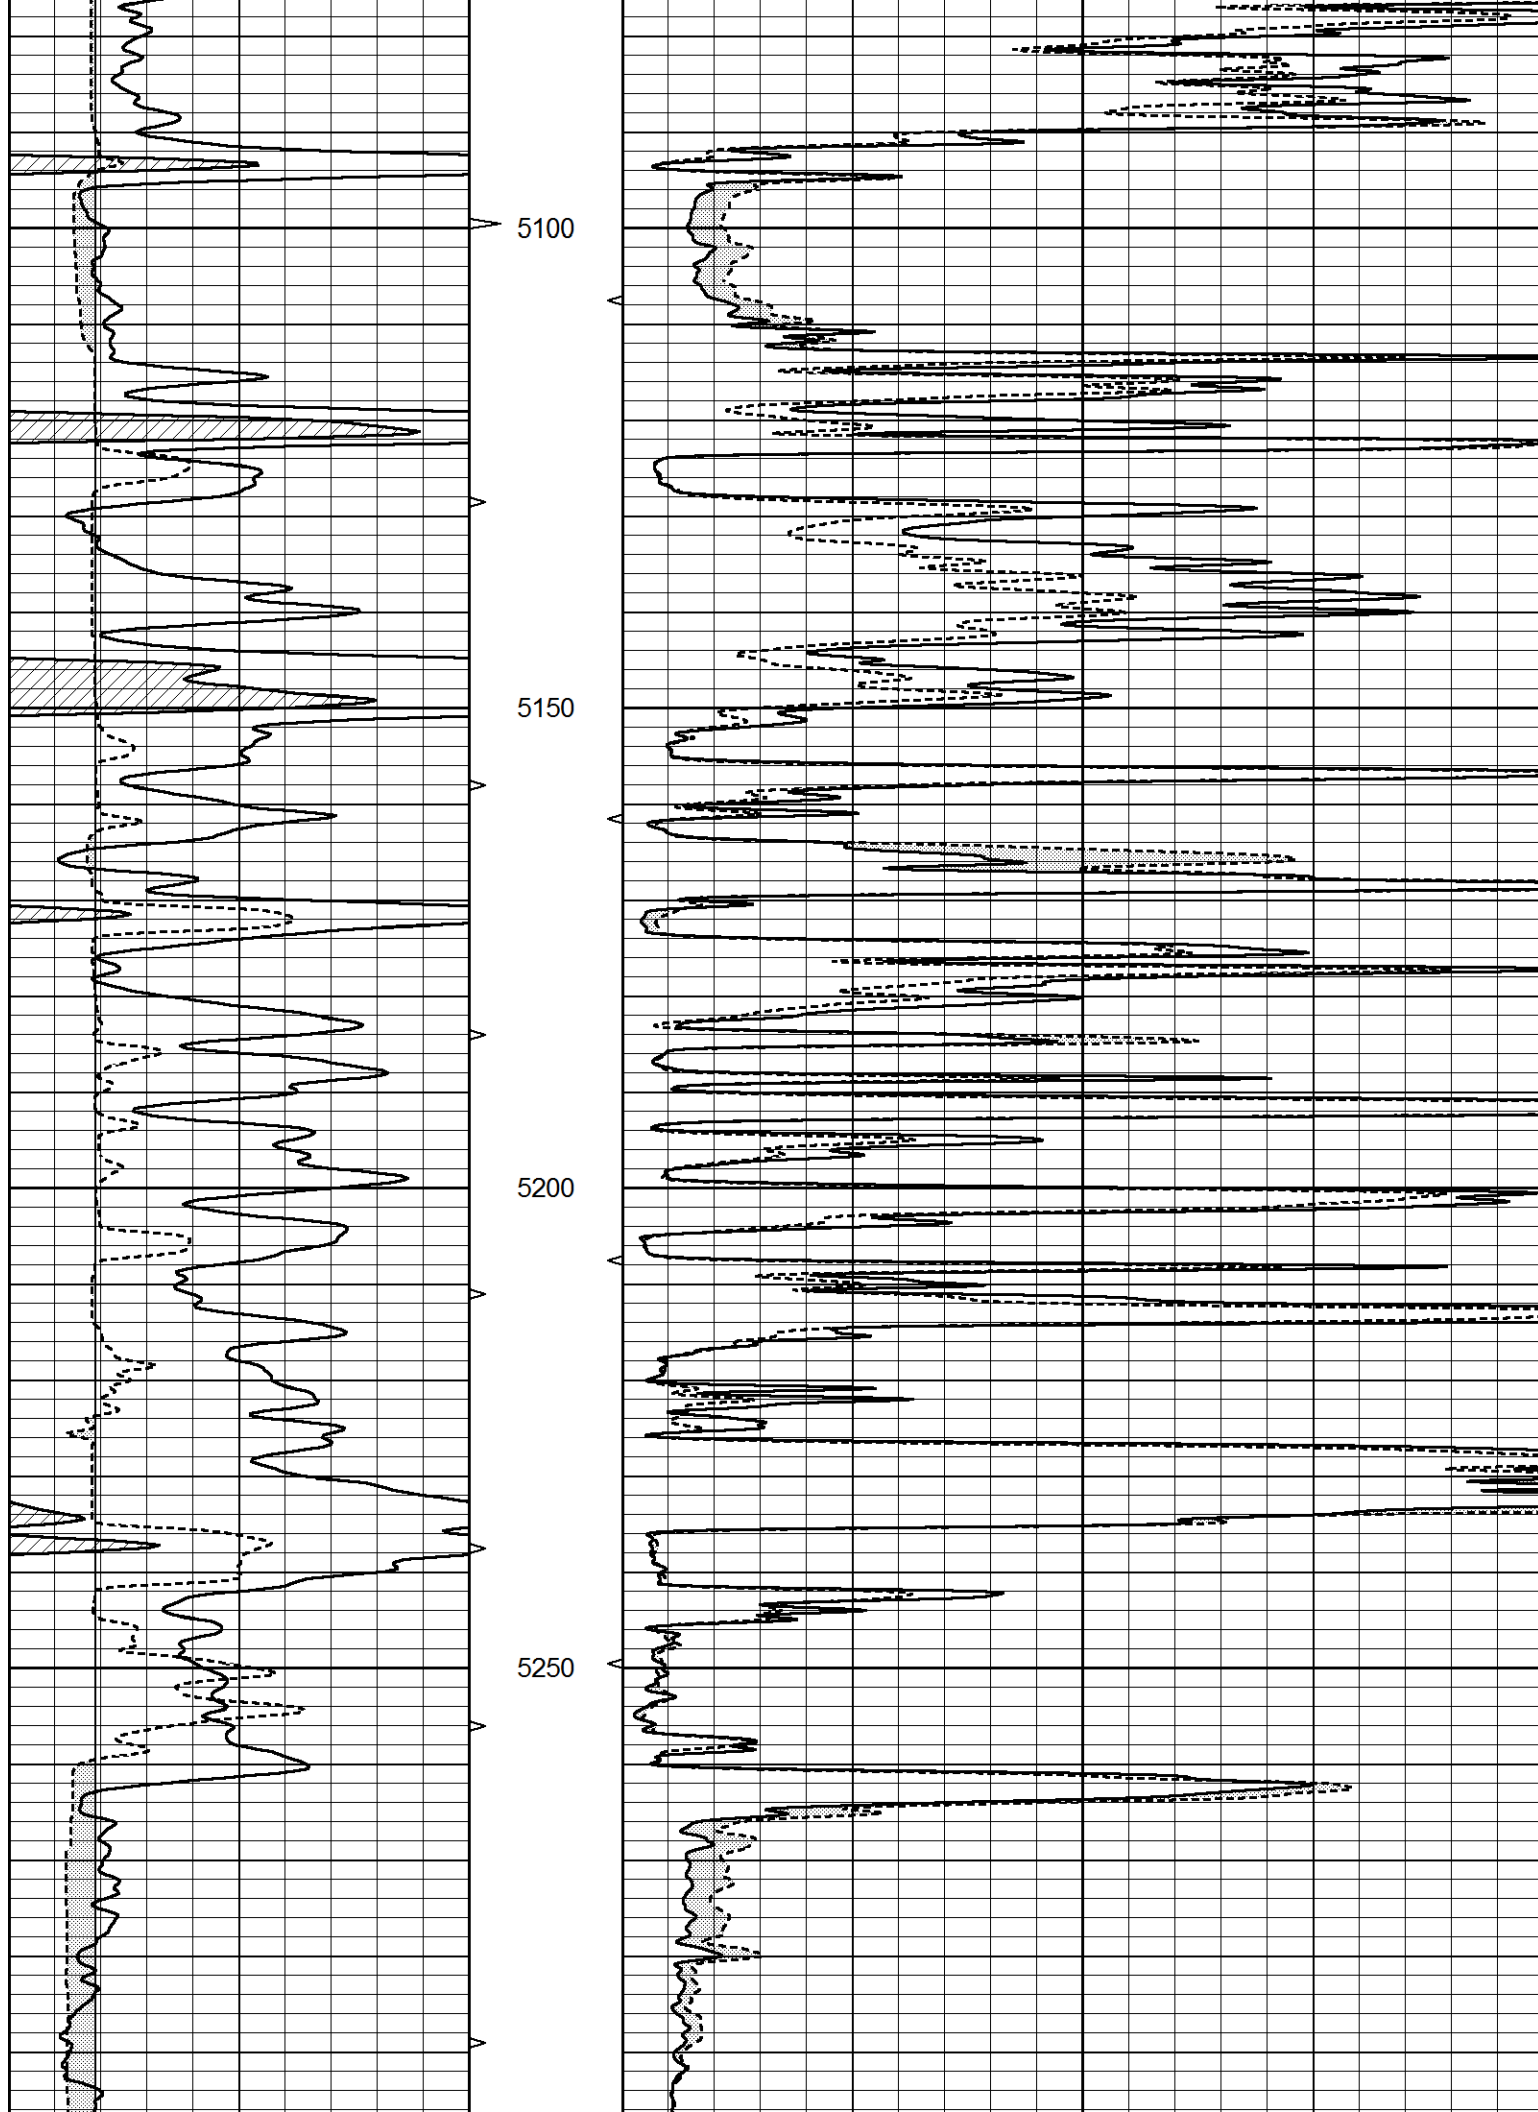

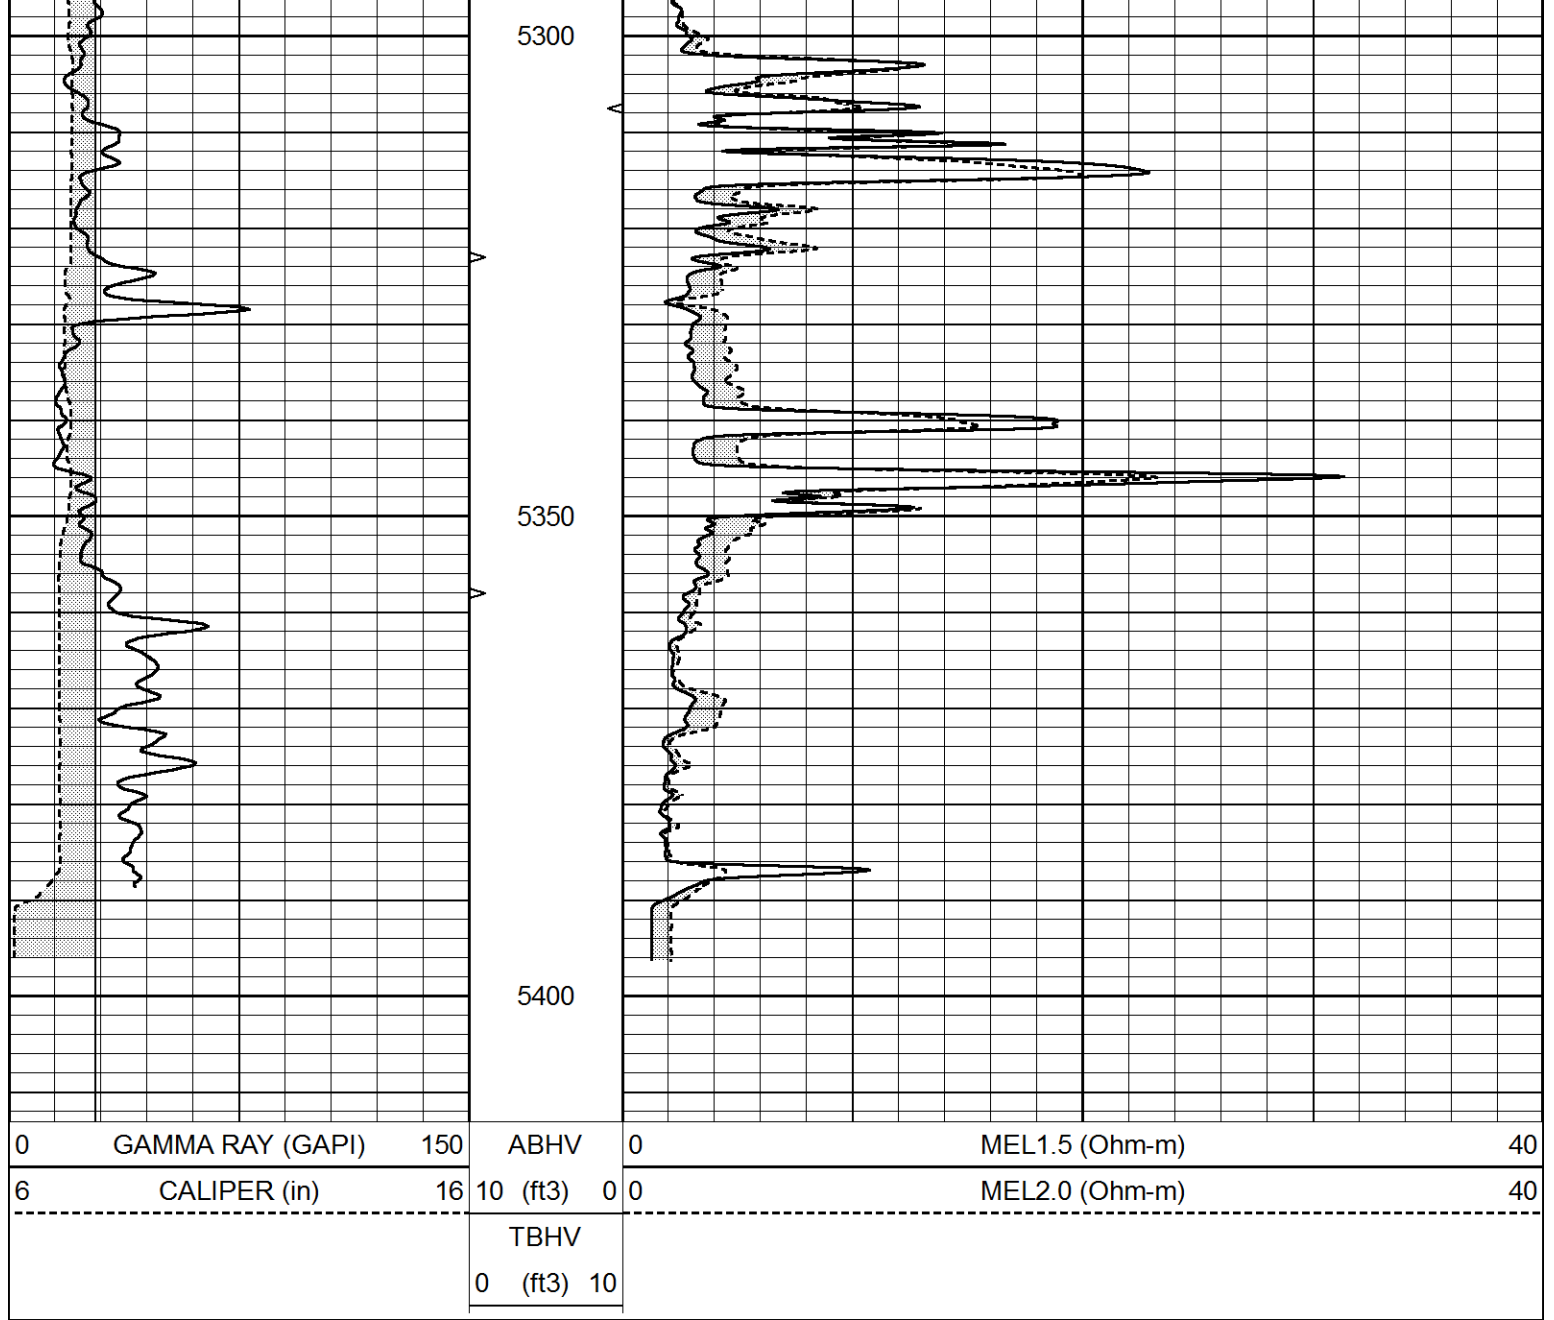

Calibration Report

Database File 26449pe8.db
 Dataset Pathname pass6.1
 Dataset Creation Sat Jul 11 15:04:33 2015

MICRO_USR Calibration Report

Serial Number:	070910	
Tool Model:	ProbeL	
Performed:	Wed Nov 26 10:51:23 2014	
Caliper Calibration:	Gain=7.041	Offset=3.100
References	Low Cal	High Cal
Readings	8.000	14.000
	0.779	1.631
1.5" Calibration:	Gain=25.000	Offset=-0.067
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	1.335

2" Calibration: Gain=35.000 Offset=0.079

2" Calibration:	Gain=35.000	Offset=-0.079
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model: Performed:	070910-ProbeL (Not Performed)
-----------------------------	----------------------------------

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Thu Jan 01 09:43:47 2015	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5000	GAPI/cps