



MICRO LOG

Company	VESS OIL CORPORATION		
Well	SCULLY "A" #25		
Field	AUGUSTA		
County	BUTLER		
State	KANSAS		
Company	VESS OIL CORPORATION		
Well	SCULLY "A" #25		
Field	AUGUSTA		
County	BUTLER		
State	KANSAS		
Location:	API # : 15-015-24089-0000 1380' FSL & 2025' FEL		
Permanent Datum	GROUND LEVEL	Elevation	1212
Log Measured From	KELLY BUSHING 6' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 9	TWP 28S	RGE 4E	
Other Services	CDL/CNL/PE	DIL	
Elevation			
K.B. 1218			
D.F. 1216			
G.L. 1212			
Date	8/8/17		
Run Number	THREE		
Depth Driller	2485		
Depth Logger	2484		
Bottom Logged Interval	2482		
Top Log Interval	1300		
Casing Driller	8 5/8"@262'		
Casing Logger	262		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 800 PPM	
Density / Viscosity	9.2/45		
pH / Fluid Loss	9.5/8.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.50@85F		
Rmf @ Meas. Temp	1.13@85F		
Rmc @ Meas. Temp	1.80@85F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	1.25@102F		
Time Circulation Stopped	7.5 HOURS		
Time Logger on Bottom	5:15 A.M.		
Maximum Recorded Temperature	102F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROGER MARTIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
AUGUSTA, KS., 3S. ON HWY 77 TO "130TH RD.", W. & S. 1 1/2 MILES, W. AT POLE, CROSS RR TRACKS,
N. INTO




MAIN SECTION

Database File: 1595pe.db
 Dataset Pathname: pass12.4
 Presentation Format: micro
 Dataset Creation: Tue Aug 08 07:03:16 2017
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

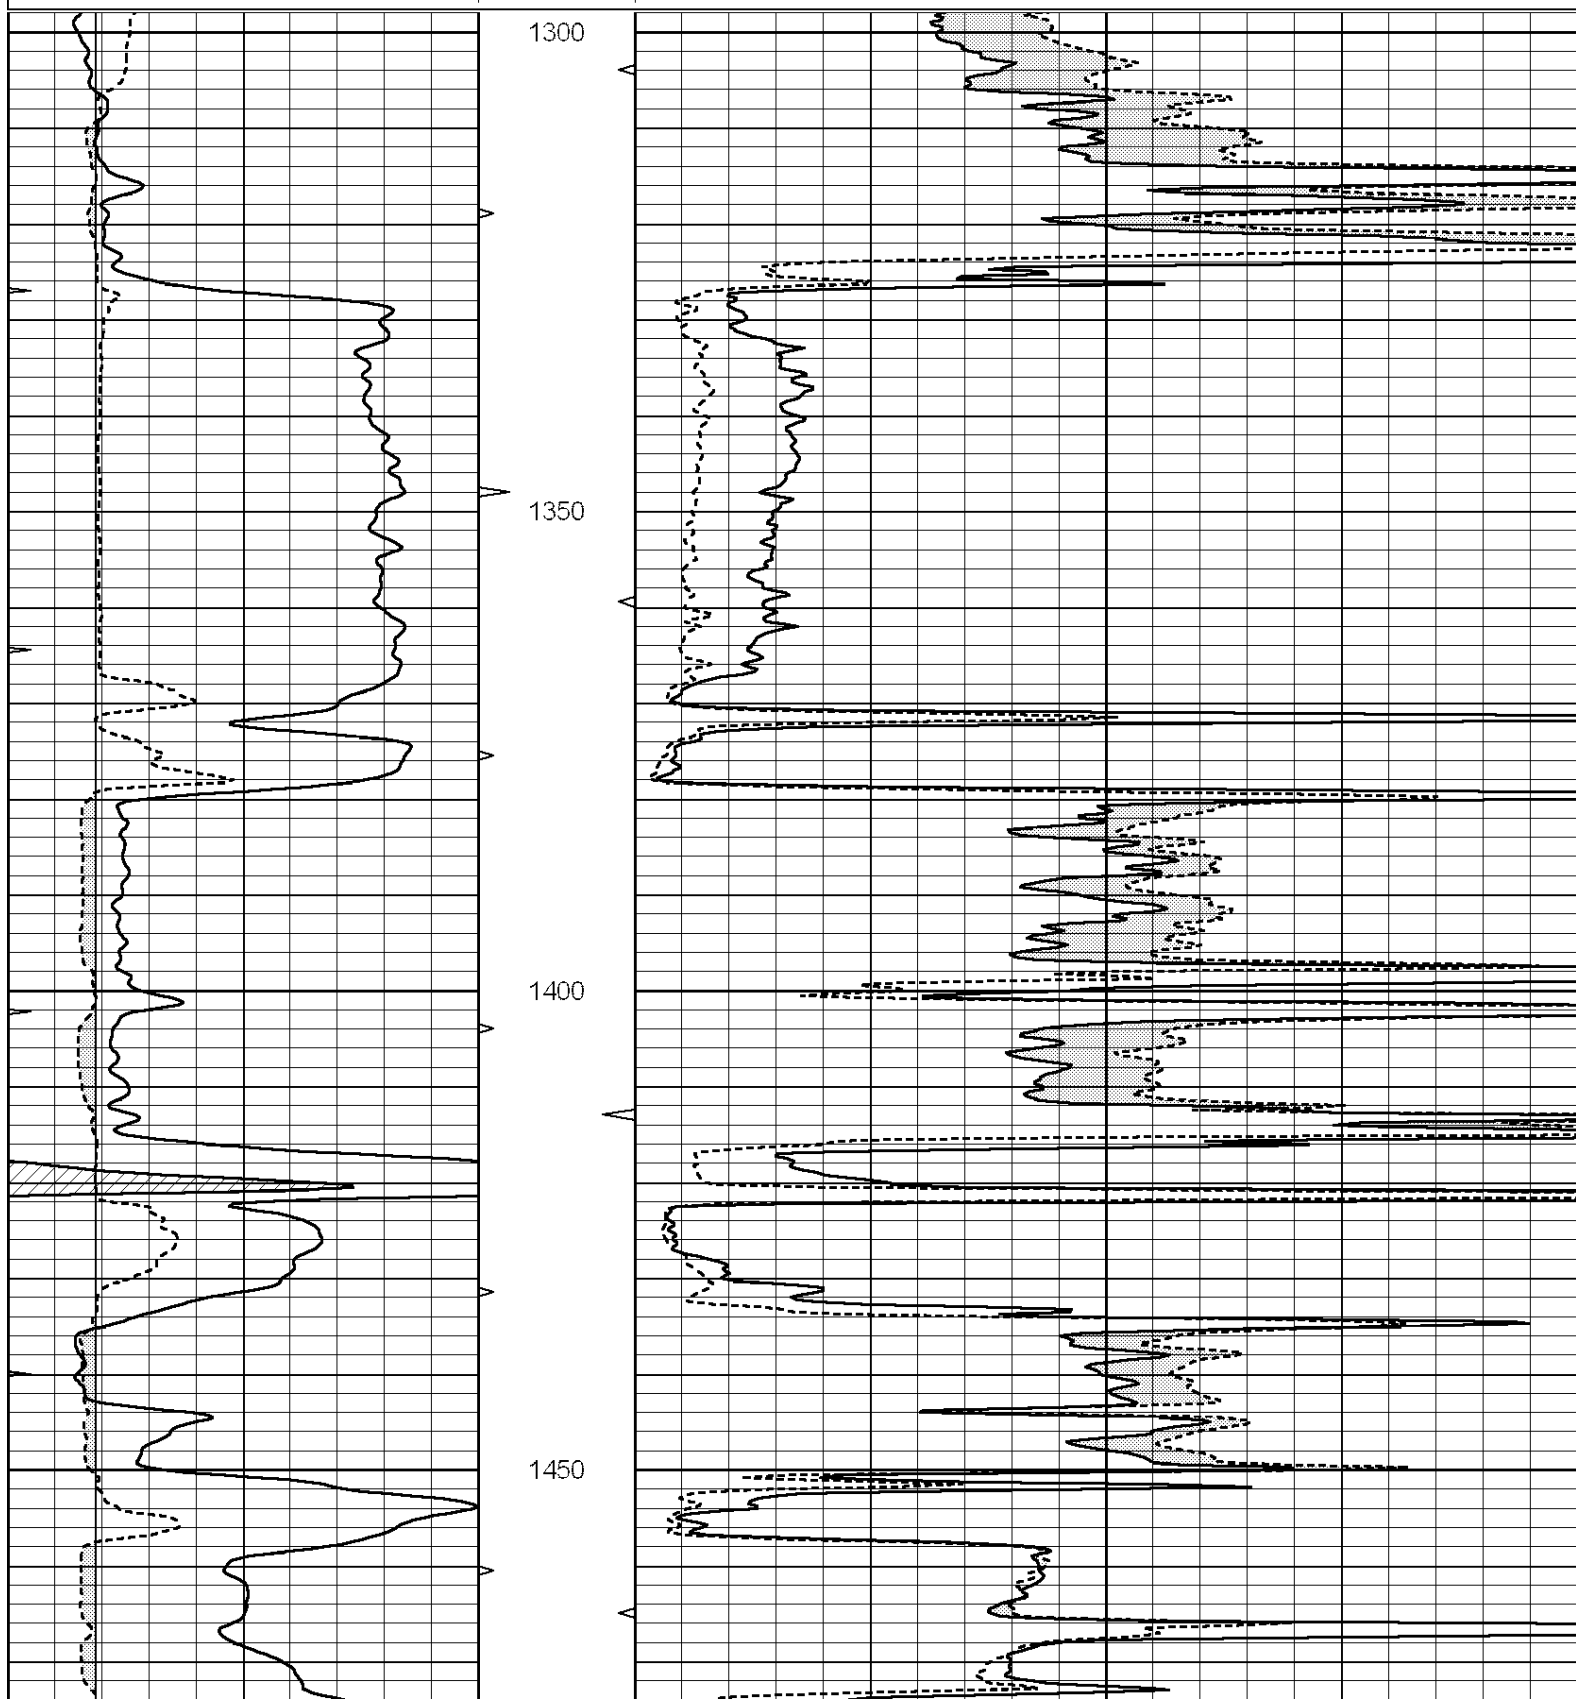

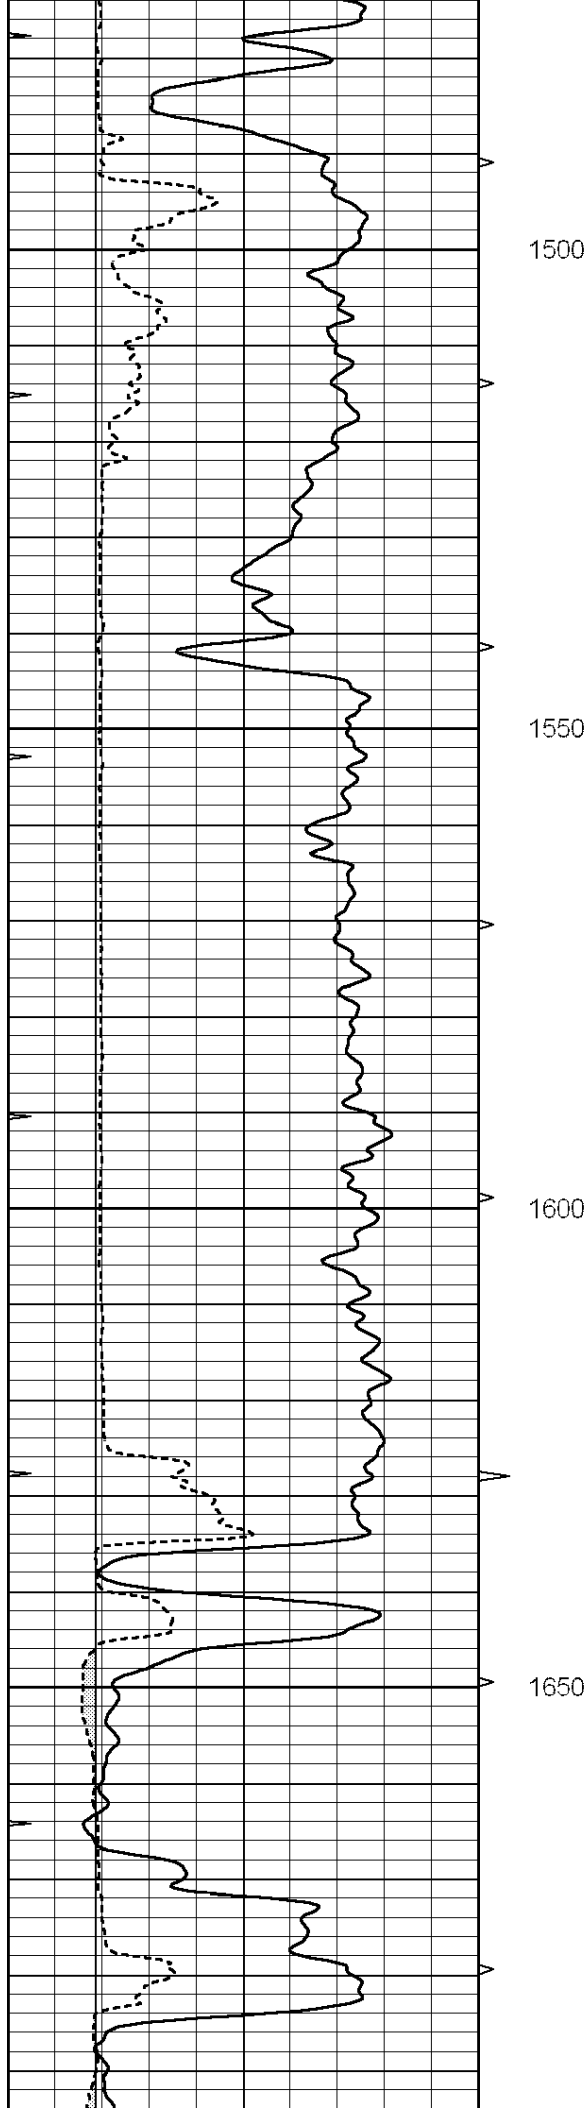




1500



1550



1600



1650

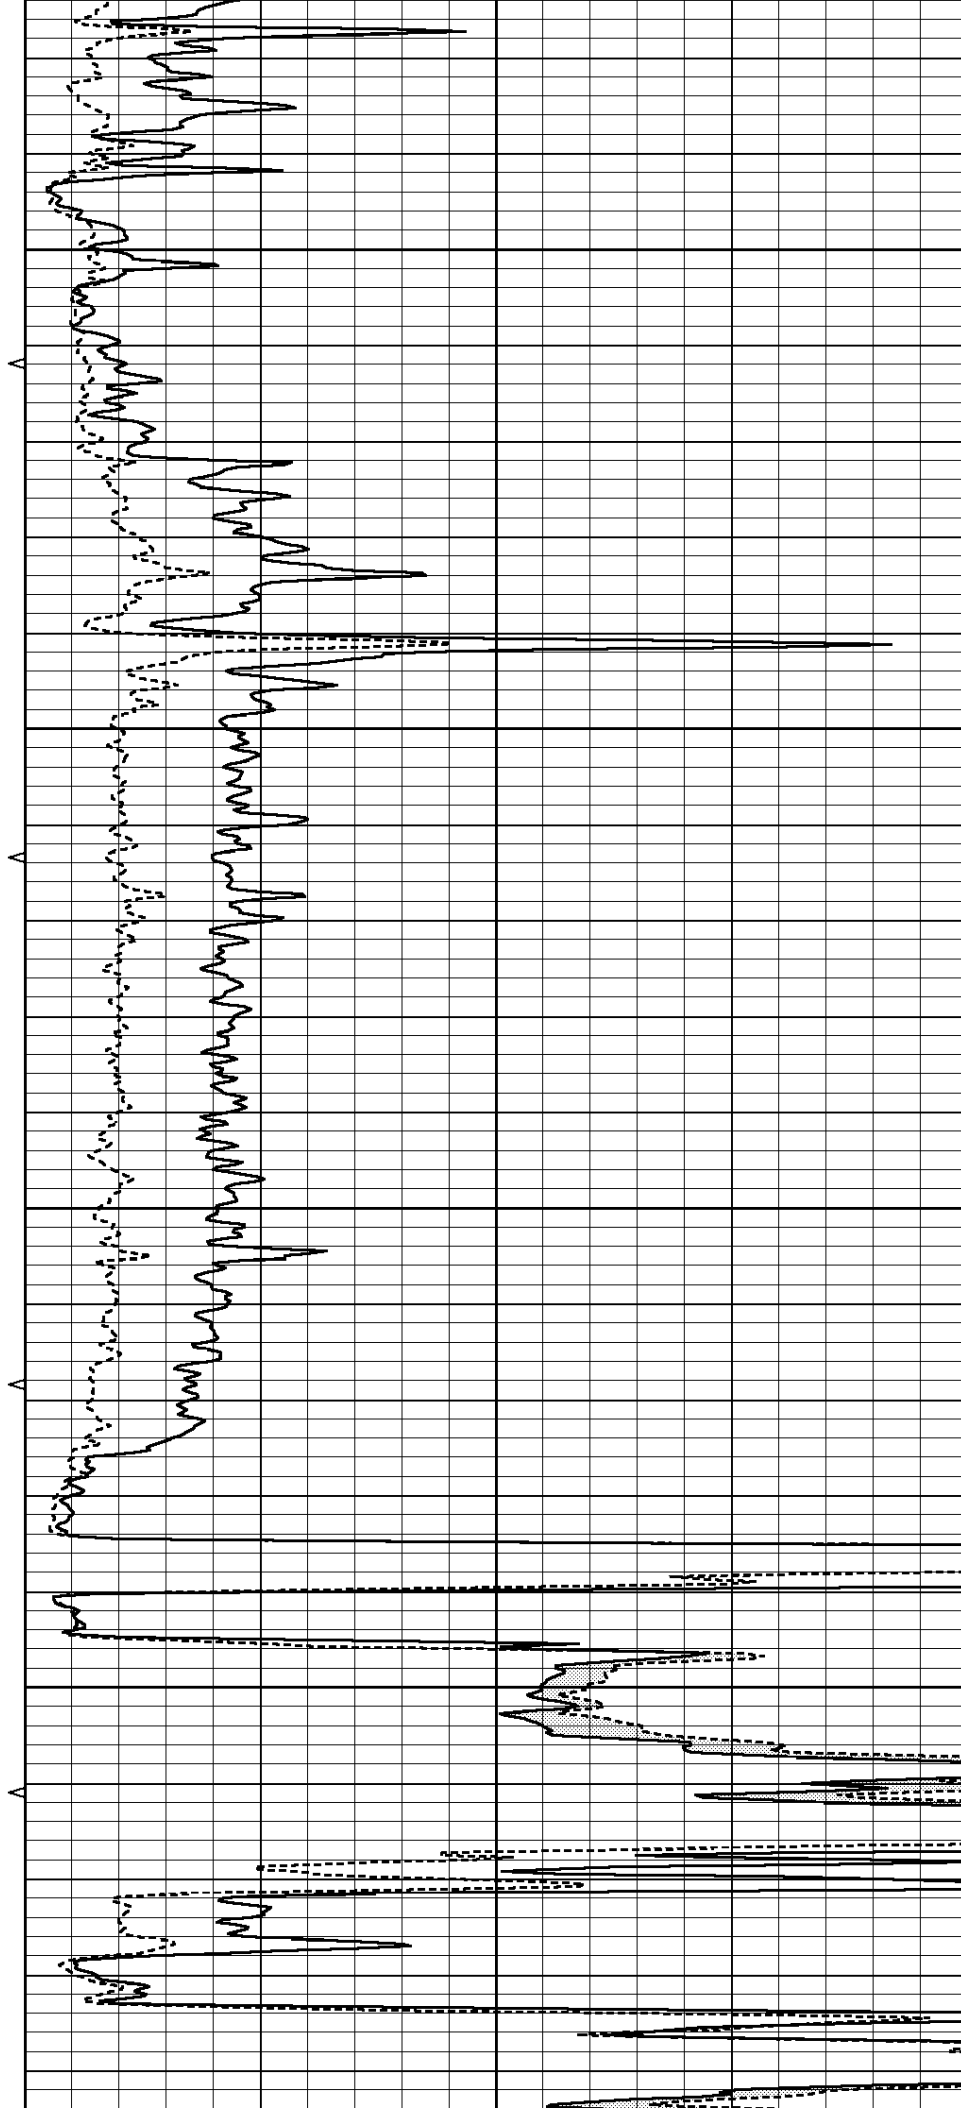

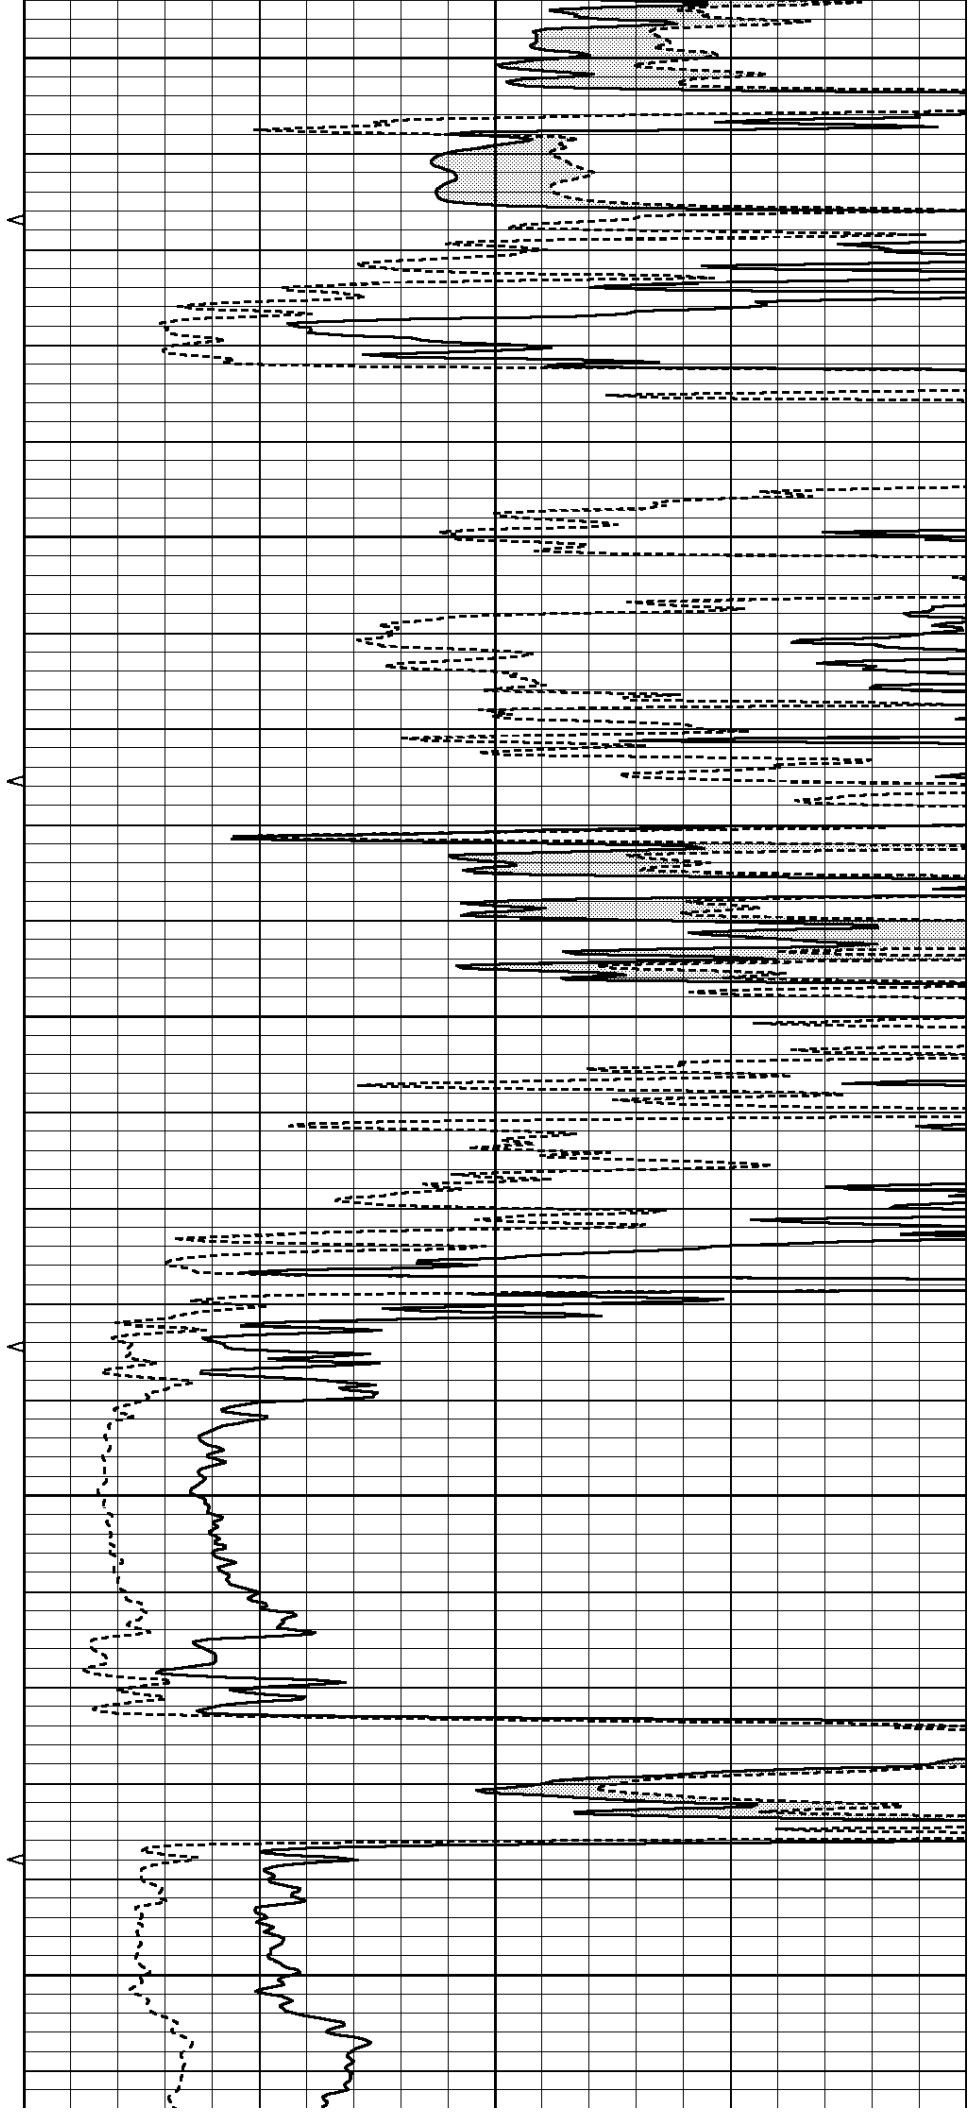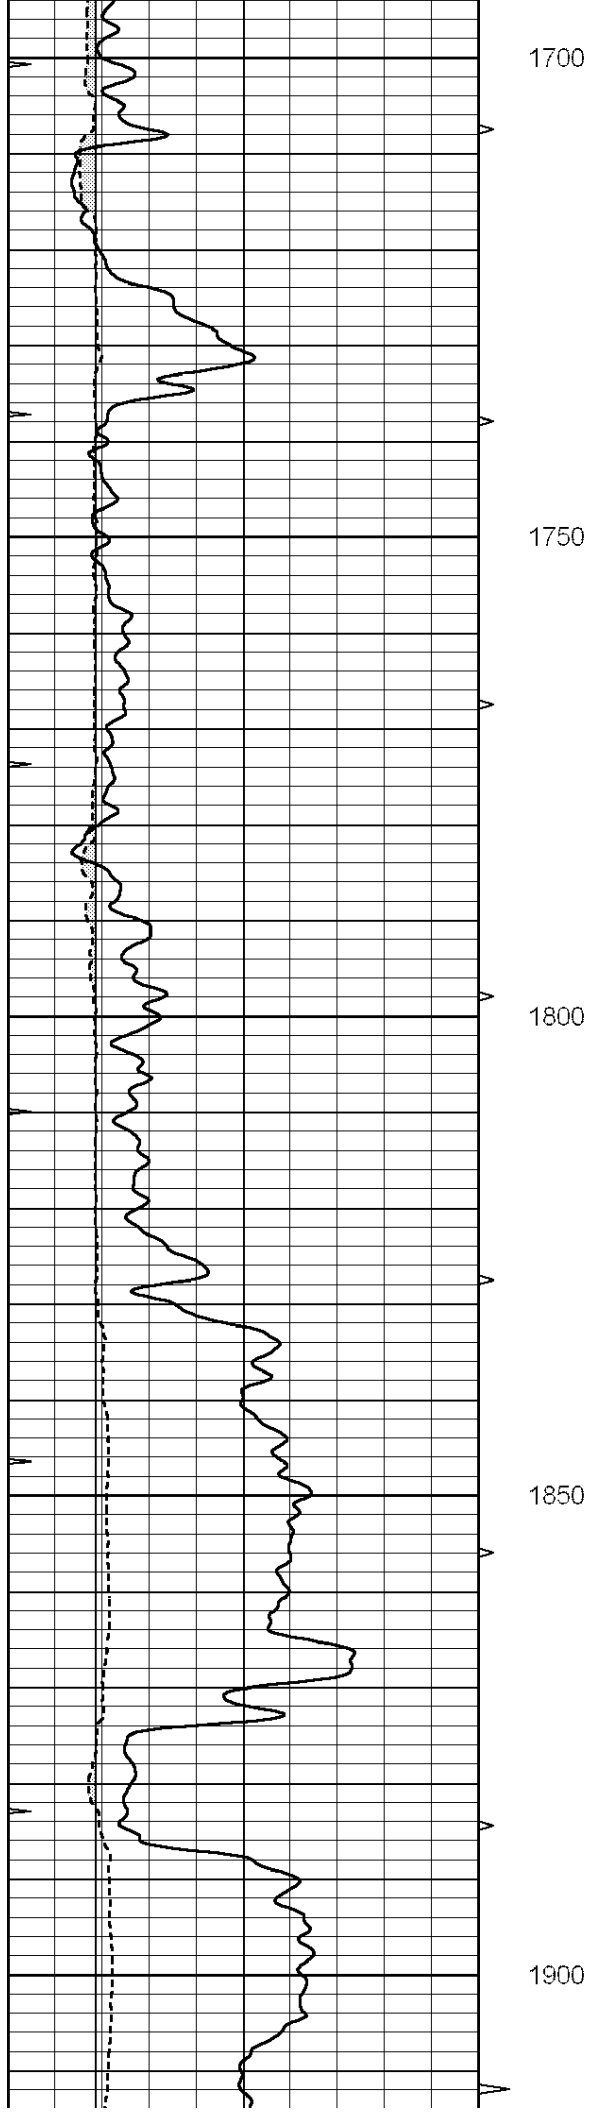

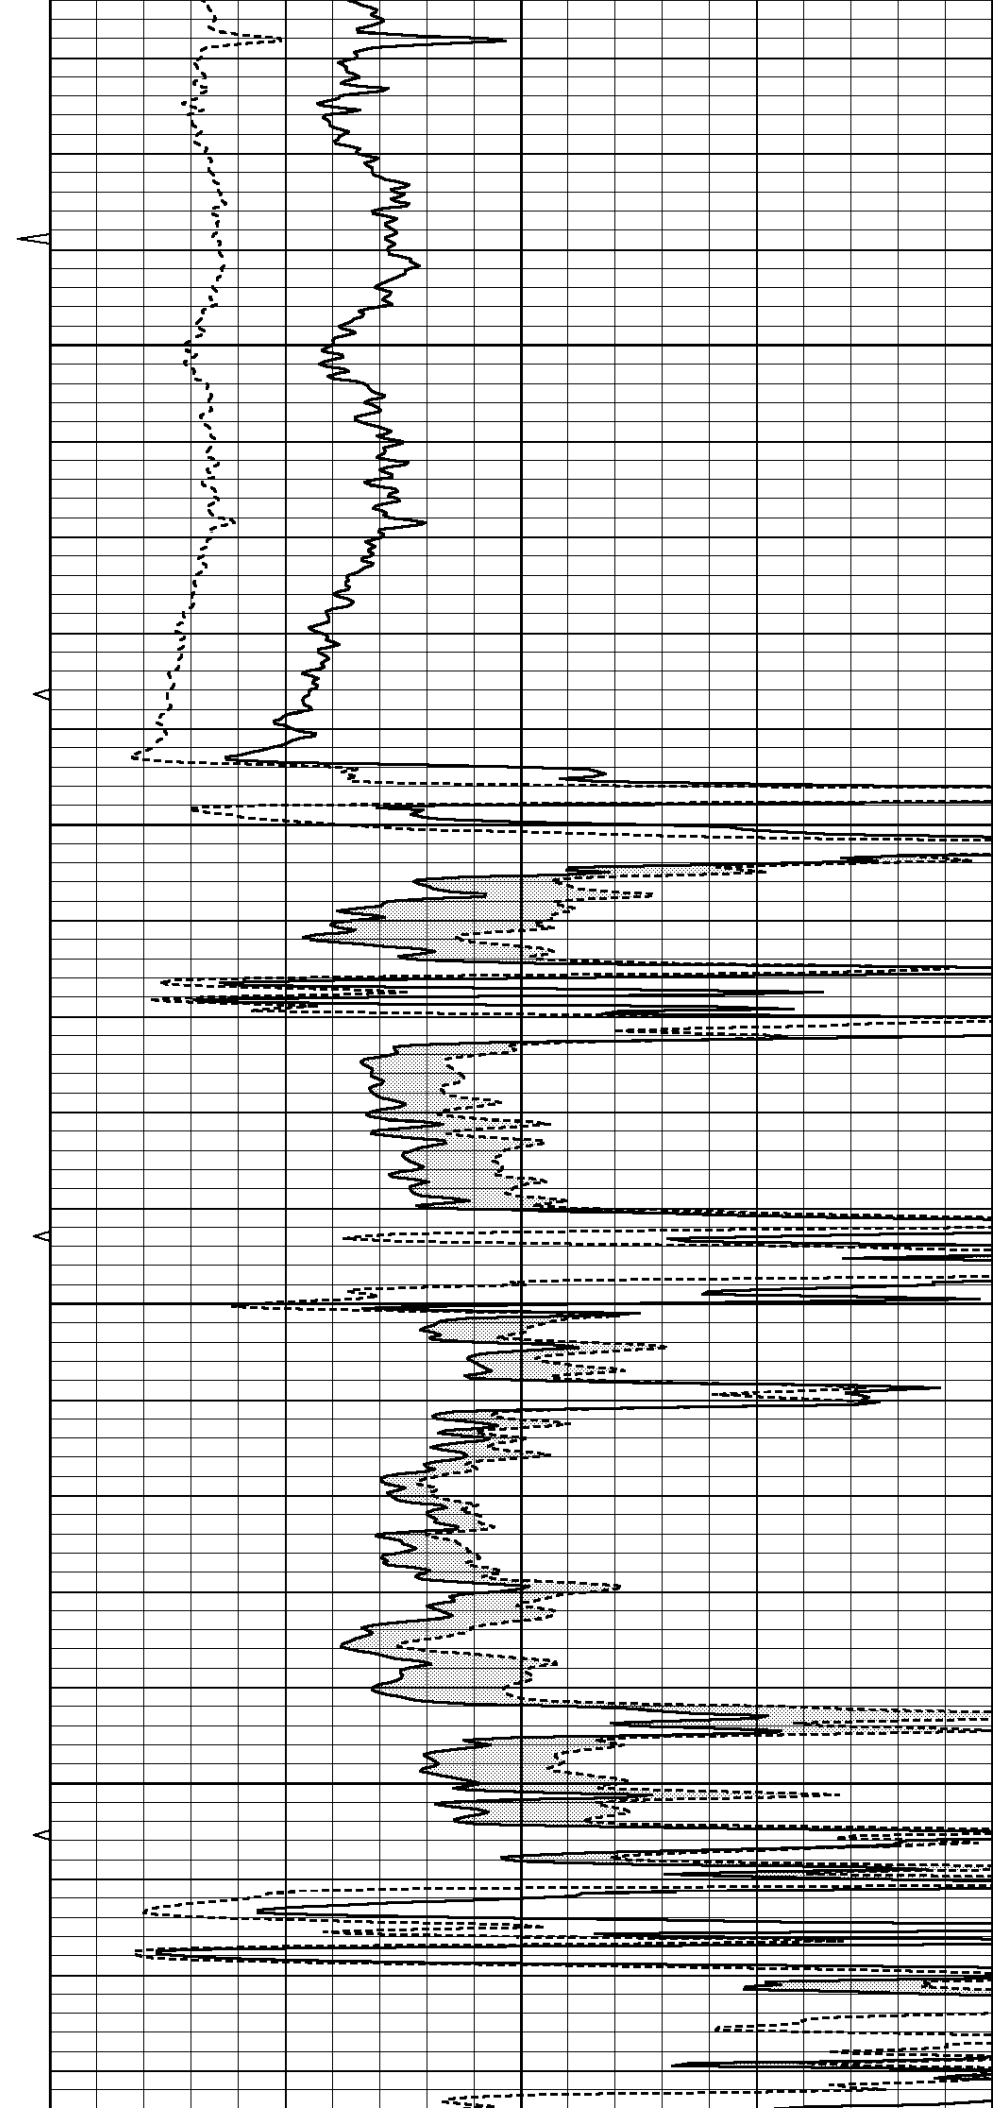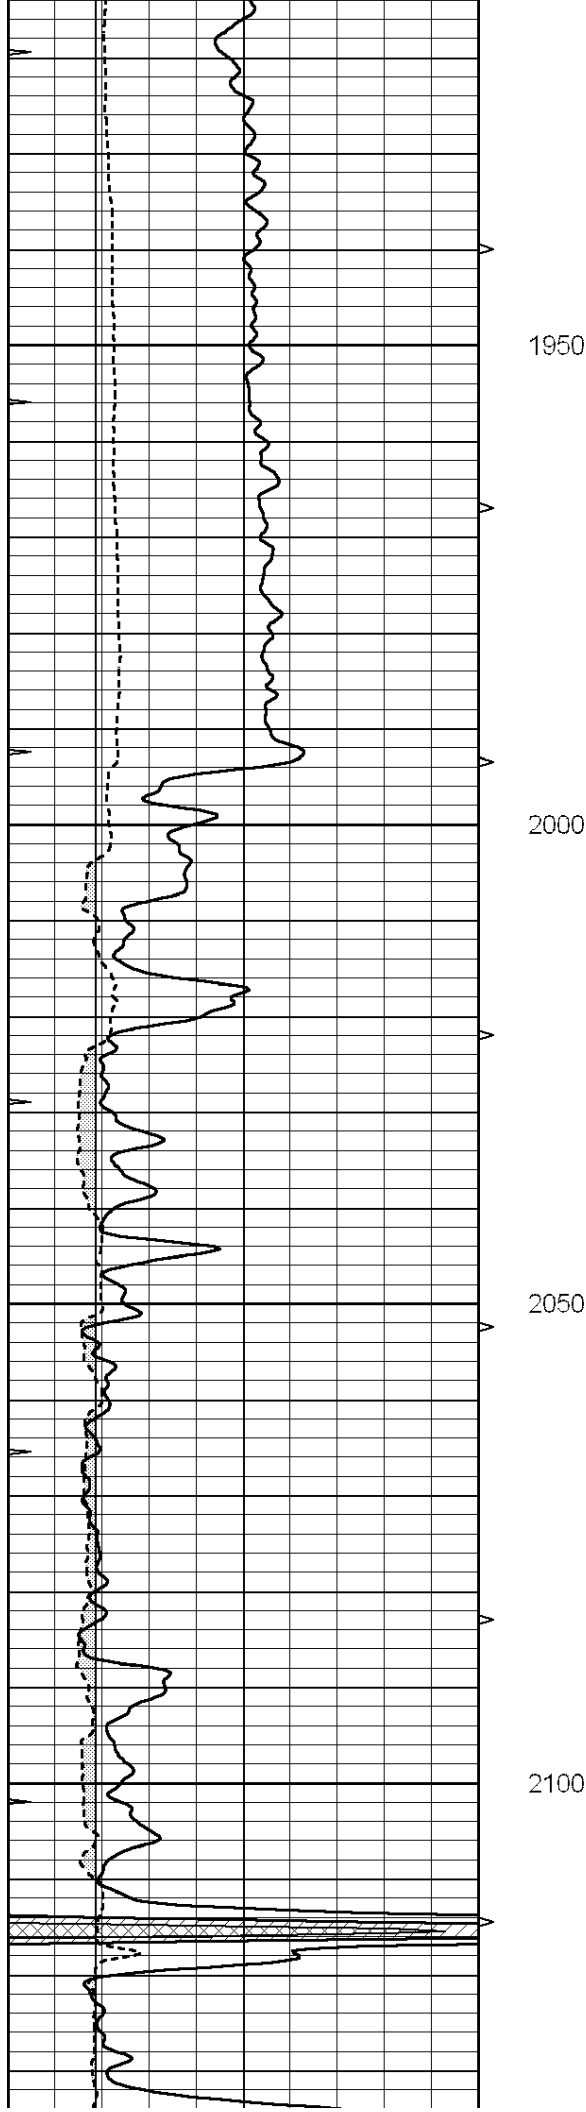


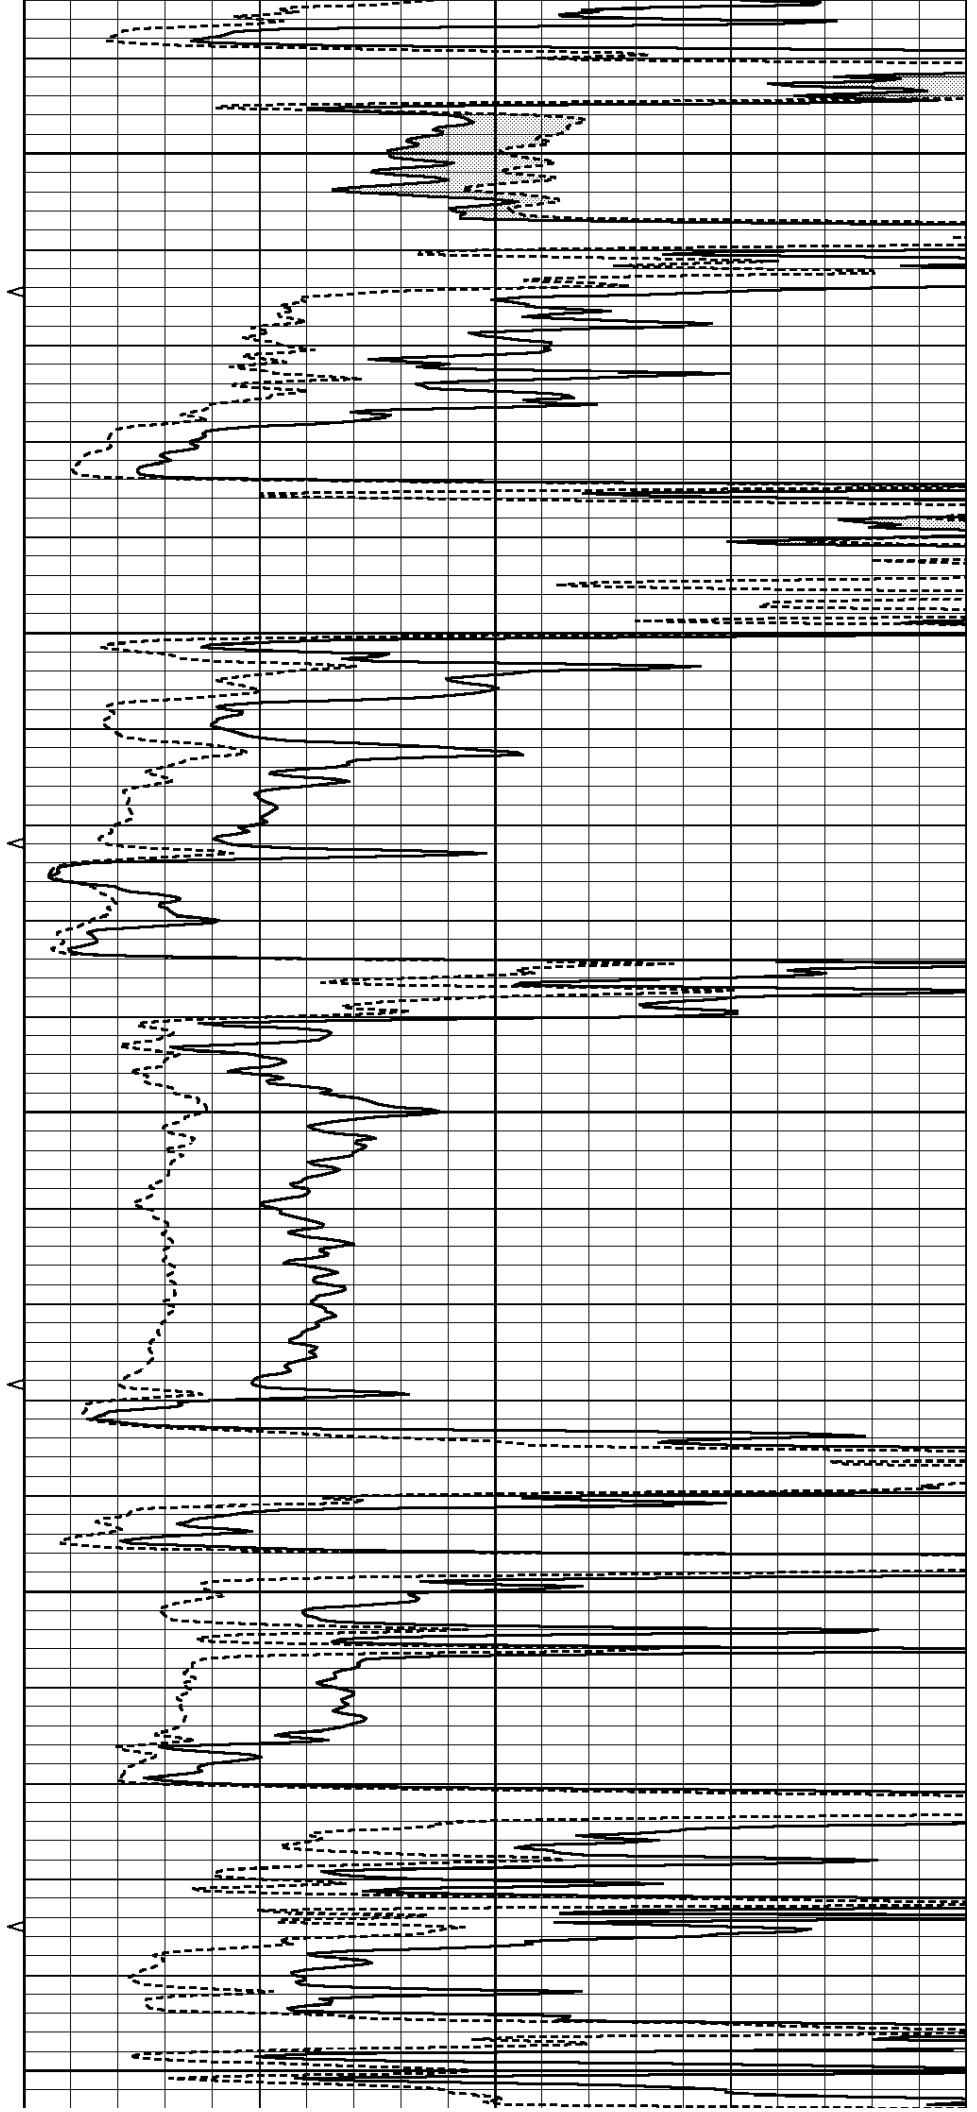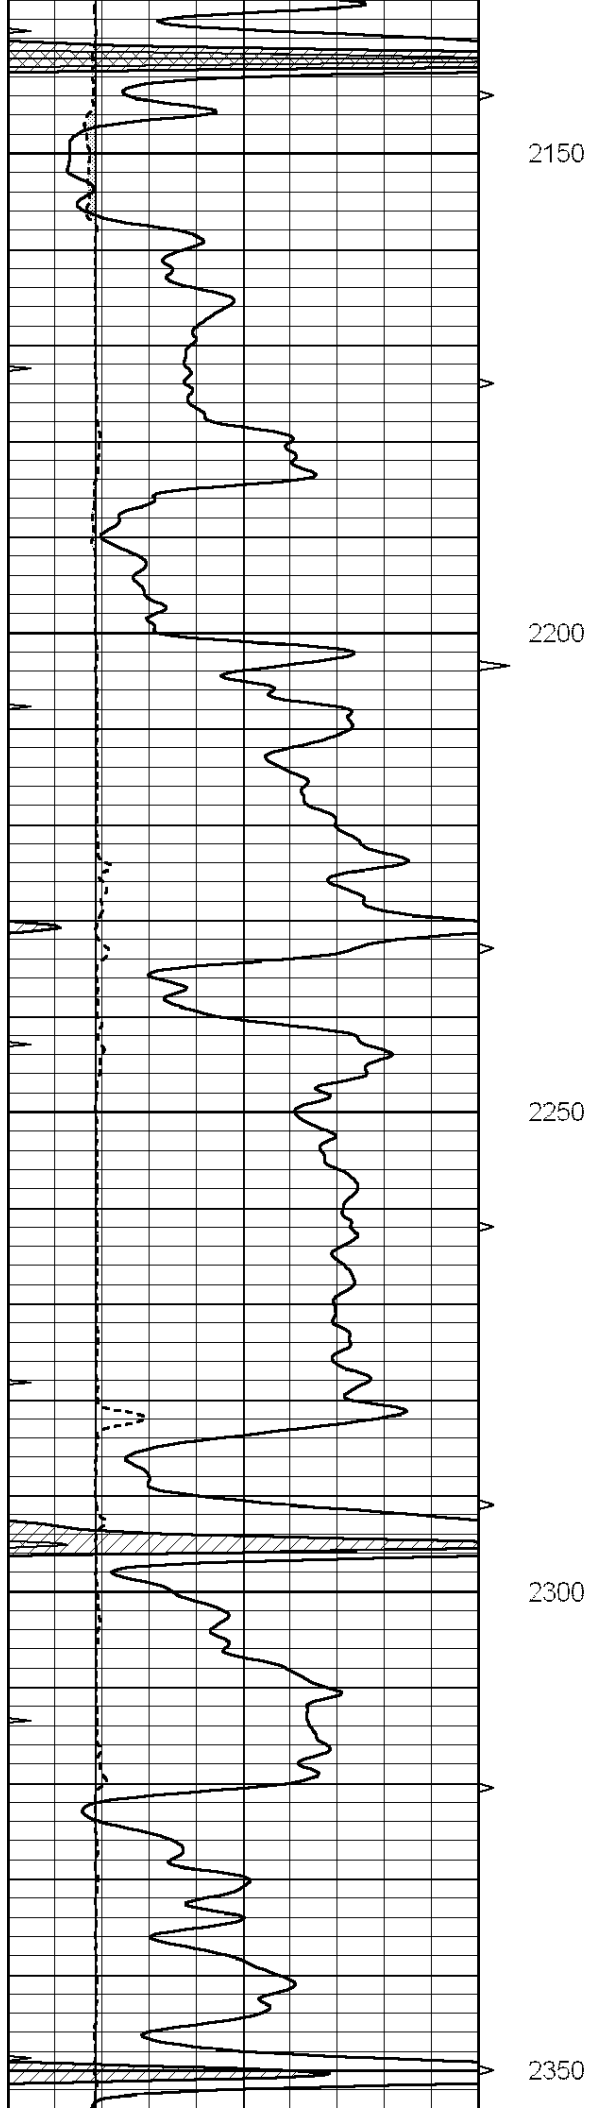


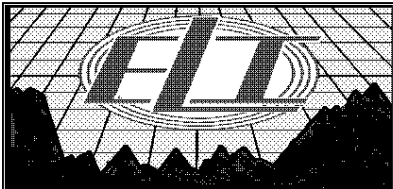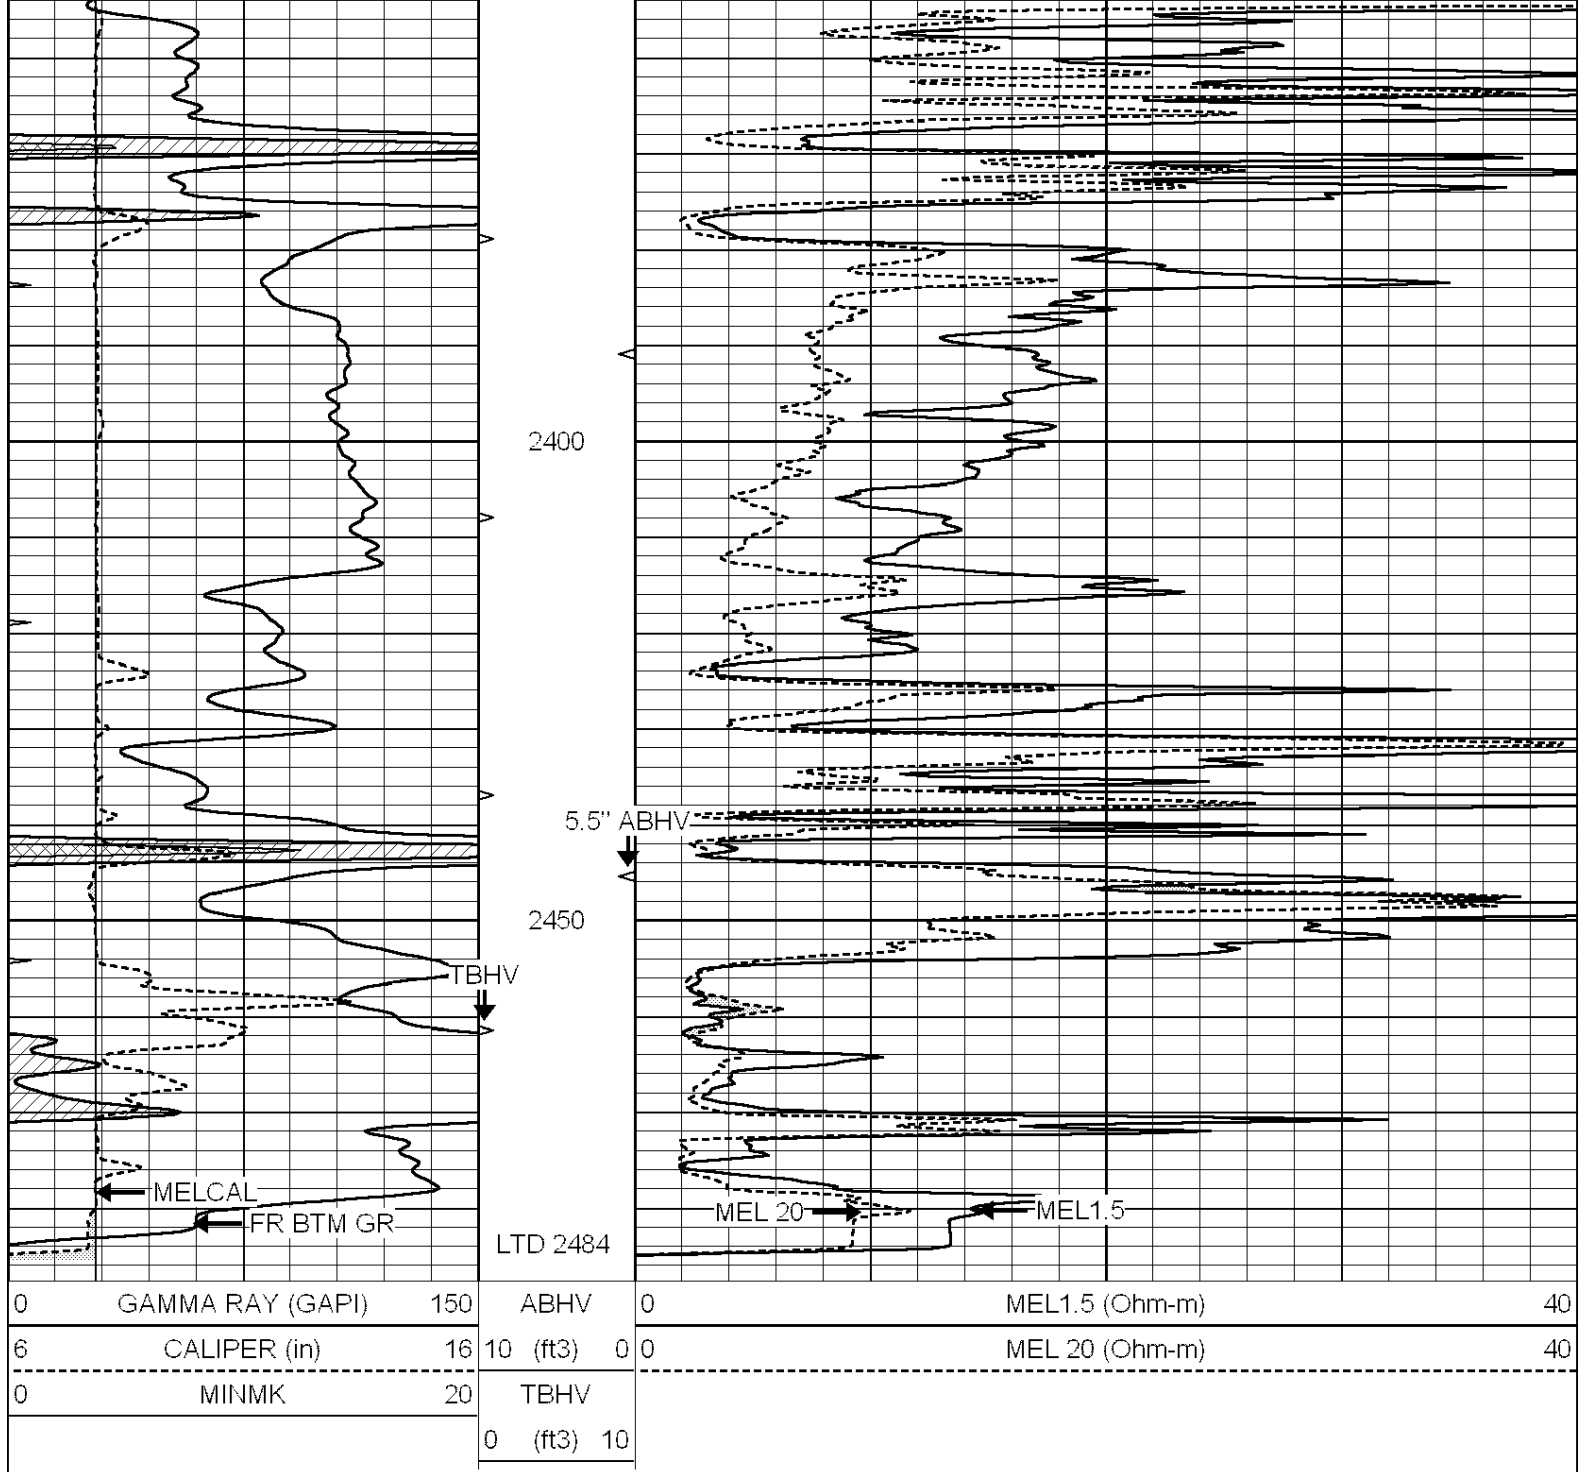

REPEAT SECTION

Database File: 1595pe.db
 Dataset Pathname: pass11.2
 Presentation Format: micro
 Dataset Creation: Tue Aug 08 06:47:23 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

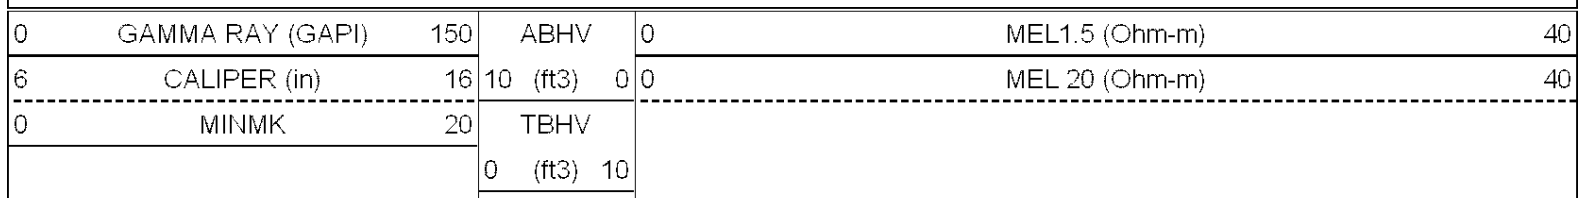

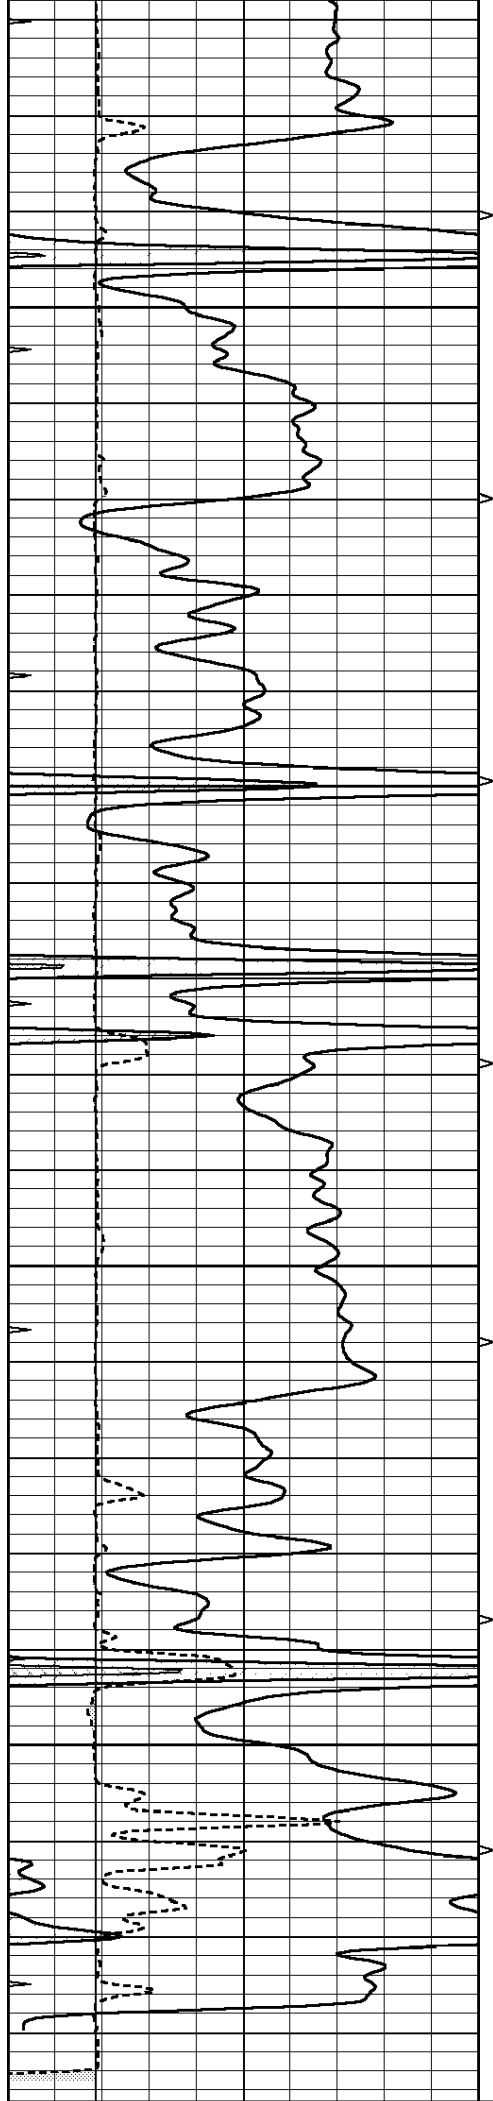


2300

2350

2400

2450

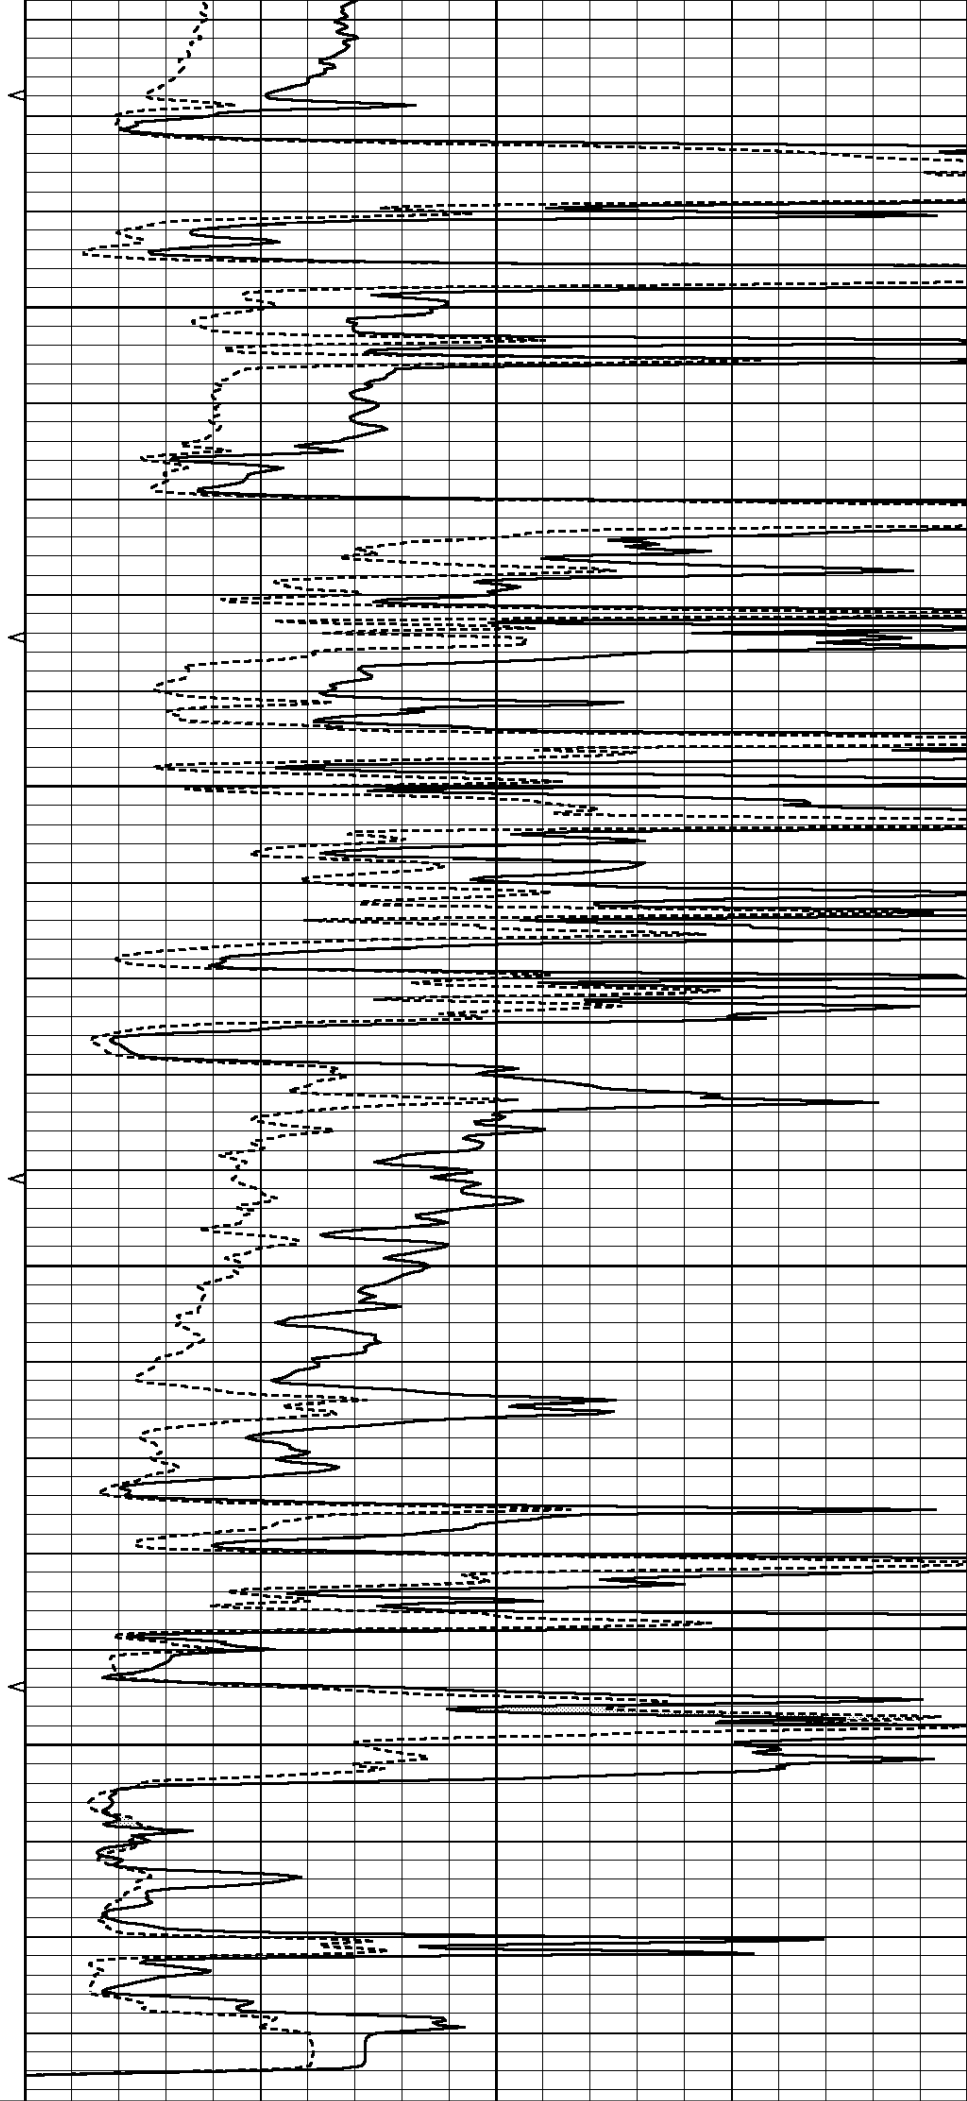

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

Calibration Report			
Database File:	1595pe.db		
Dataset Pathname:	pass12.4		
Dataset Creation:	Tue Aug 08 07:03:16 2017		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Tue Aug 08 06:25:06 2017		
Caliper Calibration:	Gain=3.922	Offset=2.314	
	Low Cal	High Cal	
References	8.000	18.000	
Readings	1.450	4.000	
1.5" Calibration:	Gain=42.000	Offset=-2.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.240	
2" Calibration:	Gain=42.000	Offset=-1.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.076	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Tue Aug 08 06:18:44 2017		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2200	GAPI/cps	