

MICRO LOG

Company	DOLOMITE RESOURCES CORPORATION		
Well	WALSH SBM#6-1		
Field	UNNAMED		
County	TREGO	State	KANSAS
Location:	AP1 # : 15-195-23044-00-00		Other Services CDL/CNL/DIL SONIC
Permanent Datum	691' FNL & 1650' FWL		Elevation
Log Measured From	SEC 6 TWP 11S RGE 25W	GROUND LEVEL	K.B. 2443
Drilling Measured From		KELLY BUSHING 5' A.G.L.	D.F. 2441
		KELLY BUSHING	G.L. 2438
Date	03/12/18		
Run Number	TWO		
Depth Driller	4080		
Depth Logger	4082		
Bottom Logged Interval	4062		
Top Log Interval	3200		
Casing Driller	8 5/8" @ 218		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	8.9/56		
pH / Fluid Loss	11.0/6.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.40@58		
Rmt @ Meas. Temp	1.05@58		
Rmc @ Meas. Temp	1.68@58		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.63@117		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	117F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	TOM PRONOLD		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


1/2 WEST OF COLLYER TO 120 RD, 12 NORTH TO B RD.,
1WEST, 3/4 SOUTH


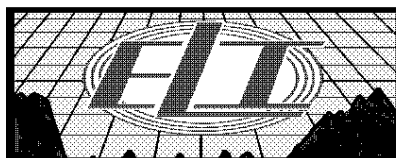




MAIN PASS


Database File: 2414pe.db
Dataset Pathname: pass6MIC
Presentation Format: _micro
Dataset Creation: Mon Mar 12 18:39:01 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

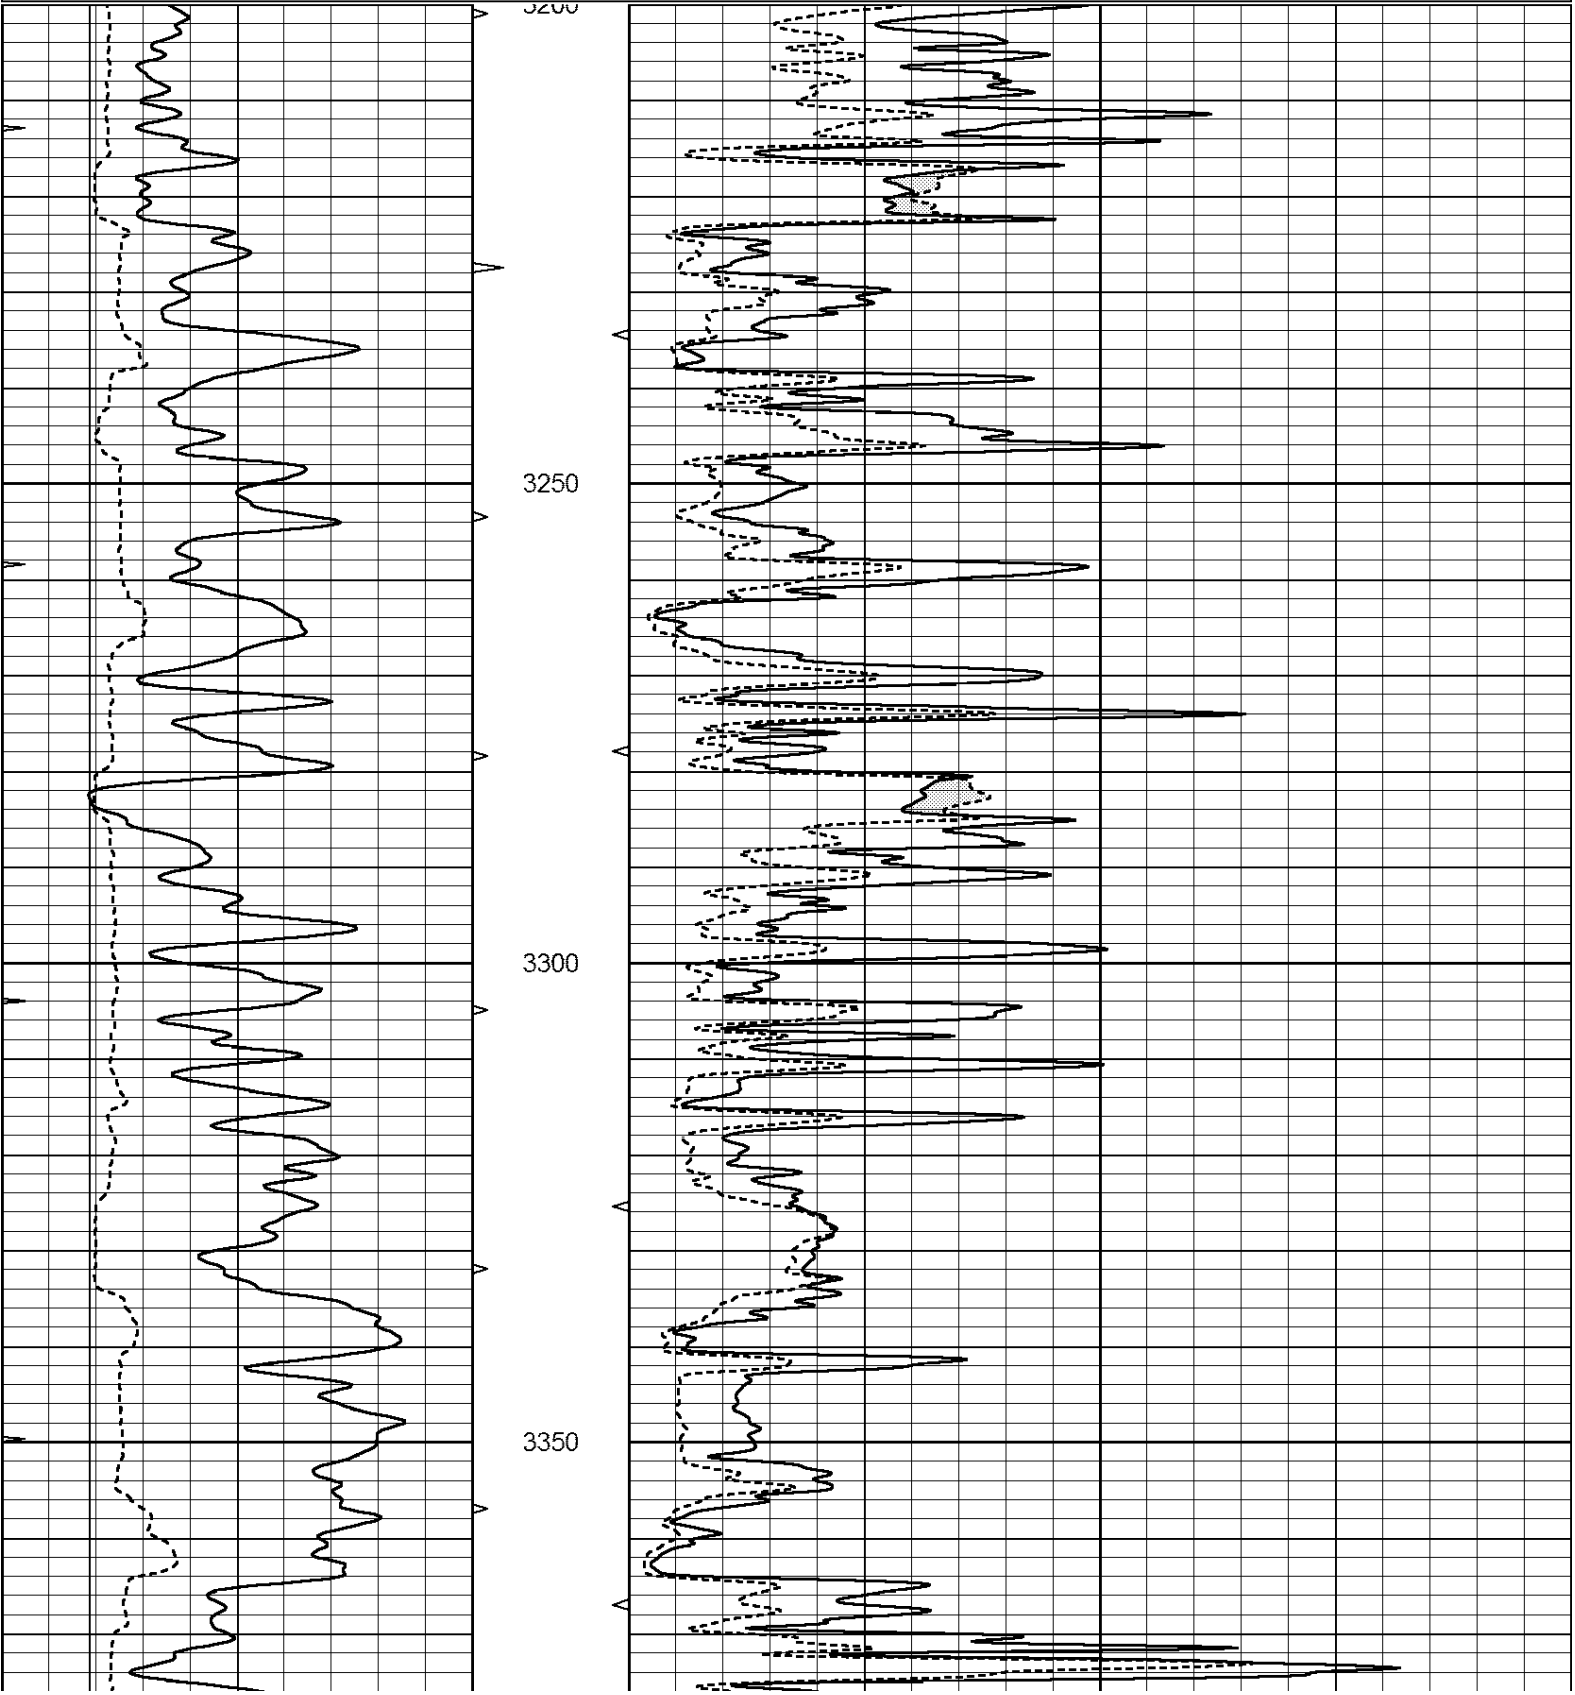

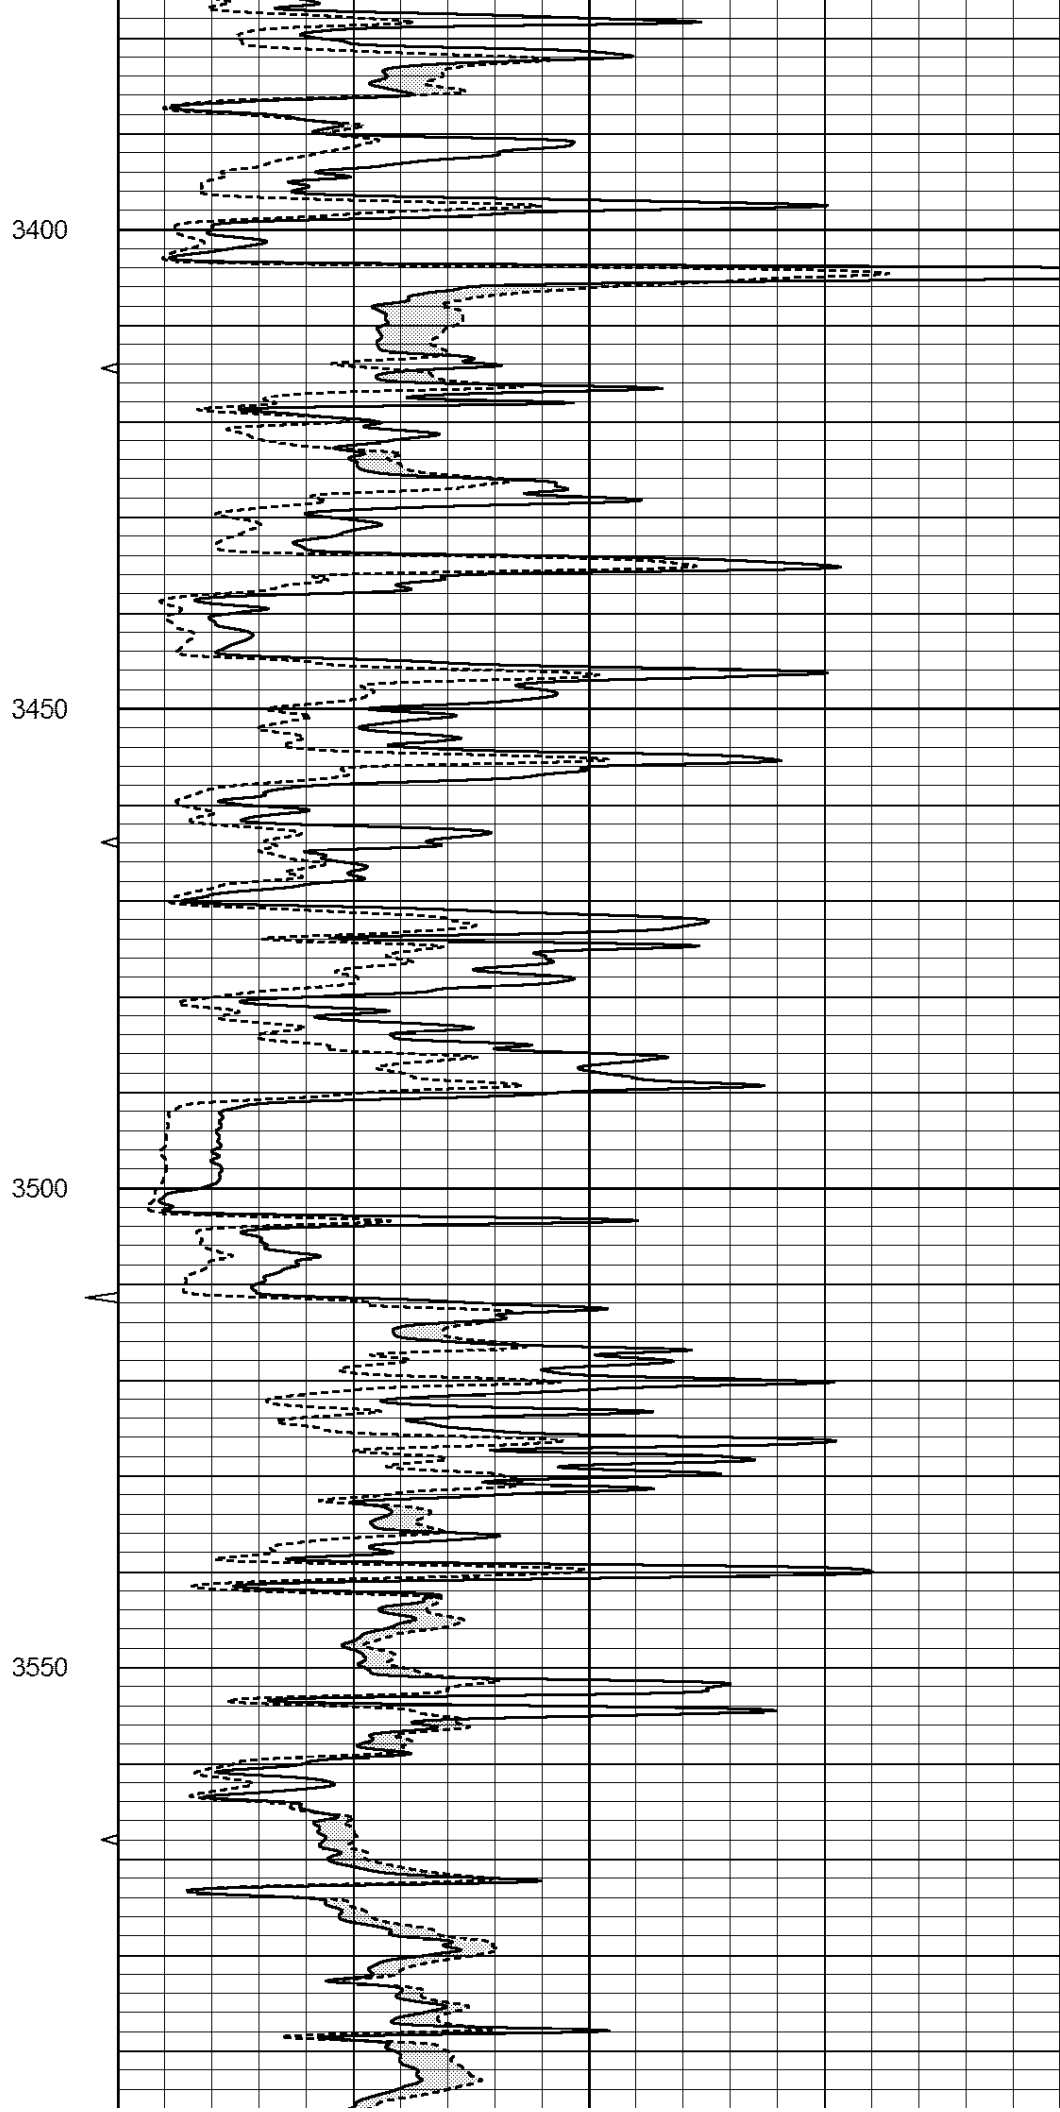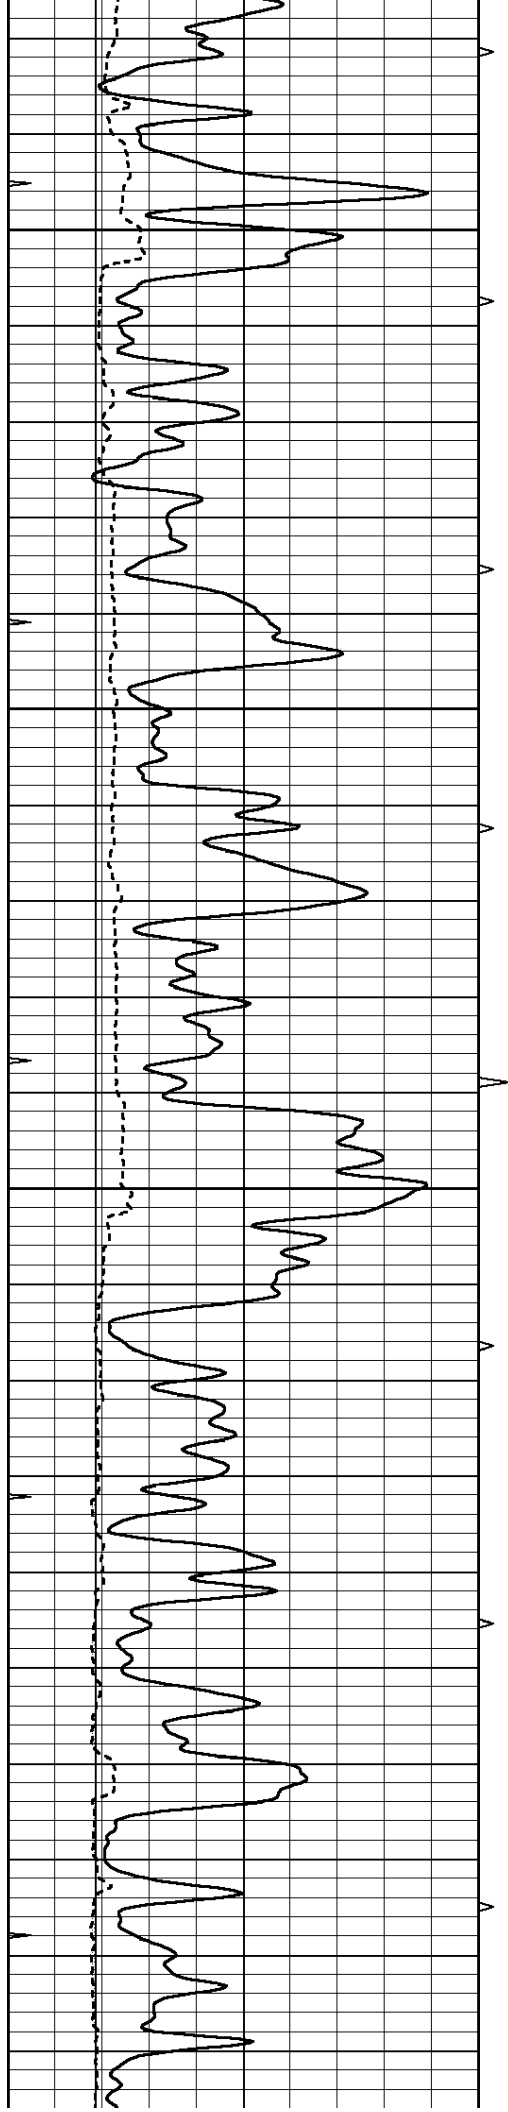


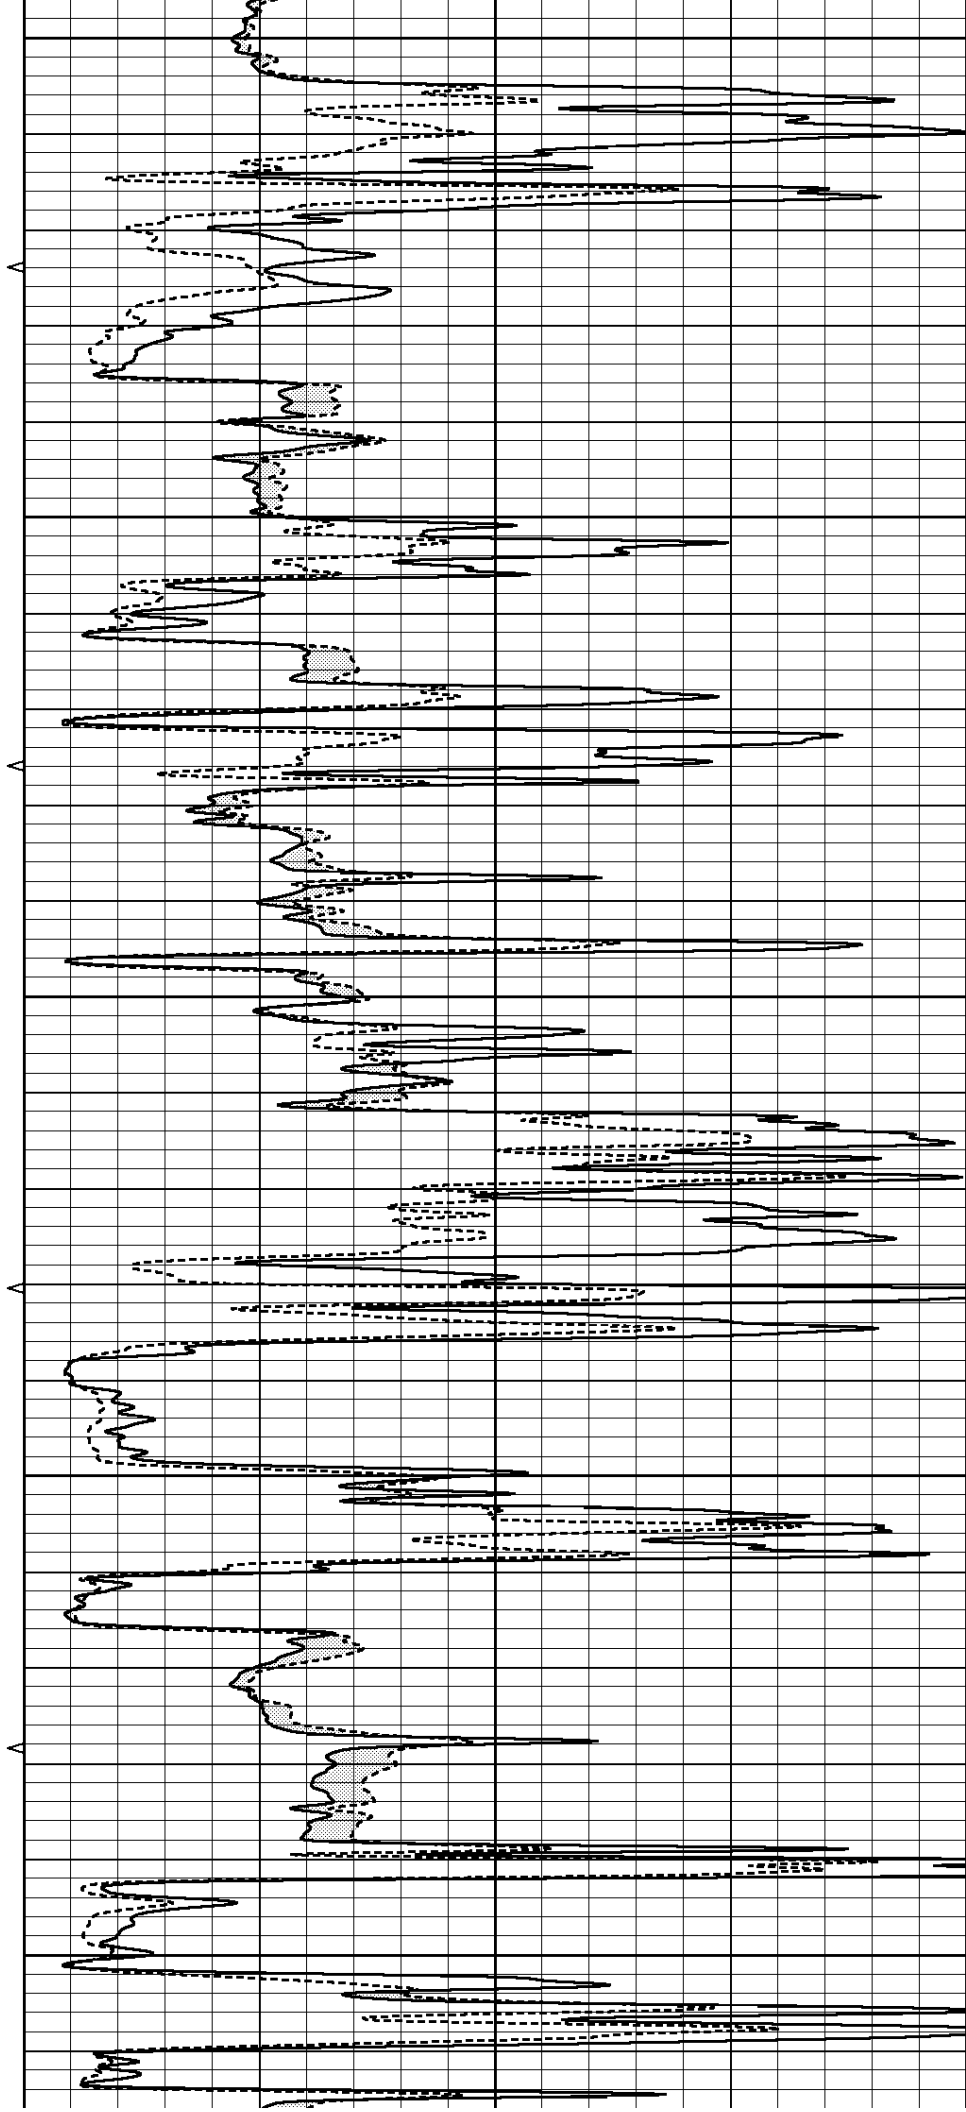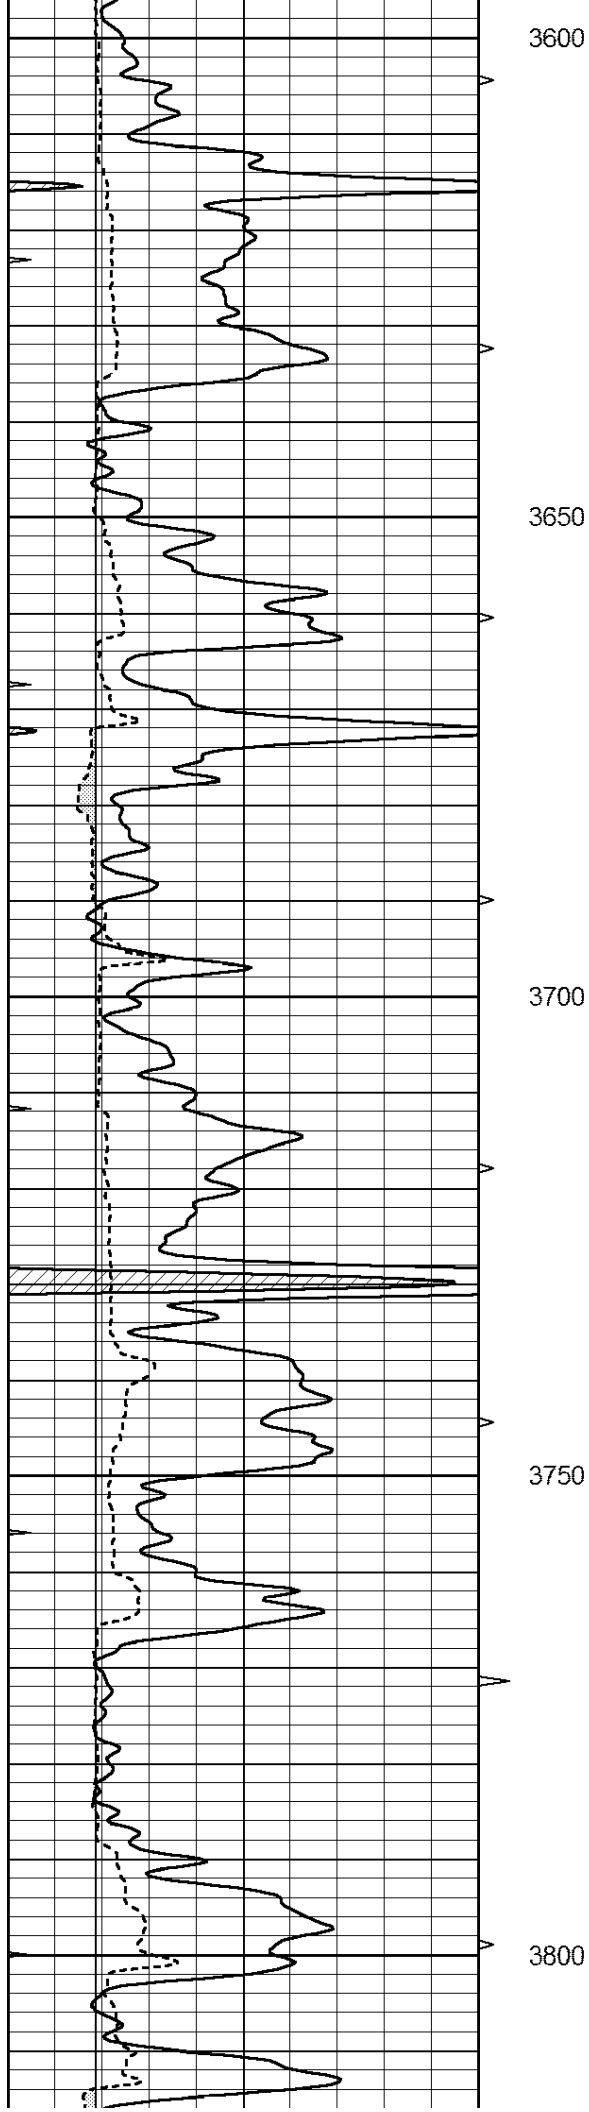

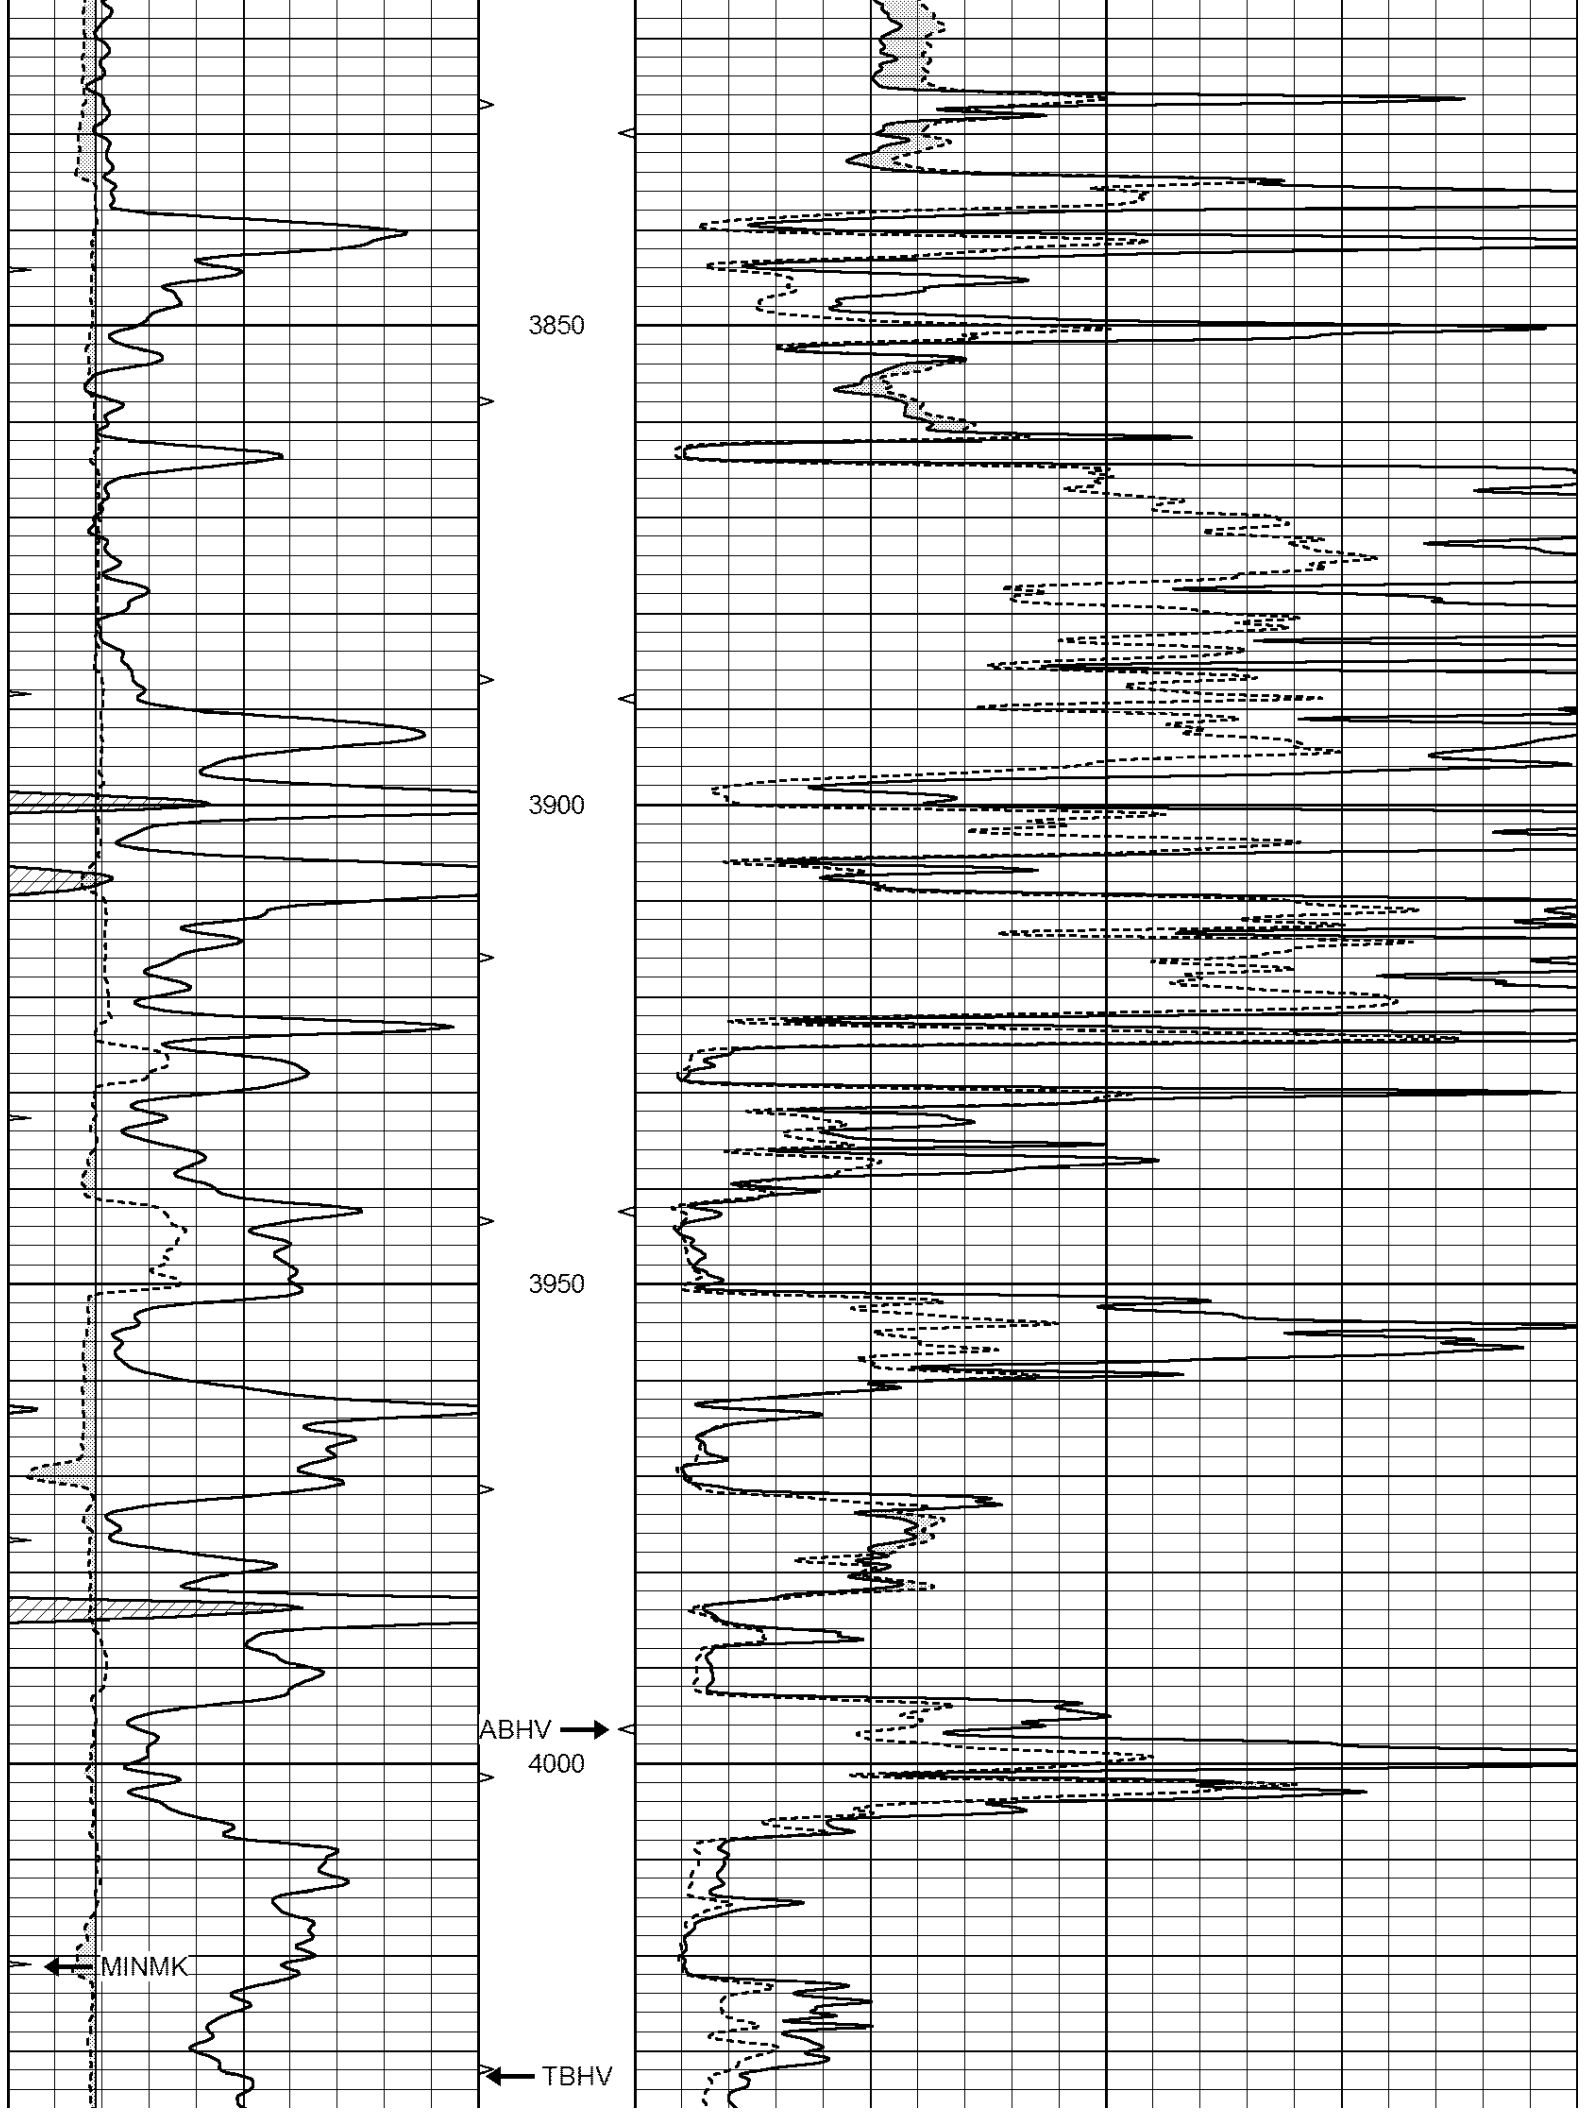

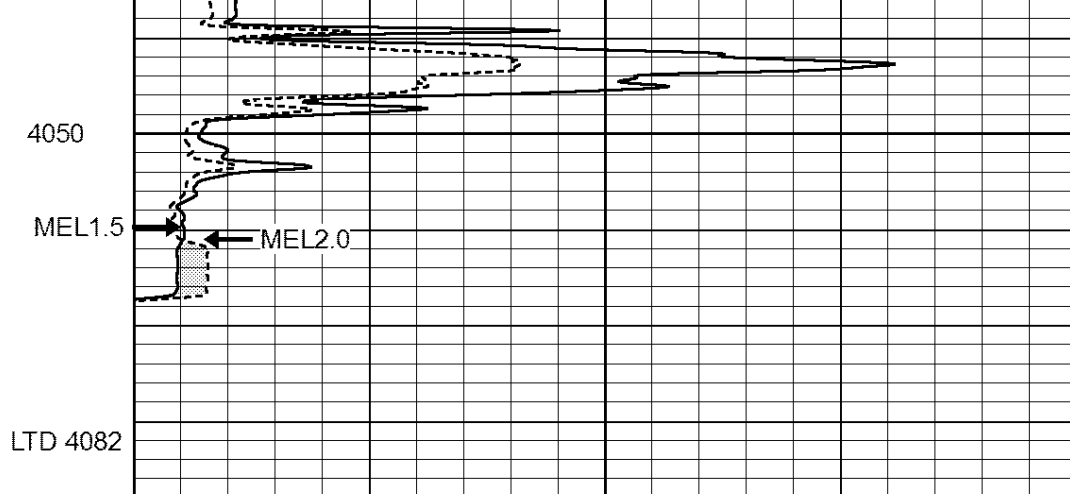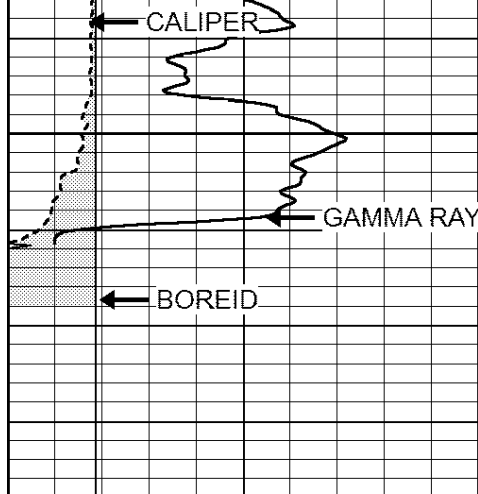



0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

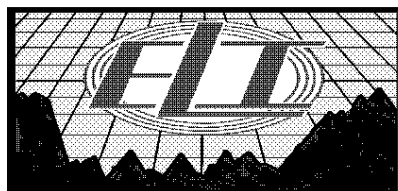


REPEAT SECTION

Database File: 2414pe.db
 Dataset Pathname: pass5RP
 Presentation Format: _micro
 Dataset Creation: Mon Mar 12 18:28:06 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

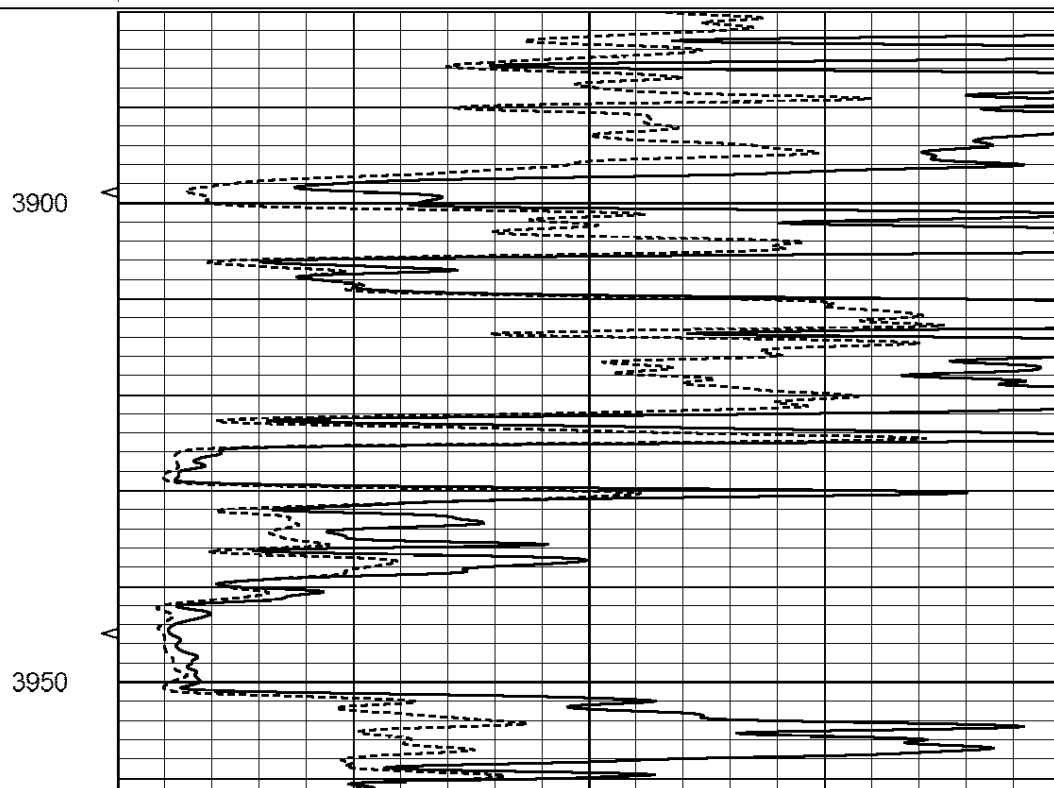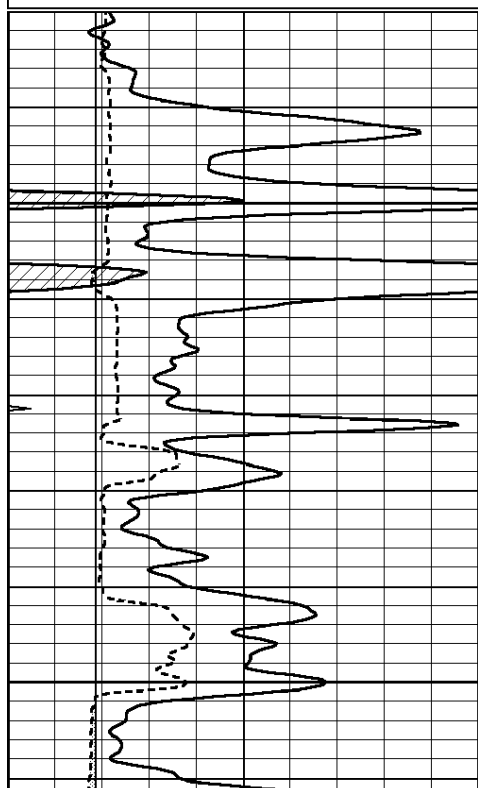

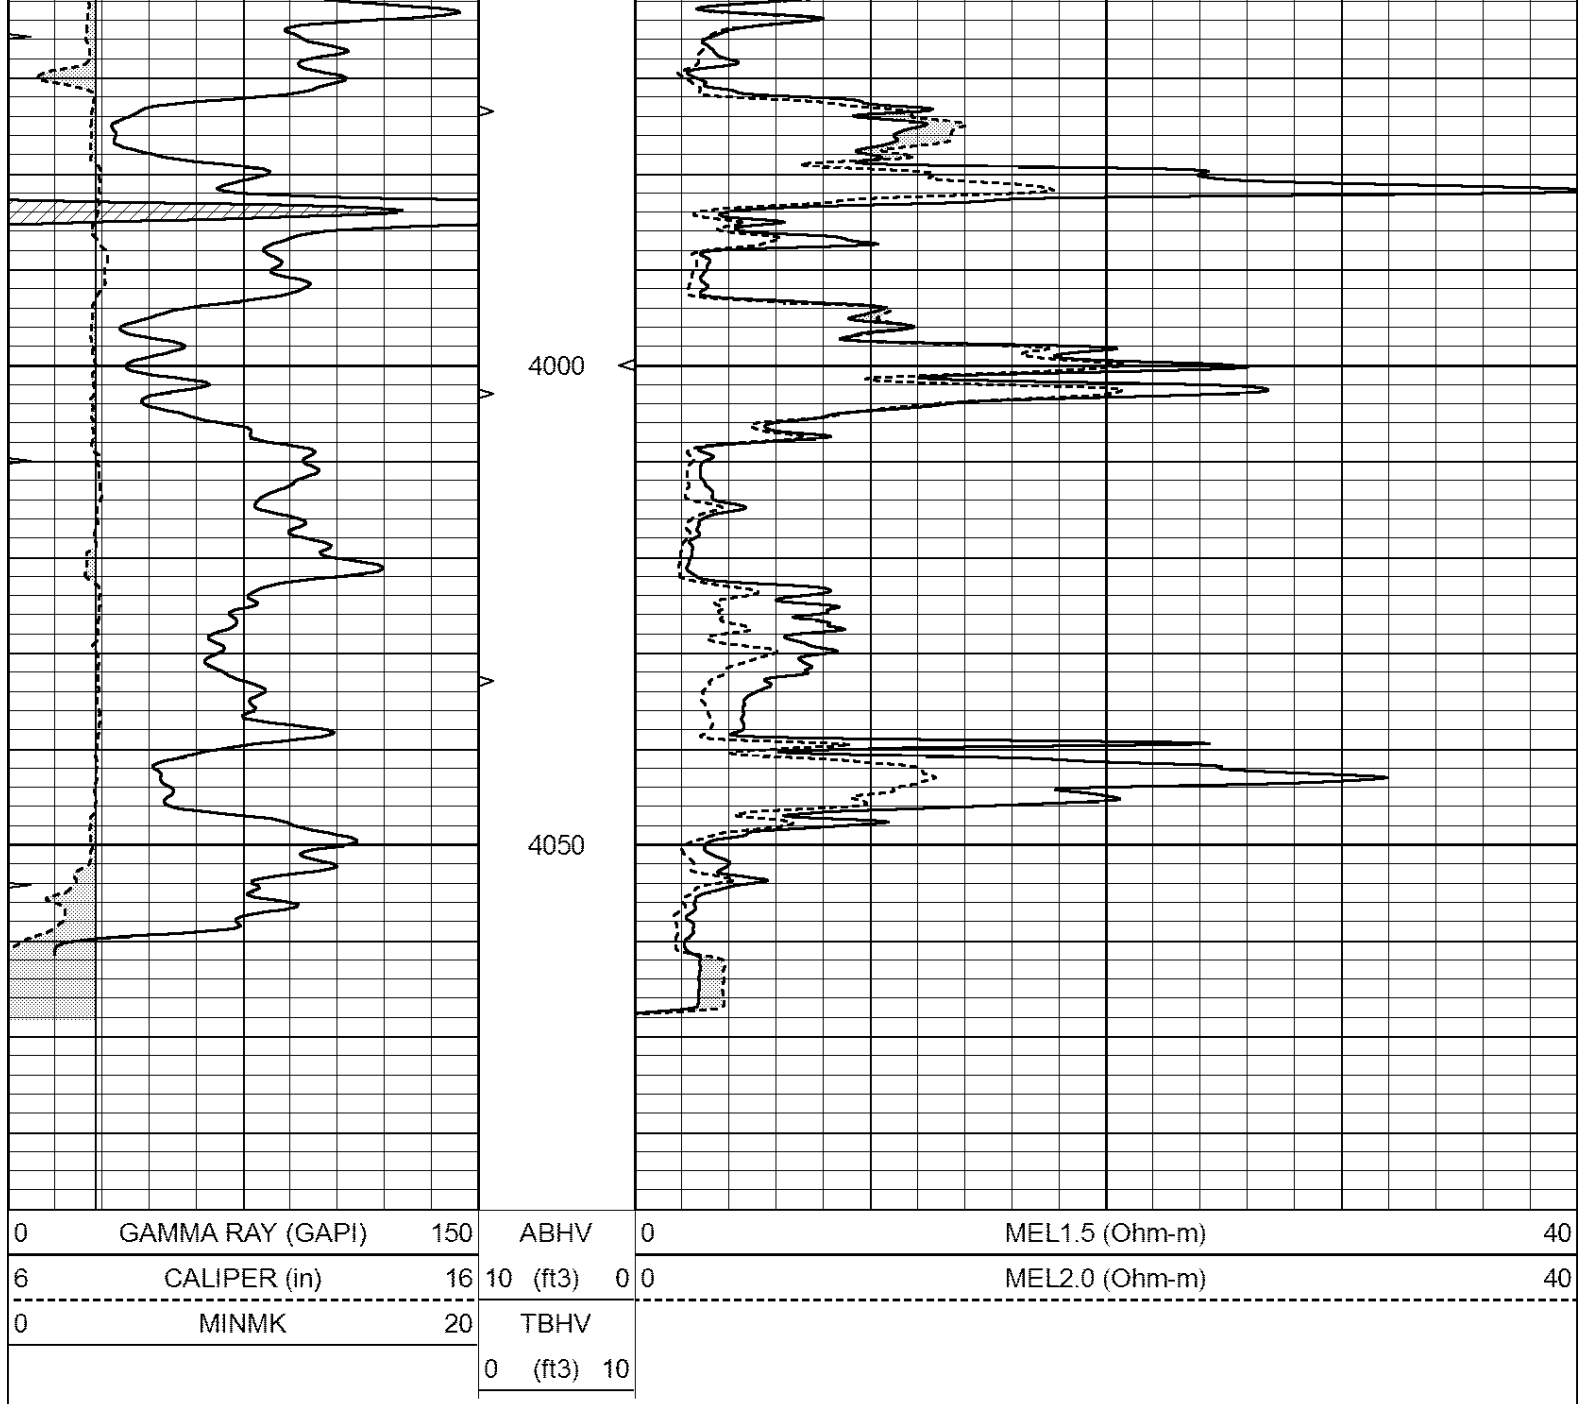

Calibration Report			
Database File:	2414pe.db		
Dataset Pathname:	pass5RP		
Dataset Creation:	Mon Mar 12 18:28:06 2018 by Calc Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Wed Feb 07 06:59:26 2018		
Caliper Calibration:	Gain=26.521	Offset=0.703	
	Low Cal	High Cal	
References	7.000	14.000	
Readings	0.217	0.478	
1.5" Calibration:	Gain=38.075	Offset=-0.700	
	Low Cal	High Cal	
References	0.000	20.000	

Readings	0.004	1.196
2" Calibration:	Gain=45.000	Offset=-1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.006	0.913

Gamma Ray Calibration Report

Serial Number:	GR2	
Tool Model:	OPEN	
Performed:	Tue Mar 06 20:00:46 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.9300	GAPI/cps