

COMPENSATED DENSITY/NEUTRON LOG

Company	BEAR PETROLEUM	Company	BEAR PETROLEUM
Well	THOMPSON A#1	Well	THOMPSON A#1
Field	N/A	Field	N/A
County	PAWNEE	County	PAWNEE
State	KANSAS	State	KANSAS
Location:	API # : 15-145-21834-00-00	Other Services	DIL/MEL SONIC
Permanent Datum	660 FNL & 1605 FEL	Elevation	
Log Measured From	GROUND LEVEL	K.B. 2192	
Drilling Measured From	KELLY BUSHING 6' A.G.L. KELLY BUSHING	D.F. 2190	
		G.L. 2186	
Date	07/05/18		
Run Number	ONE		
Depth Driller	4580		
Depth Logger	4581		
Bottom Logged Interval	4557		
Top Log Interval	2200		
Casing Driller	8 5/8" @ 1278		
Casing Logger	1278		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6800 PPM	
Density / Viscosity	9.3/52		
pH / Fluid Loss	9.0/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.60@82		
Rmt @ Meas. Temp	.45@82		
Rmc @ Meas. Temp	.72@82		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.40@121		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	122F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	ROD ANDERSON		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
BURDETT EAST TO 340 SOUTH TO K RD.
WEST INTO.

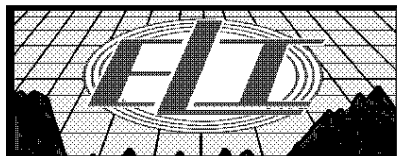



DOLOMITE MATRIX 2.81


Database File: 2689ddn.db
Dataset Pathname: pass3DOL
Presentation Format: den_neu
Dataset Creation: Thu Jul 05 10:18:34 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

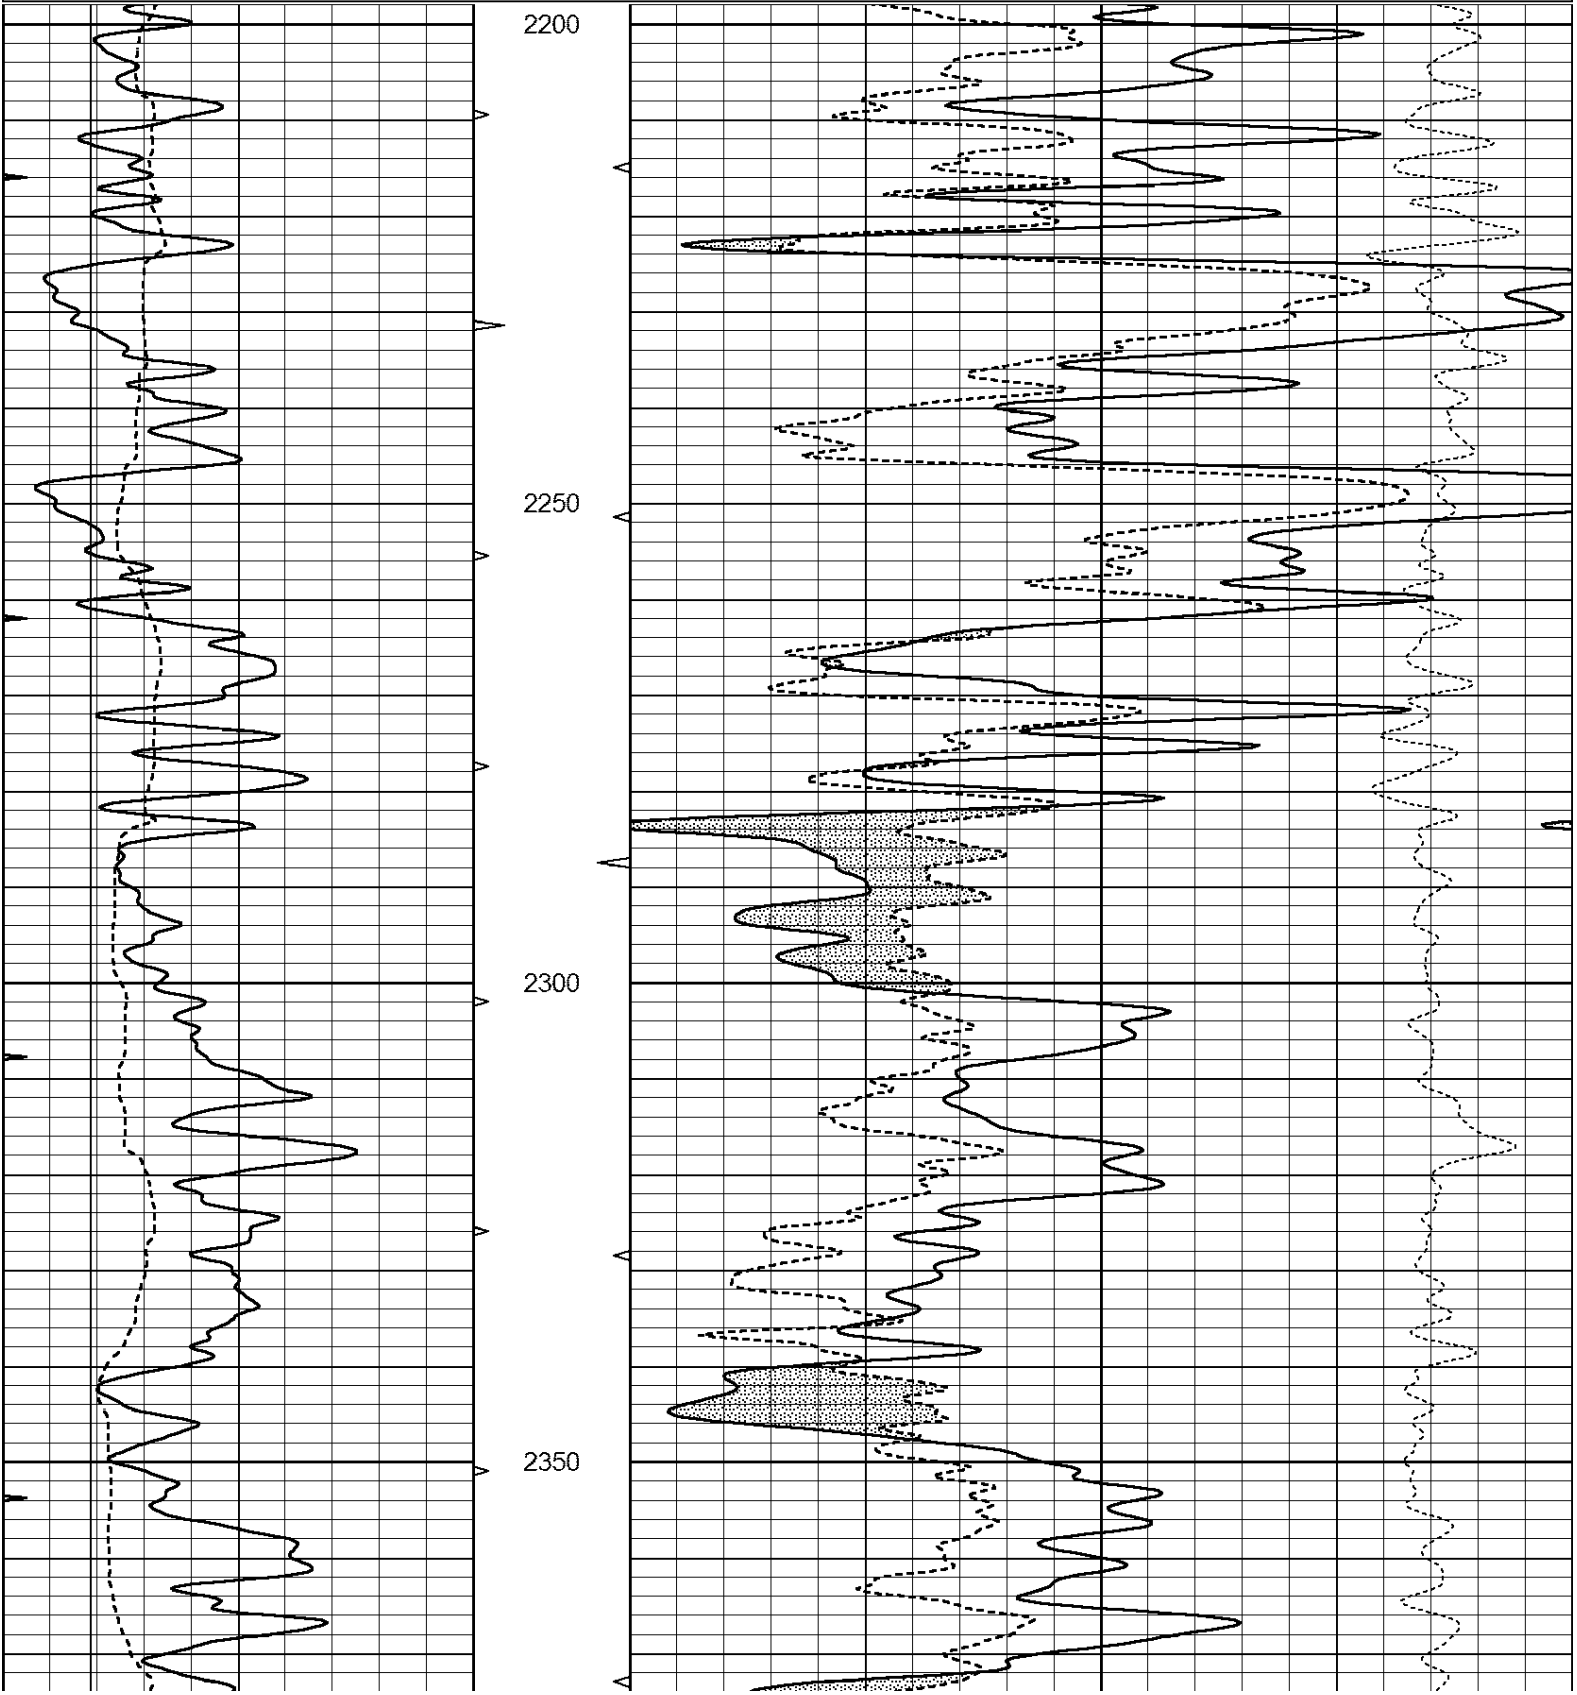

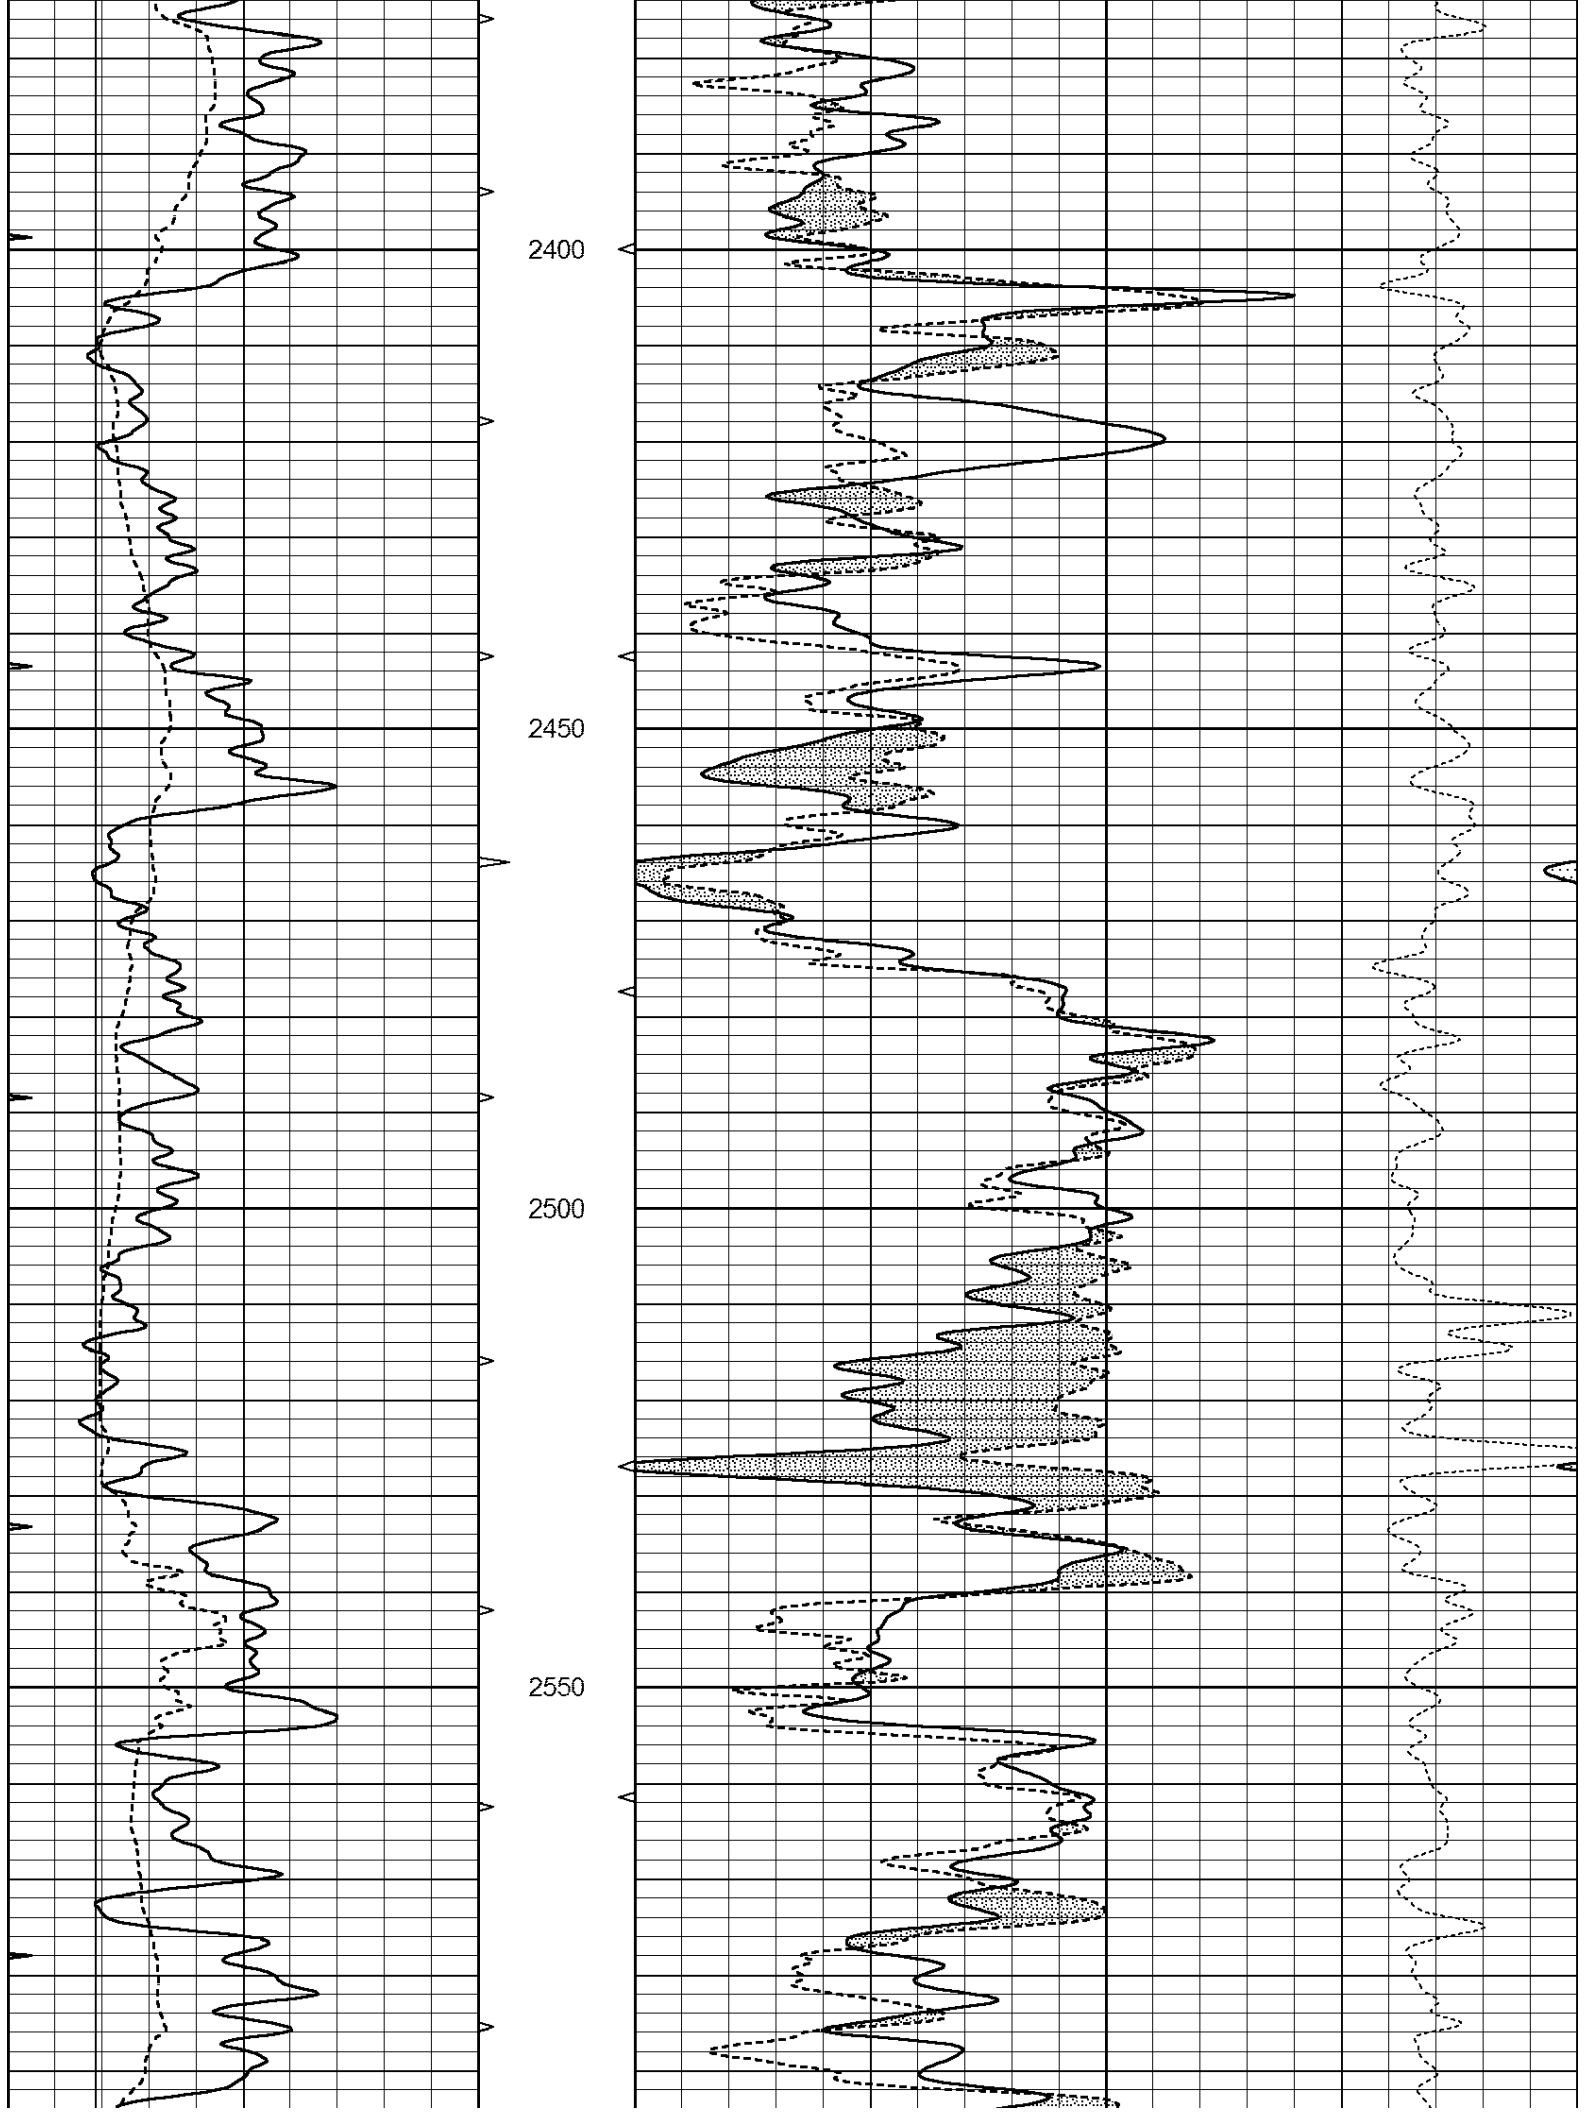


			2600			
0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu) -10	
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu) -10	
0	MINMK	20	TBHV	-0.25 CORRECTION (g/cc) 0.25		
			0 (ft3) 10			


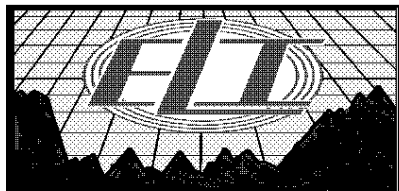



MAIN PASS


Database File: 2689ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: den_neu
 Dataset Creation: Thu Jul 05 10:08:28 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)			-10	
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)			-10
0	MINMK	20	TBHV				-0.25 CORRECTION (g/cc)		0.25
			0 (ft3)				10		

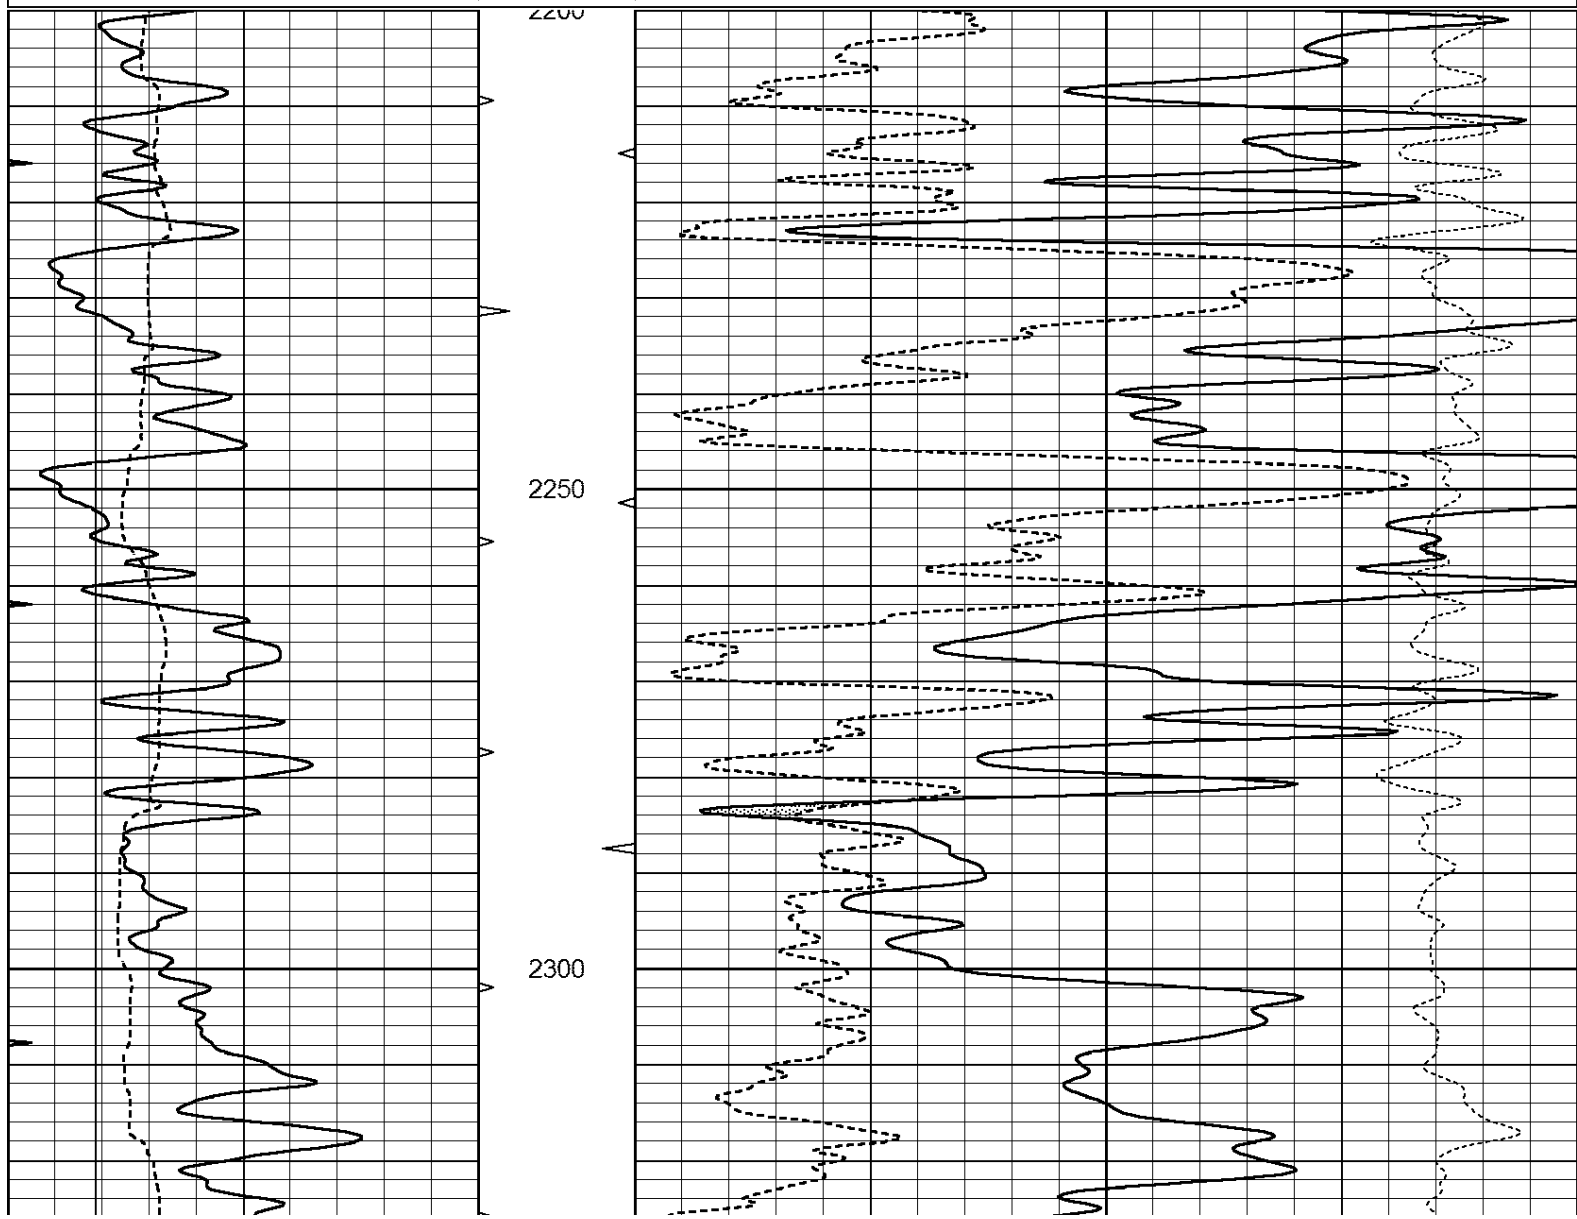

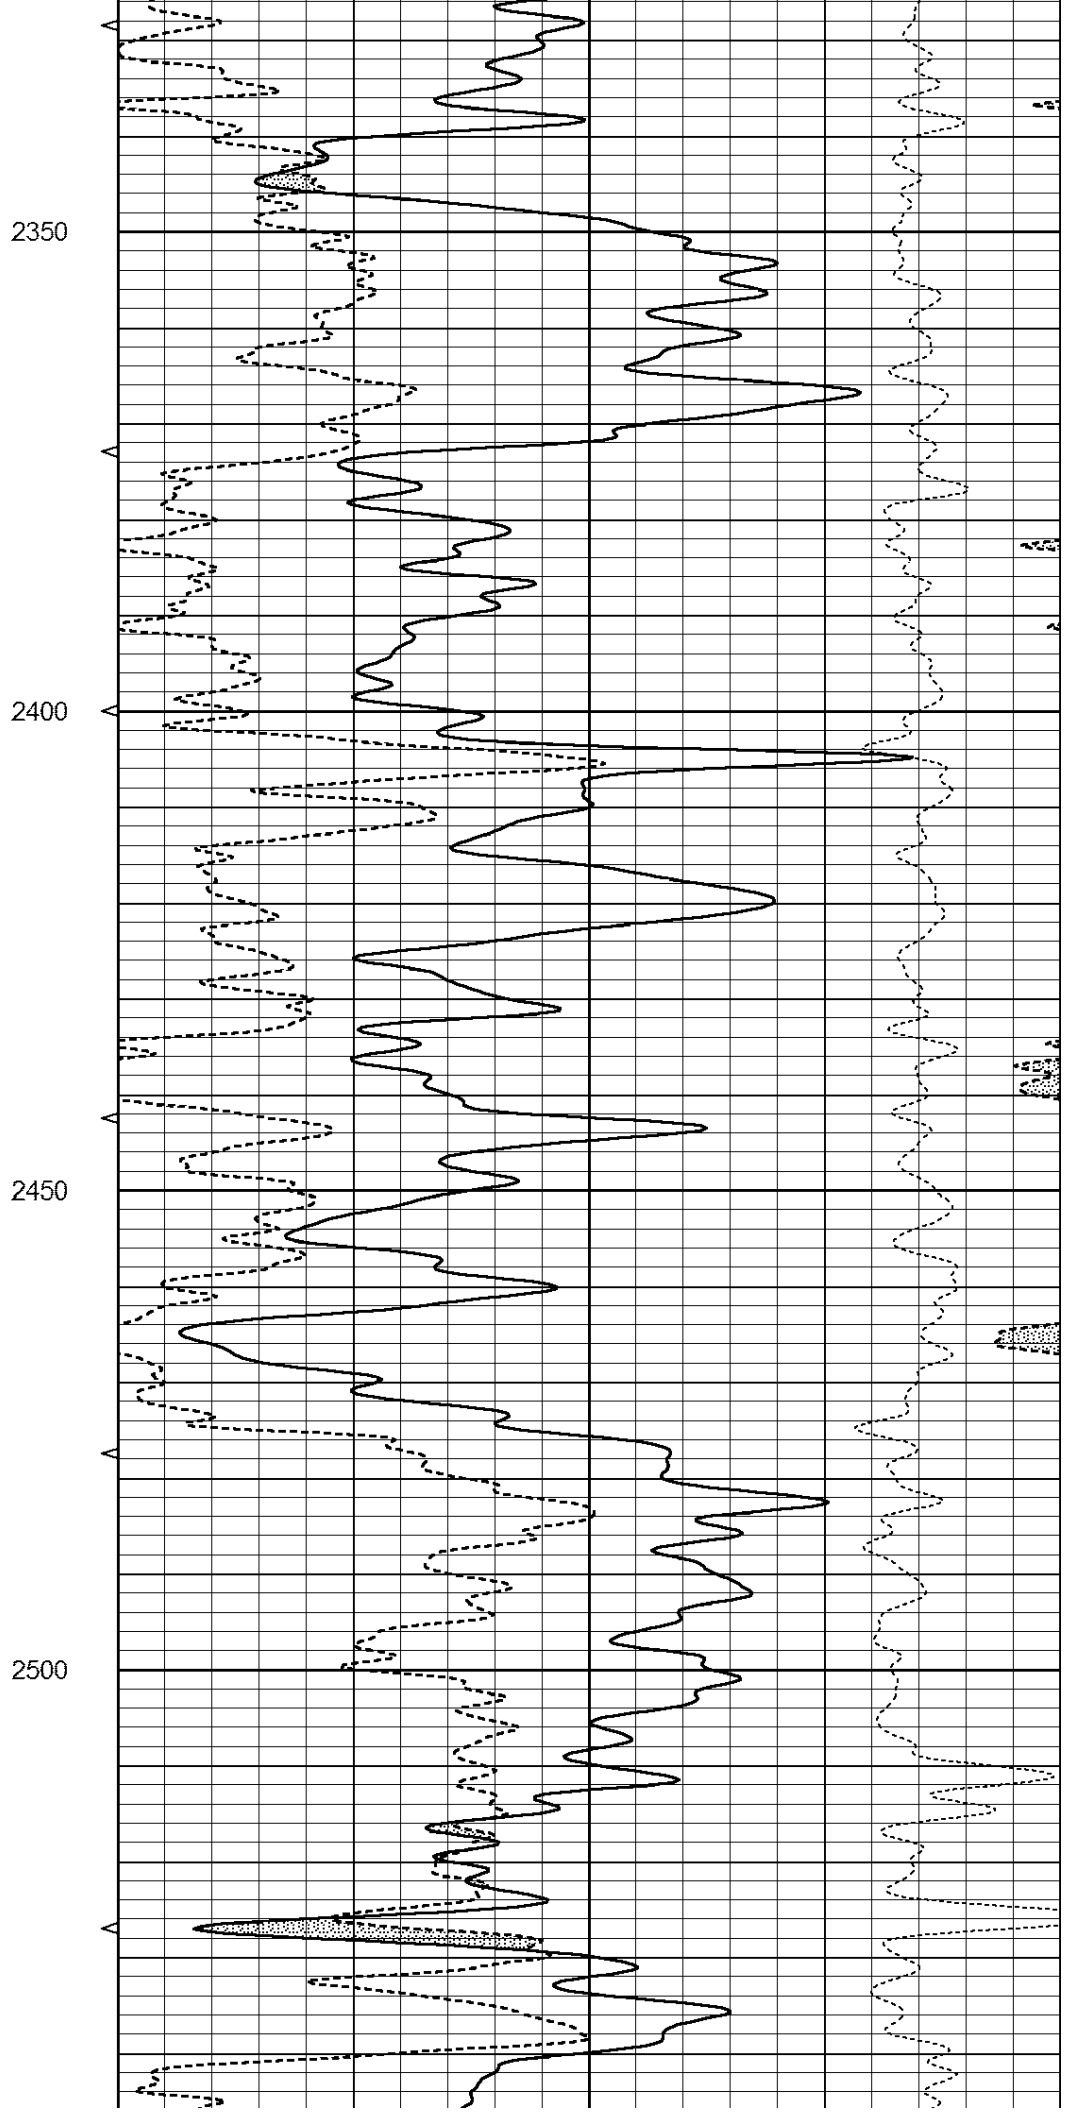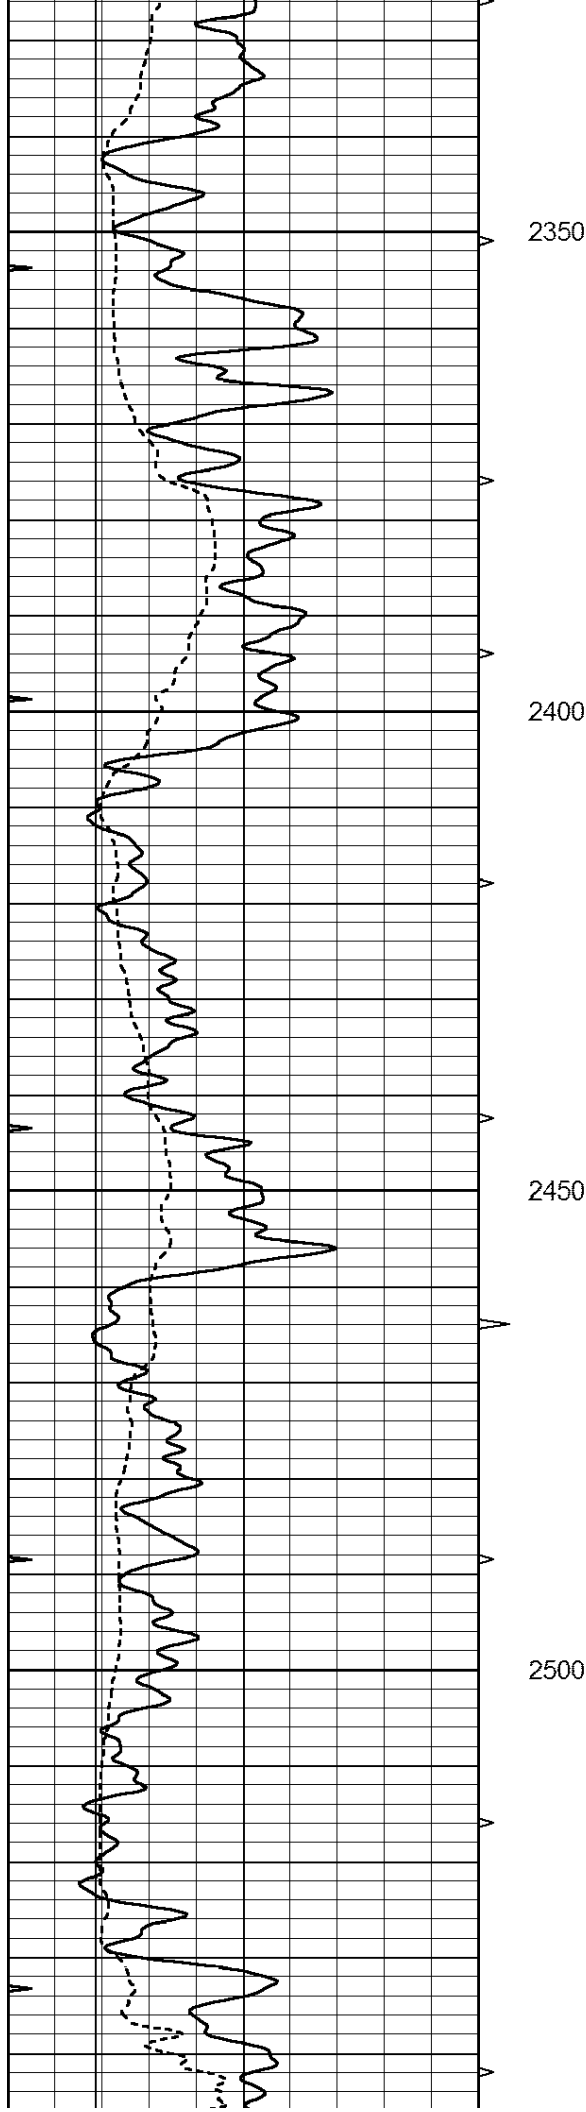

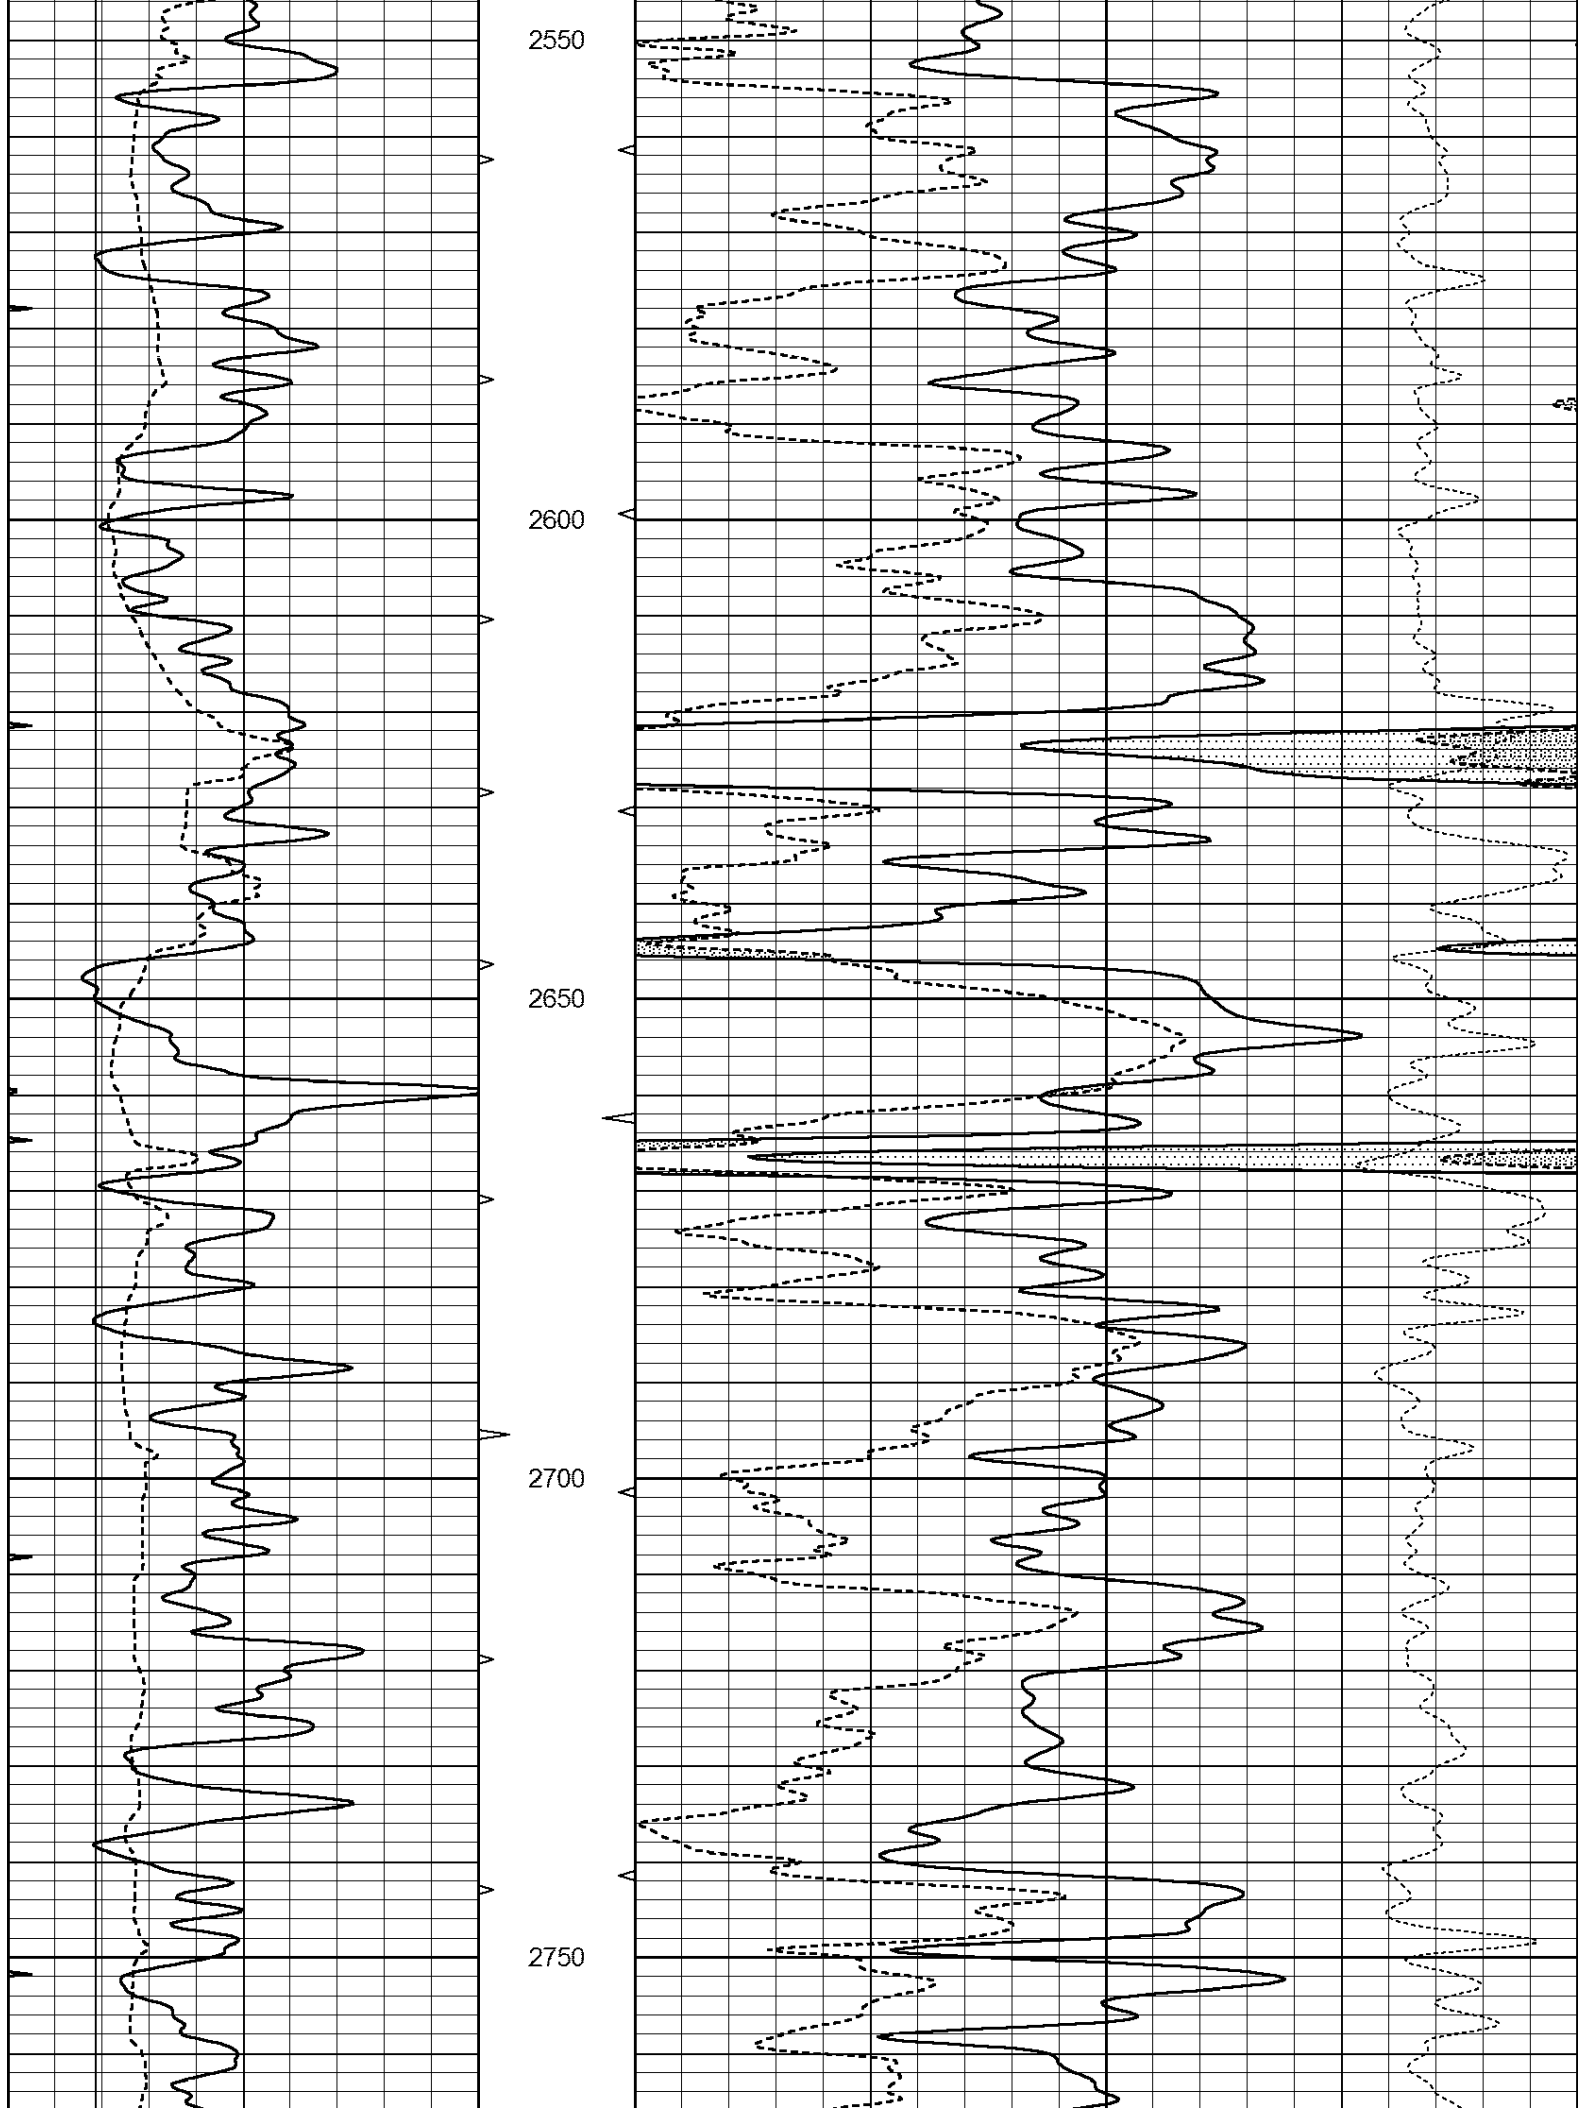

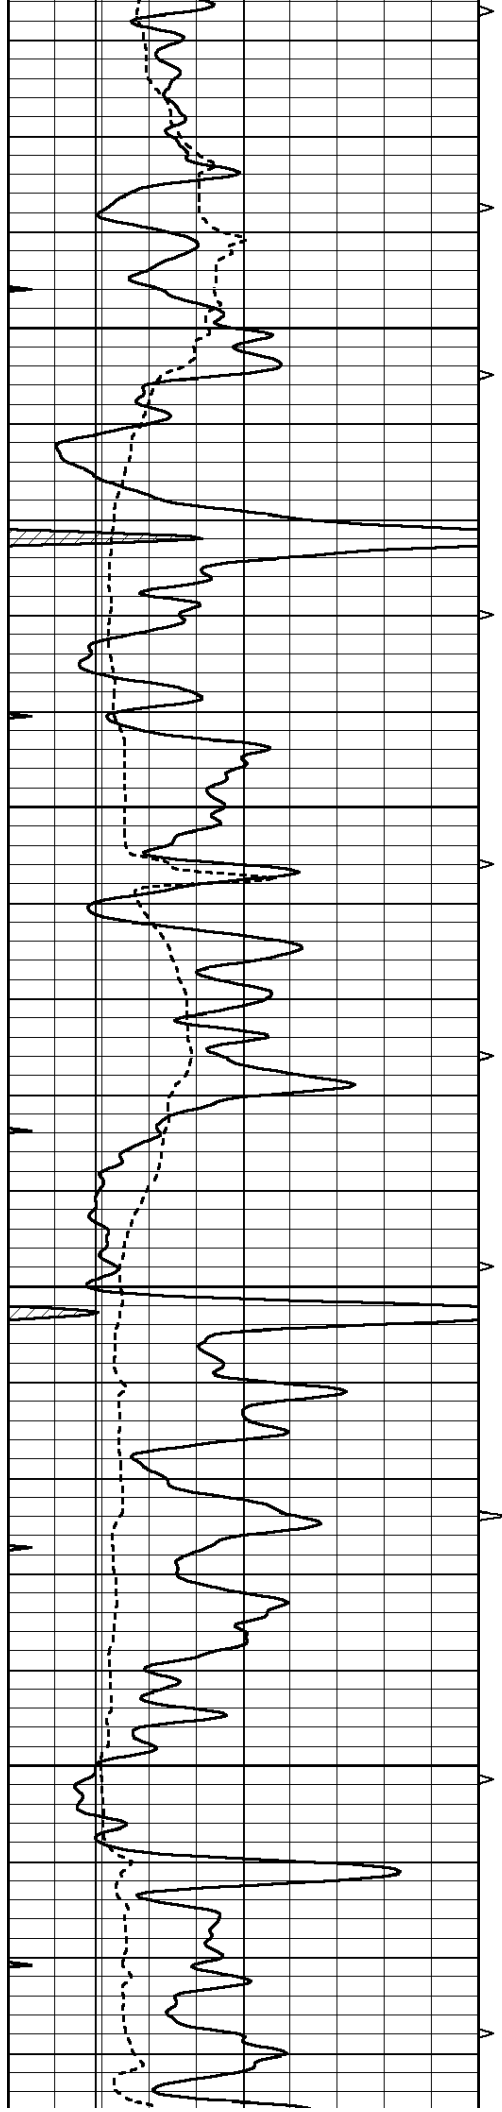



2800


2850

2900

2950

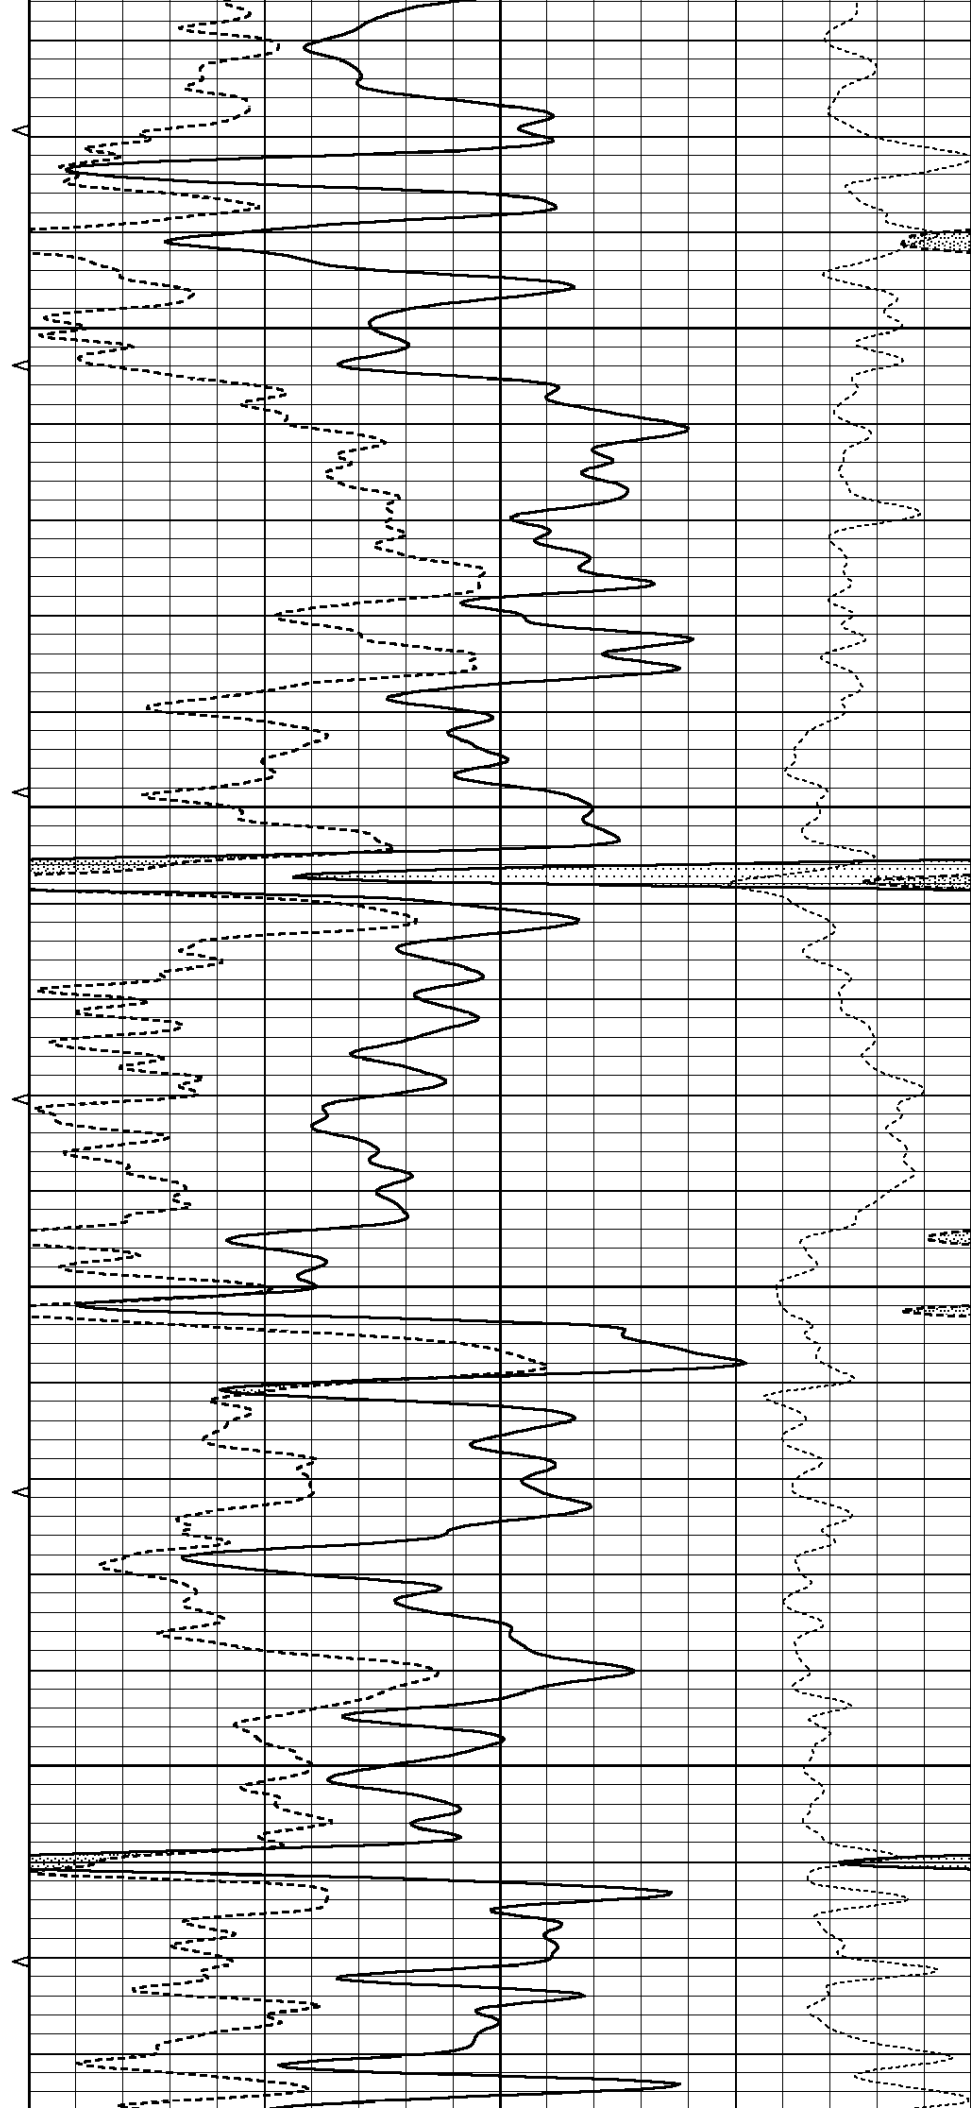

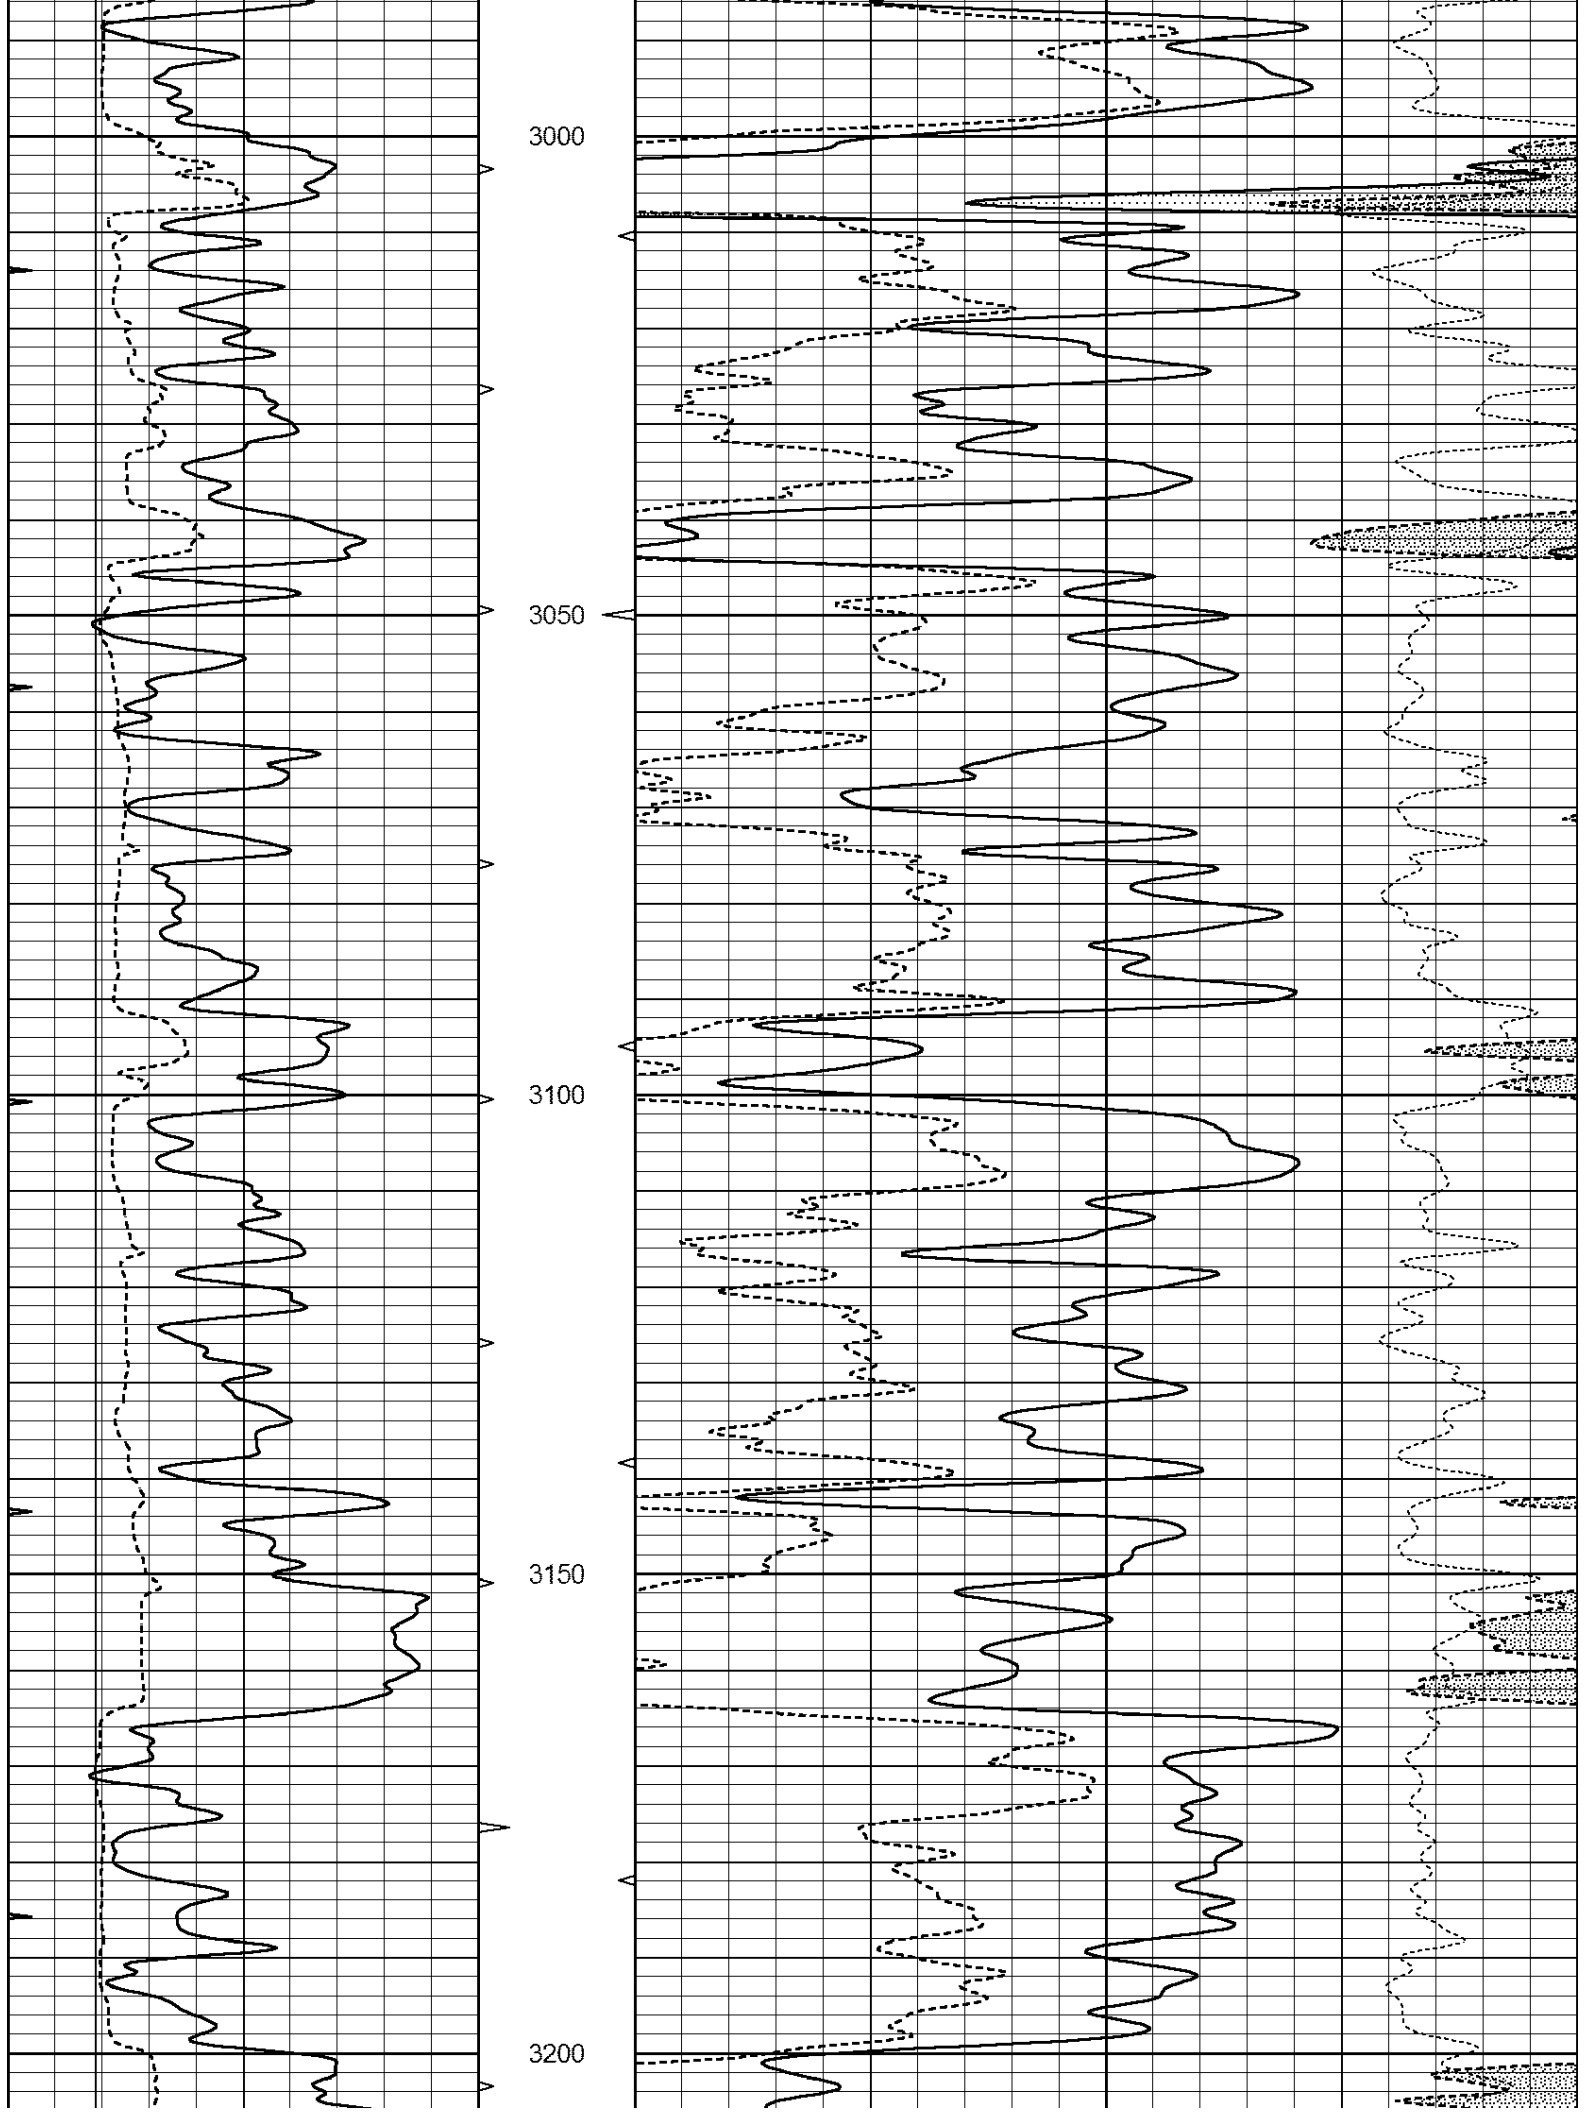

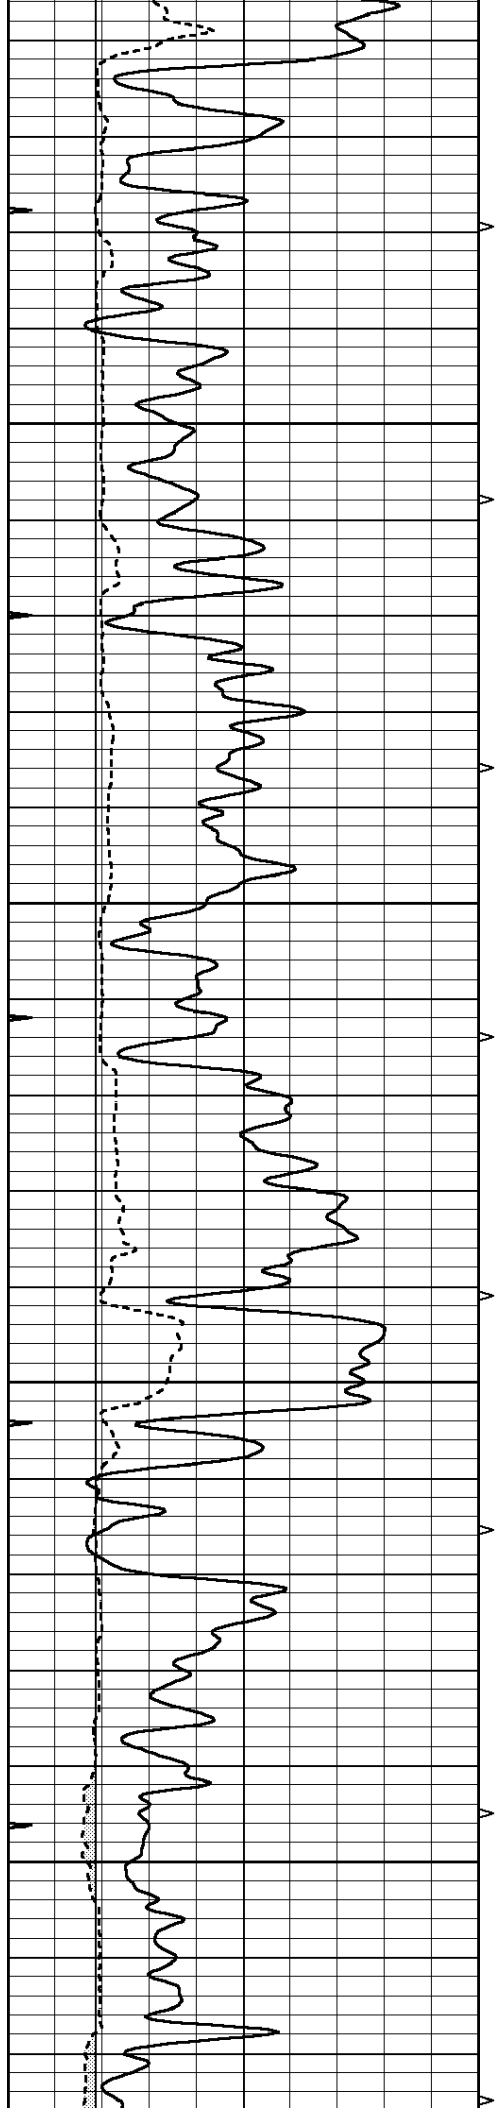




3250


3300


3350


3400

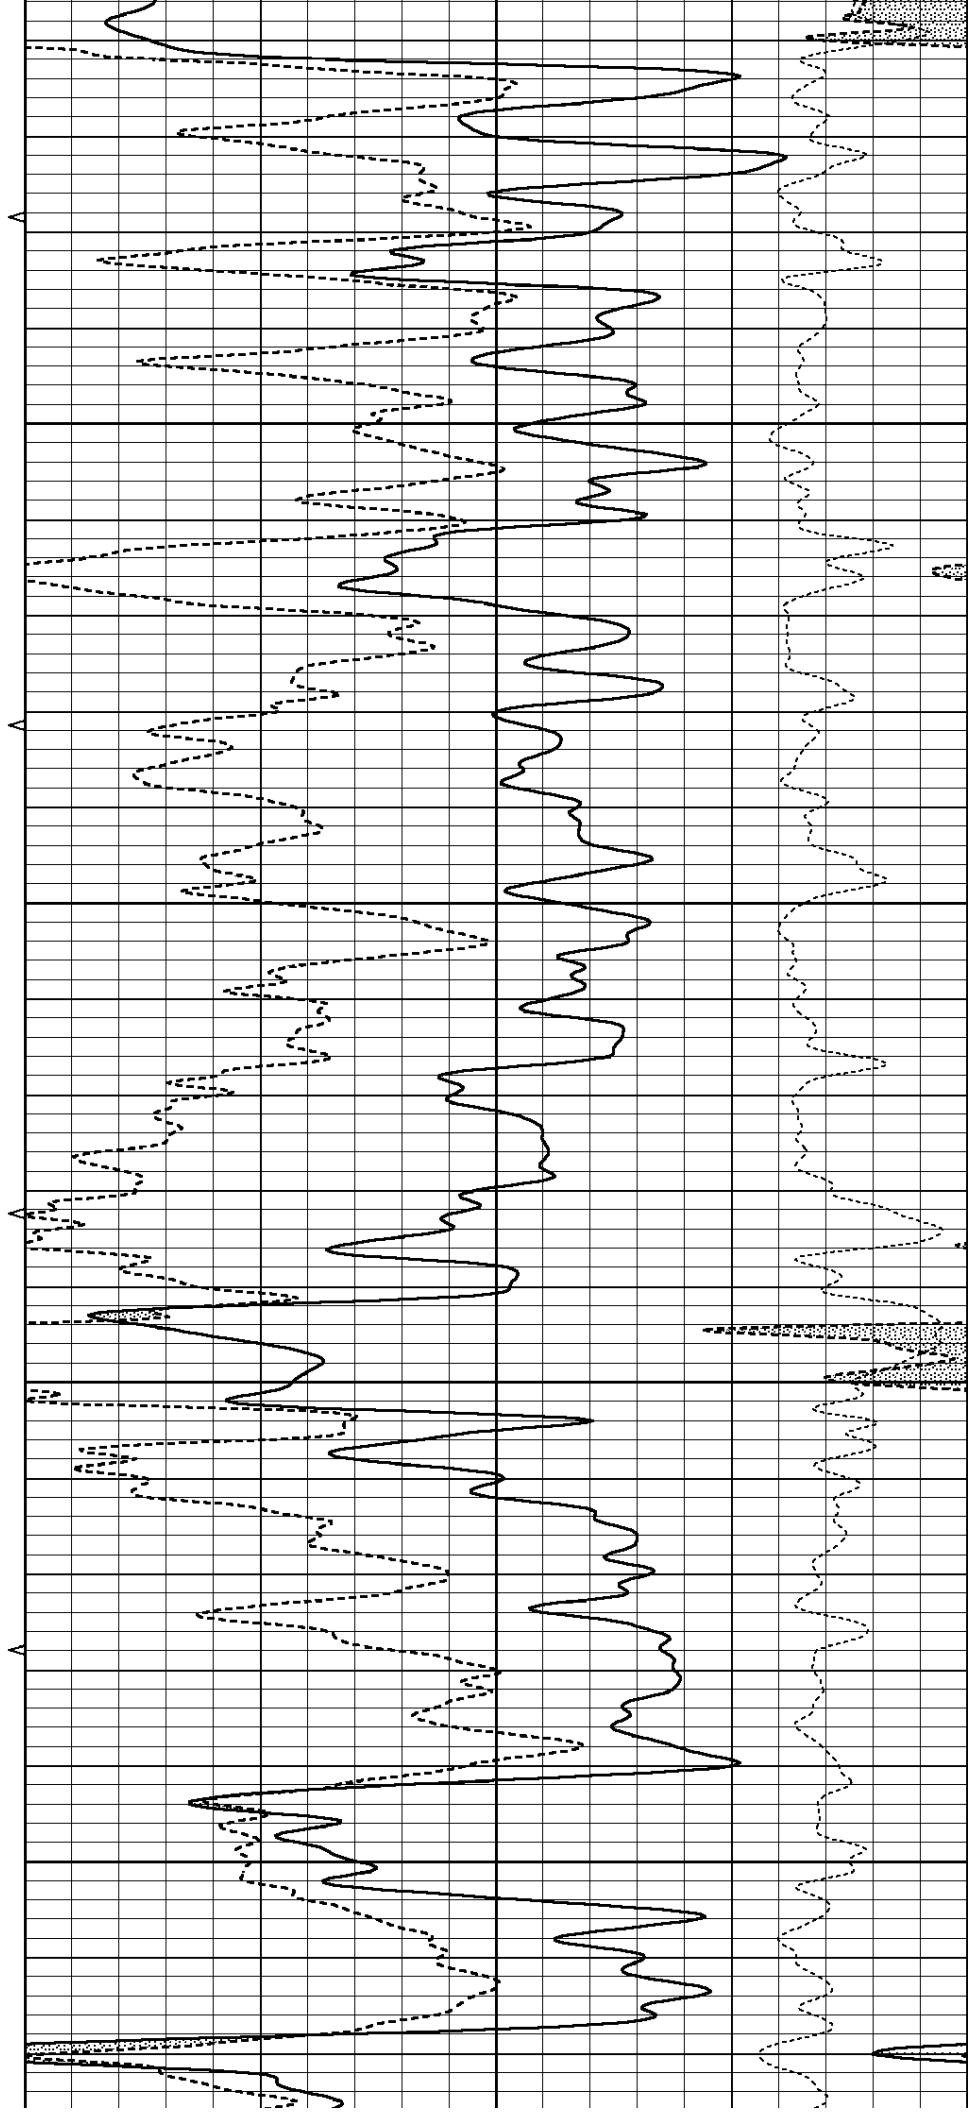

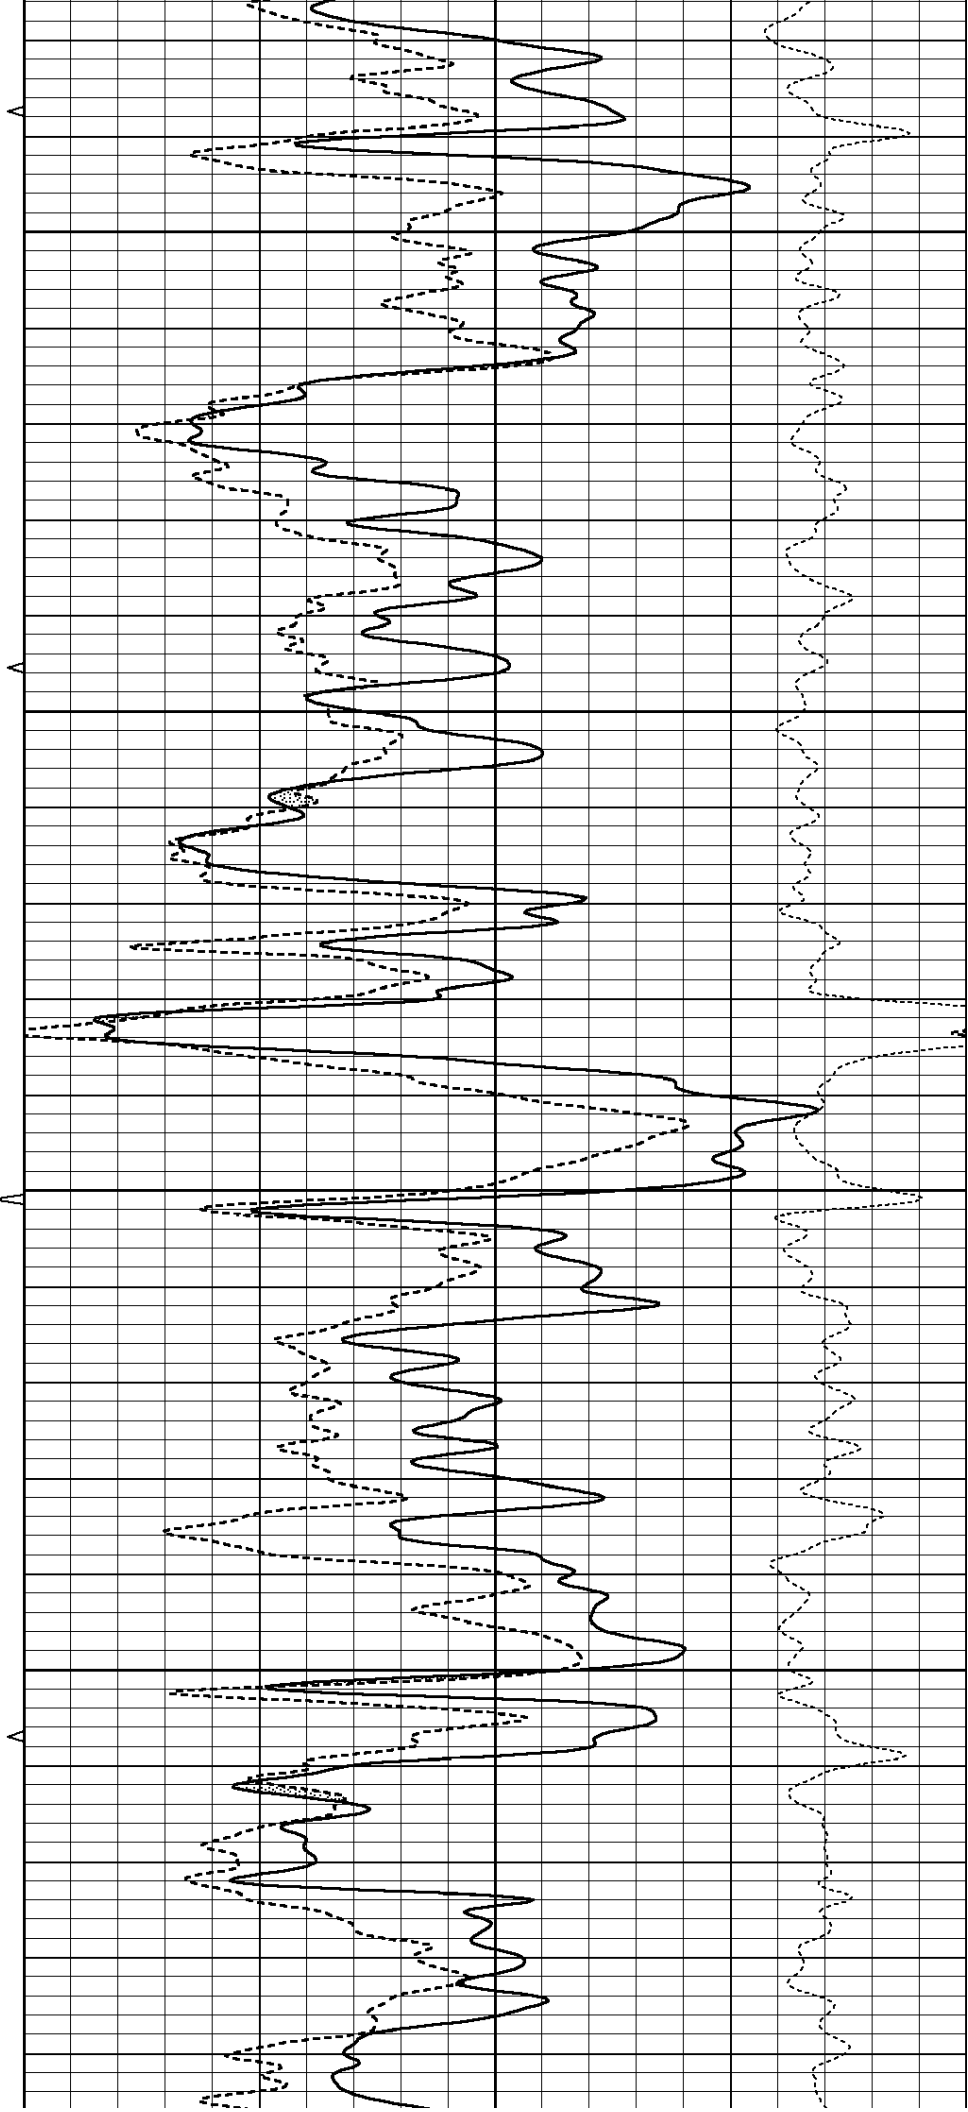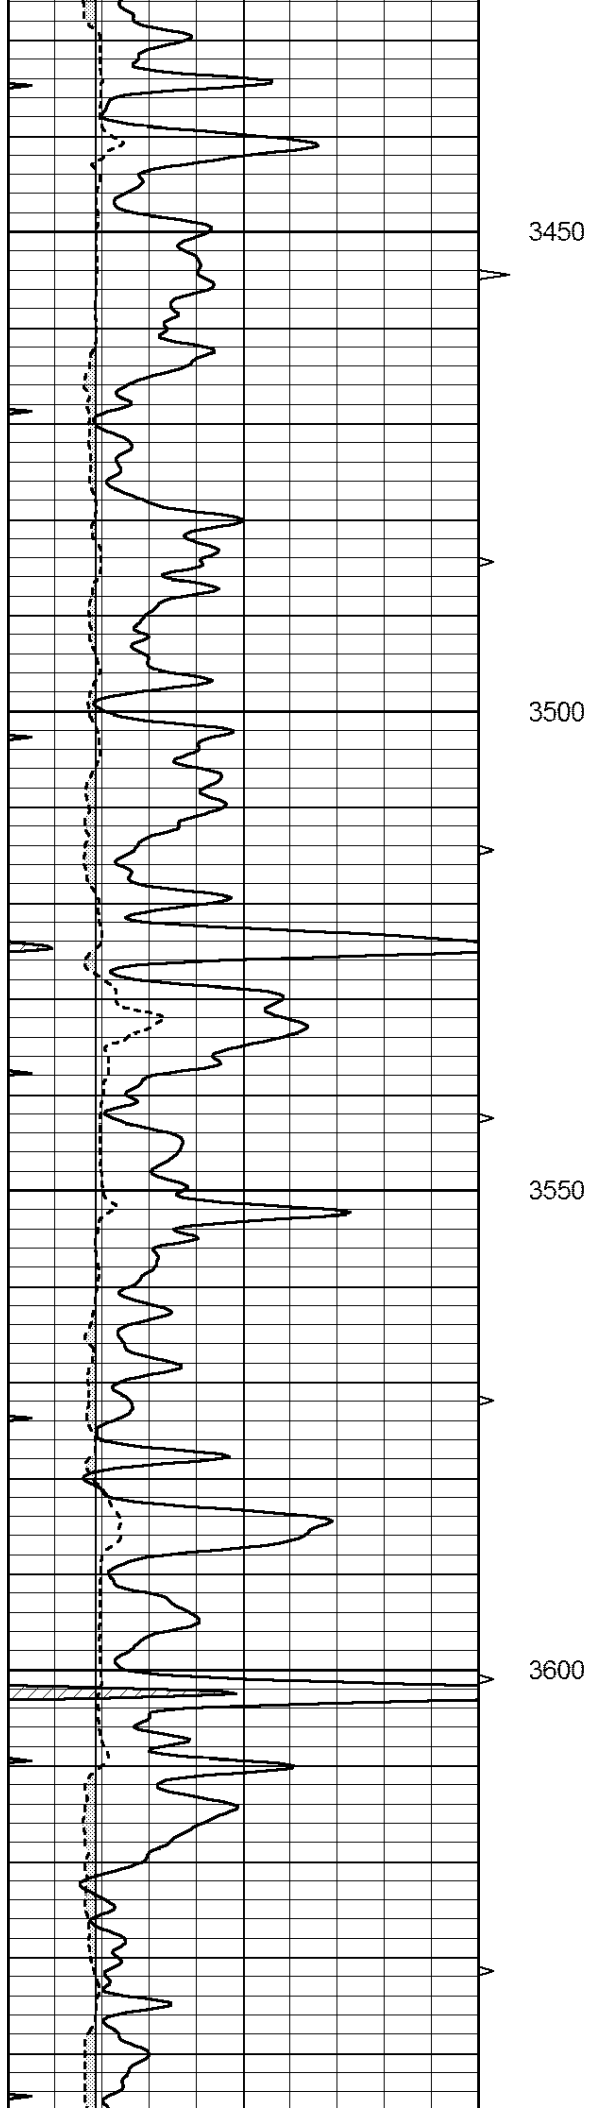

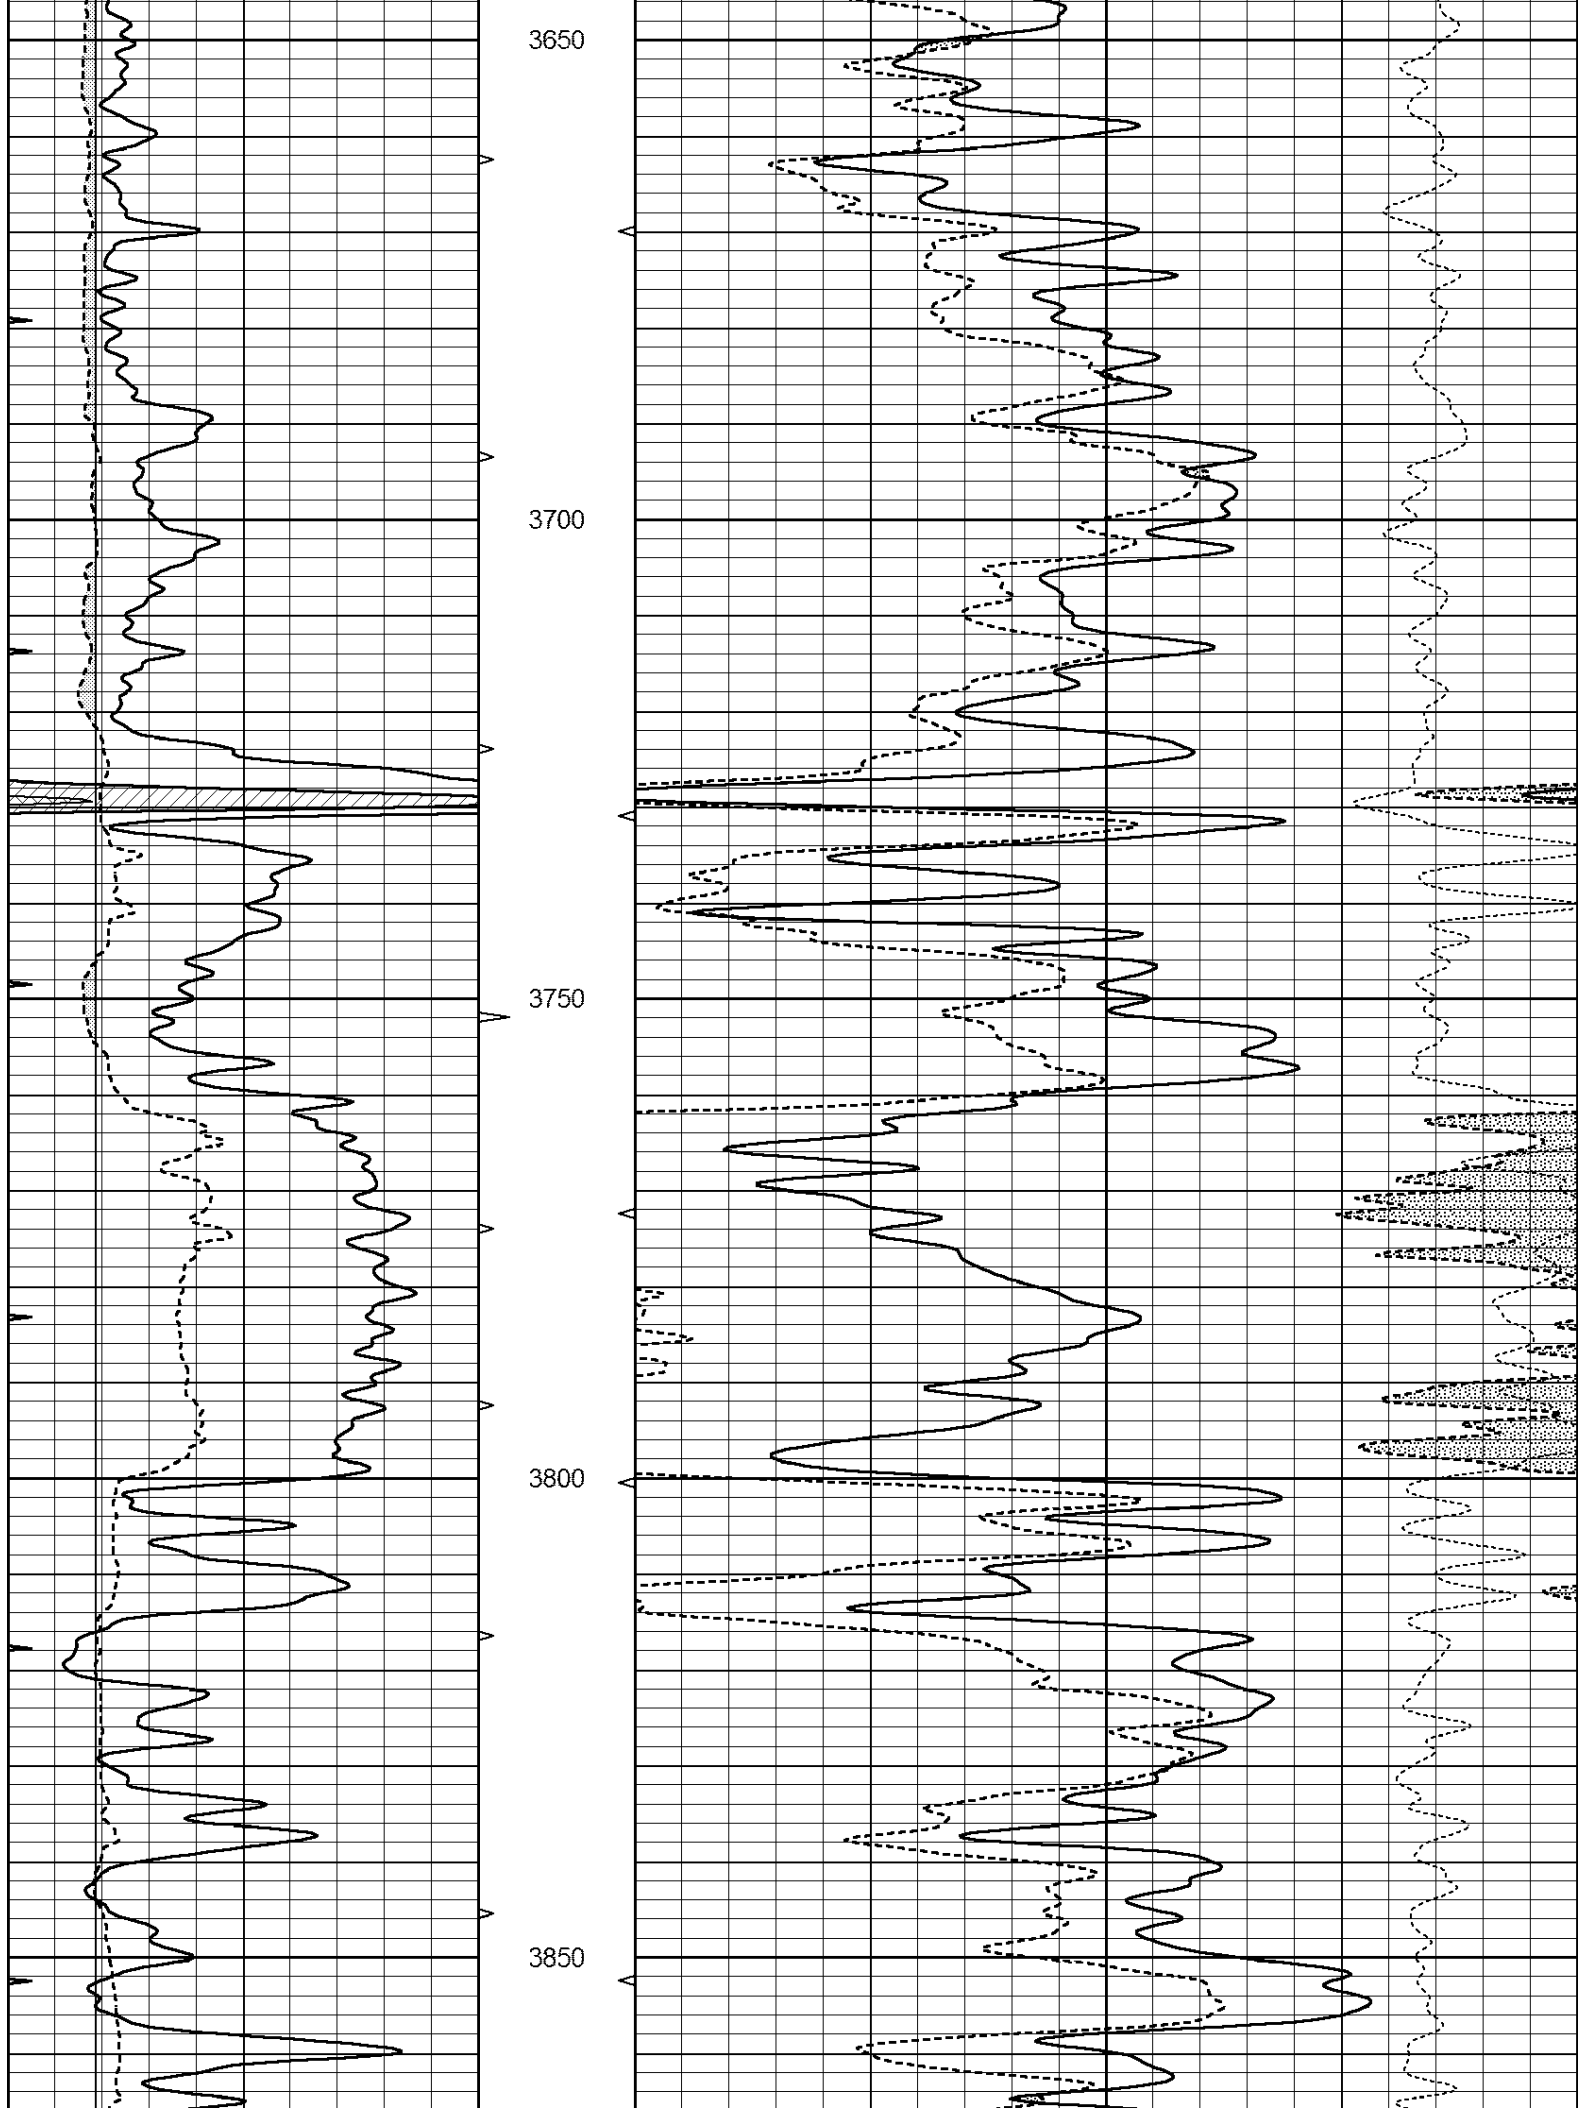

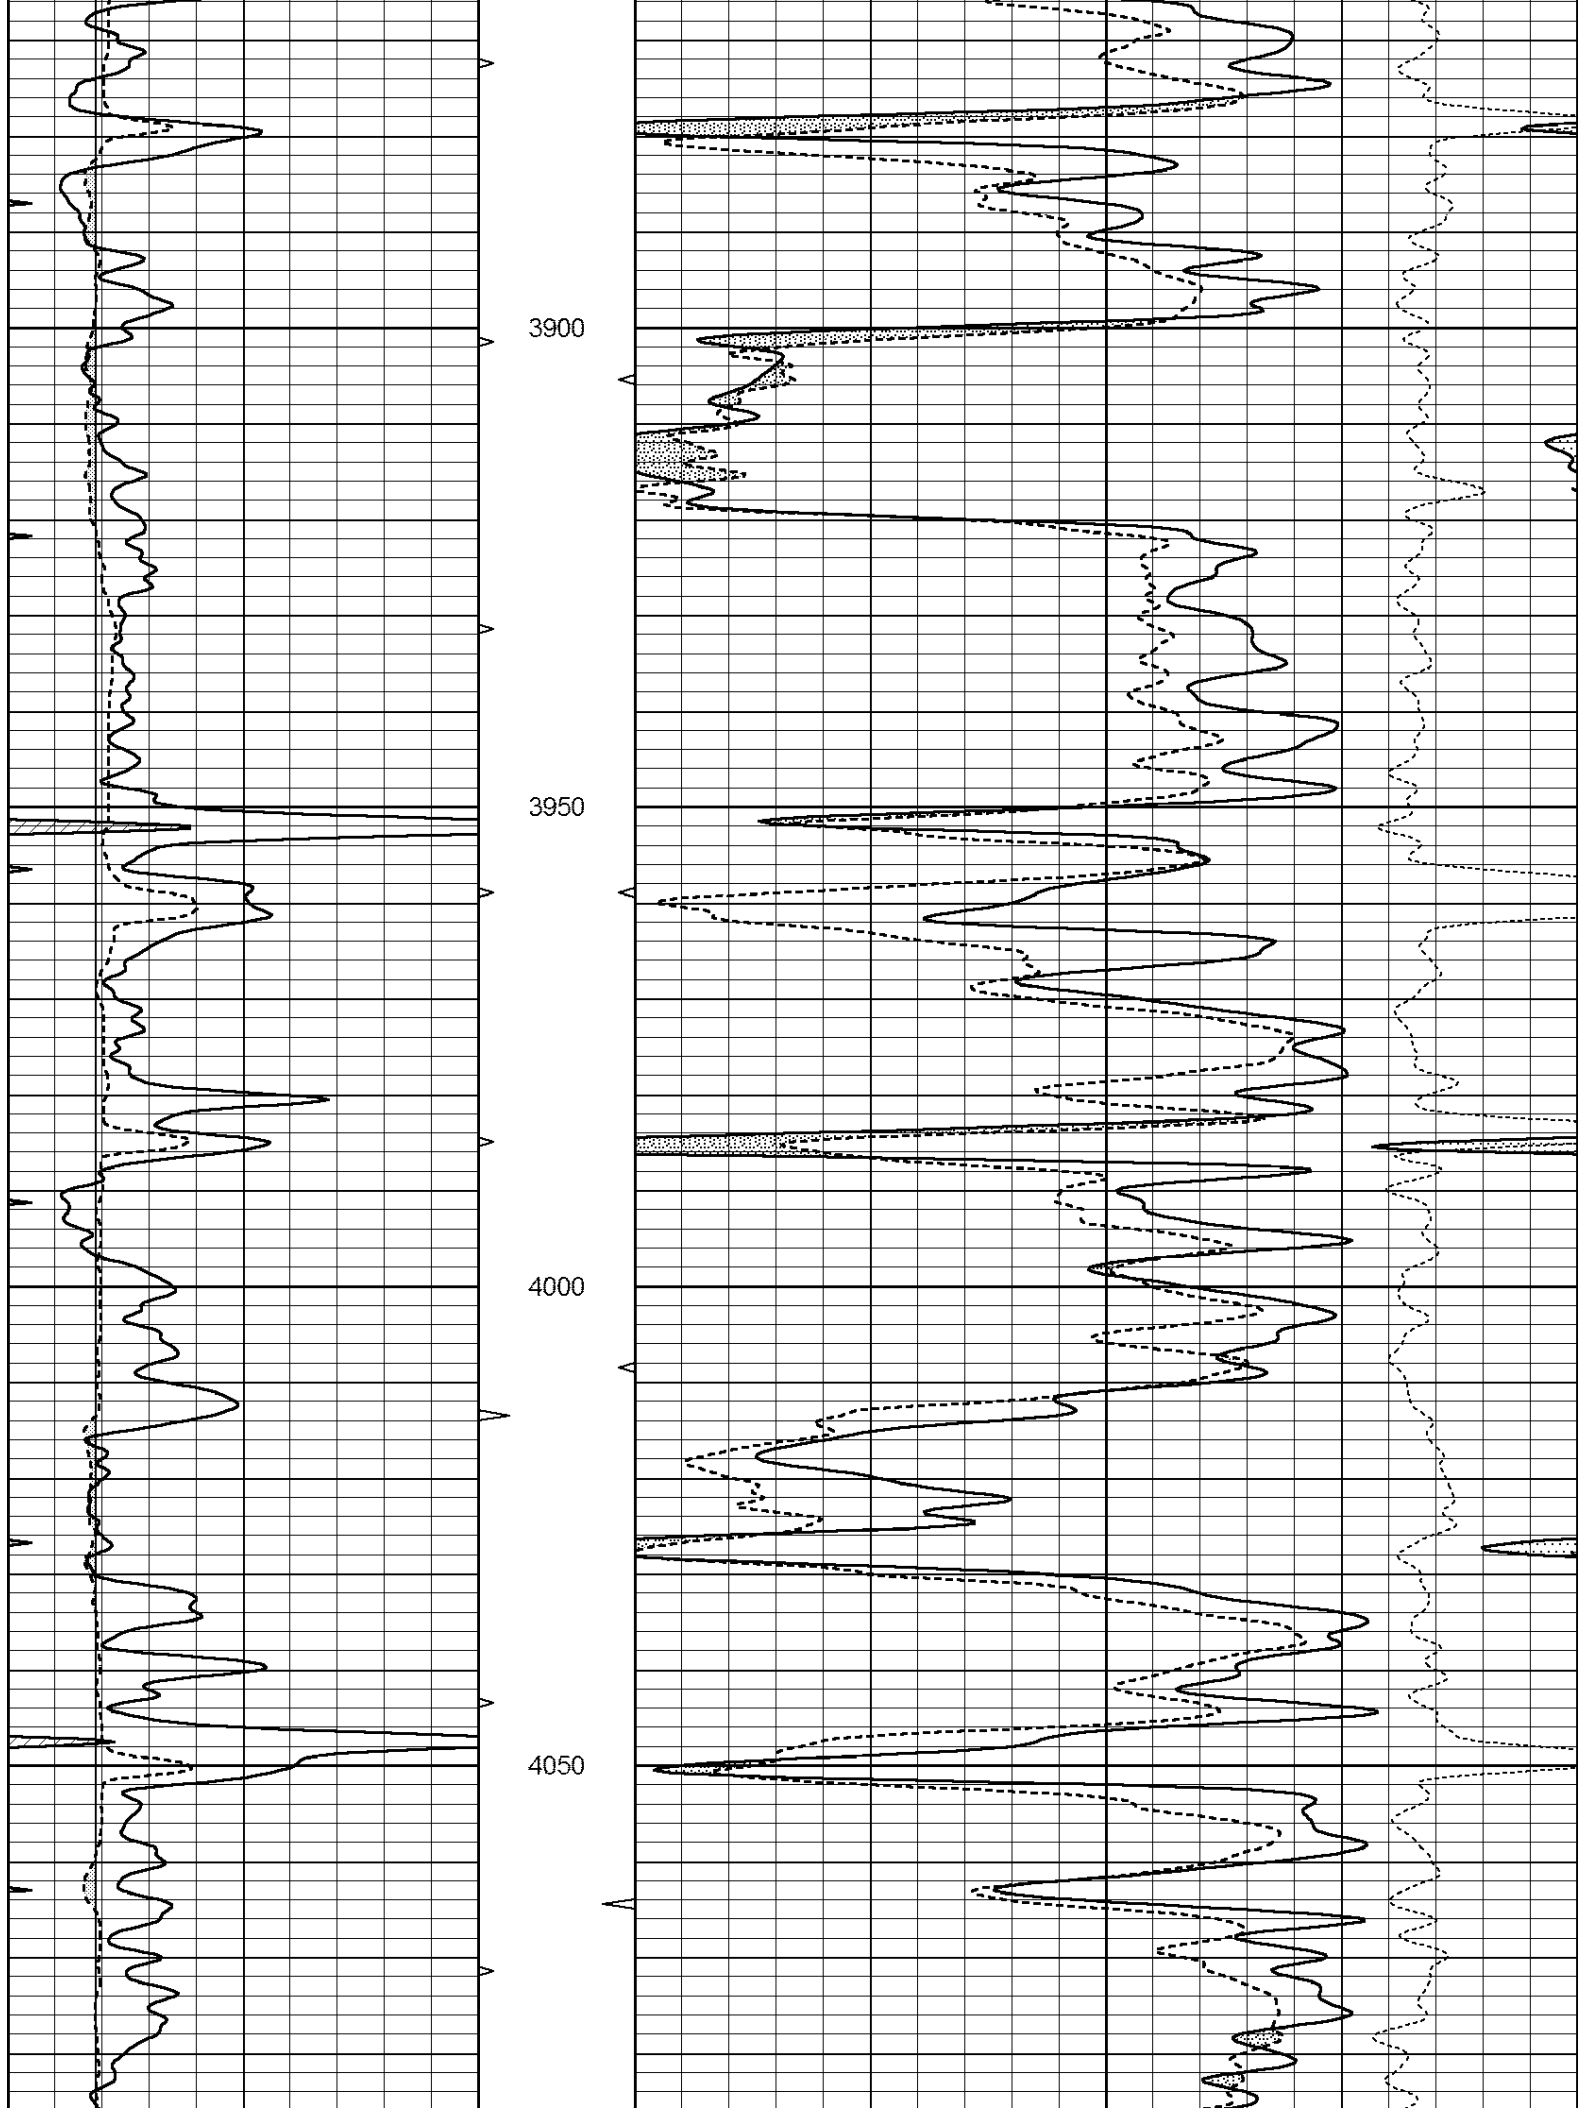

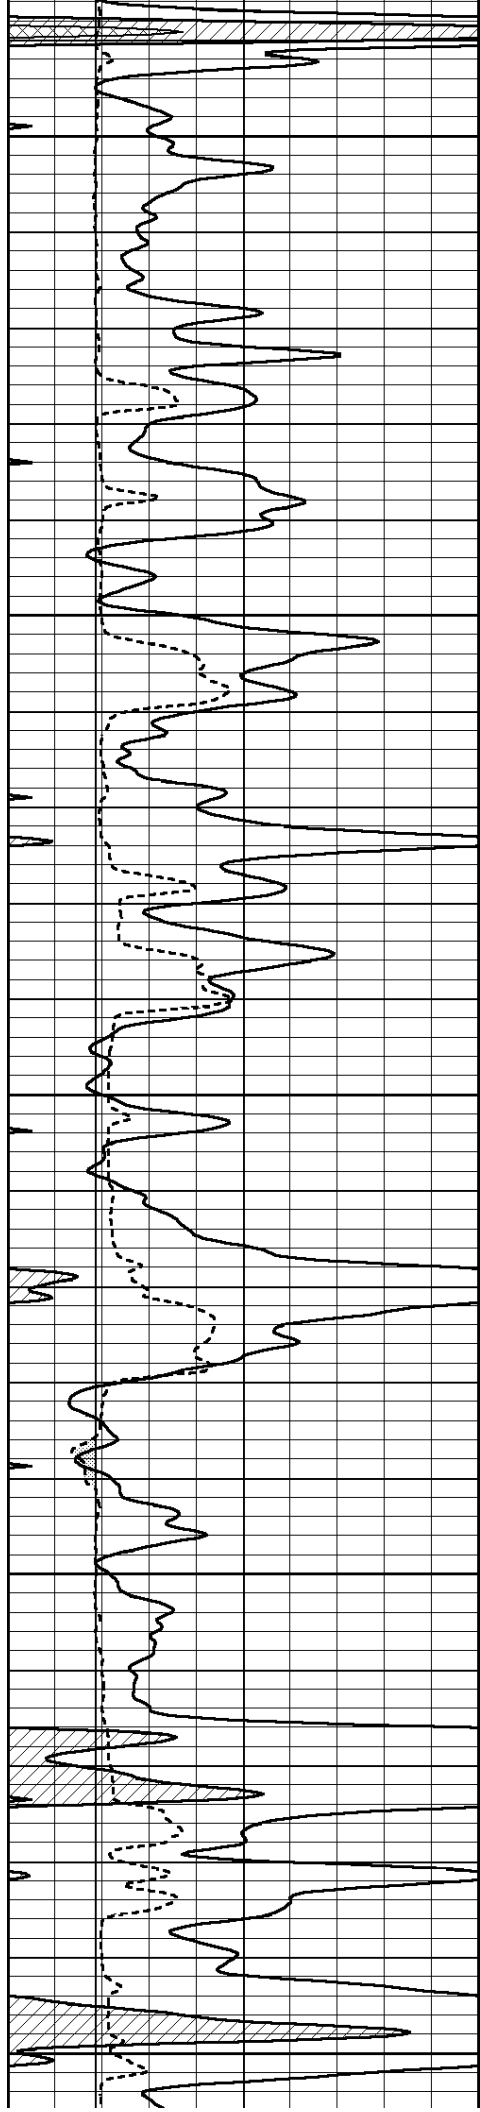


4100


4150



4200

4250

4300

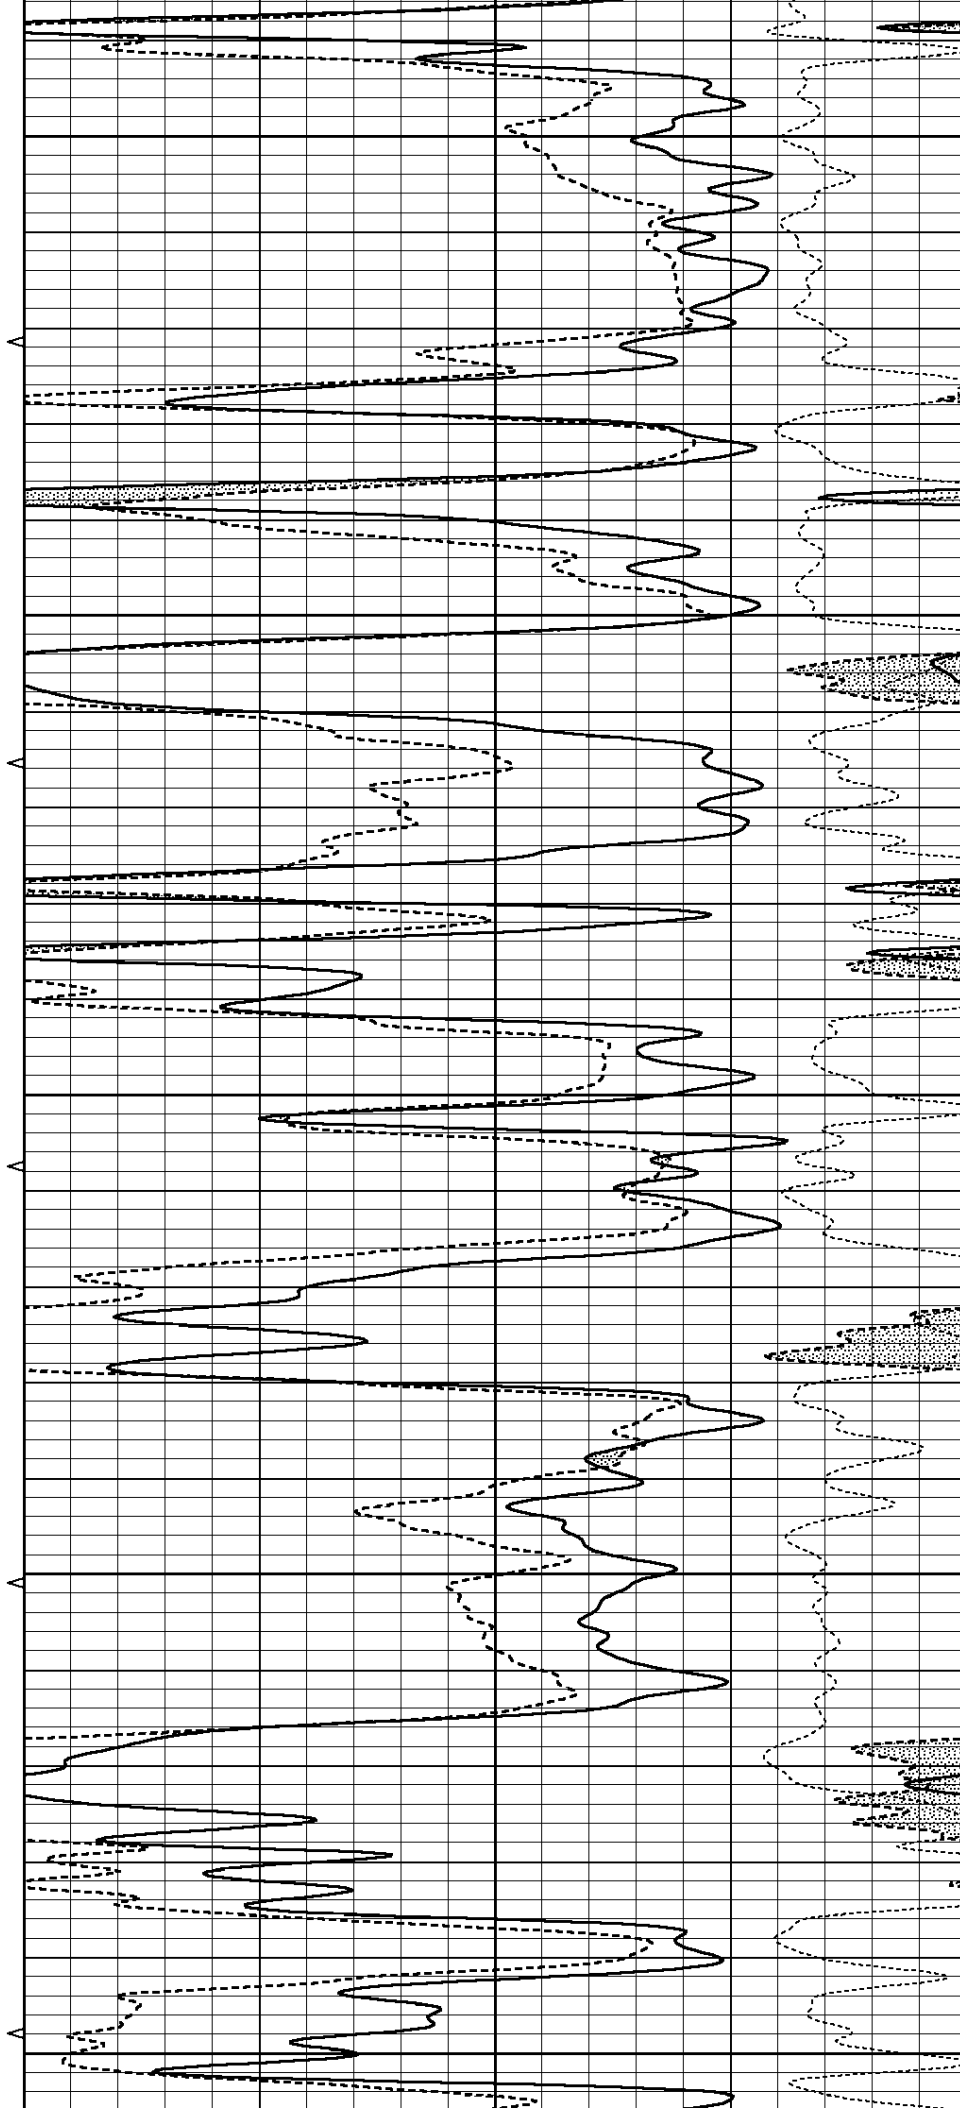

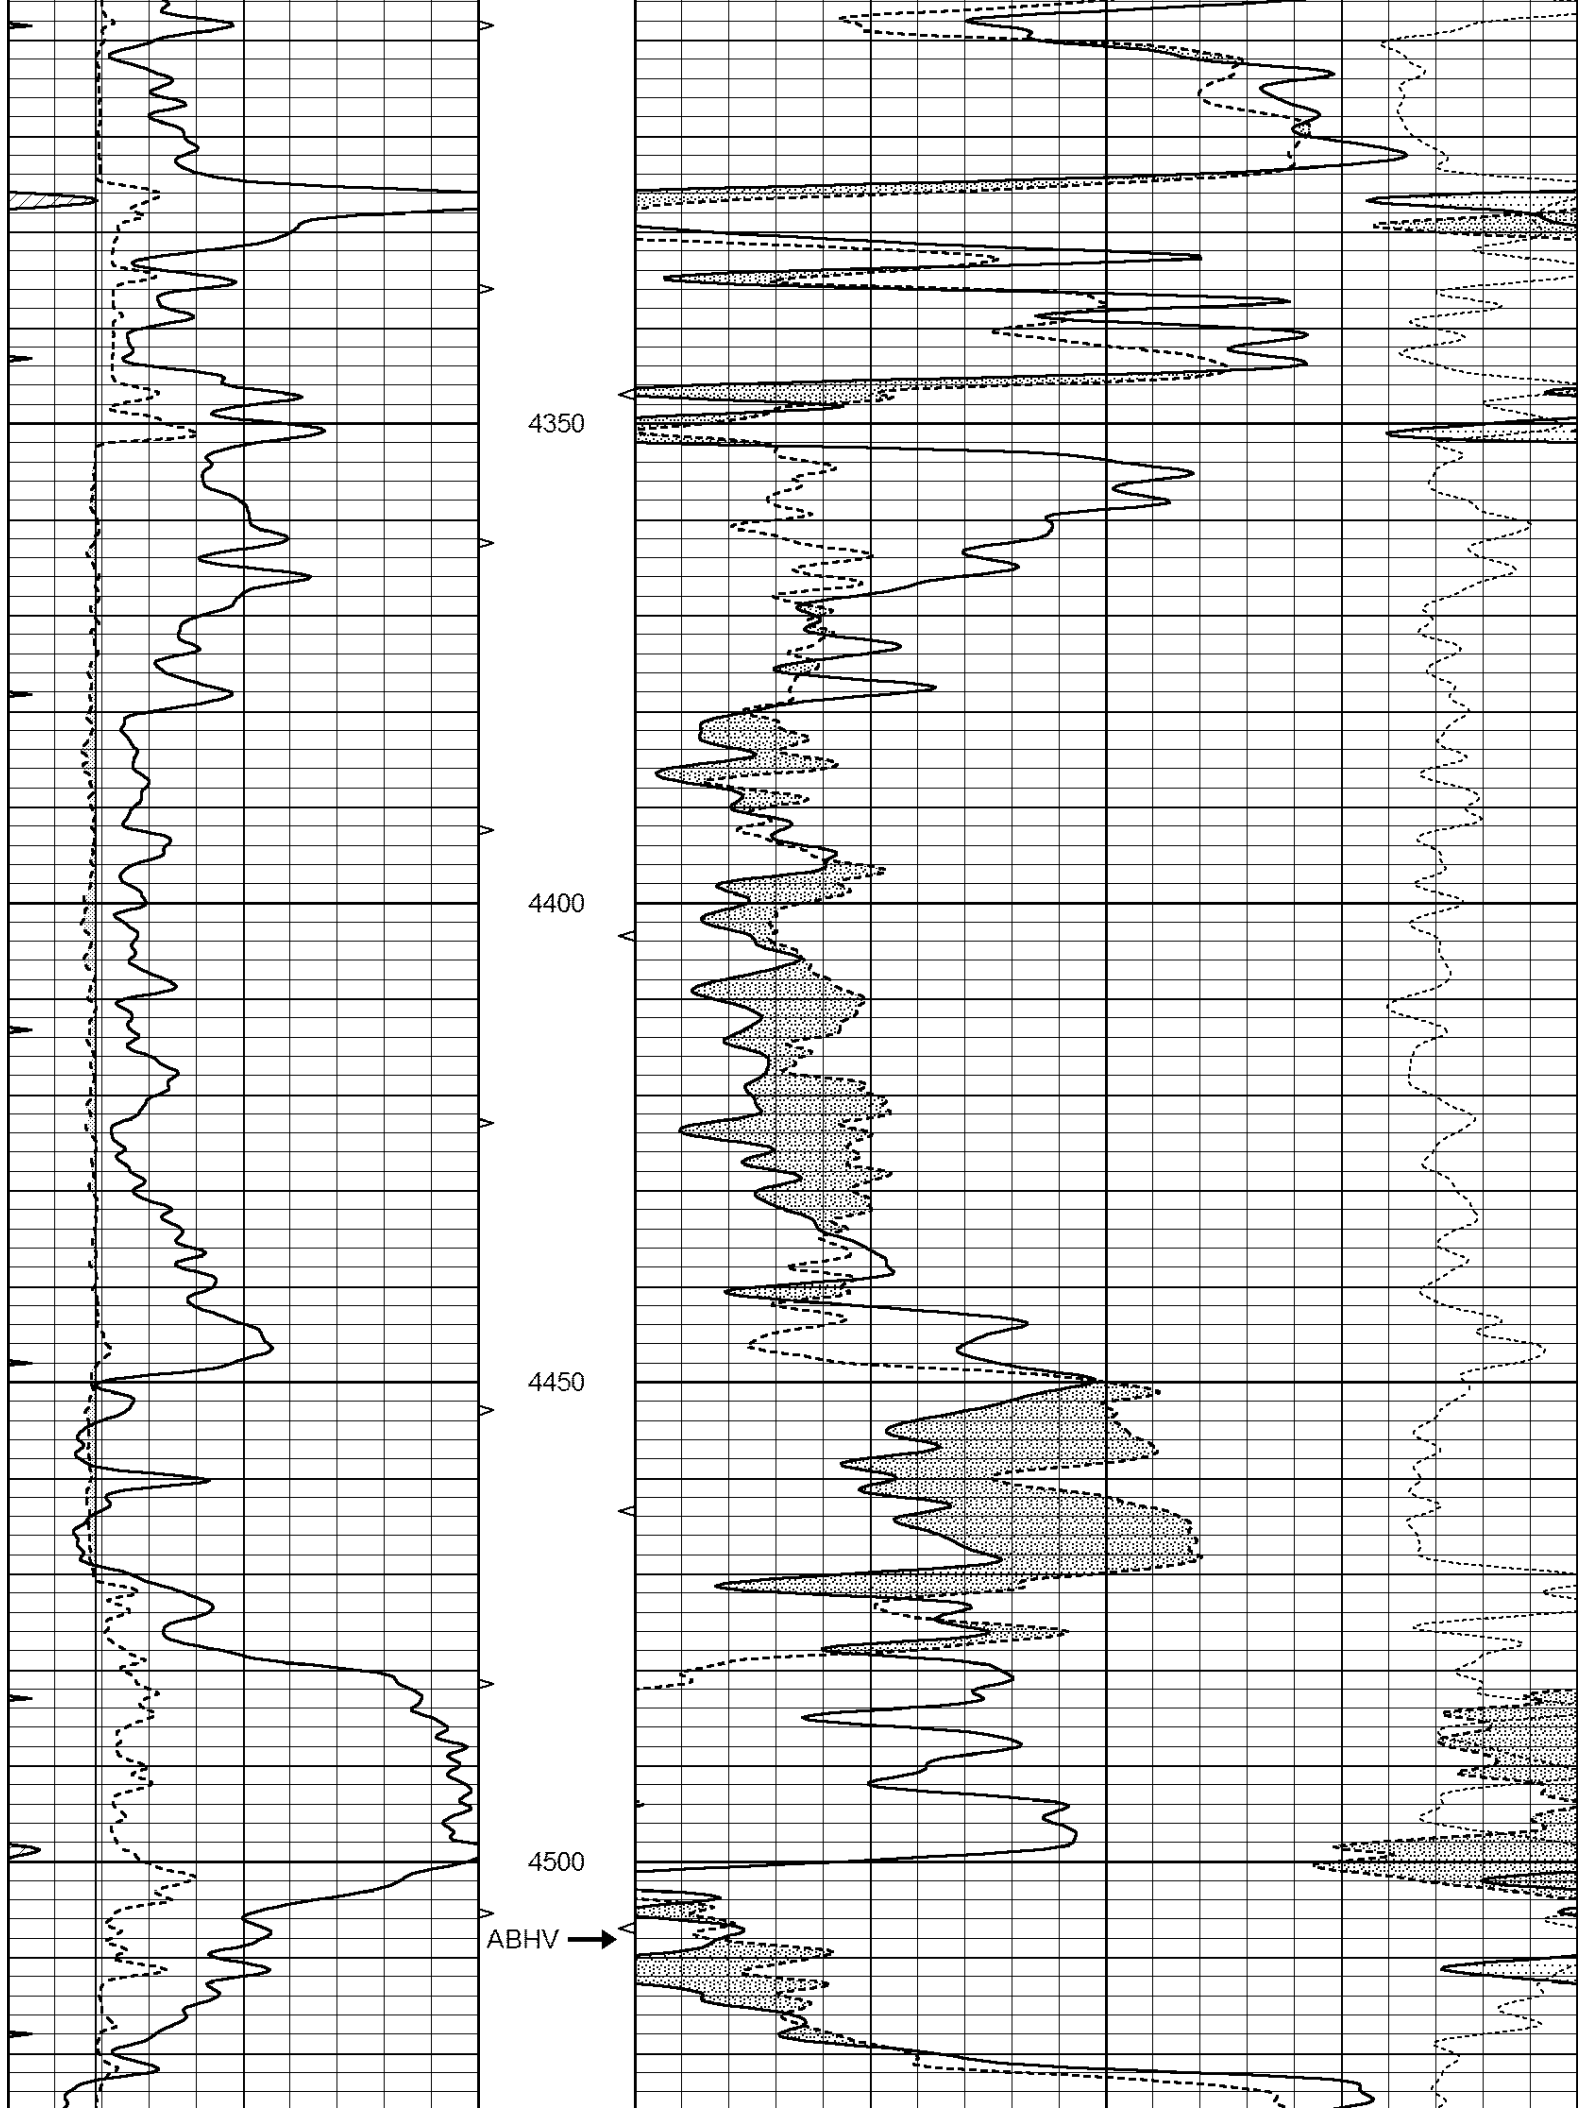


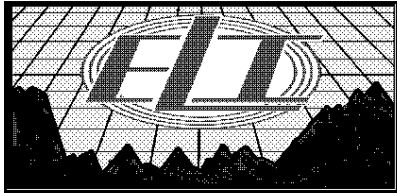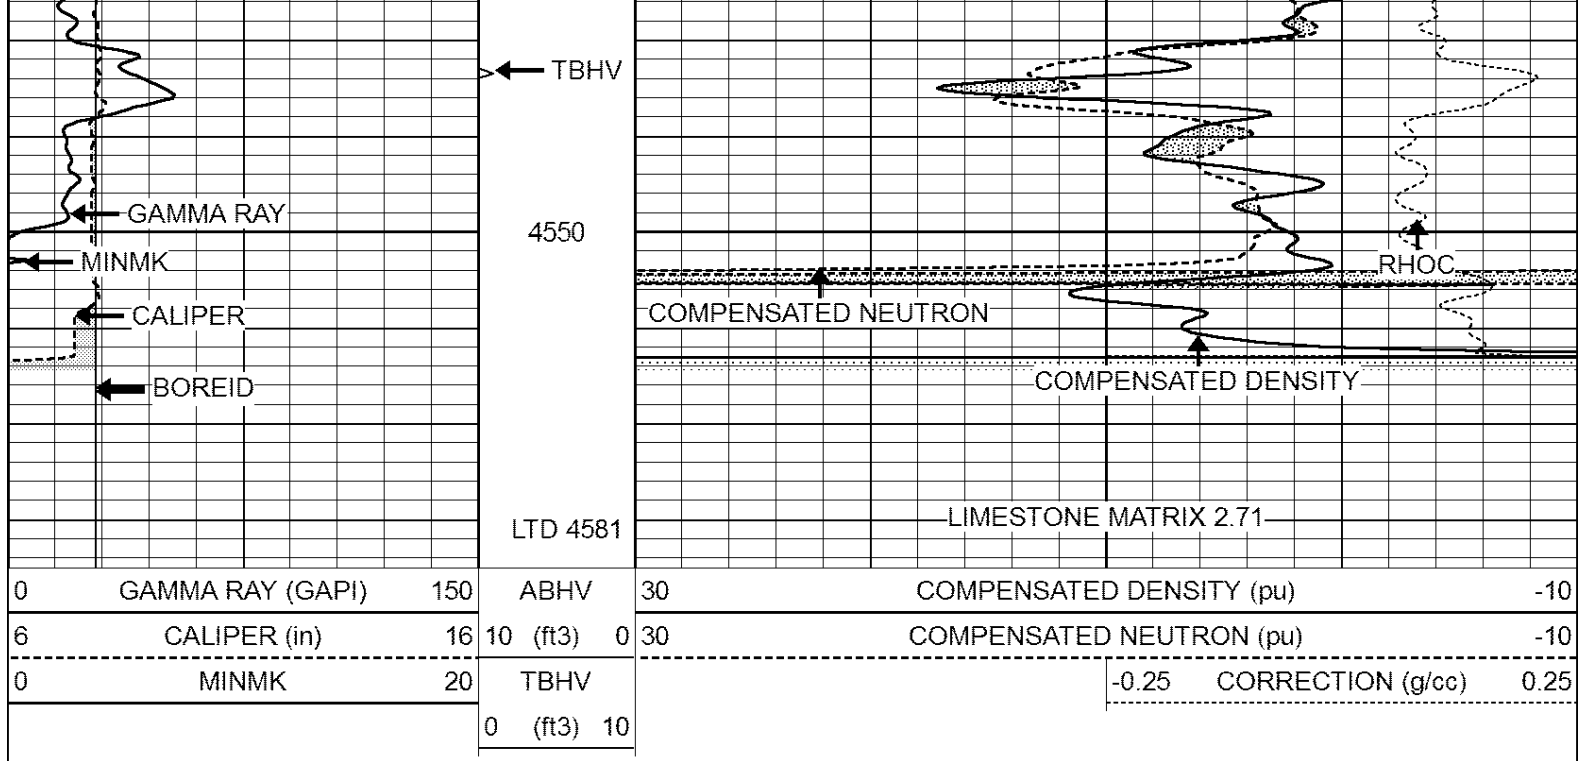


REPEAT SECTION

Database File: 2689ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: den_neu
 Dataset Creation: Thu Jul 05 10:04:58 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)		-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)		-10
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc)	0.25
			0 (ft3) 10				

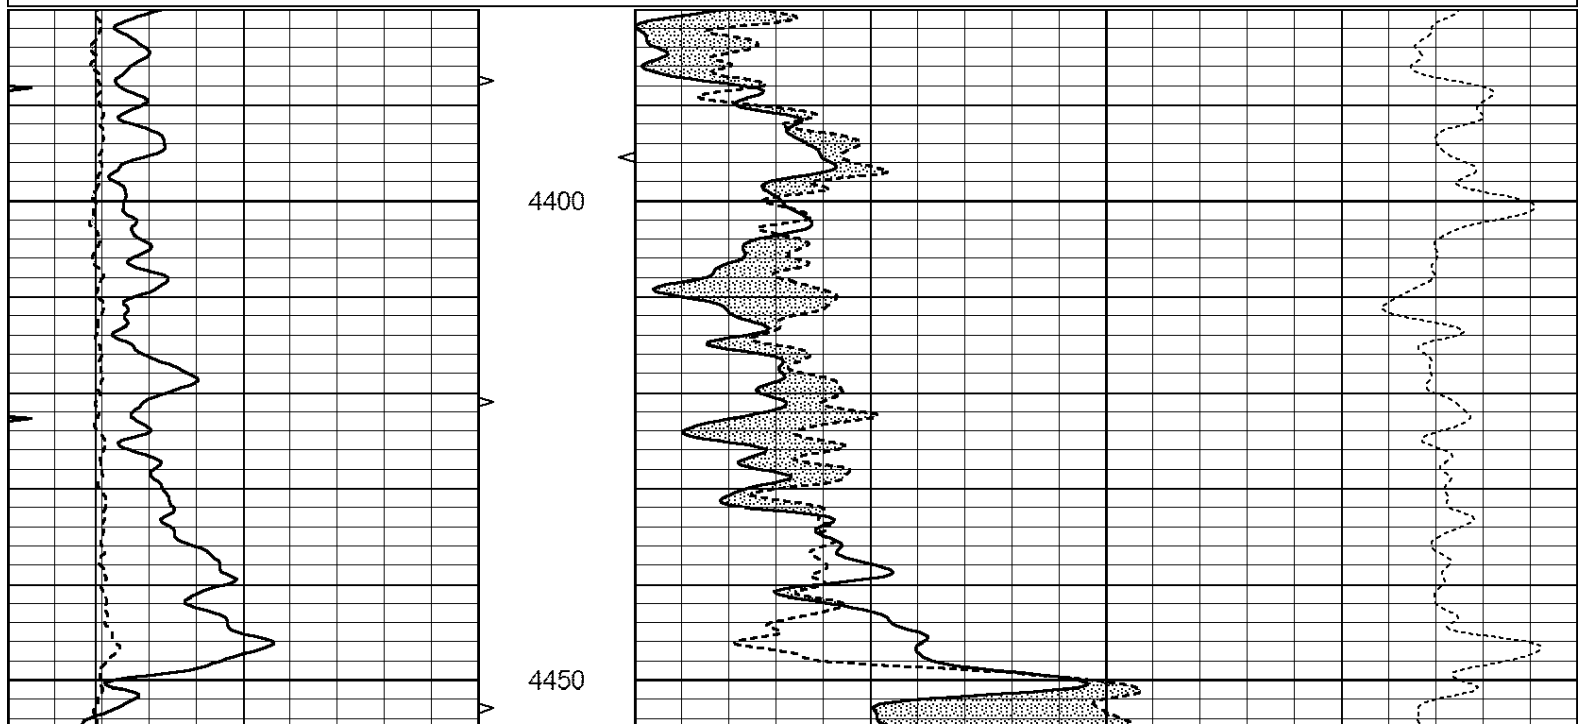

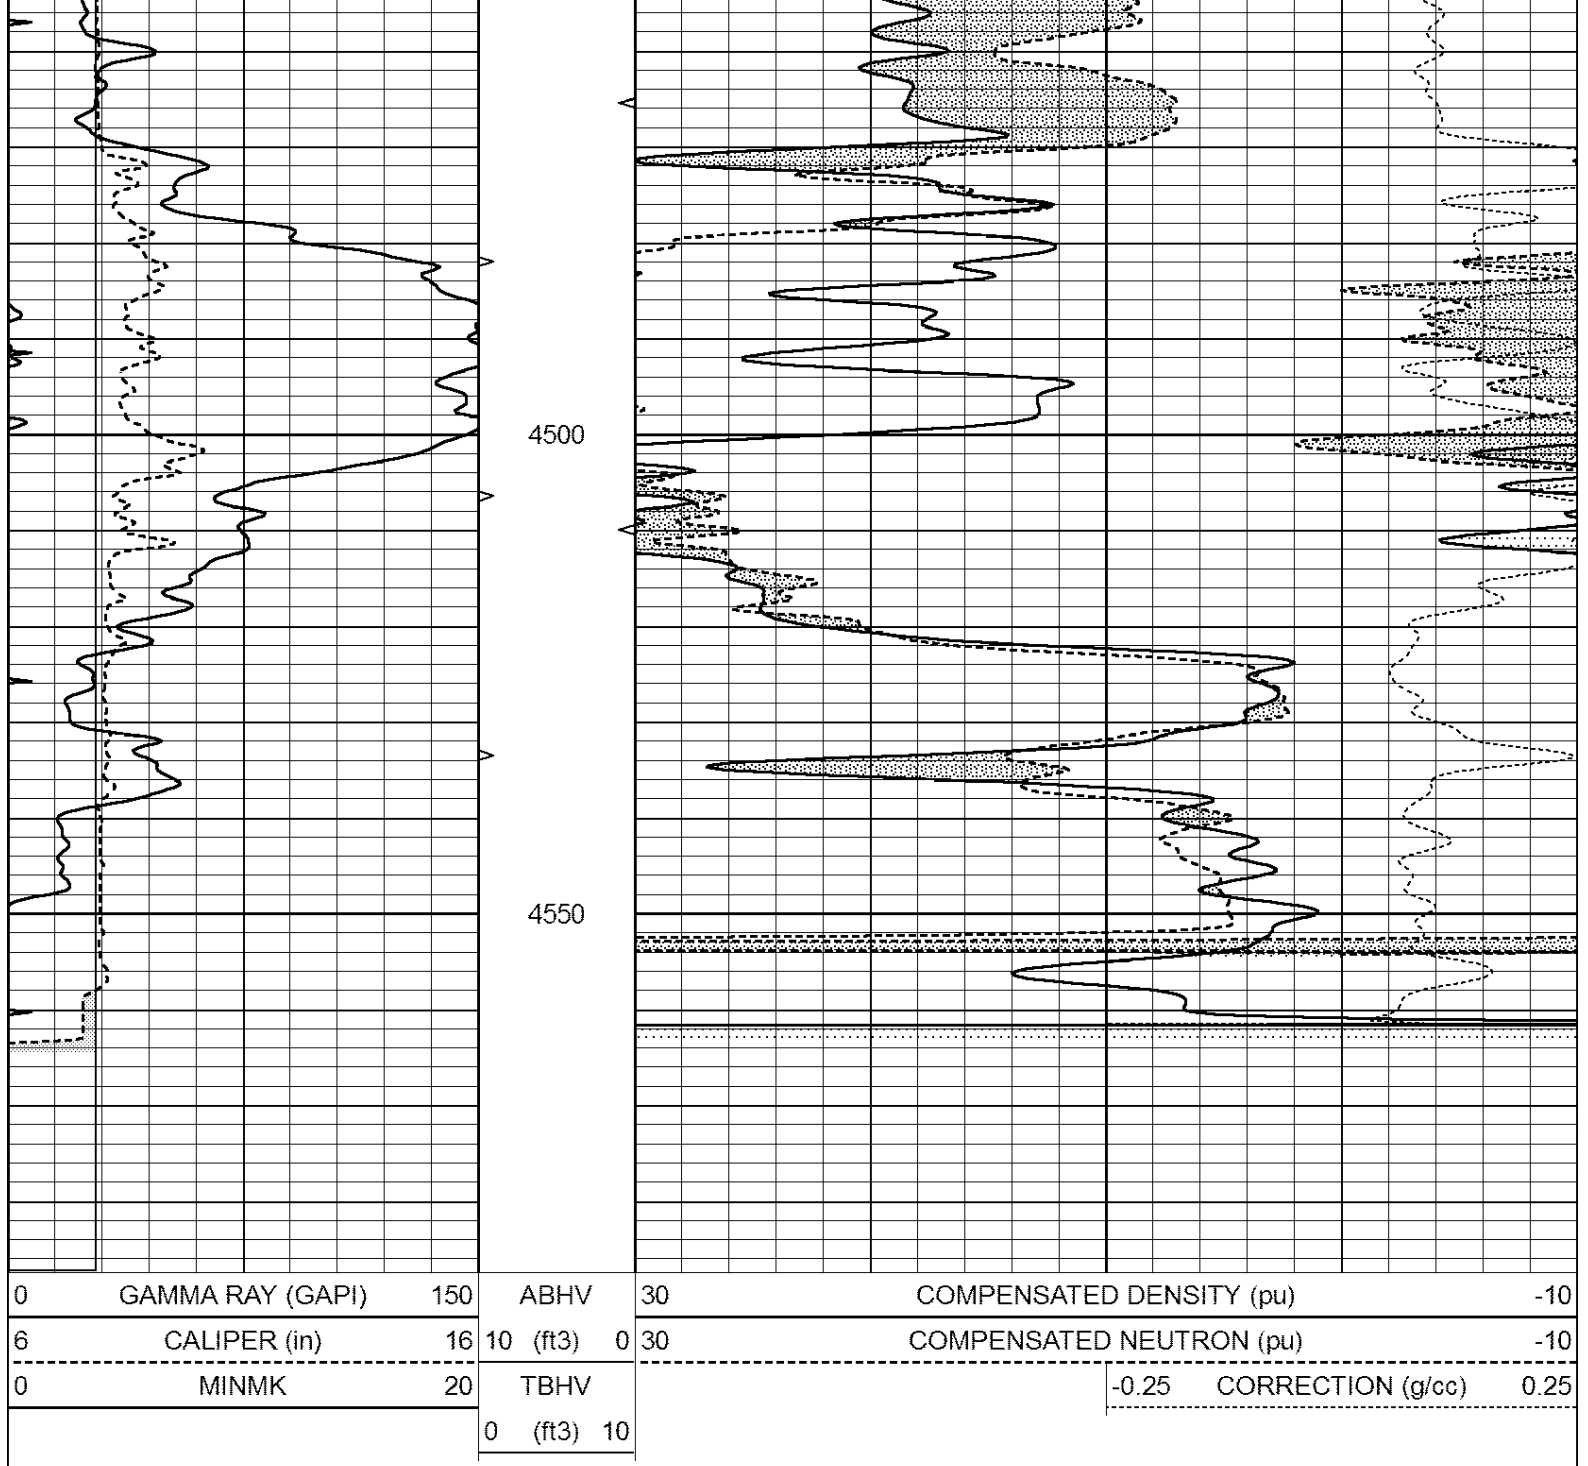

Calibration Report

Database File: pe2.db
 Dataset Pathname: pass2
 Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Mon Aug 21 11:58:18 2017
 Downhole Cal Performed: Mon Aug 21 11:58:21 2017
 After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739
Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		
After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Litho Density Calibration Report								
Serial: 002 Model: PRB								
Master Calibration			Performed Mon Aug 21 11:56:41 2017					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	833.6	7394.2		2287.3		8111.8		cps
Window 2	768.9	6322.3		1995.6		6800.0		cps
Window 3	621.5	3261.9		1186.4		3380.9		cps
Window 4	184.2	185.7		184.9		184.8		cps
Long Space	0.0	5553.4		1226.6		6031.1		cps
Short Space	1.2	1307.5		903.9		1387.7		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio			: 0.566	
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept			: -20.7	
Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		
After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps

Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report
--

Serial Number:	6l
Tool Model:	G

CALIBRATION						
	Detector	Readings		Target		Normalization
	Short Space	1.00	cps	1.00	cps	1.0000
	Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION						
	Detector	Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		
3)	Short Space		cps			
	Long Space		cps	pu		

POST-SURVEY VERIFICATION						
	Detector	Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		pu
3)	Short Space		cps			
	Long Space		cps	pu		pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Aug 21 11:59:01 2017	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5500	GAPI/cps