



DUAL INDUCTION LOG

Company	MULL DRILLING COMPANY, INC.	Company	MULL DRILLING COMPANY, INC.
Well	#1-20 PHILLIPS	Well	#1-20 PHILLIPS
Field	WILDCAT	Field	WILDCAT
County	HODGEMAN	County	HODGEMAN
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-083-21961-0000 2250' FSL & 779' FWL SW - NE - NW - SW	Other Services CDL/CNL/PE MEL/SONIC	
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL KELLY BUSHING 5' A.G.L. KELLY BUSHING	Elevation K.B. 2393 D.F. 2391 G.L. 2388	
Date	11/5/18		
Run Number	ONE		
Depth Driller	4823		
Depth Logger	4822		
Bottom Logged Interval	4820		
Top Log Interval	00		
Casing Driller	8 5/8"@218'		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,600 PPM	
Density / Viscosity	9.4/52		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.580@65F		
Rmf @ Meas. Temp	.435@65F		
Rmc @ Meas. Temp	.696@65F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.307@123F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	10:15 A.M.		
Maximum Recorded Temperature	123F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	PHIL ASKEY		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
JETMORE, KS., 10S. ON HWY 283 TO "RD. C", 1E., 1/2 N. INTO OLD FARMSTEAD



MAIN SECTION


Database File: 3053pe.db
Dataset Pathname: pass3.4
Presentation Format: dil2
Dataset Creation: Mon Nov 05 11:37:45 2018
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50

1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

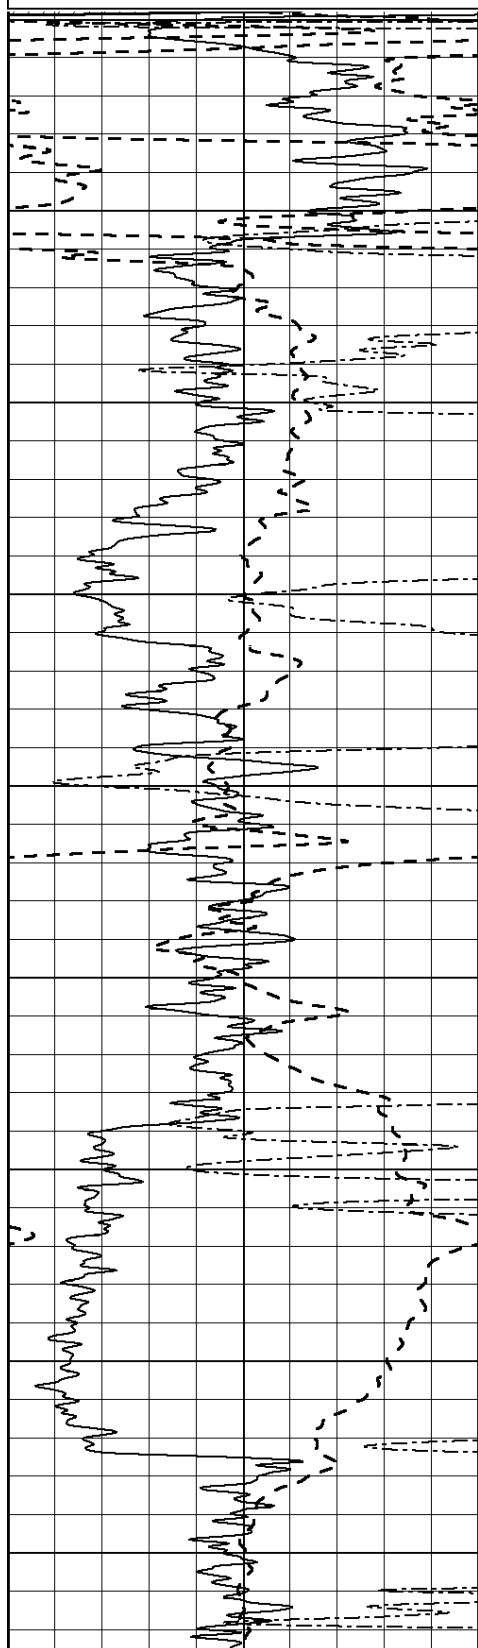

0
50
100
150
200
250
300
350
400

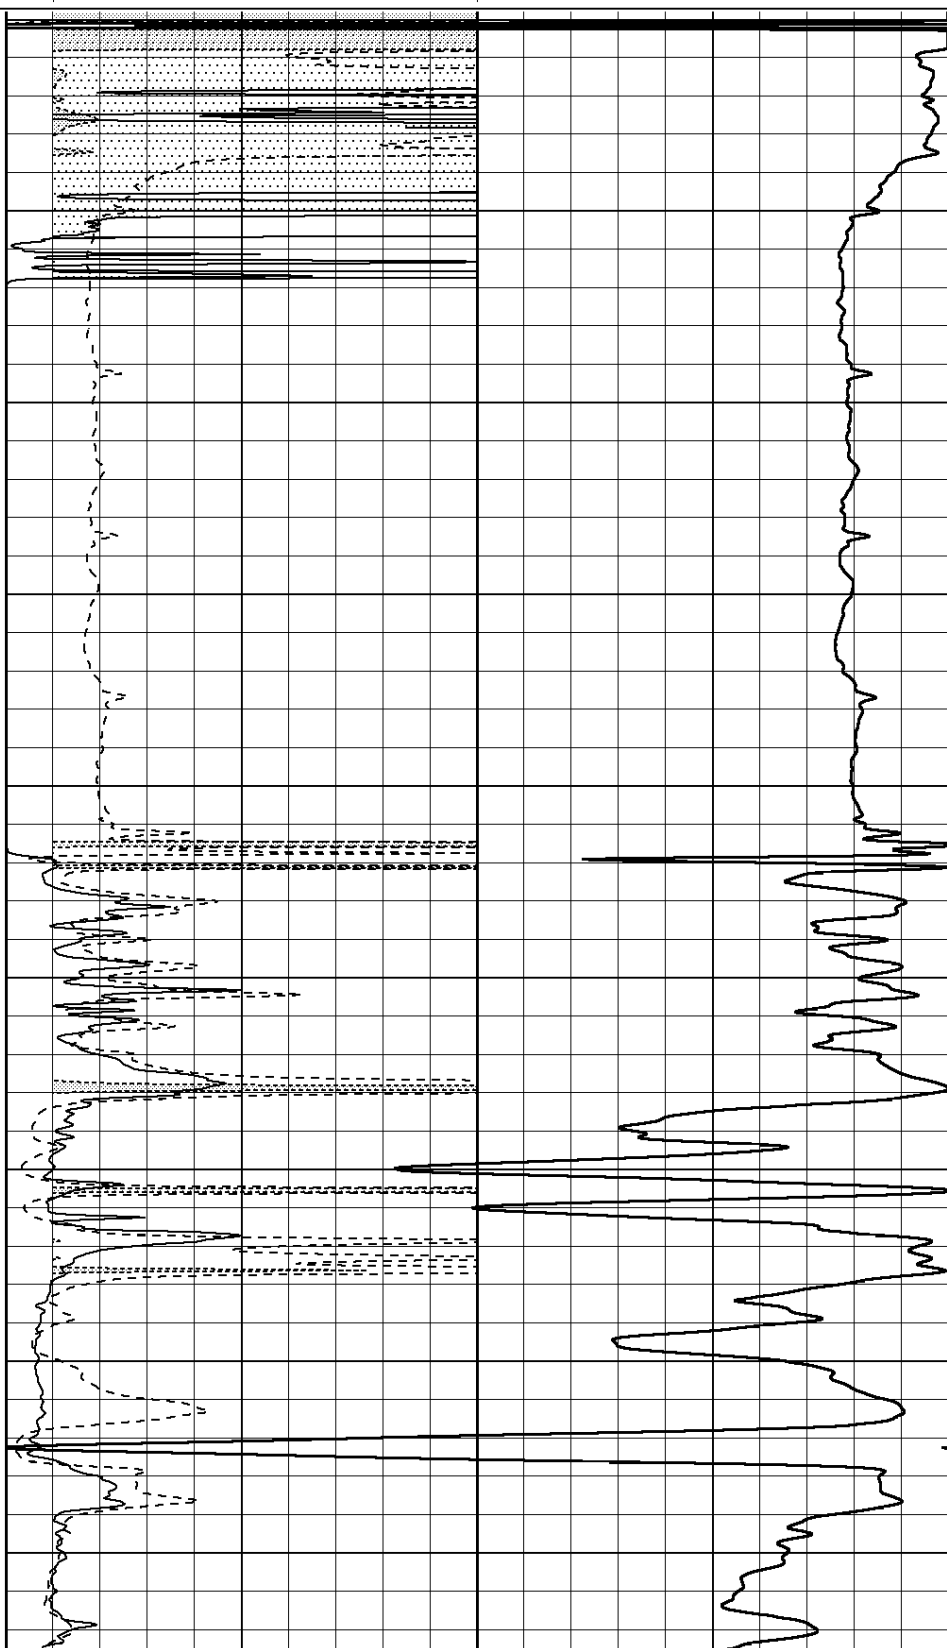

450

500

550

600

650

700



750



800



850


900

950

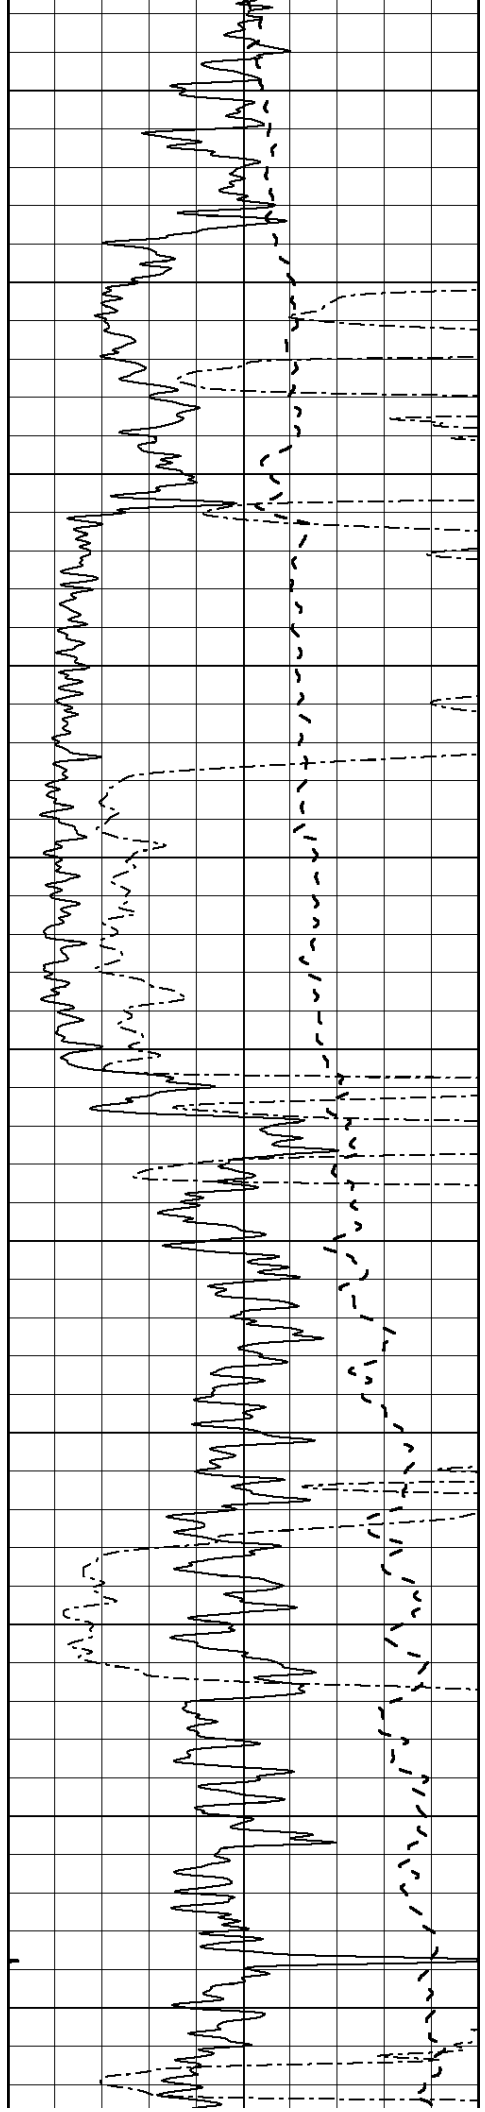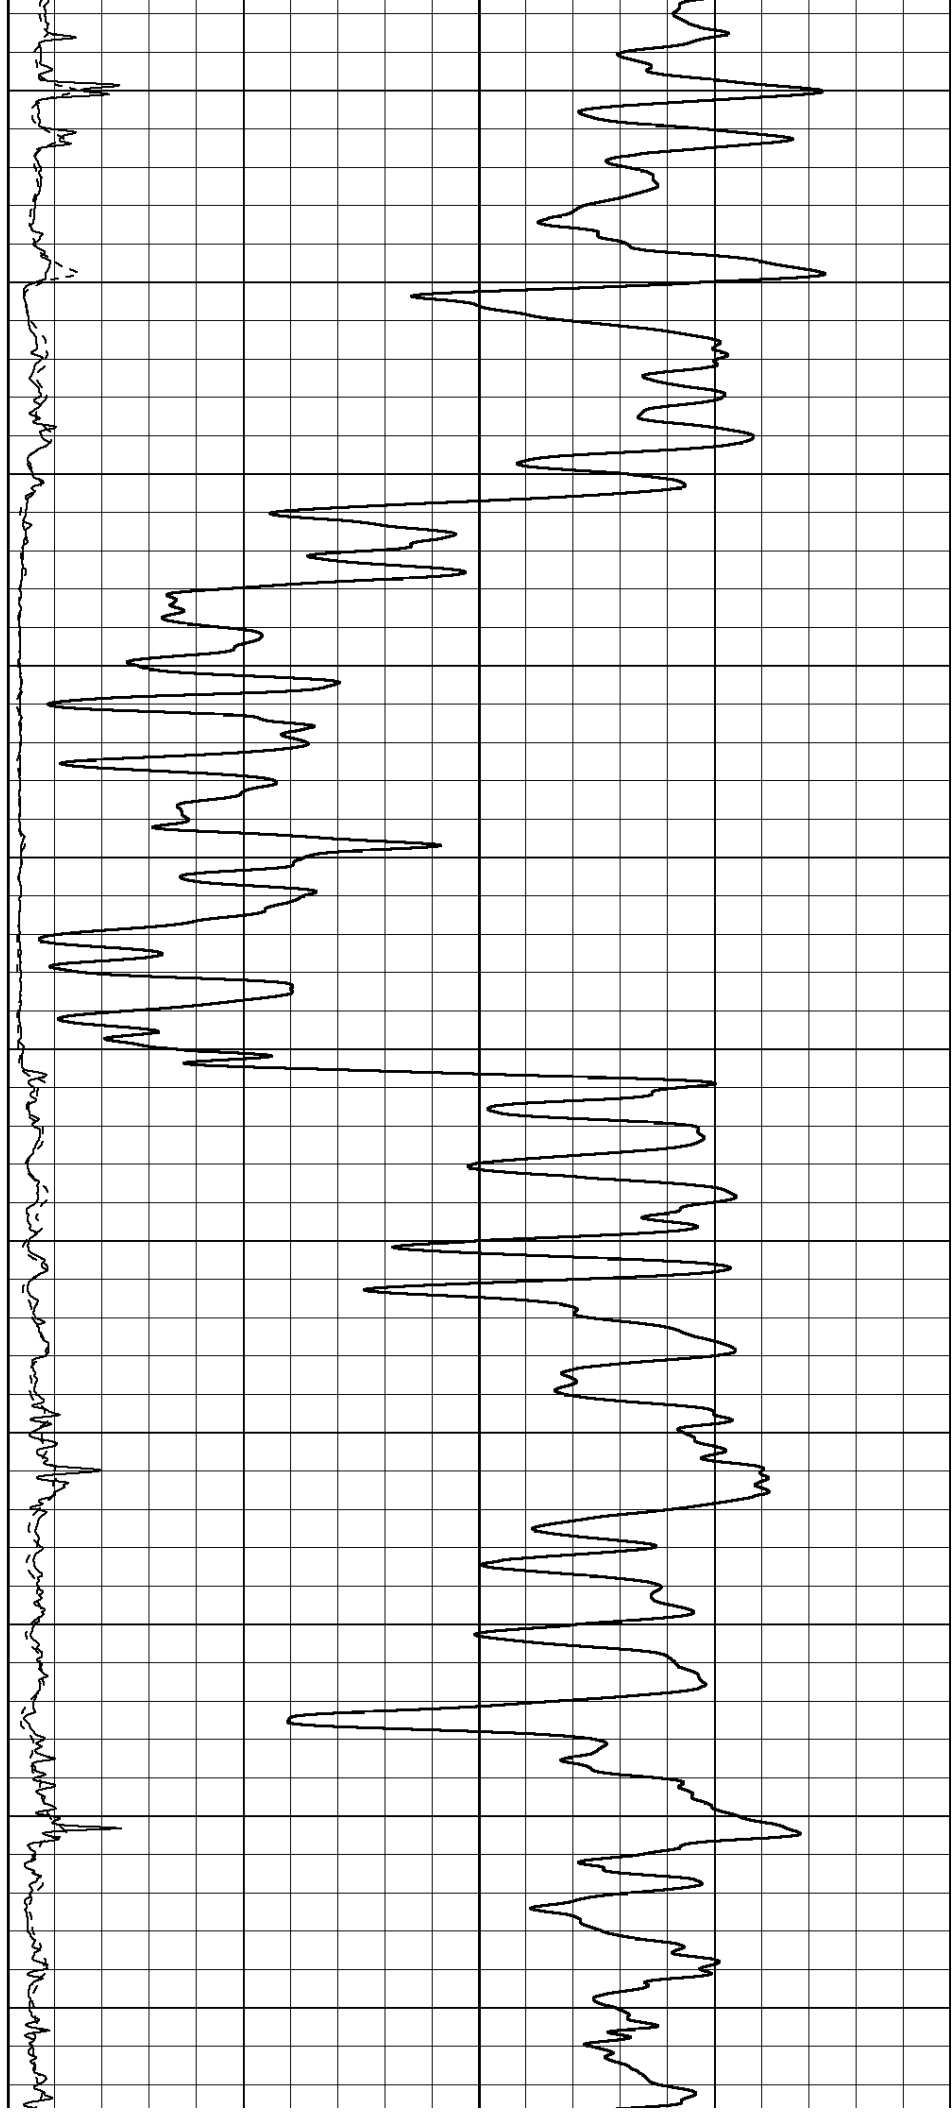

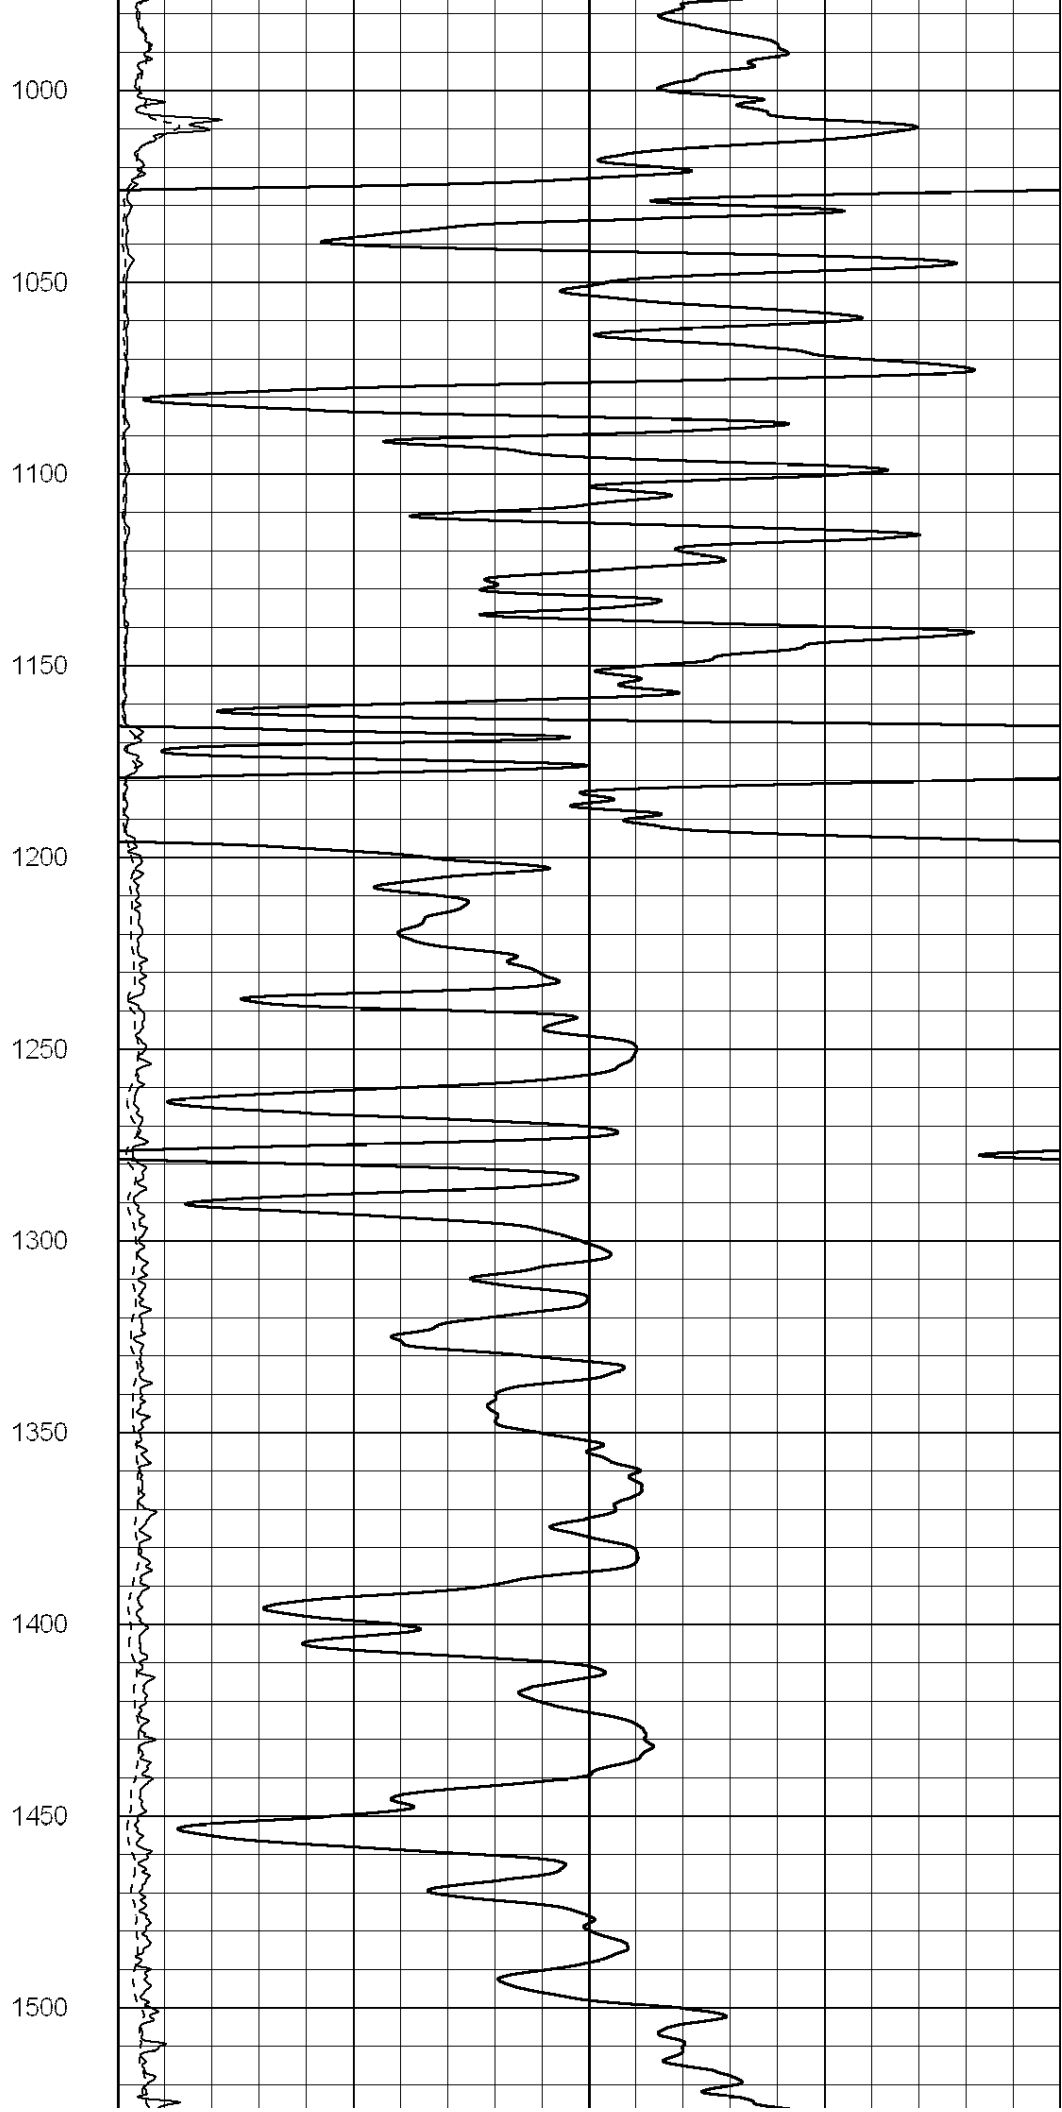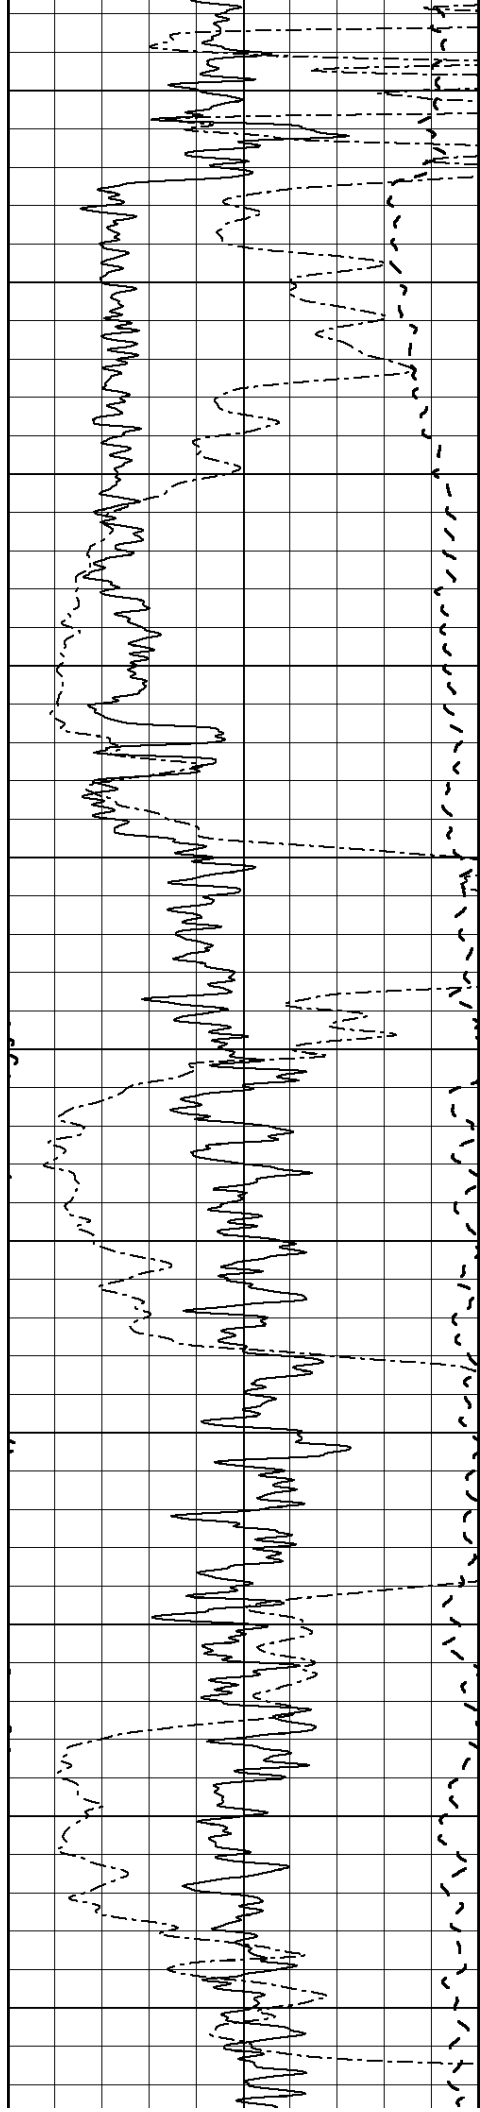

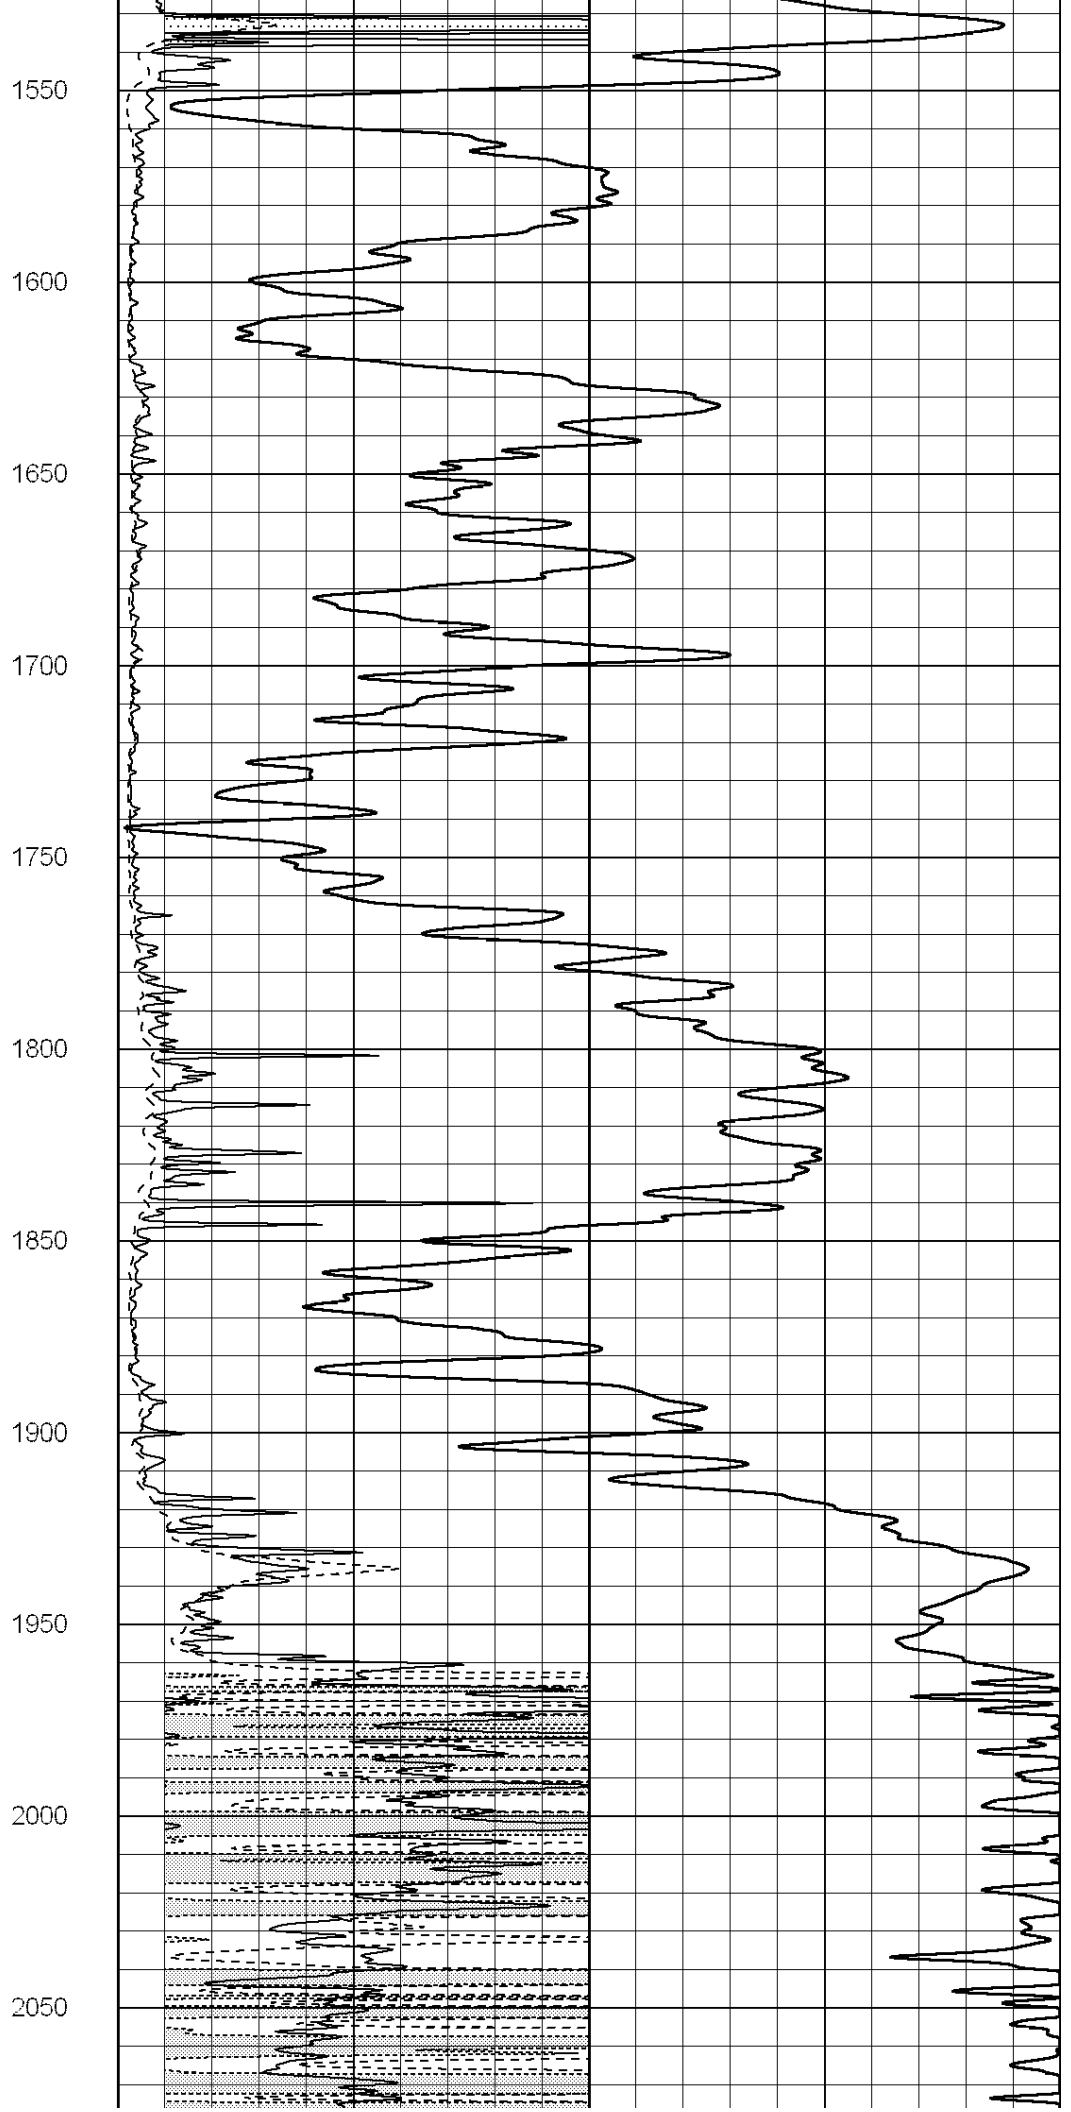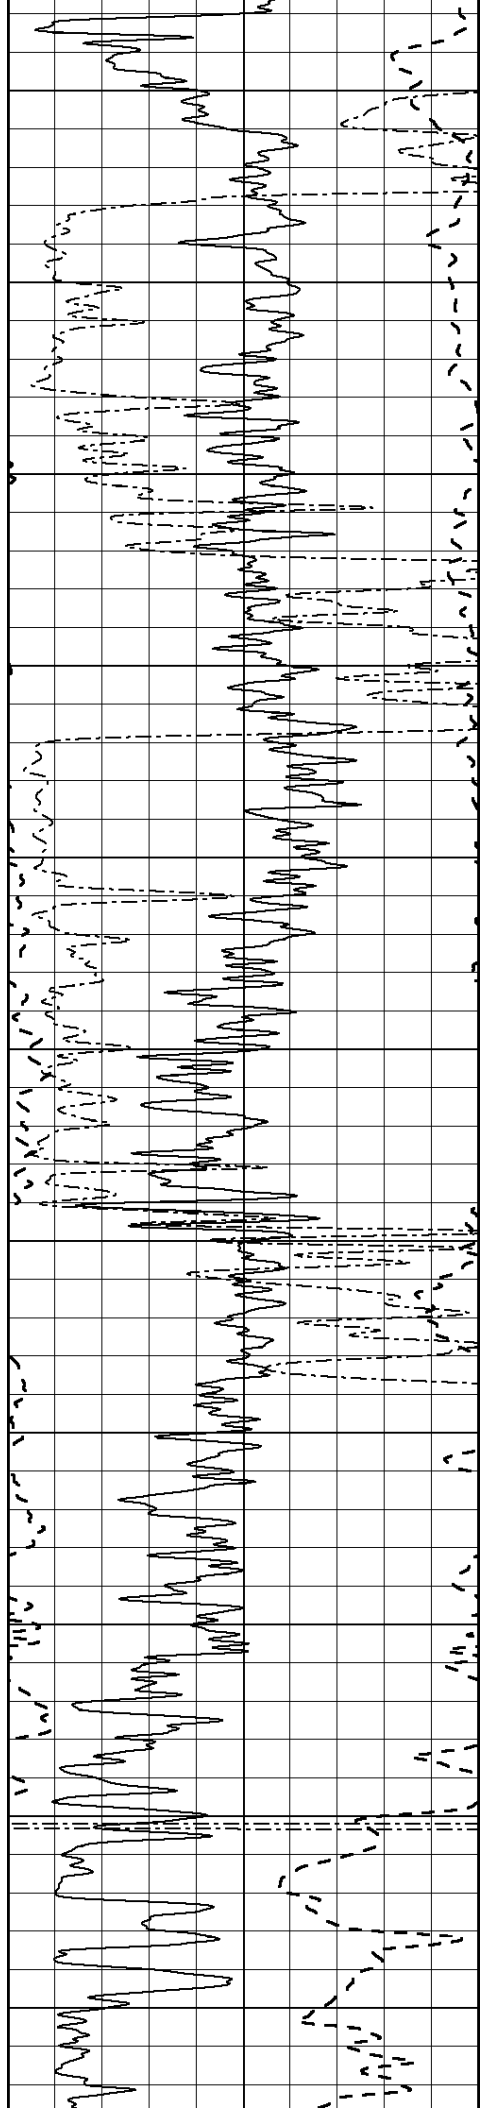

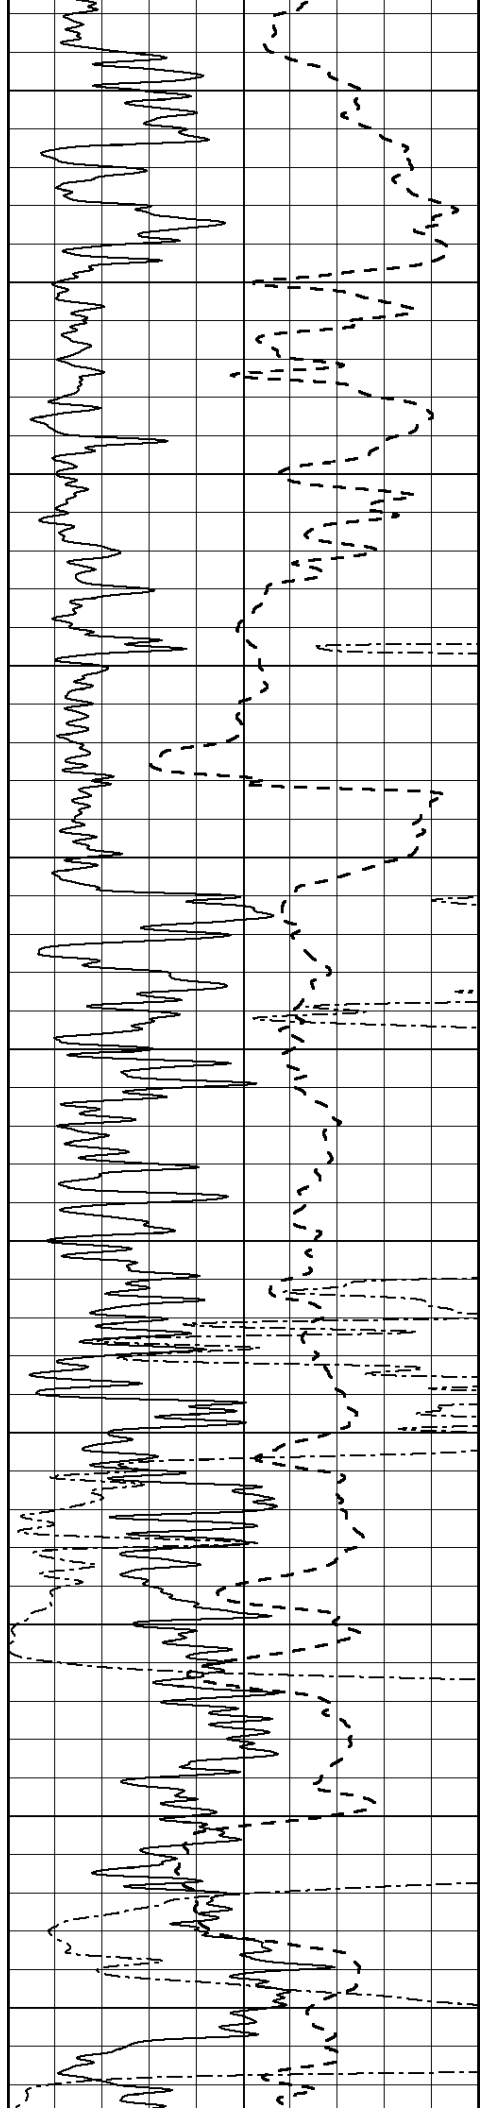

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

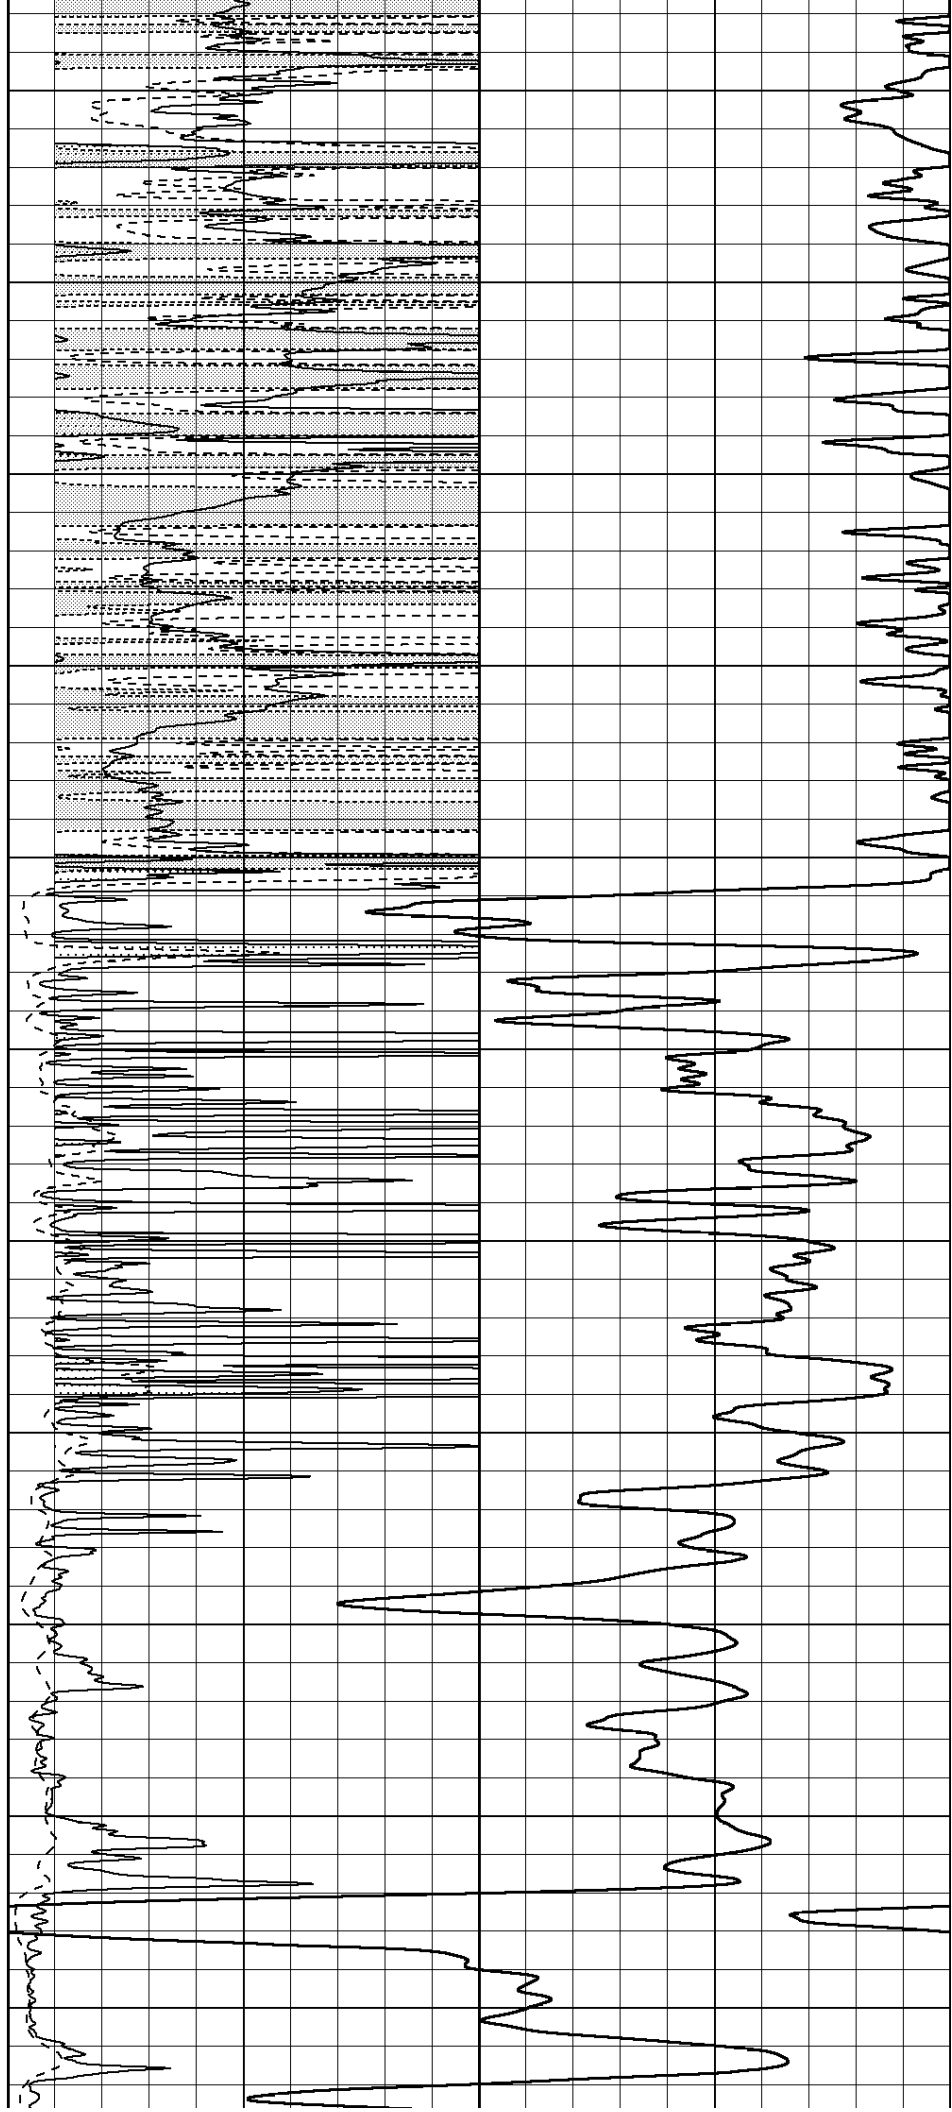

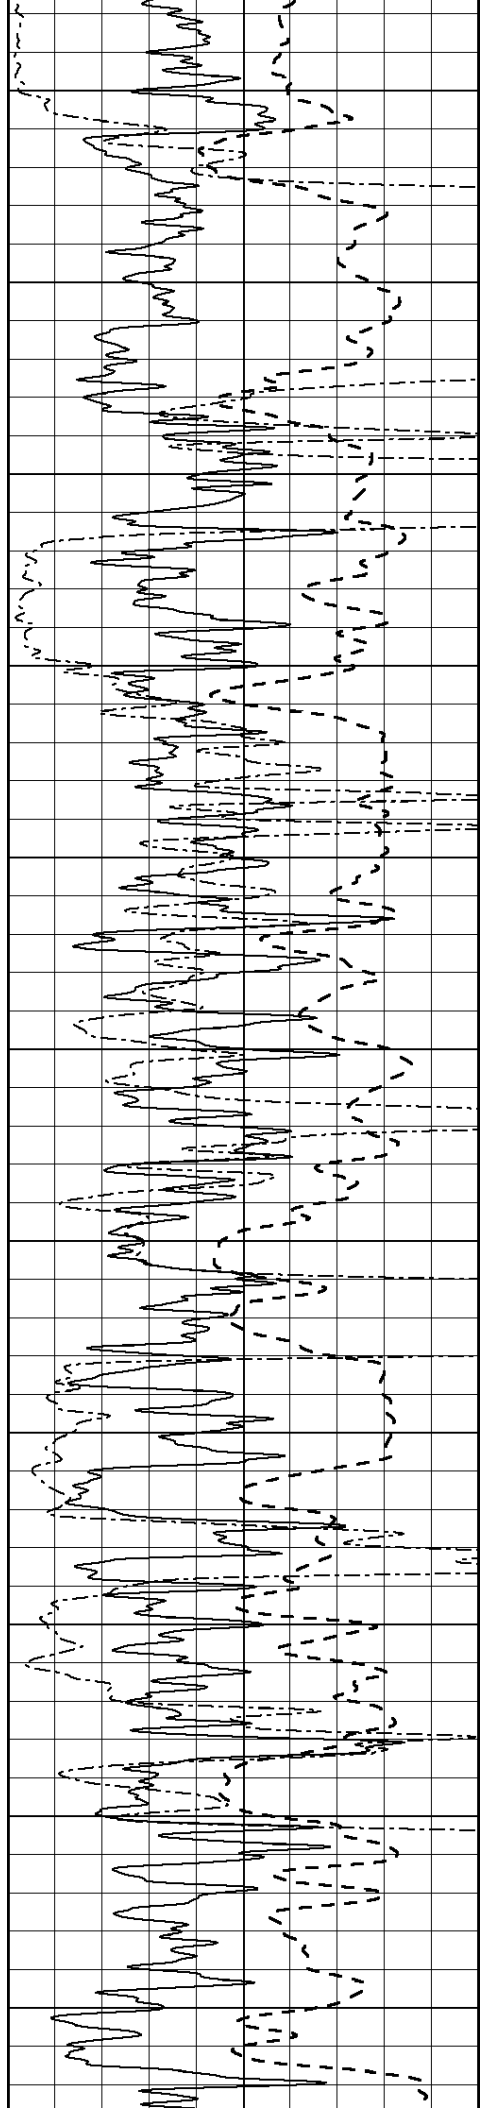

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

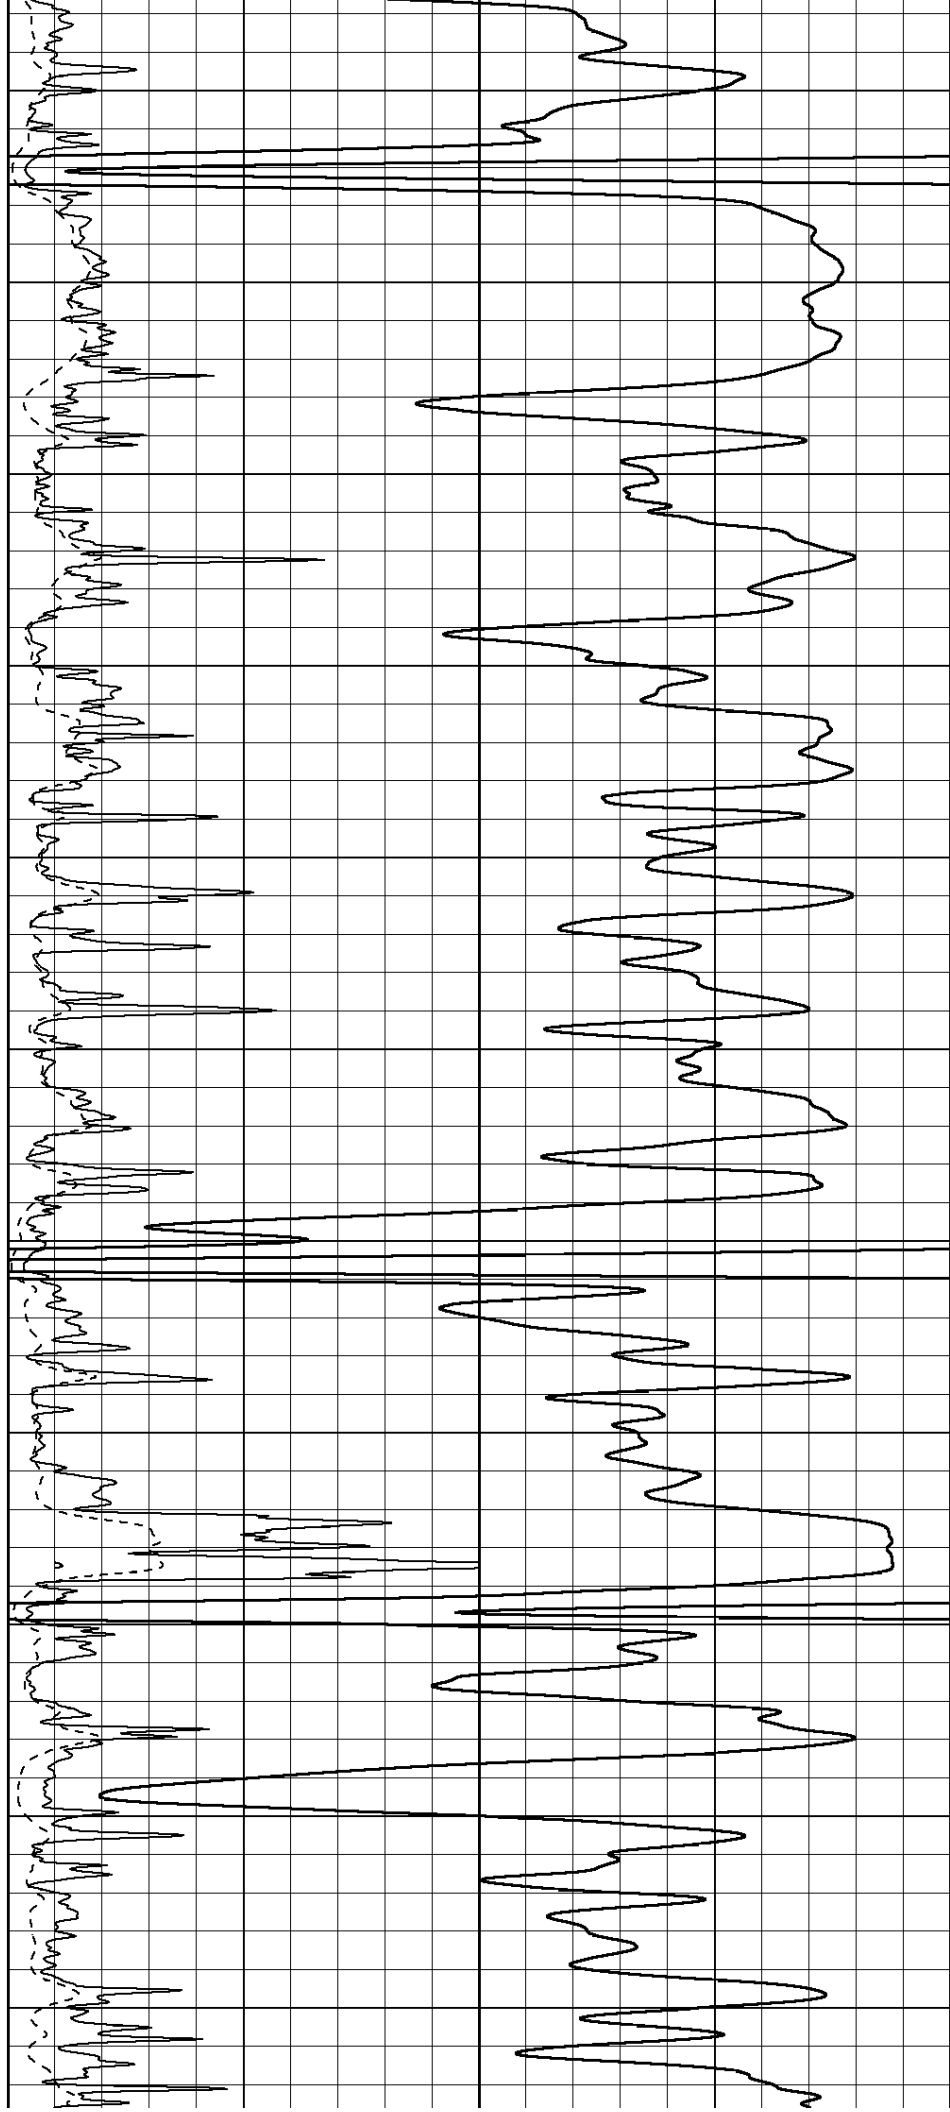

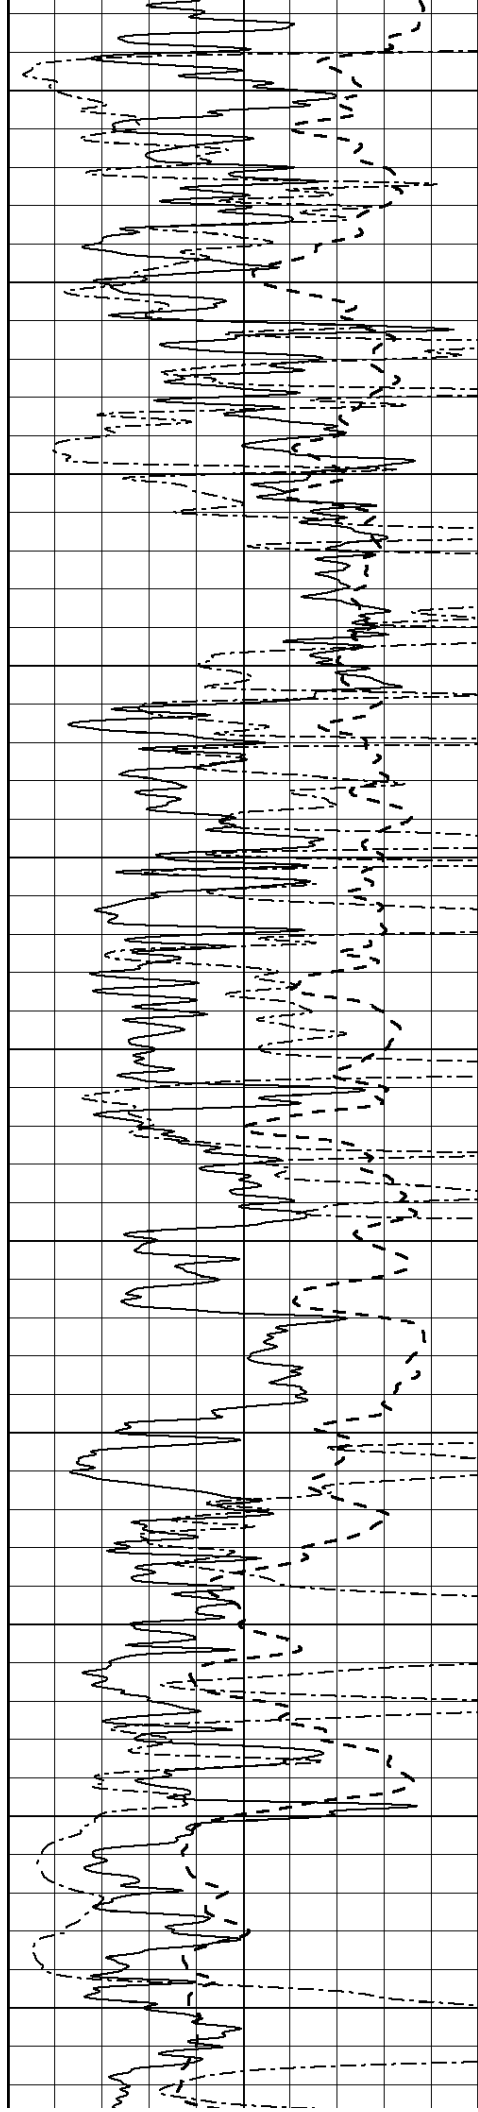

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

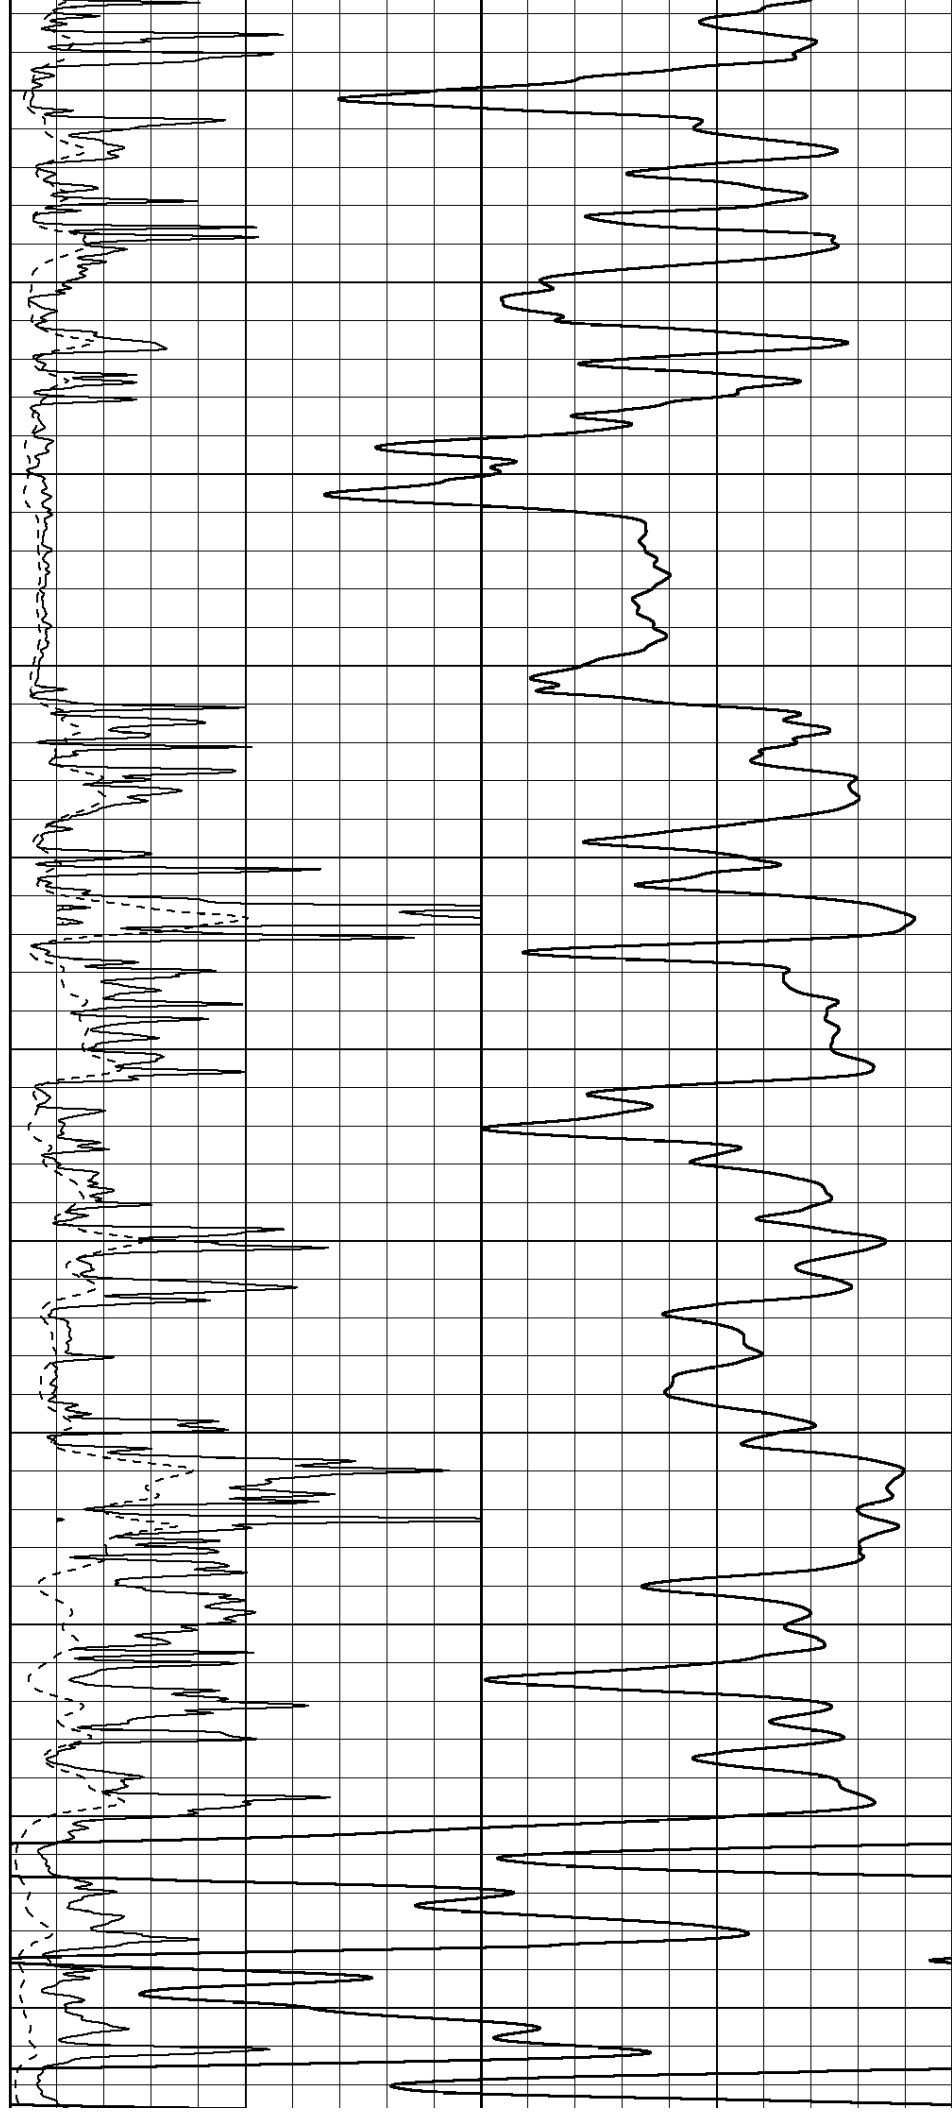

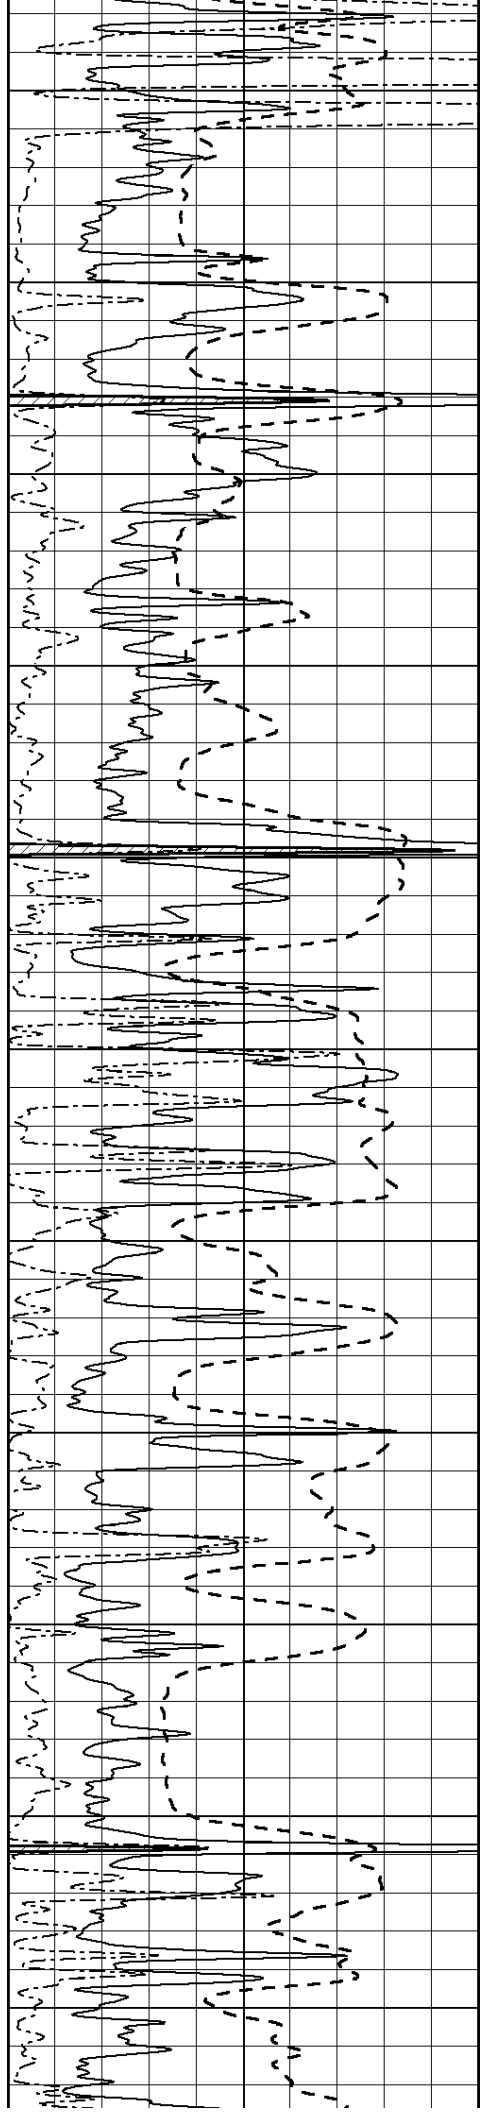

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

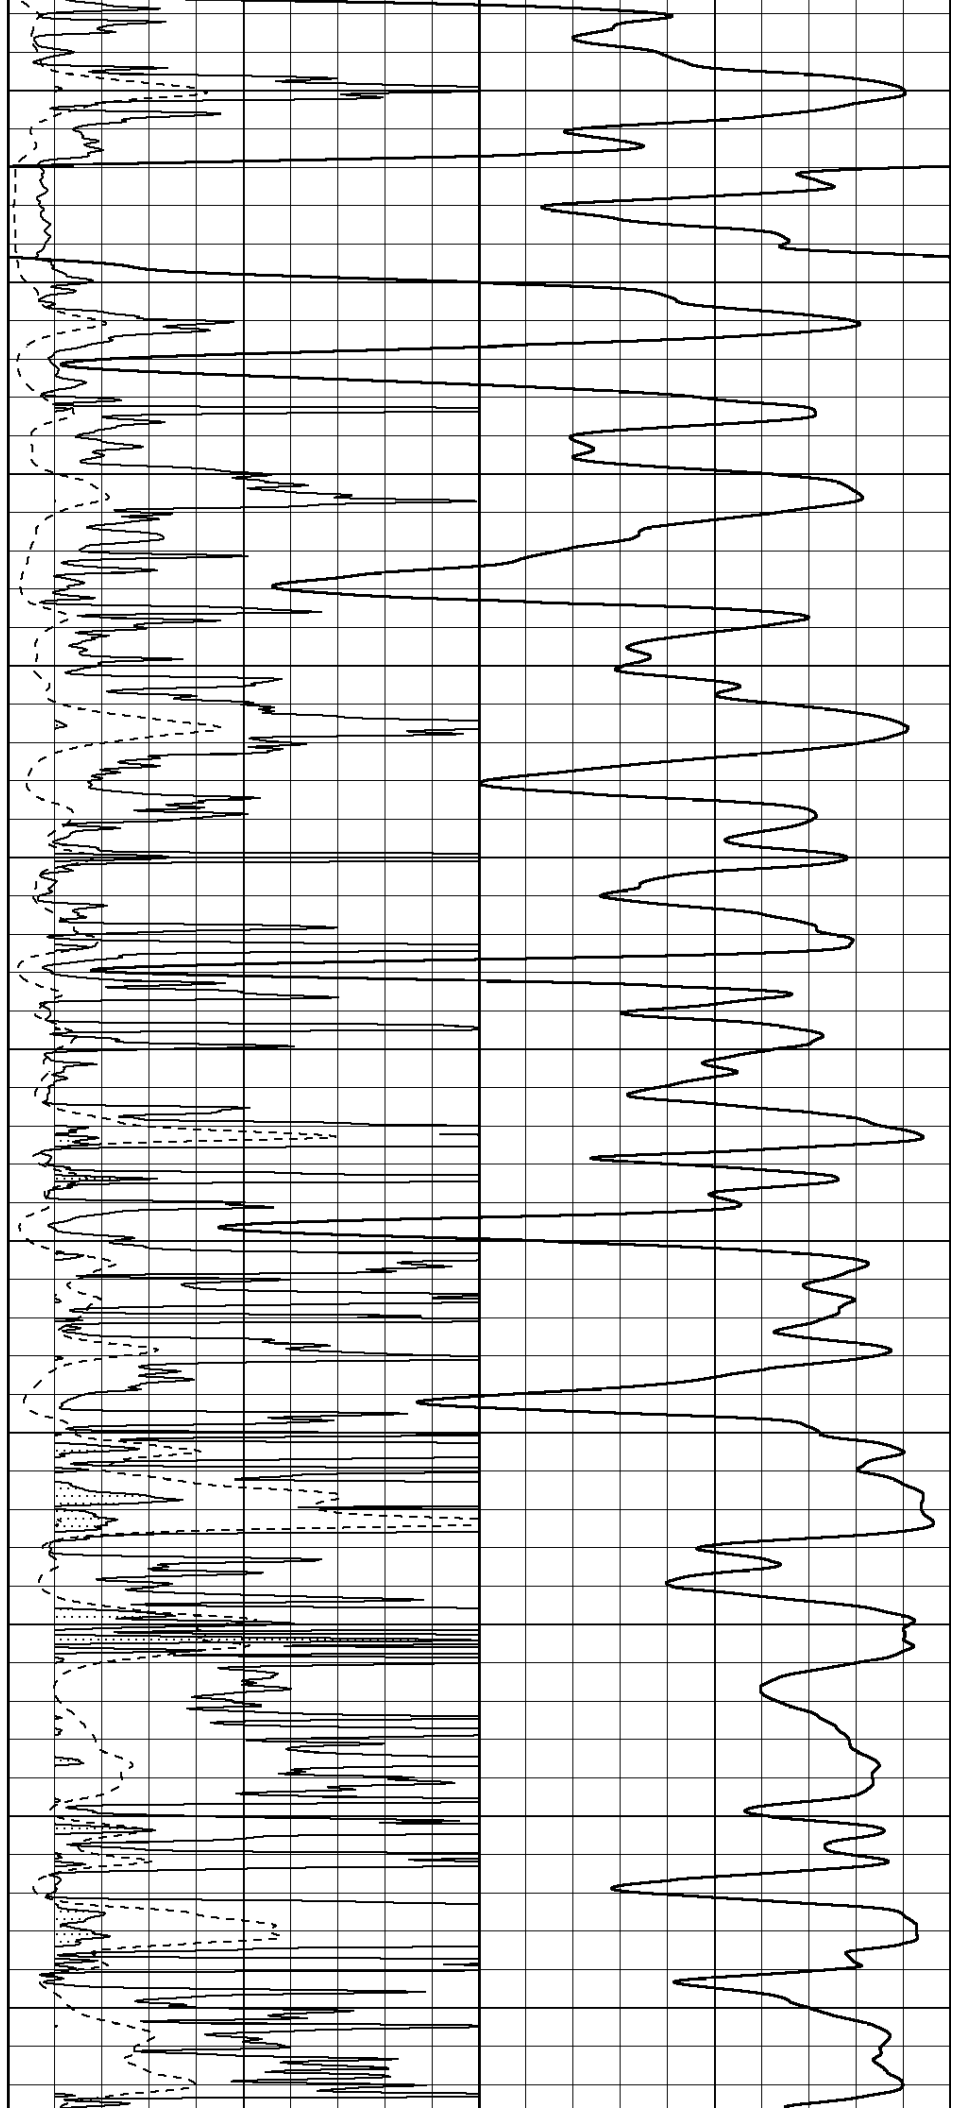

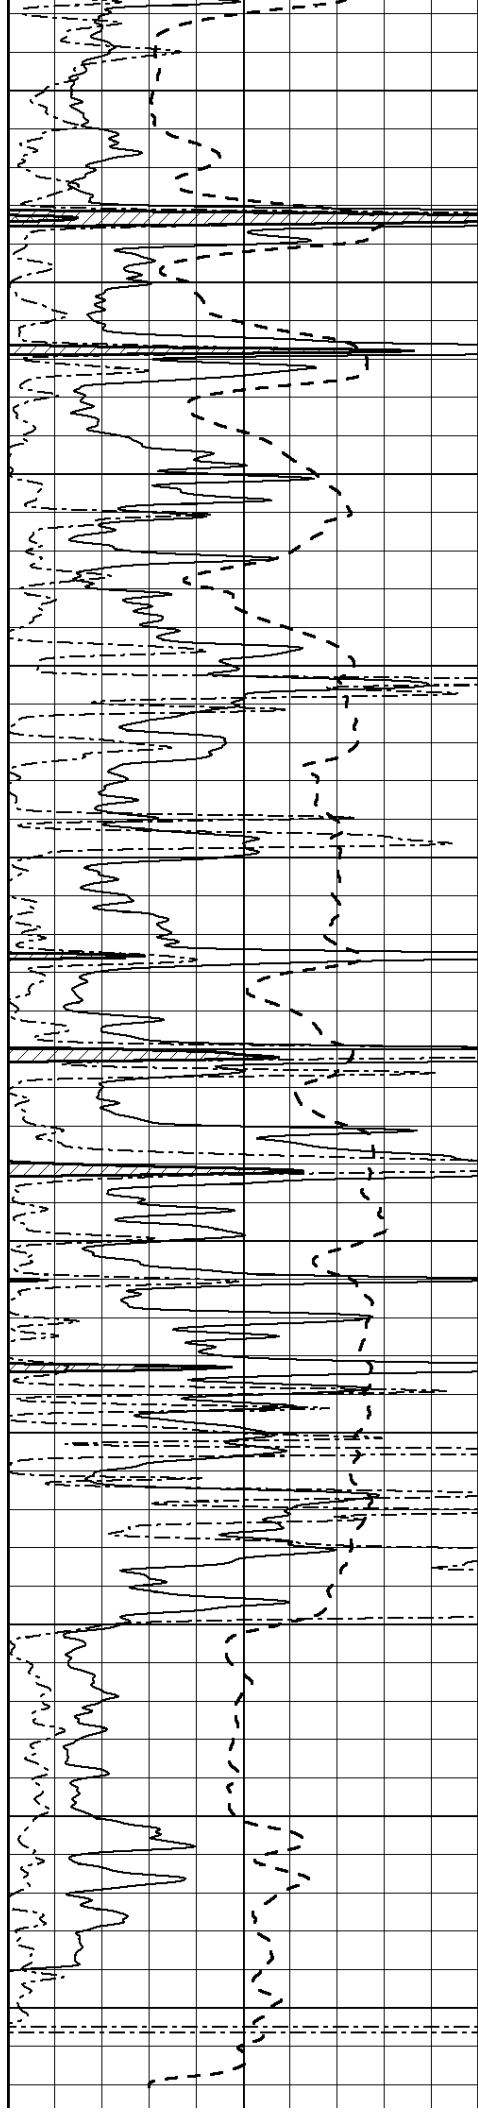

4300

4350

4400

4450

4500

4550



4600

4650


4700

4750

4800

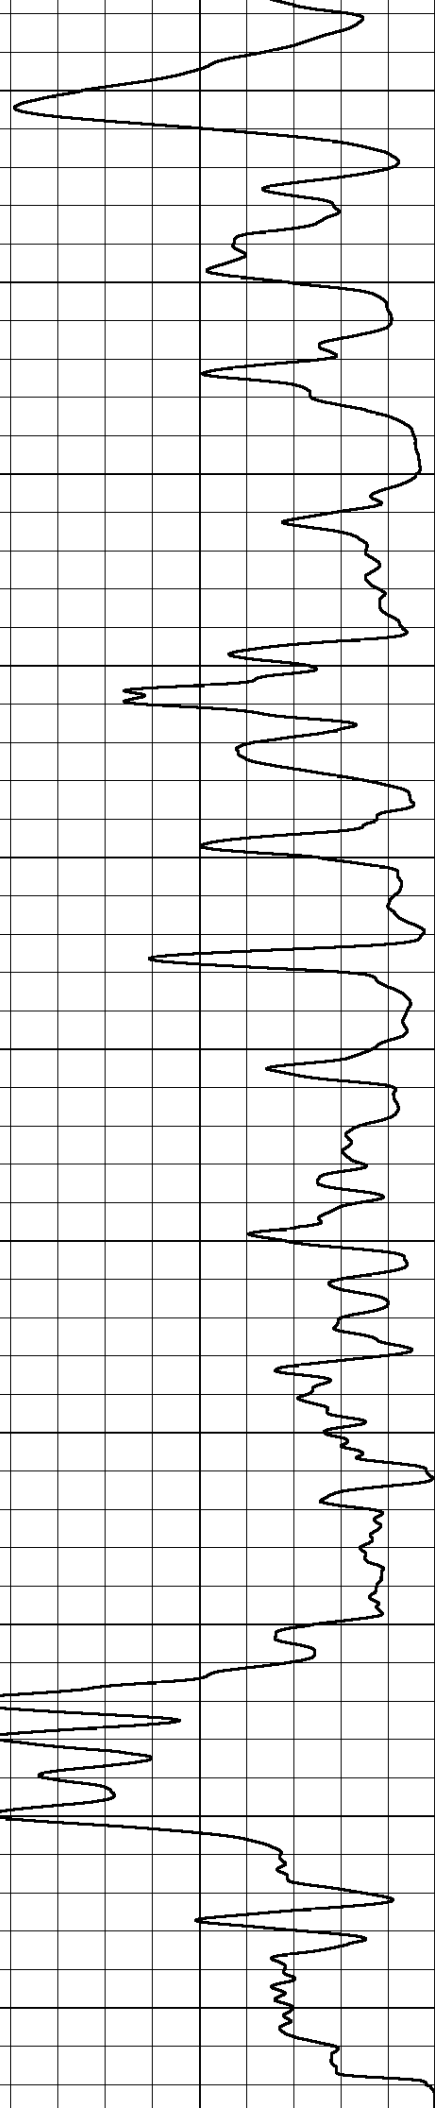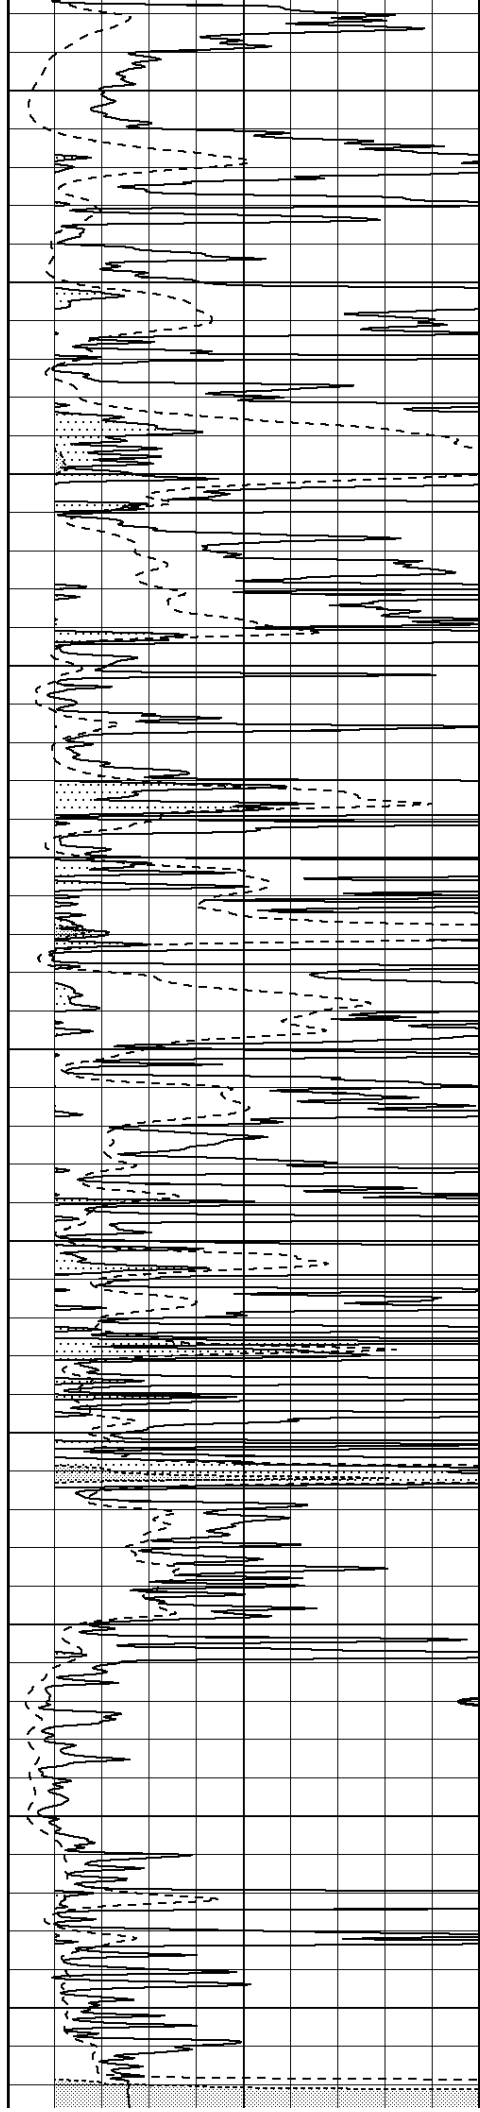



0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
-100	SP (mV)	100	0	RILD (Ohm-m)	50	
0	RWA (Ohm-m)	1	1000	CILD (mmho/m)		0
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

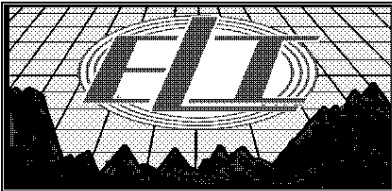


ANHYDRITE

Database File:	3053pe.db
Dataset Pathname:	pass3.5
Presentation Format:	_dil
Dataset Creation:	Mon Nov 05 11:38:41 2018
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

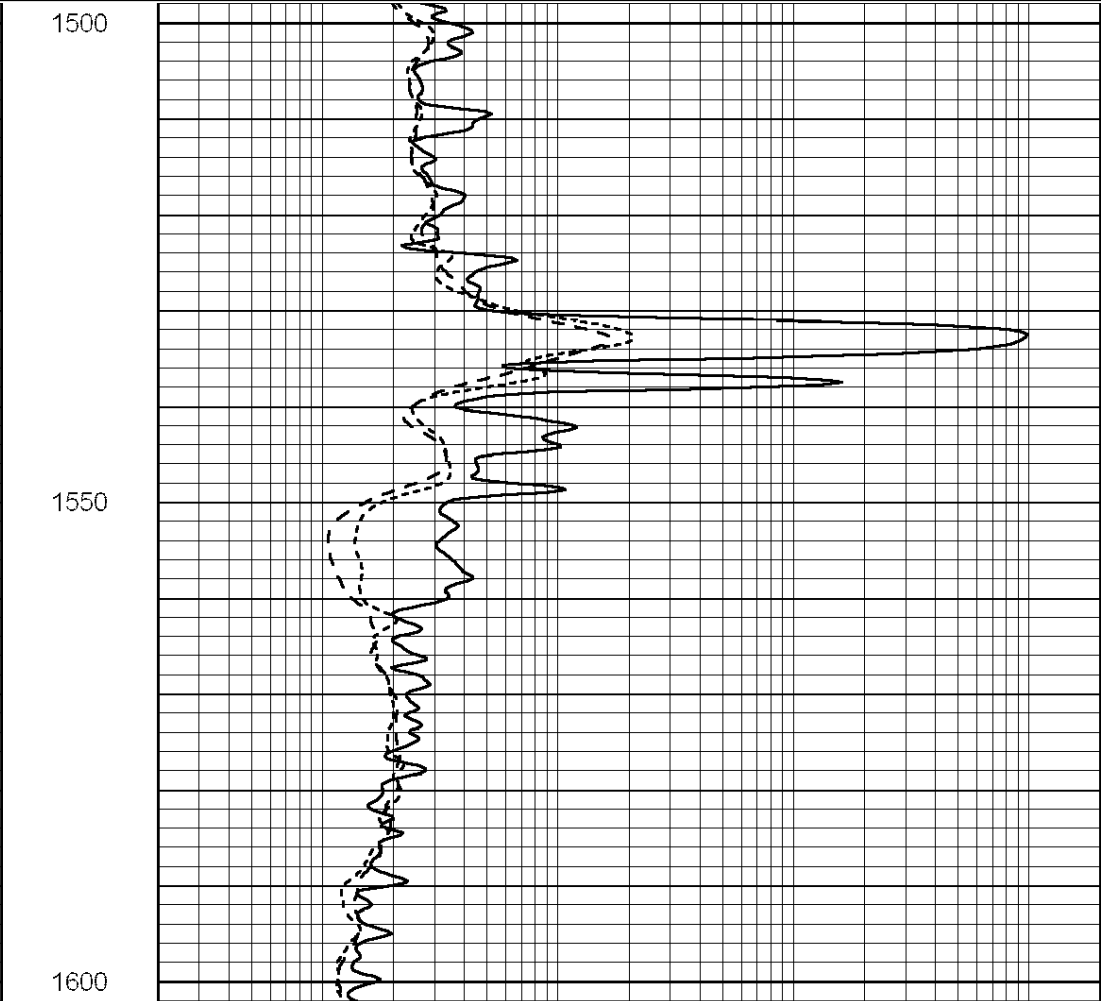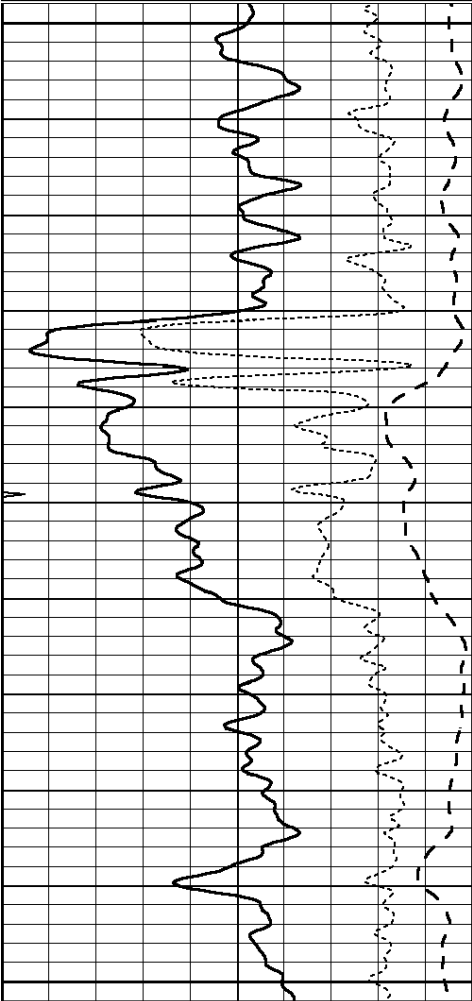

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

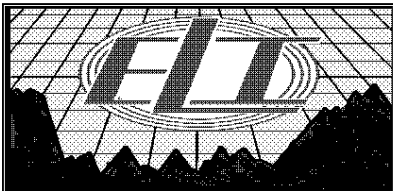


MAIN SECTION

Database File: 3053pe.db
Dataset Pathname: pass3.4
Presentation Format: _dil
Dataset Creation: Mon Nov 05 11:37:45 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

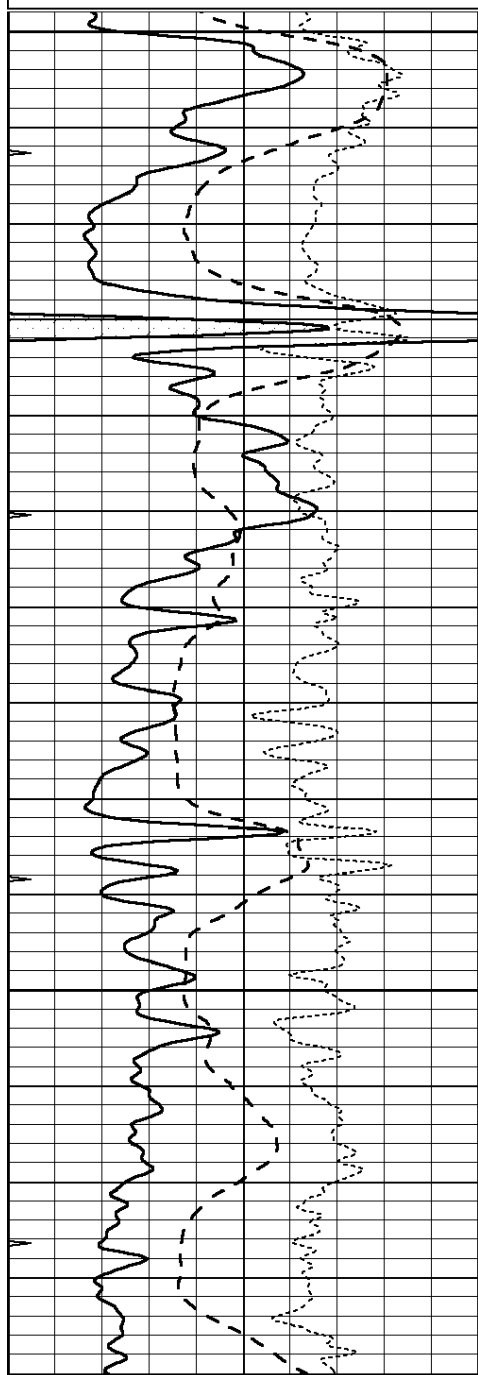


3800

3850

3900

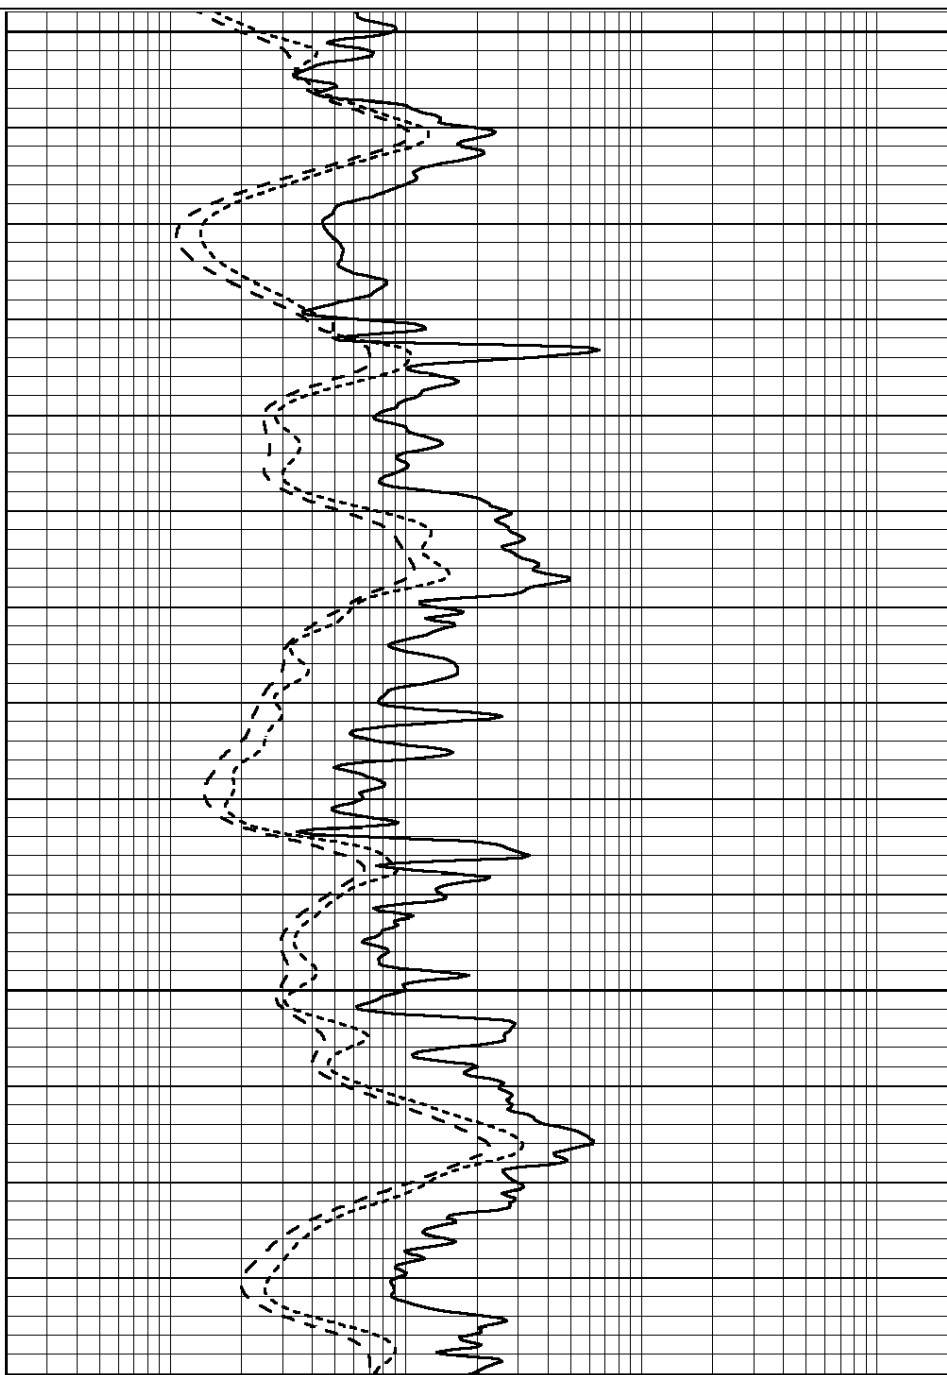

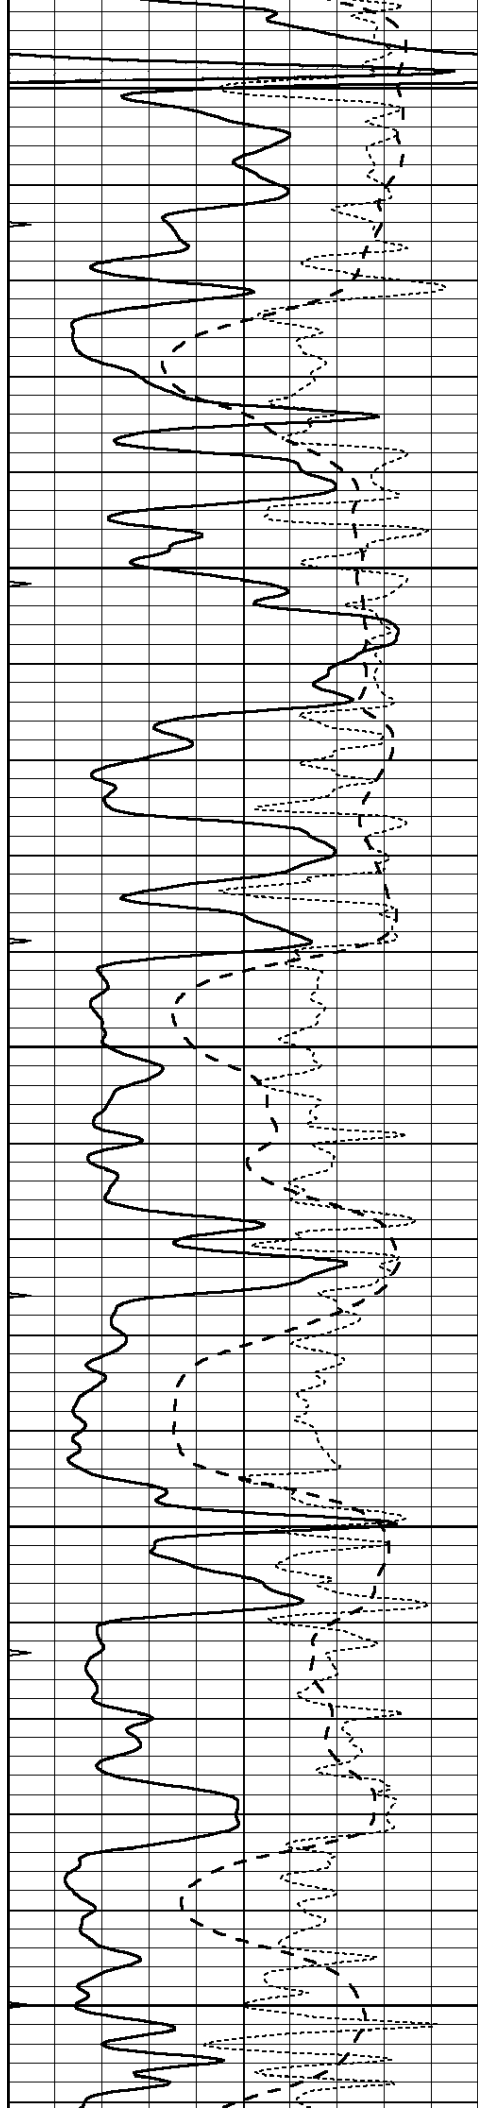


3950


4000

4050

4100

4150

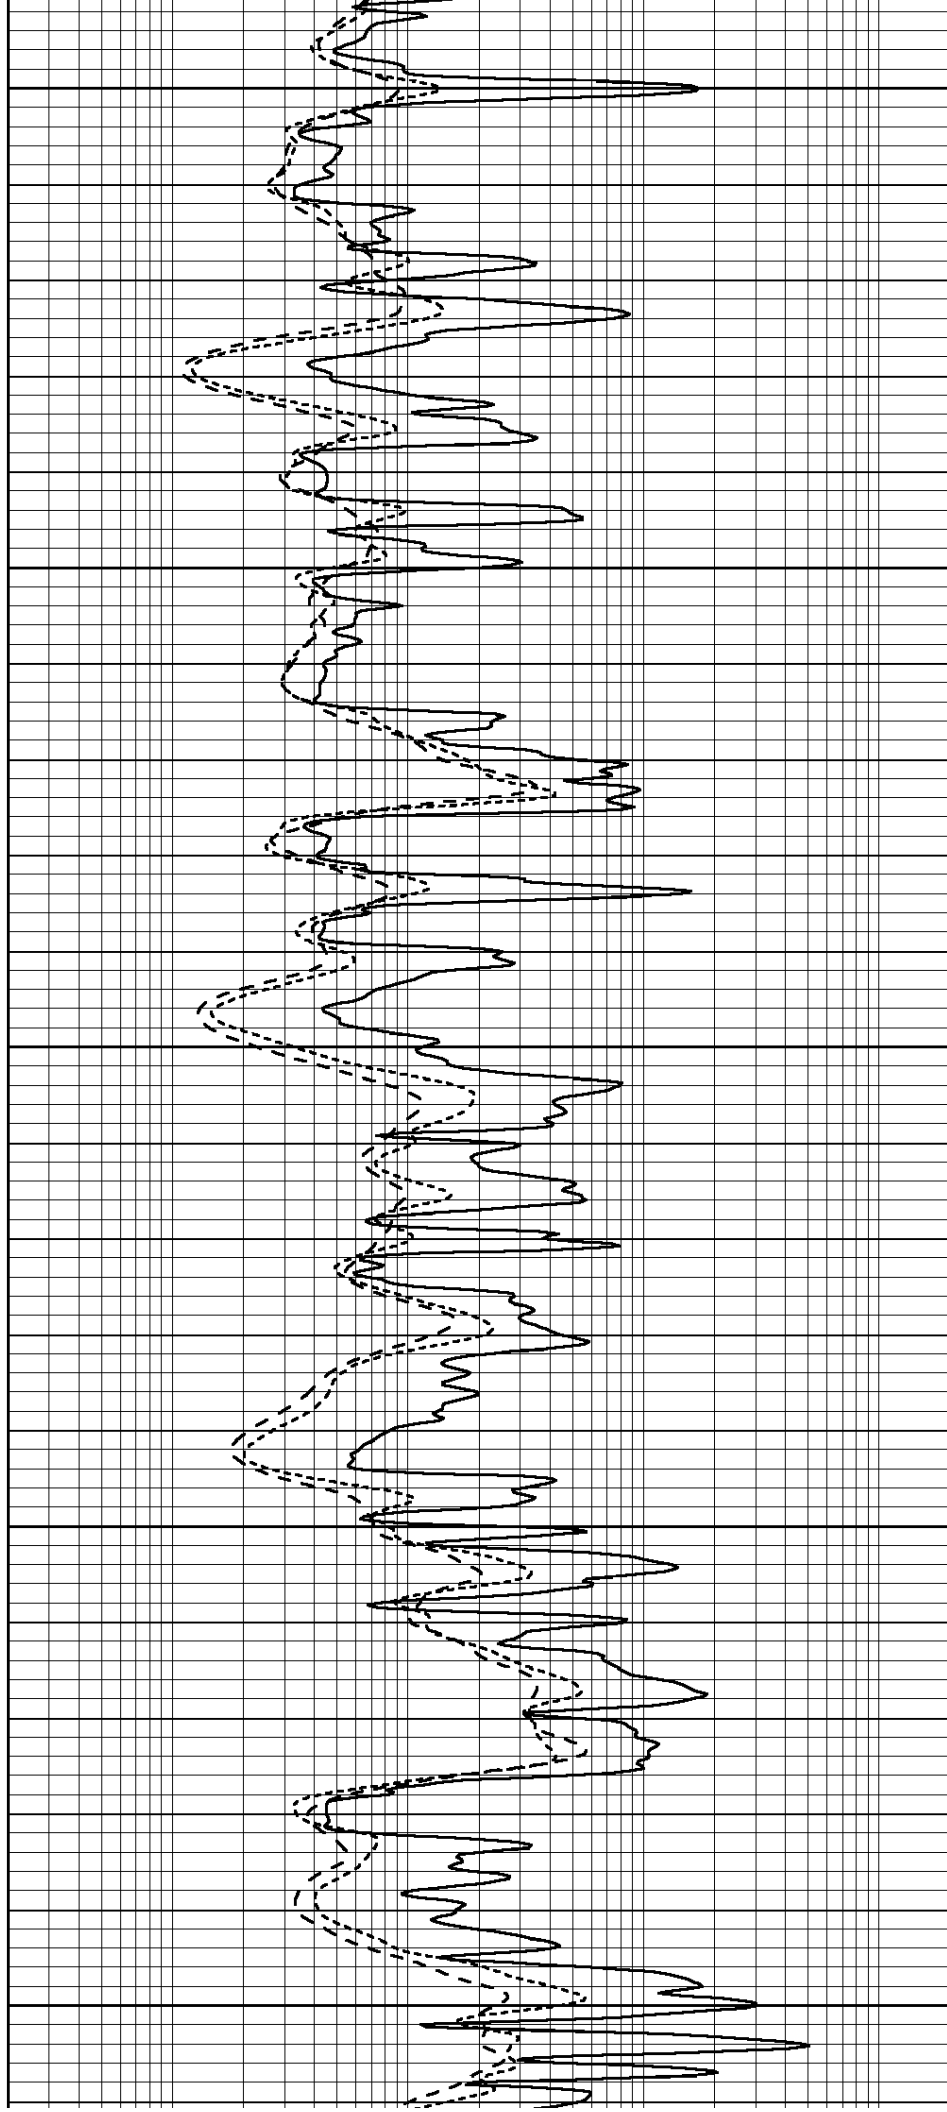

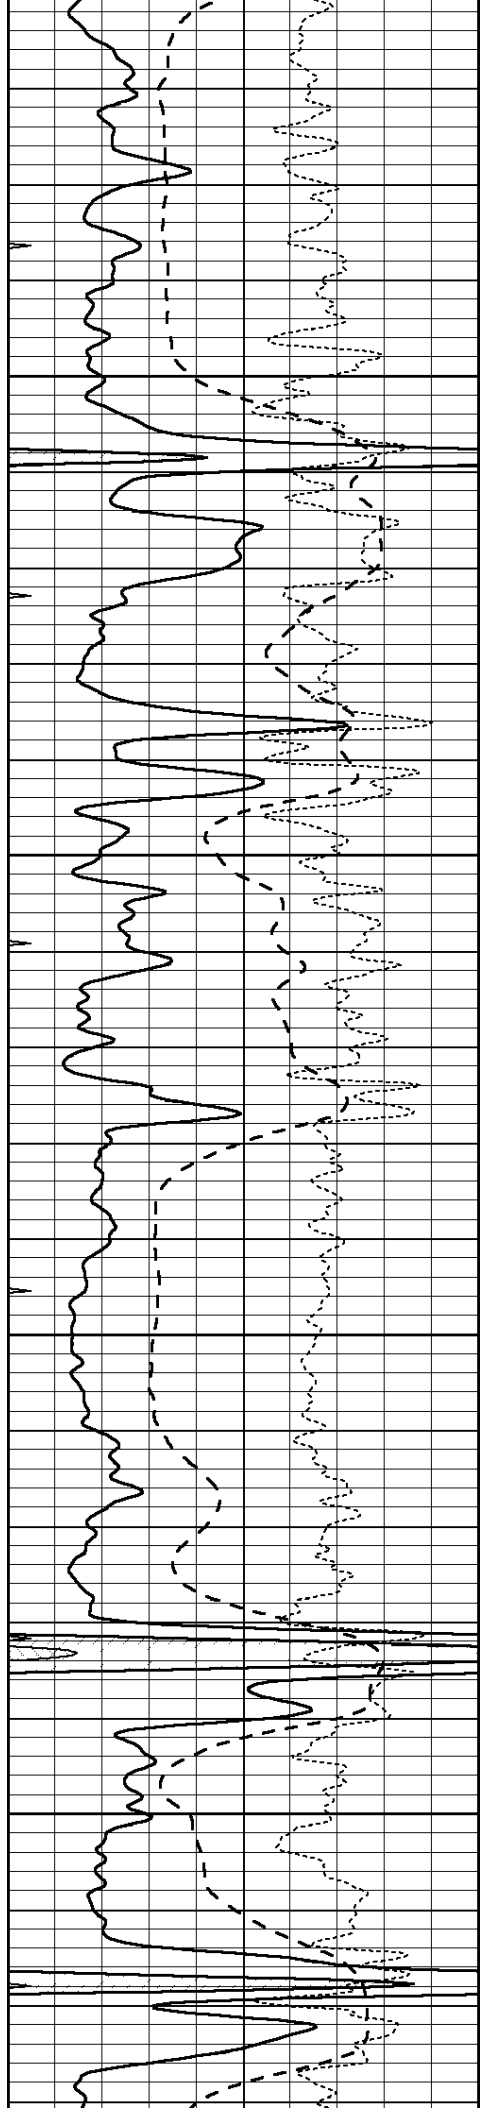



4200

4250

4300

4350

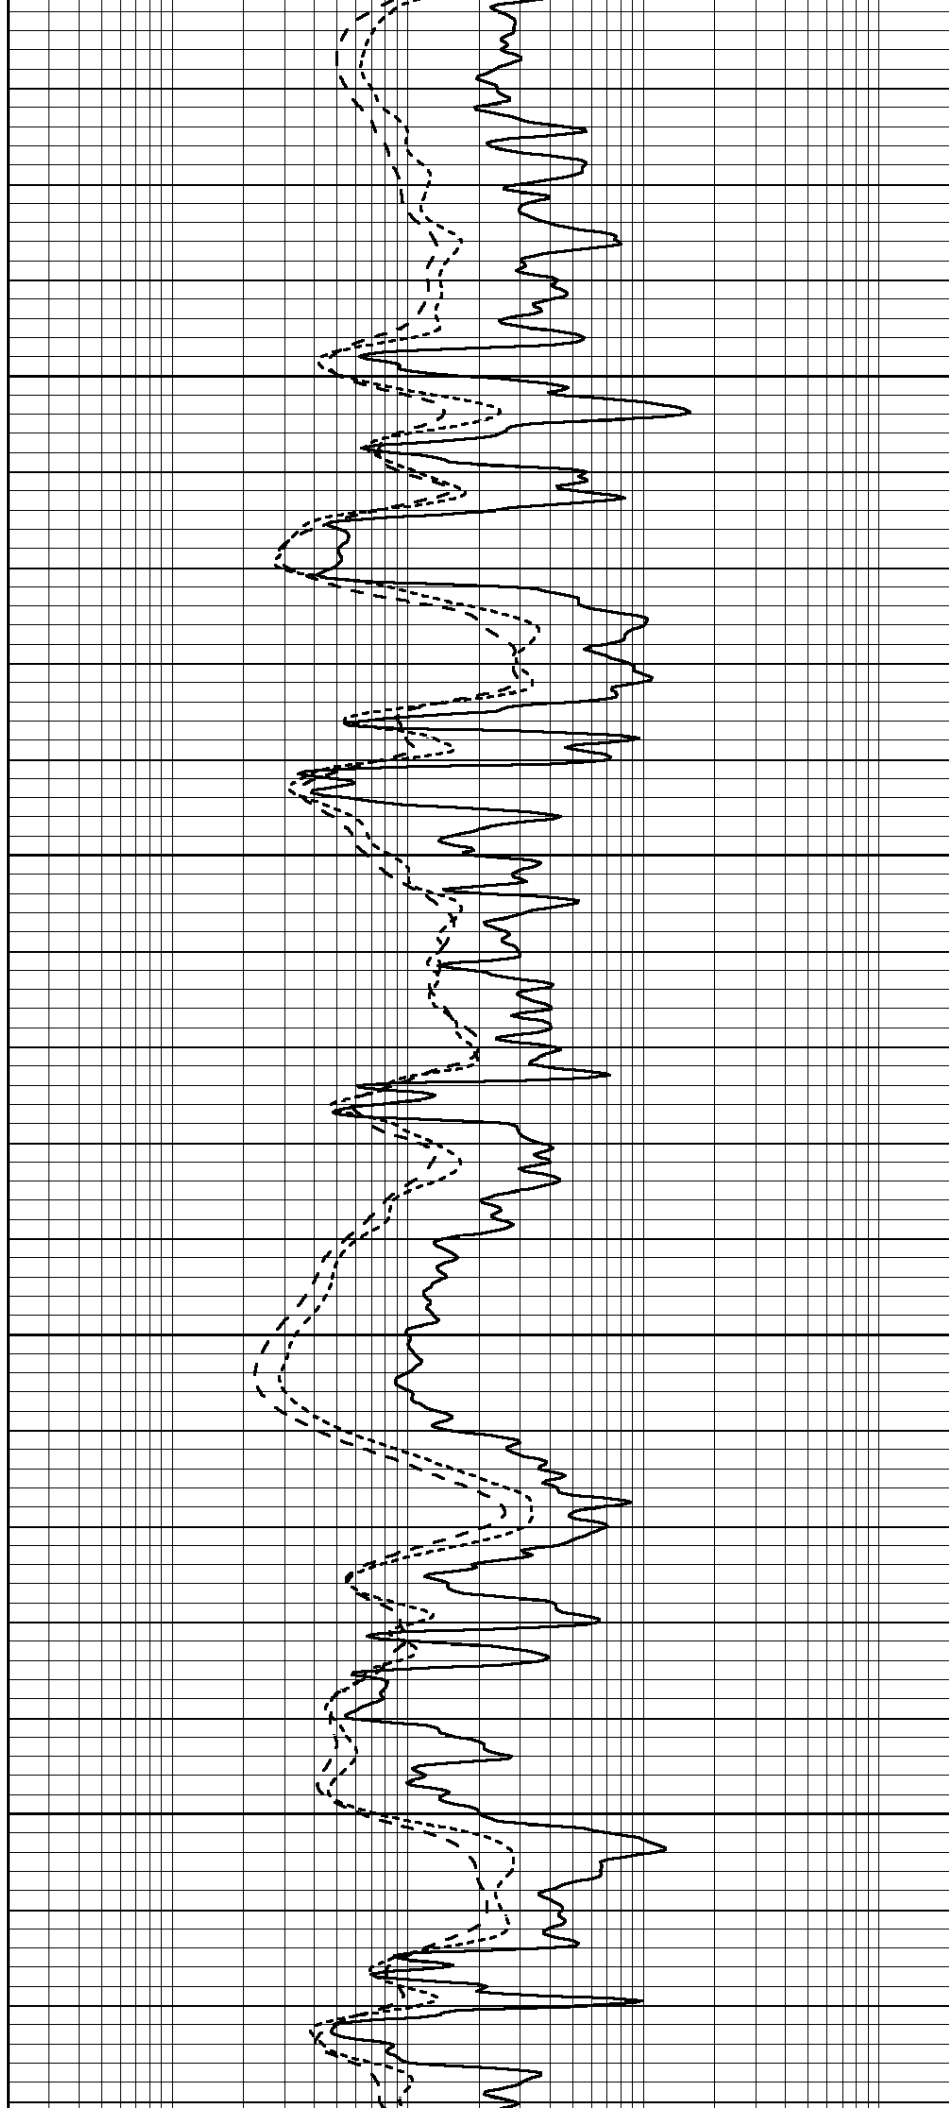

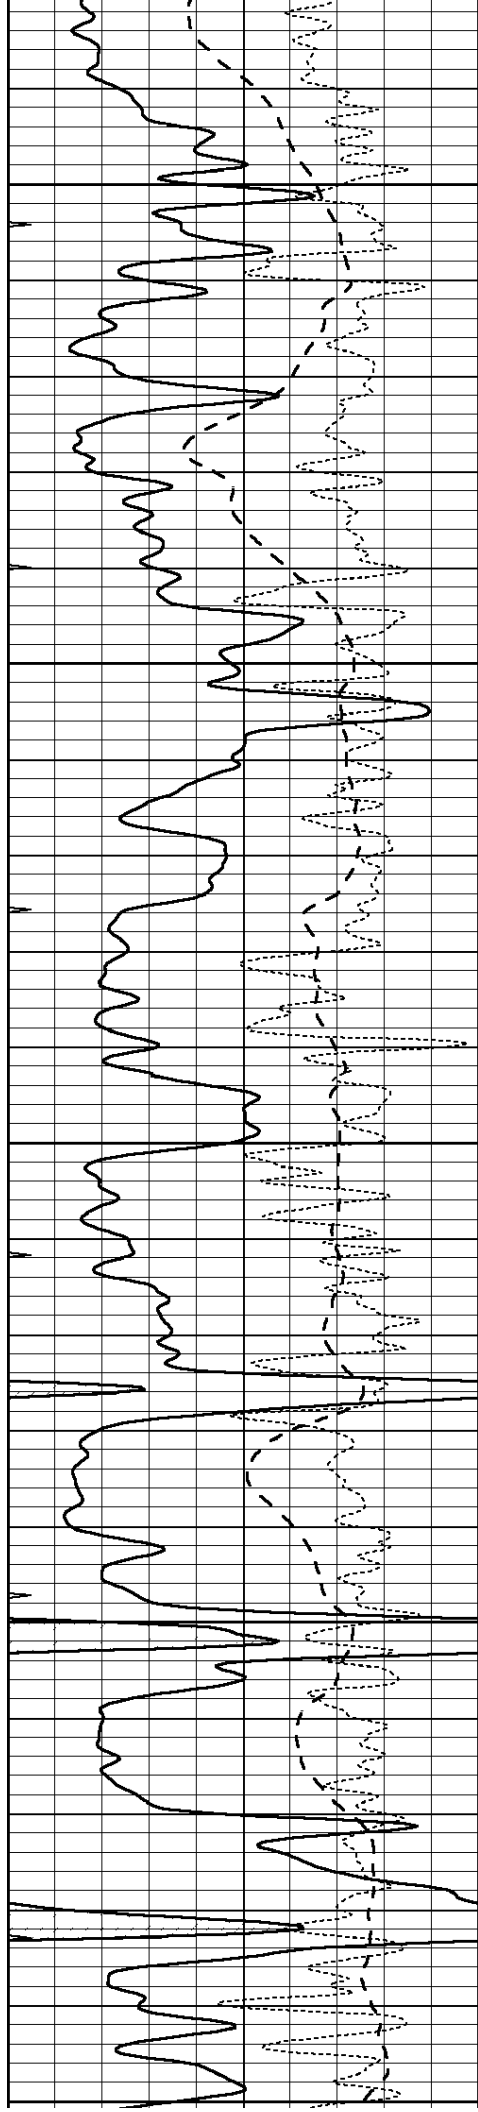


4400


4450

4500

4550

4600

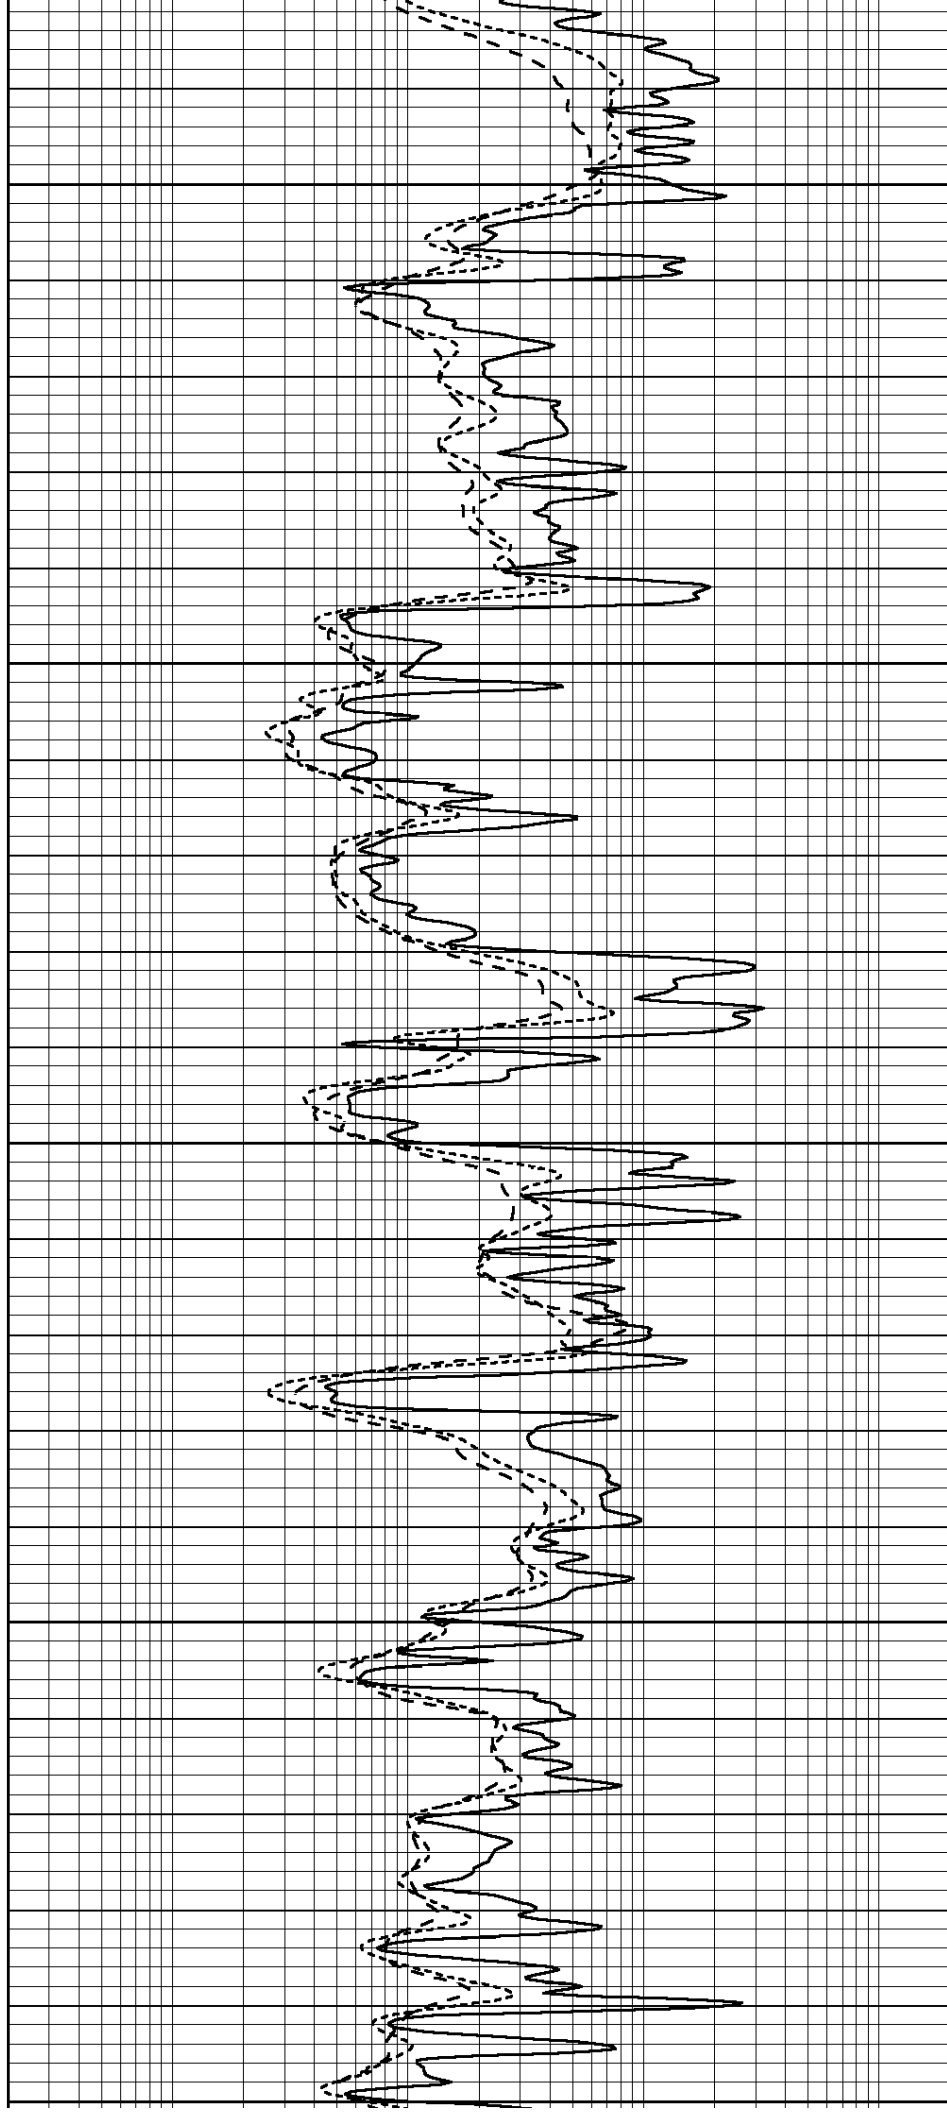

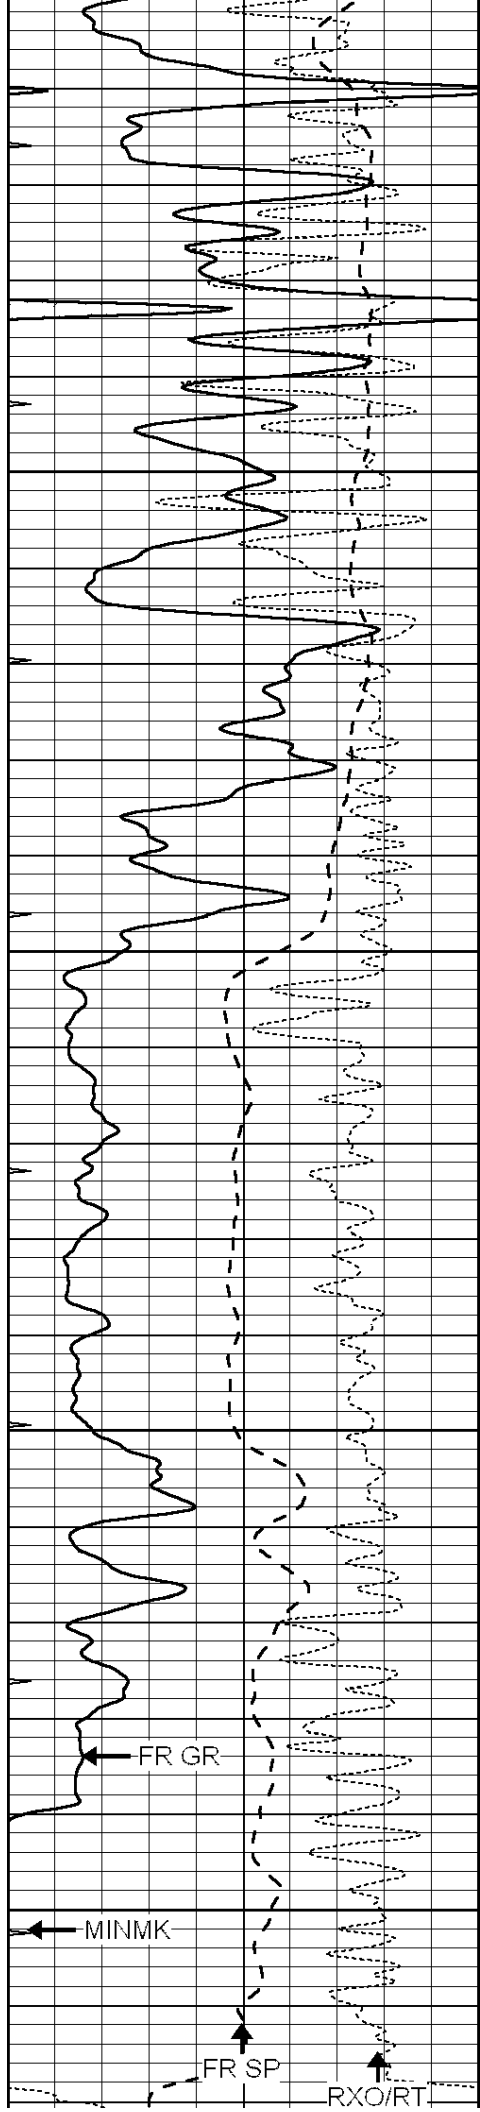

4650

4700

4750


4800

FR GR

MINMK

FR SP

RXO/RT

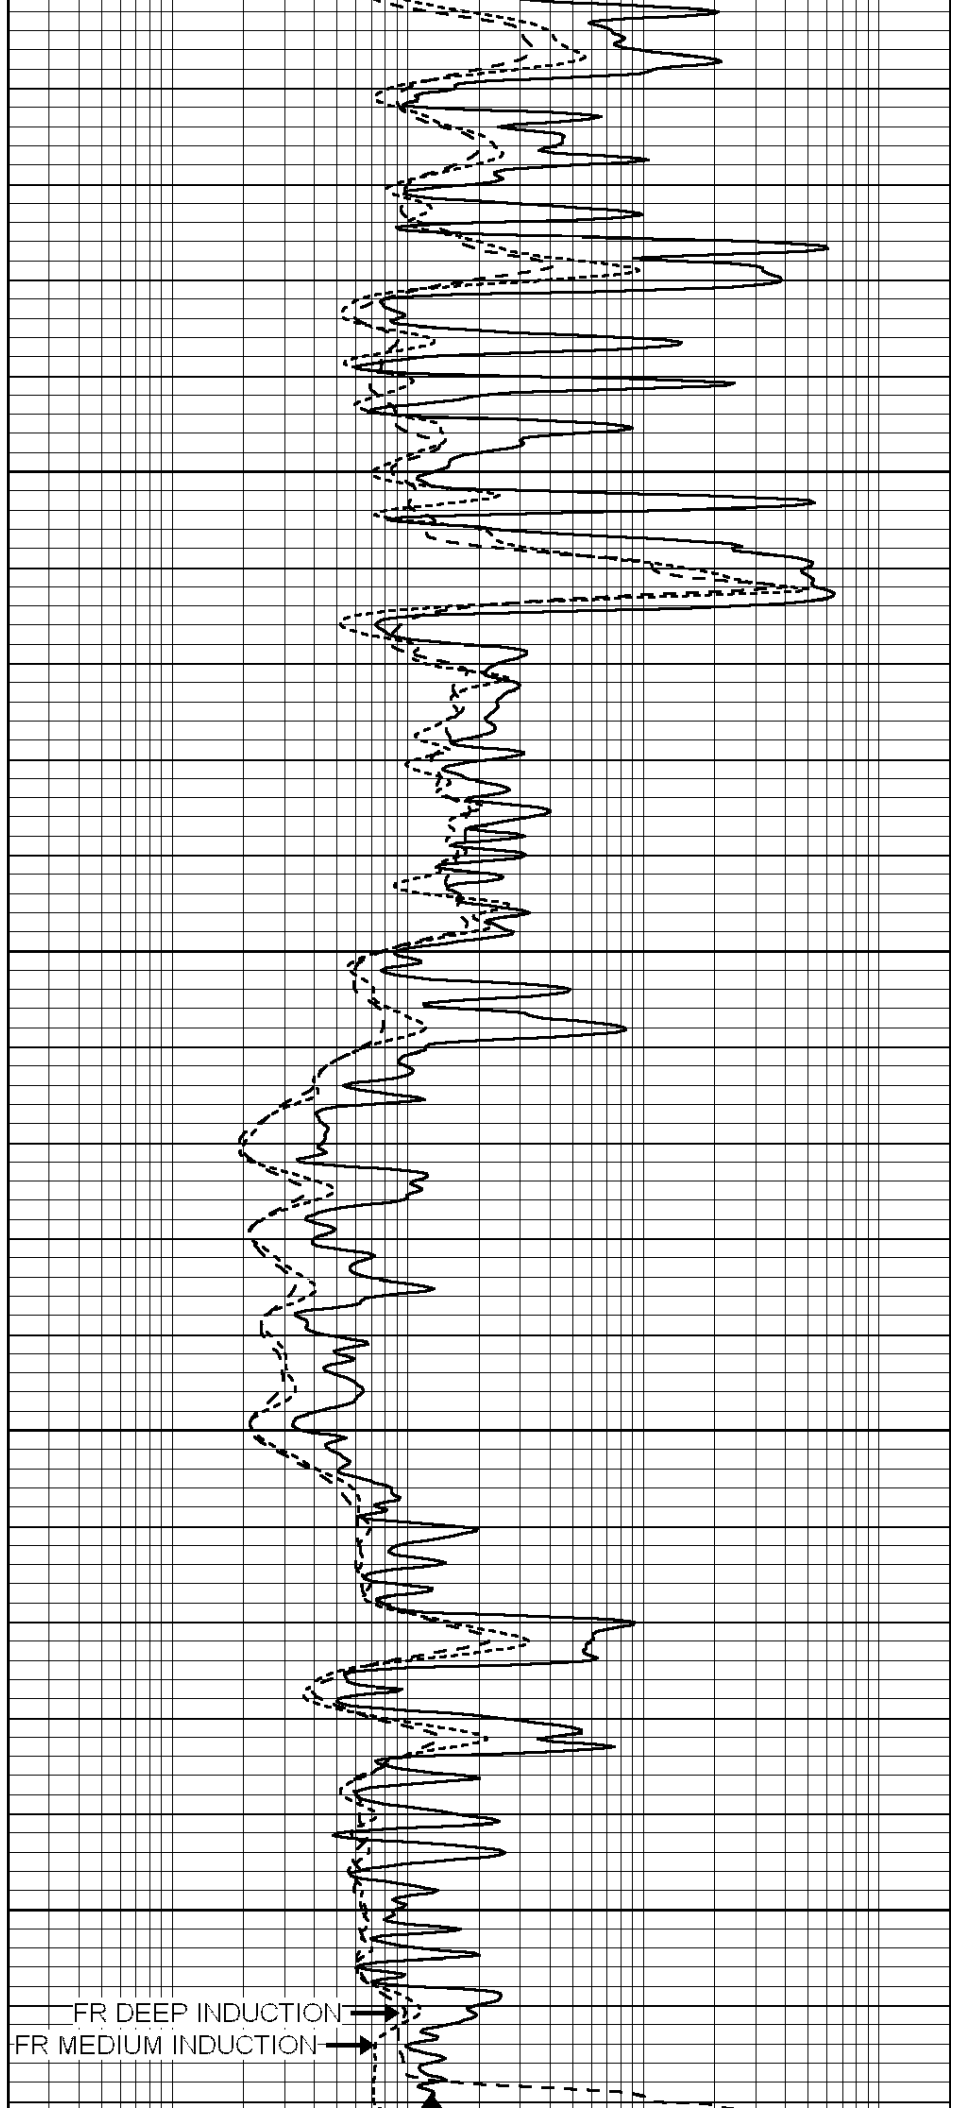


FR DEEP INDUCTION
FR MEDIUM INDUCTION

LTD 4822

FR SHALLOW GUARD

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

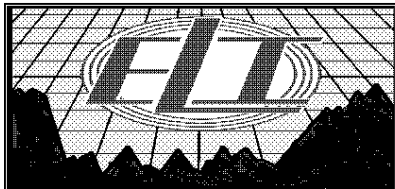


REPEAT SECTION

Database File: 3053pe.db
 Dataset Pathname: pass2.4
 Presentation Format: _dil
 Dataset Creation: Mon Nov 05 10:38:02 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

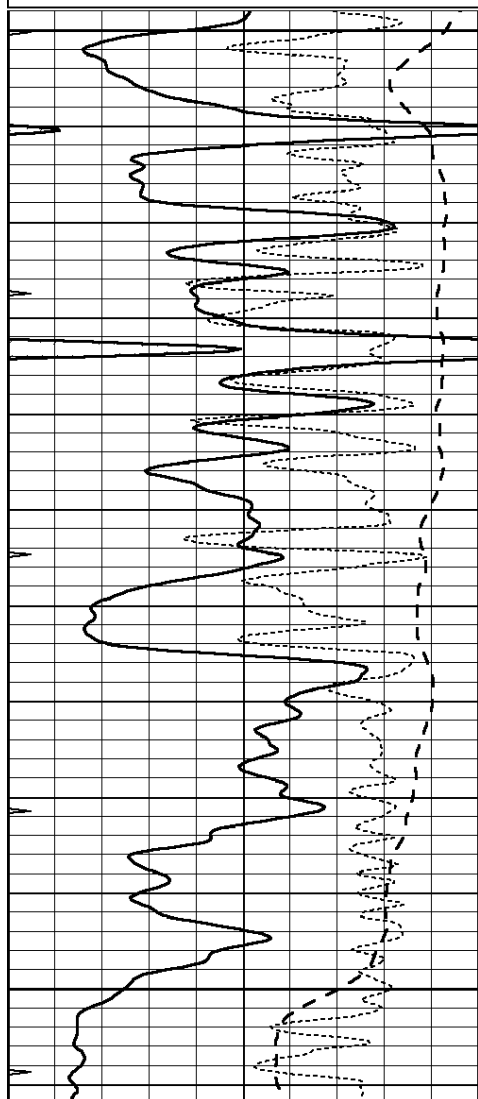


4600

4650

4700

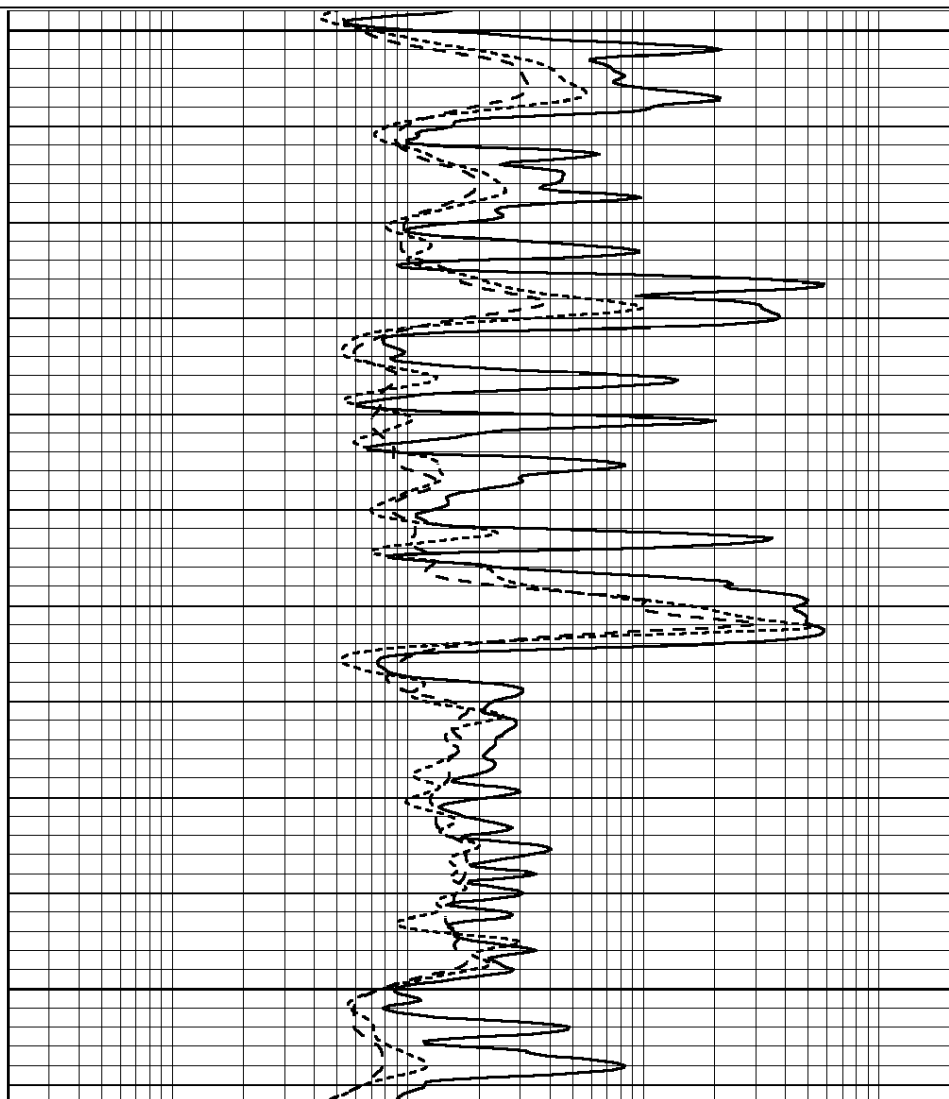

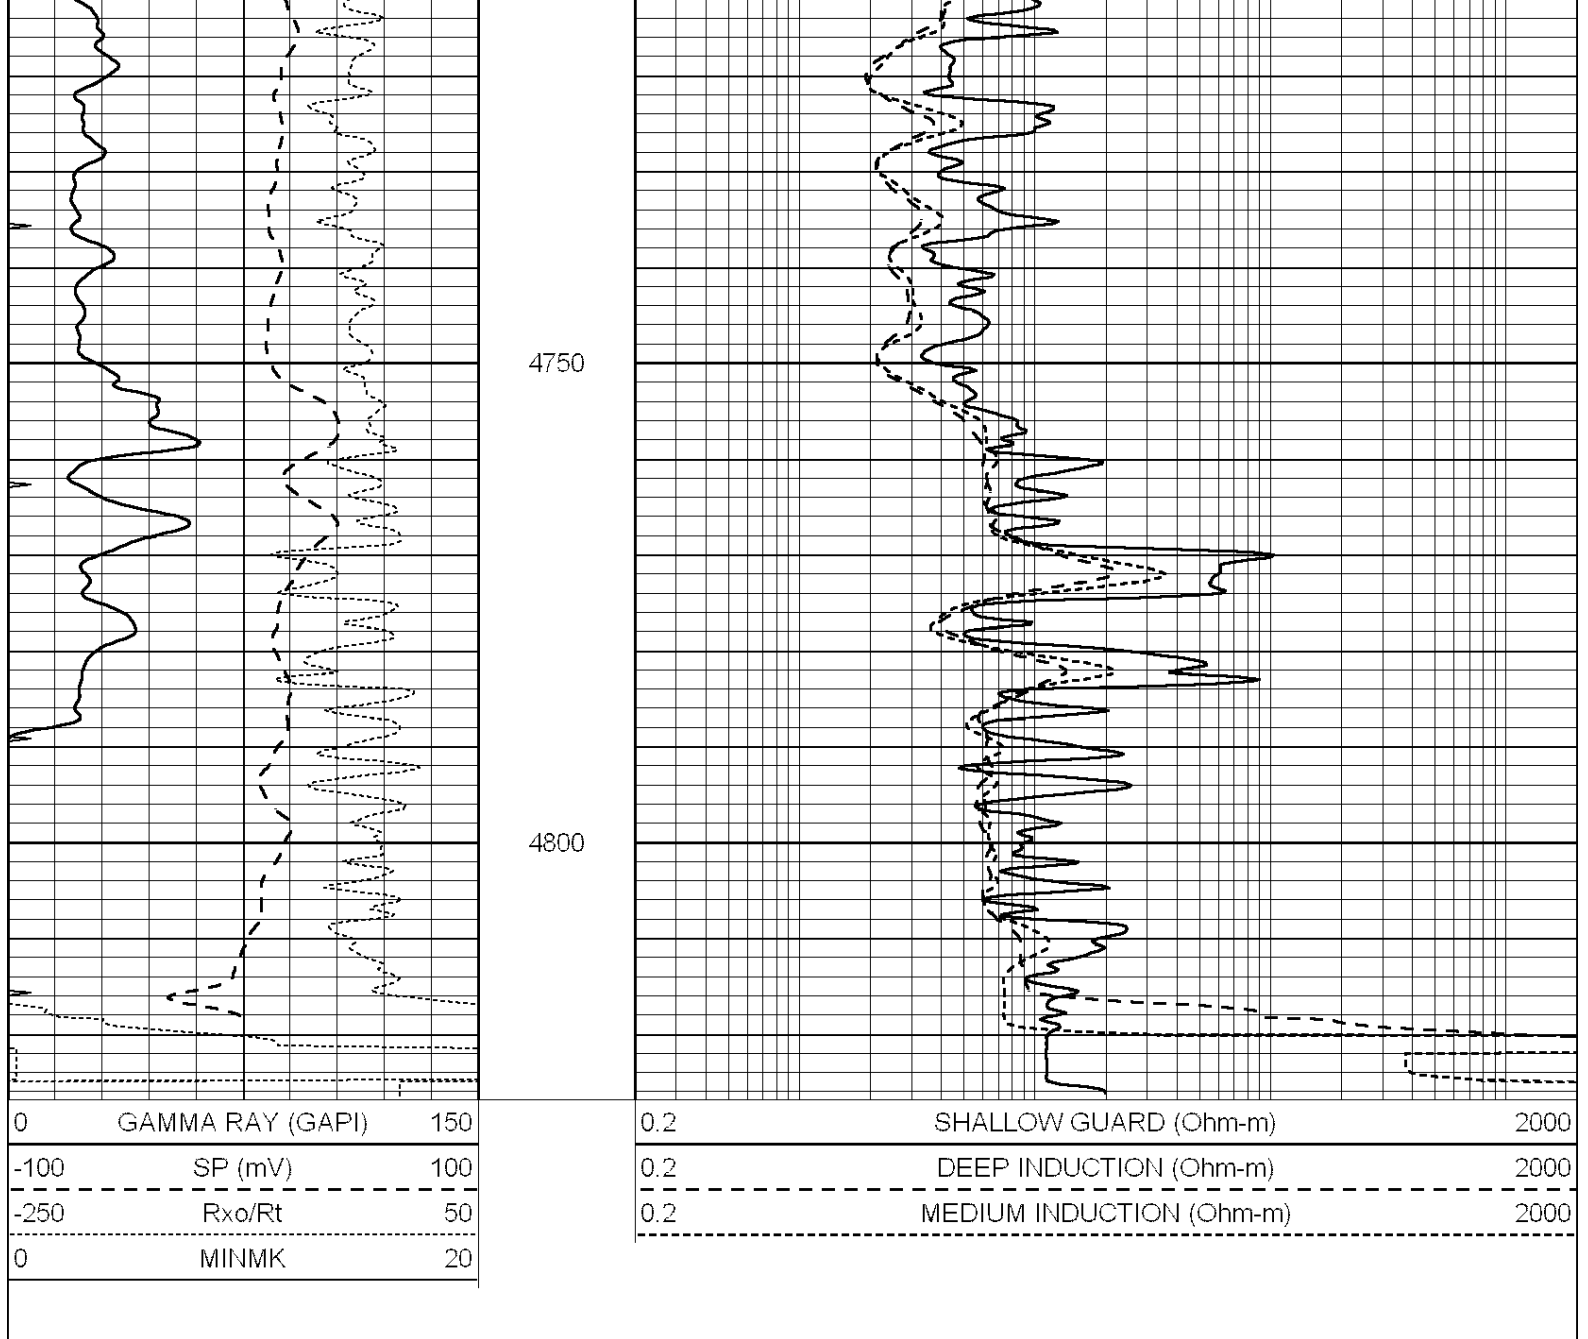

Calibration Report								
Database File:	1598ddn.db							
Dataset Pathname:	pass4							
Dataset Creation:	Wed Aug 30 02:13:00 2017 by Log SOC 120430							
Dual Induction Calibration Report								
Serial-Model:			PROBE7-DILG					
Surface Cal Performed:			Wed Aug 30 00:06:33 2017					
Downhole Cal Performed:			Mon Jul 28 12:02:56 2008					
After Survey Verification Performed:			Mon Jul 28 12:02:56 2008					
Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256

Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		
After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Litho Density Calibration Report Serial: 002 Model: PRB								
Master Calibration			Performed Mon Aug 21 11:27:42 2017					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	837.1	10632.5		2945.1		12110.1		cps
Window 2	772.0	9117.4		2570.1		10197.3		cps
Window 3	631.7	4669.0		1481.9		5042.9		cps
Window 4	187.0	187.5		185.9		189.9		cps
Long Space	0.0	8345.4		1798.1		9425.3		cps
Short Space	1.1	1927.9		1285.9		2050.2		cps
Rho		1.7100		2.5960		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	
Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		
After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
Compensated Neutron Calibration Report				
Serial Number:		070808		
Tool Model:		Probe		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				
Serial Number:	070558			
Tool Model:	OPEN_GR			
Performed:	Wed May 31 00:09:32 2017			
Calibrator Value:	1.0	GAPI		
Background Reading:	0.0	cps		
Calibrator Reading:	1.0	cps		
Sensitivity:	0.2800	GAPI/cps		