

MICRO LOG


Company	GORE OIL COMPANY	
Well	BARC UNIT #1	
Field		
County	ROOKS	
State	KANSAS	
Location:	API # : 15-163-24372-0000	
	798' FNL & 2600' FWL	
Permanent Datum	GROUND LEVEL Elevation	2037
Log Measured From	KELLY BUSHING 5' A.G.L	
Drilling Measured From	KELLY BUSHING	
	SEC 10 TWP 9S RGE 19W	Elevation
		K.B. 2042
		D.F. 2040
		G.L. 2037
Date	10/5/18	
Run Number	TWO	
Depth Driller	3575	
Depth Logger	3575	
Bottom Logged Interval	3573	
Top Log Interval	2800	
Casing Driller	8 5/8" @ 260	
Casing Logger	260	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2100 PPM
Density / Viscosity	9.2/58	
pH / Fluid Loss	10.5/5.8	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.20 @ 80F	
Rmf @ Meas. Temp	.90 @ 80F	
Rmc @ Meas. Temp	1.44 @ 80F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.85 @ 112F	
Time Circulation Stopped	2 HOURS	
Time Logger on Bottom	////	
Maximum Recorded Temperature	112F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	JASON CAPPELLUCCI	
Witnessed By	CHUCK SCHMALTZ	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
PLAINVILLE, KS. - 4 NORTH TO RD. T - 7 1/2 WEST - SOUTH INTO

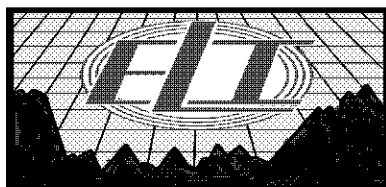



MAIN SECTION

Database File	3008ddn8.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Fri Oct 05 11:23:05 2018
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

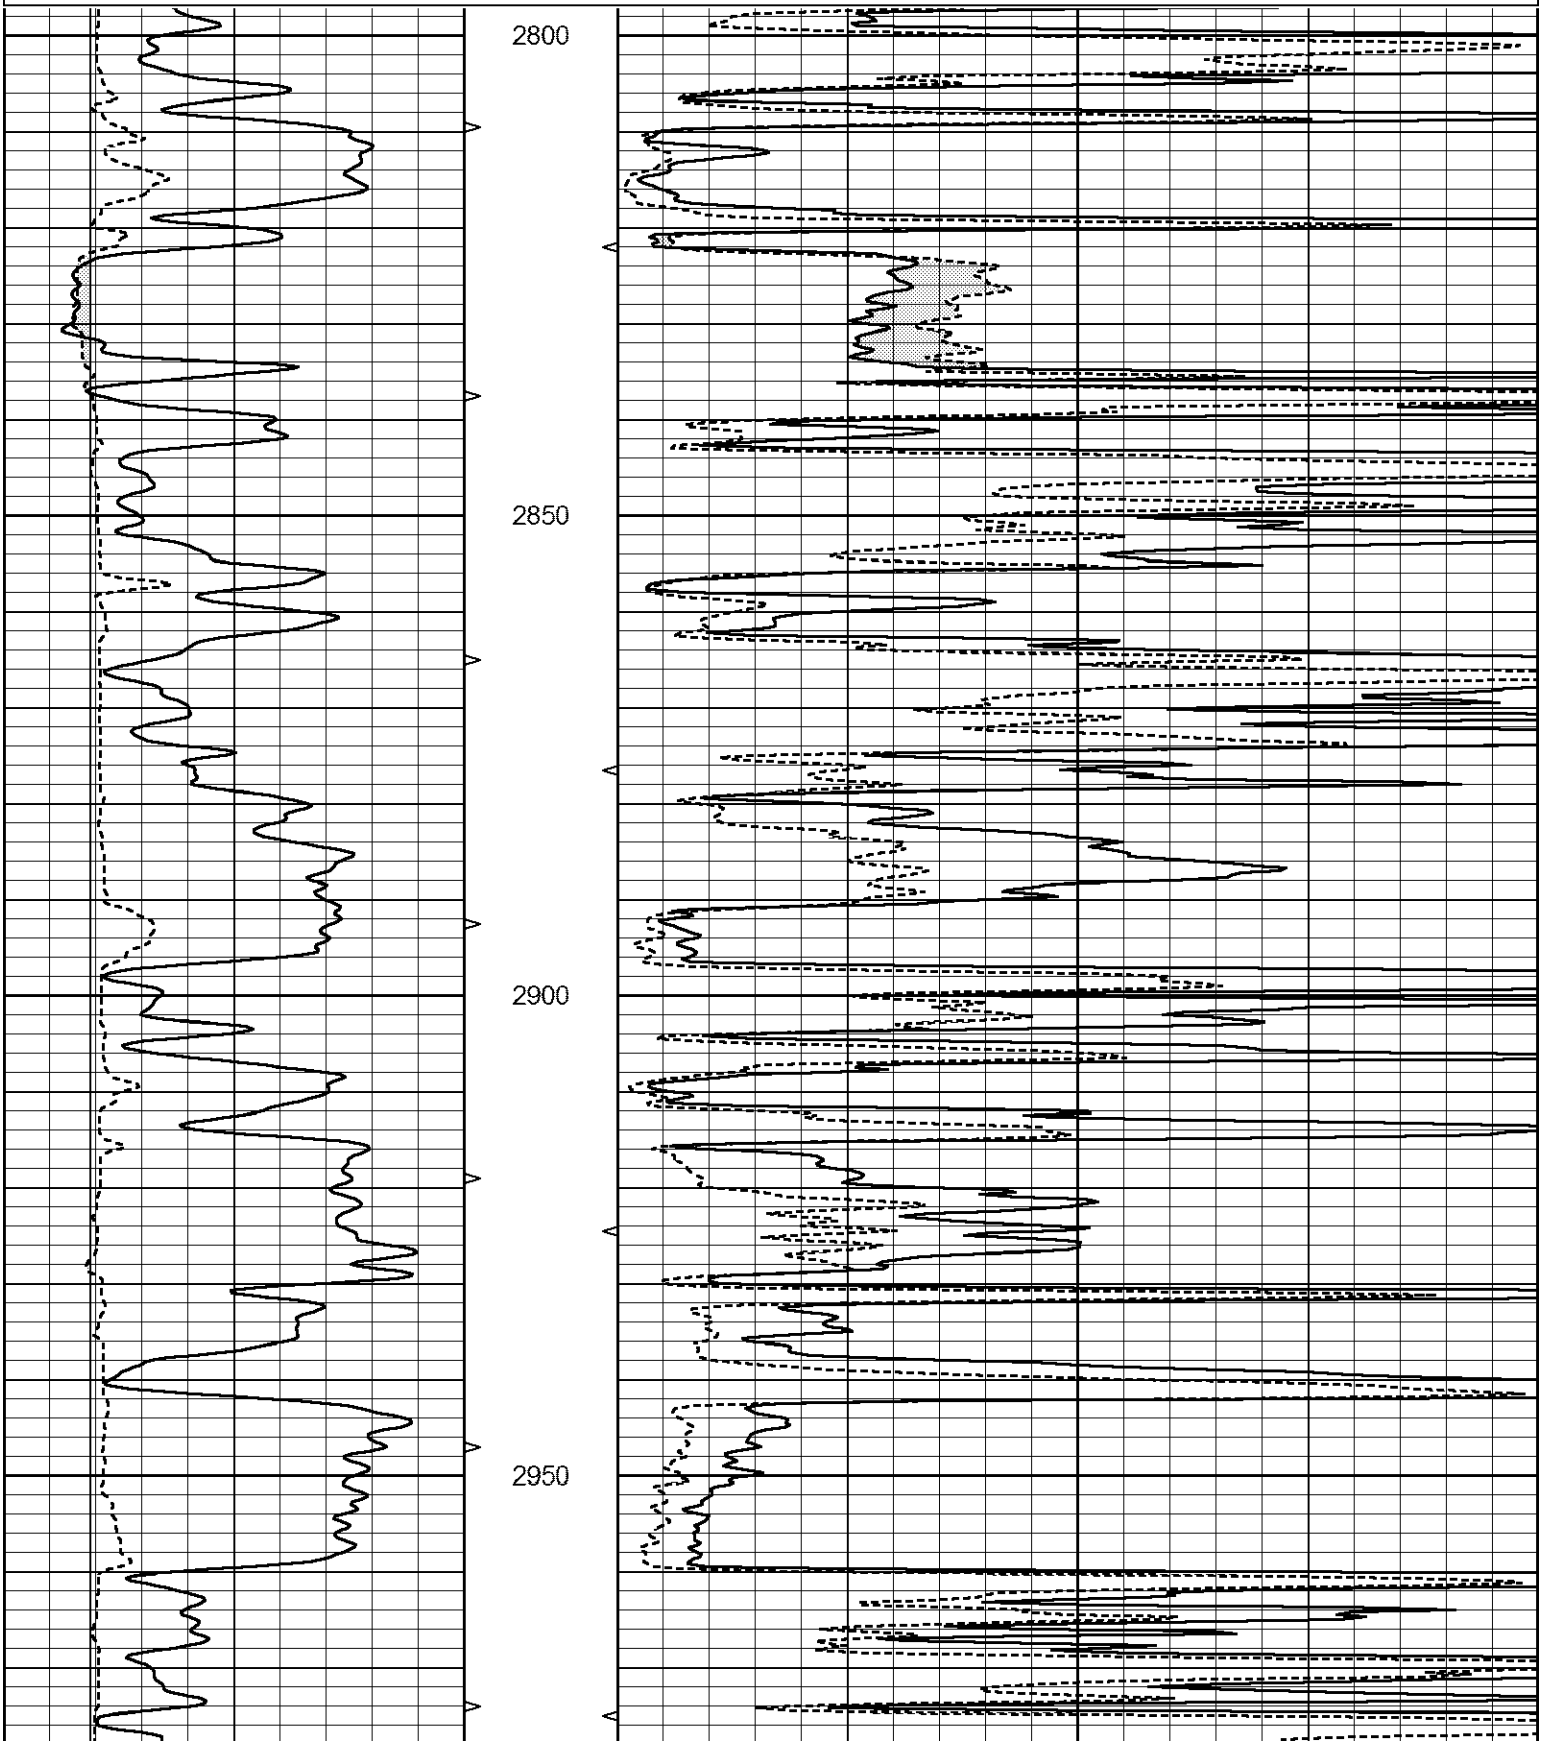

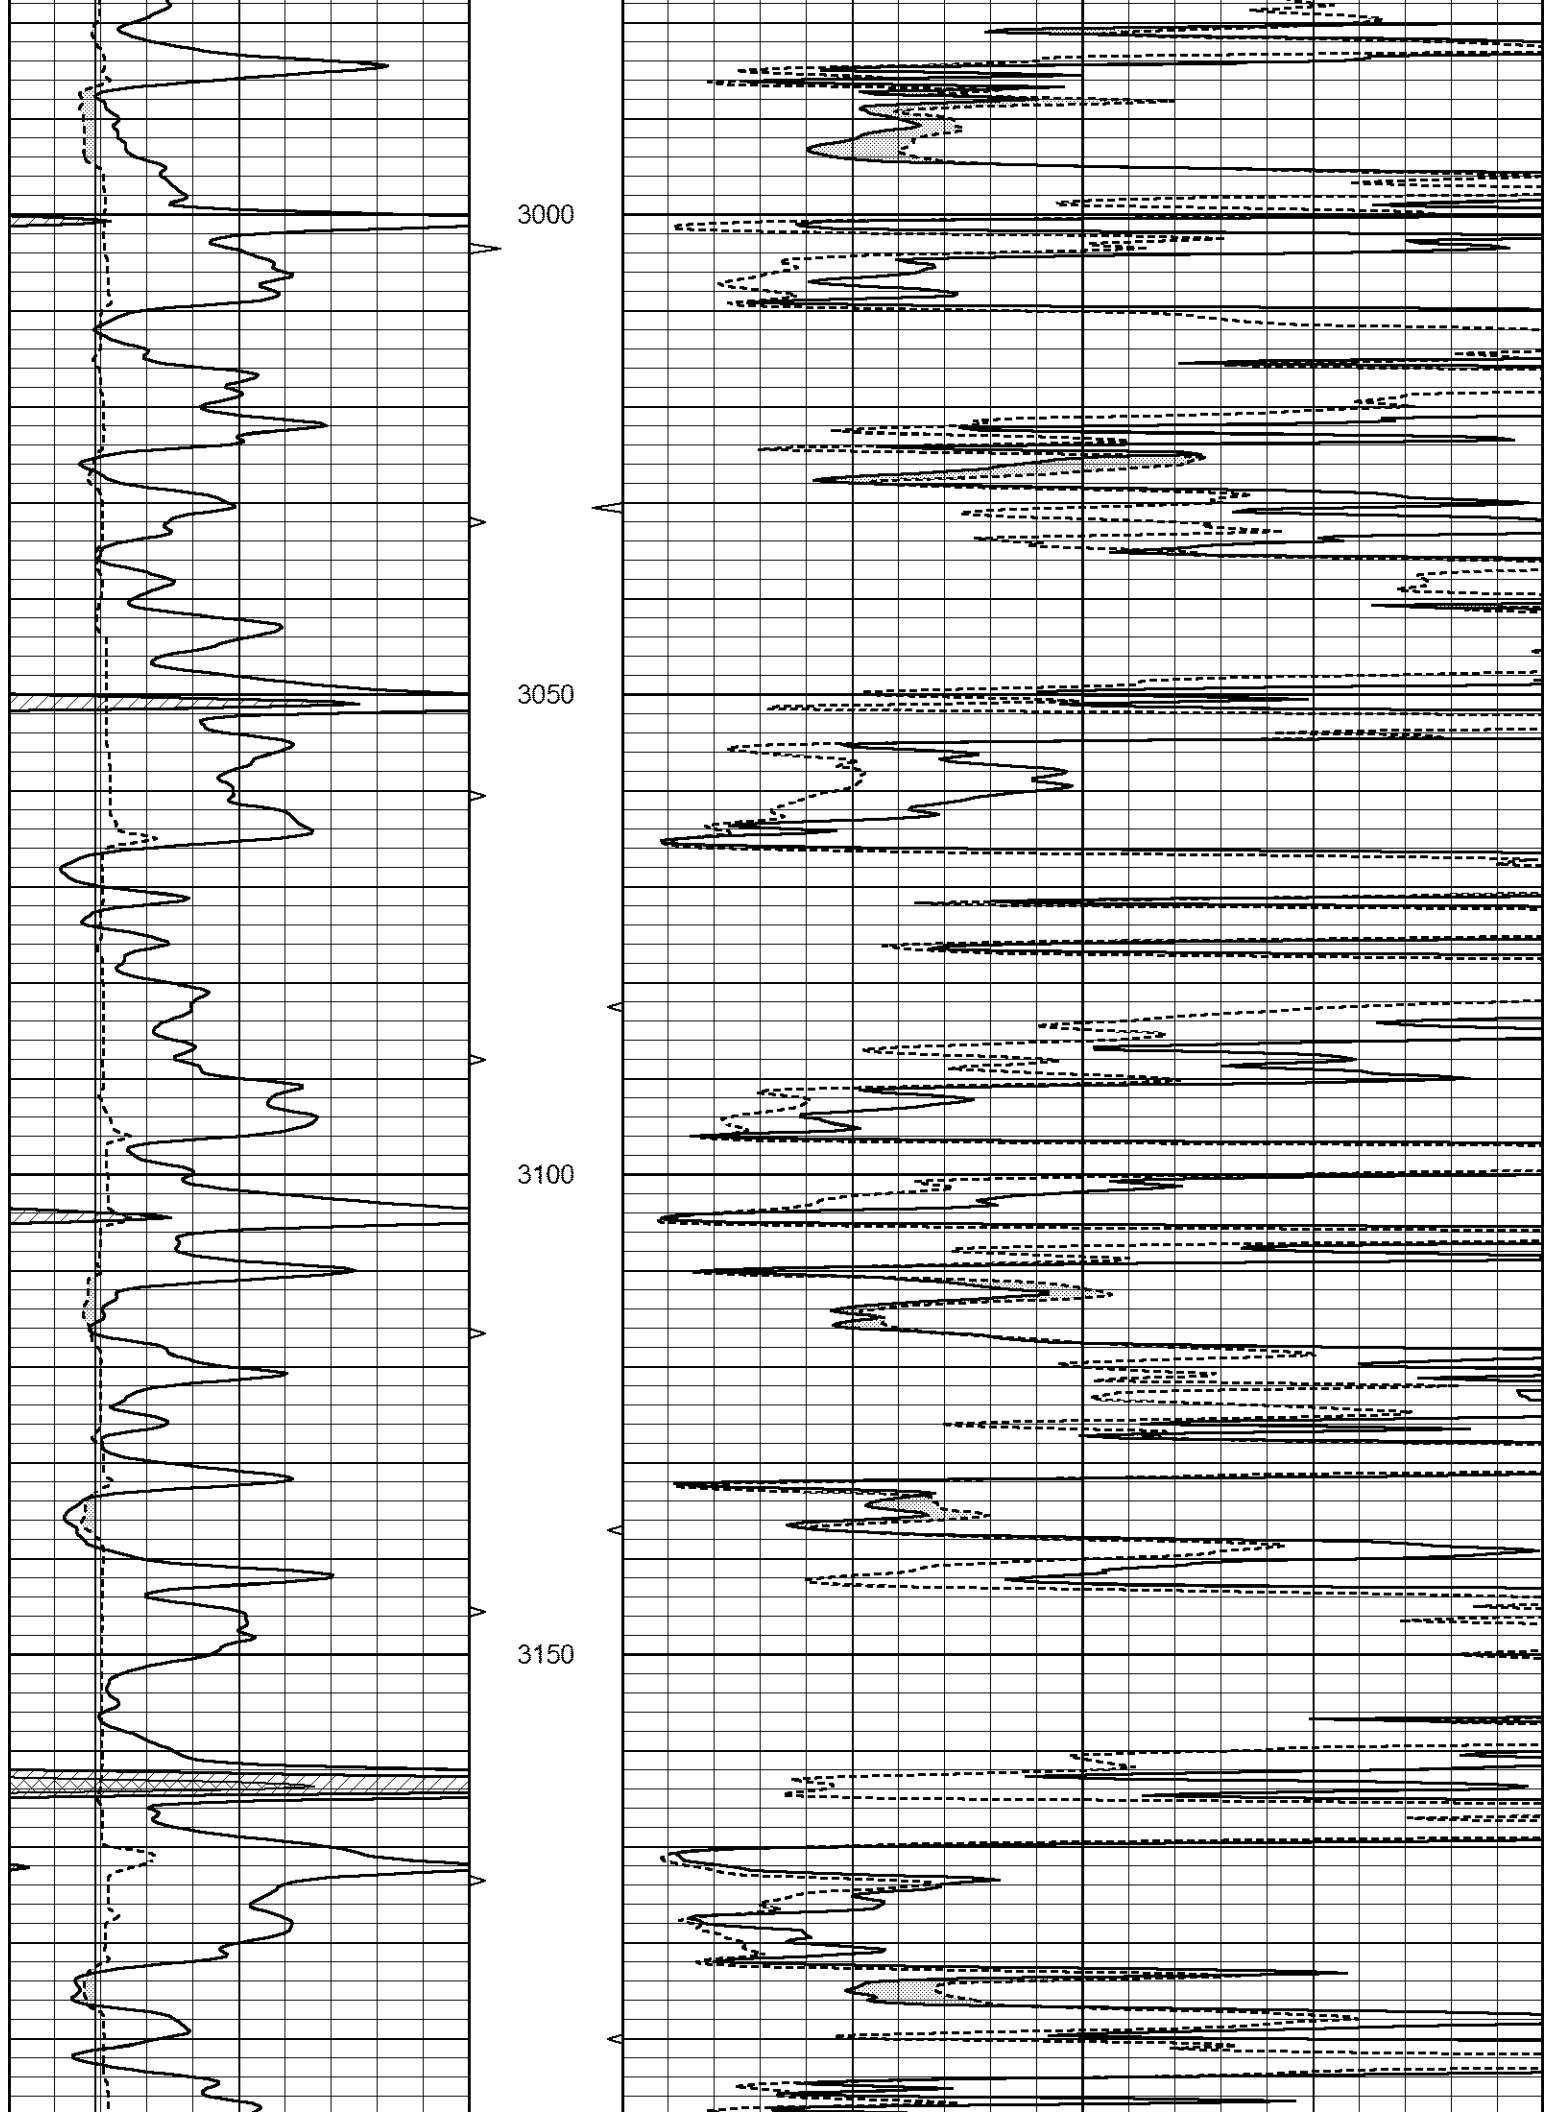

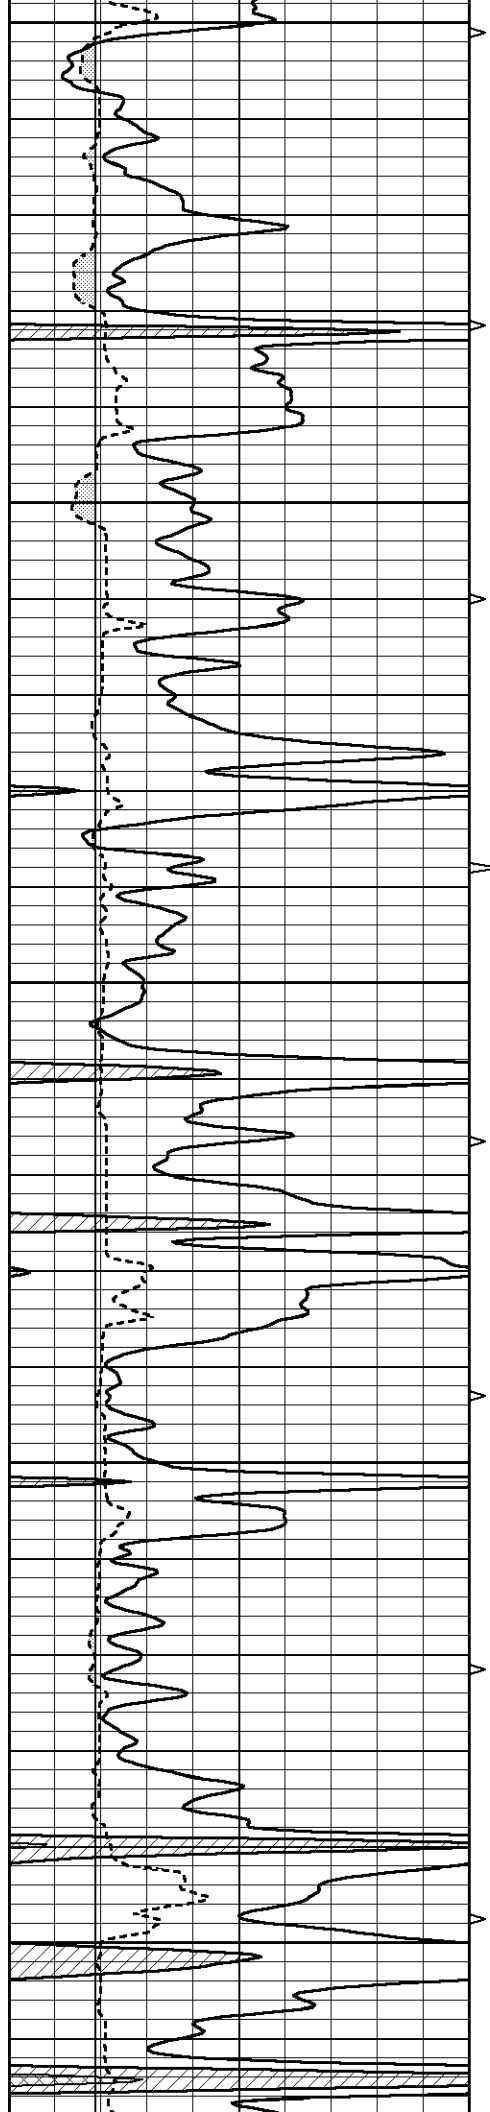


3200



3250

3300

3350


3400

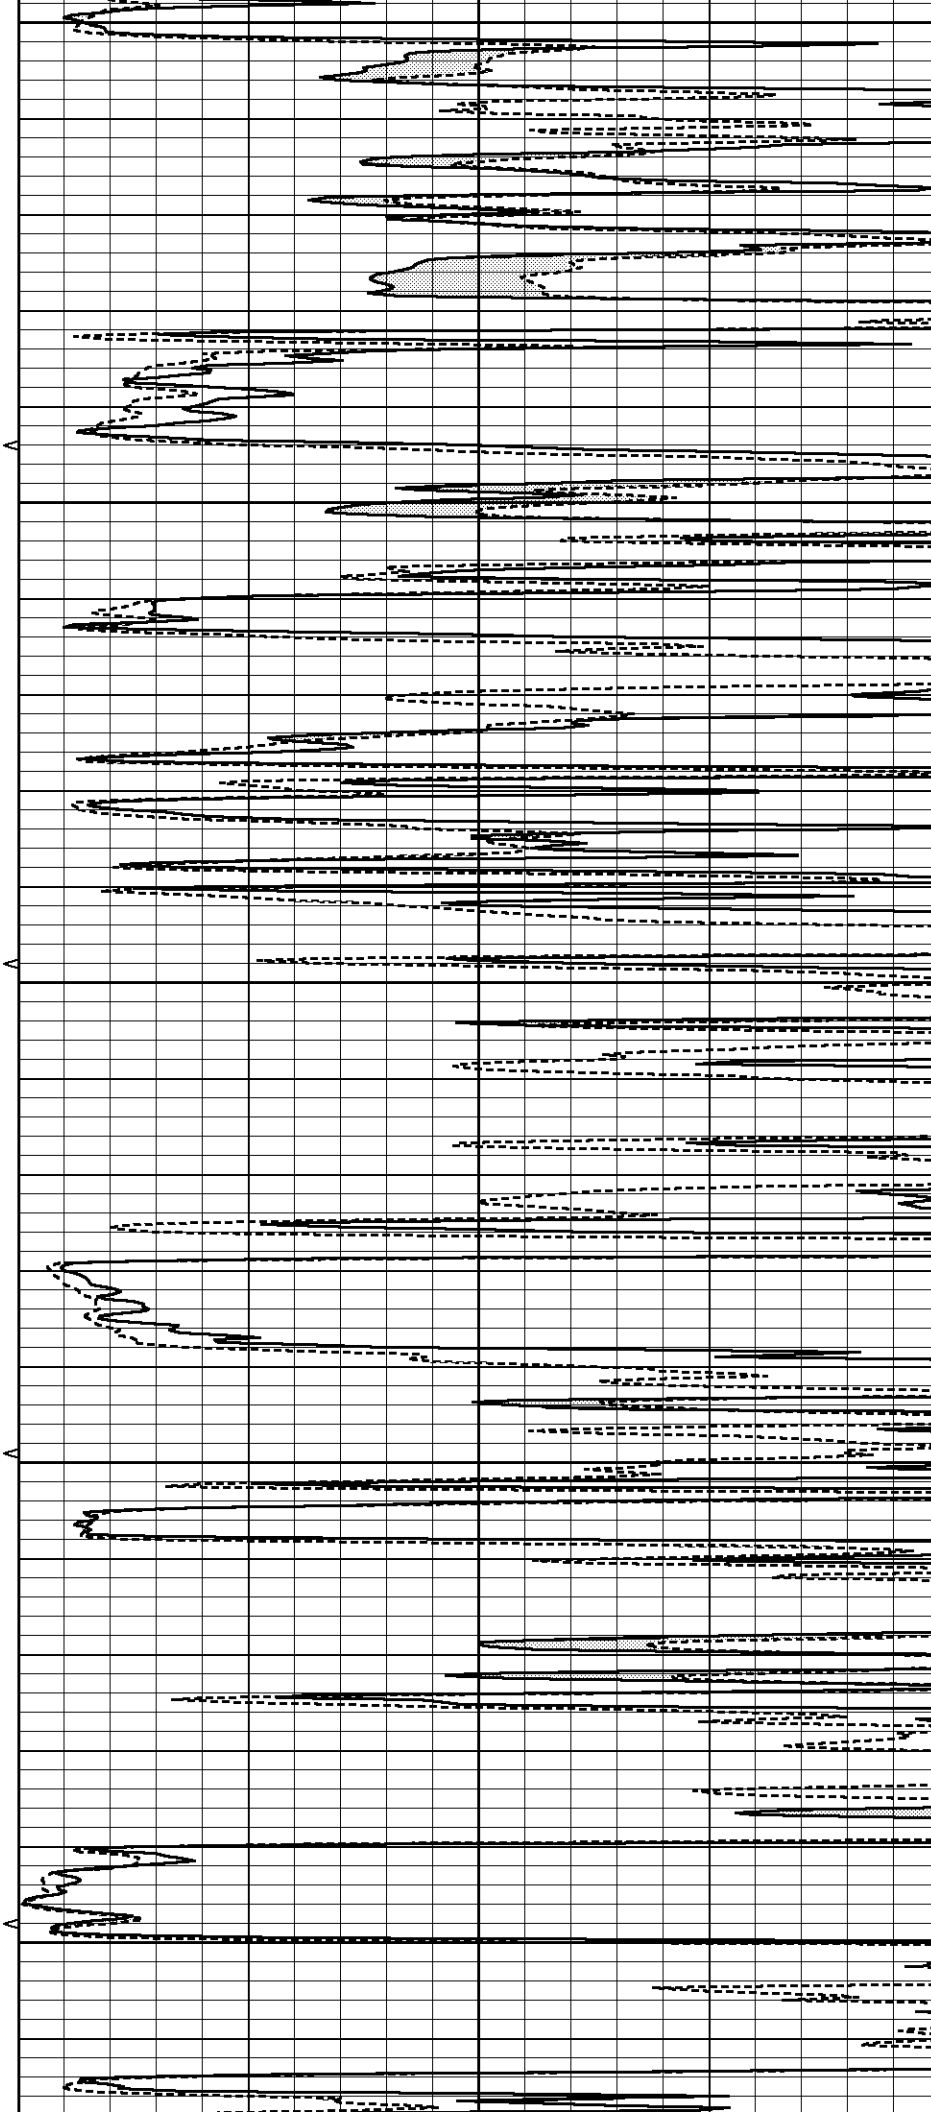

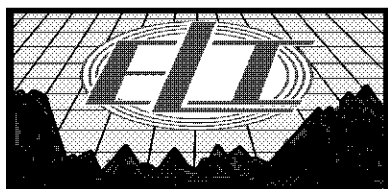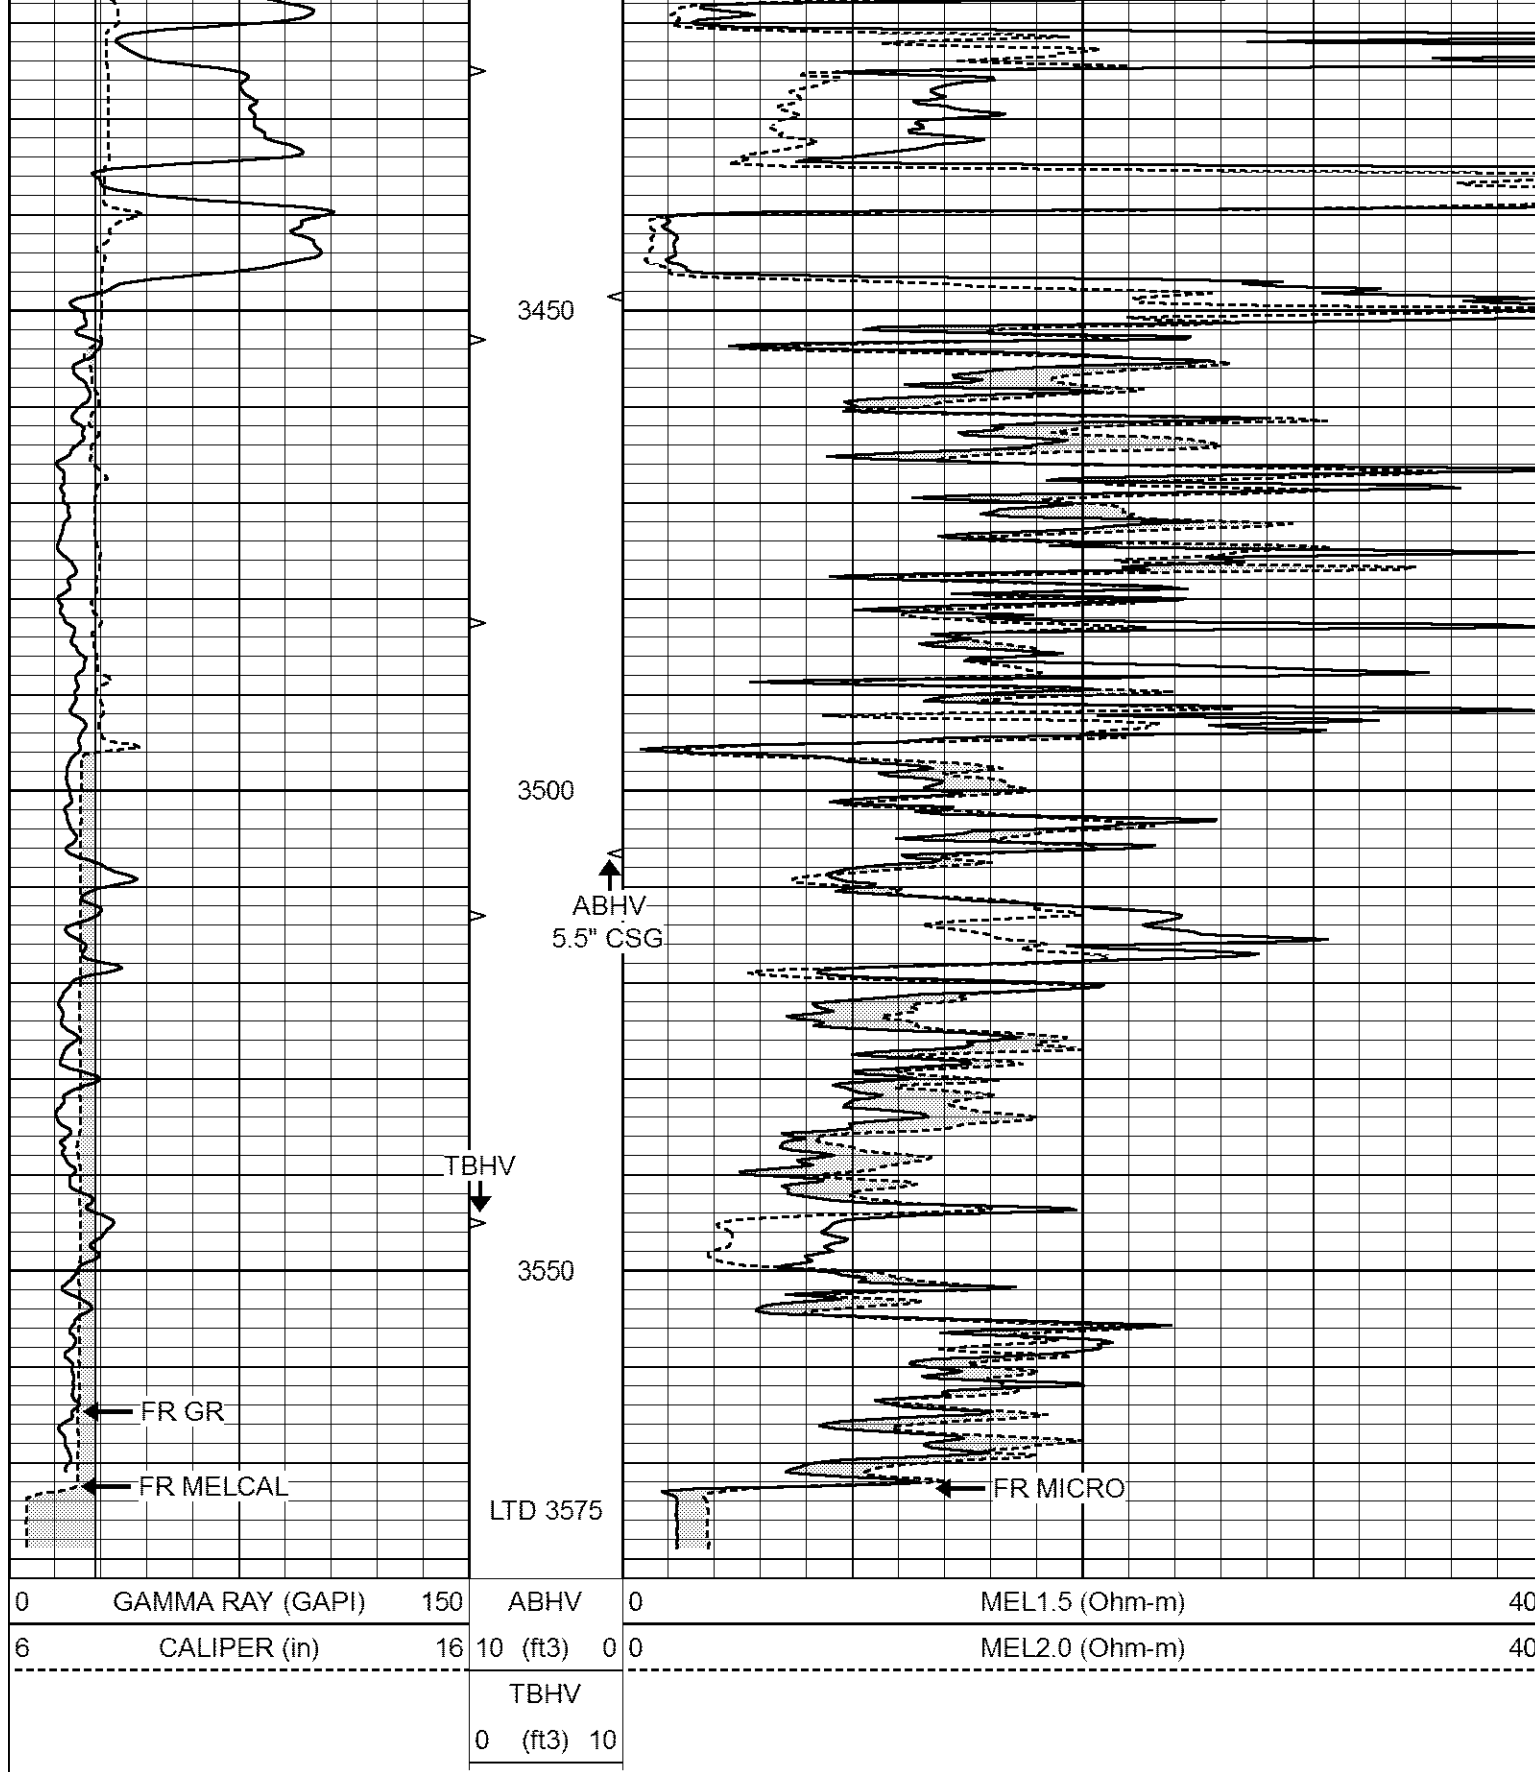

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

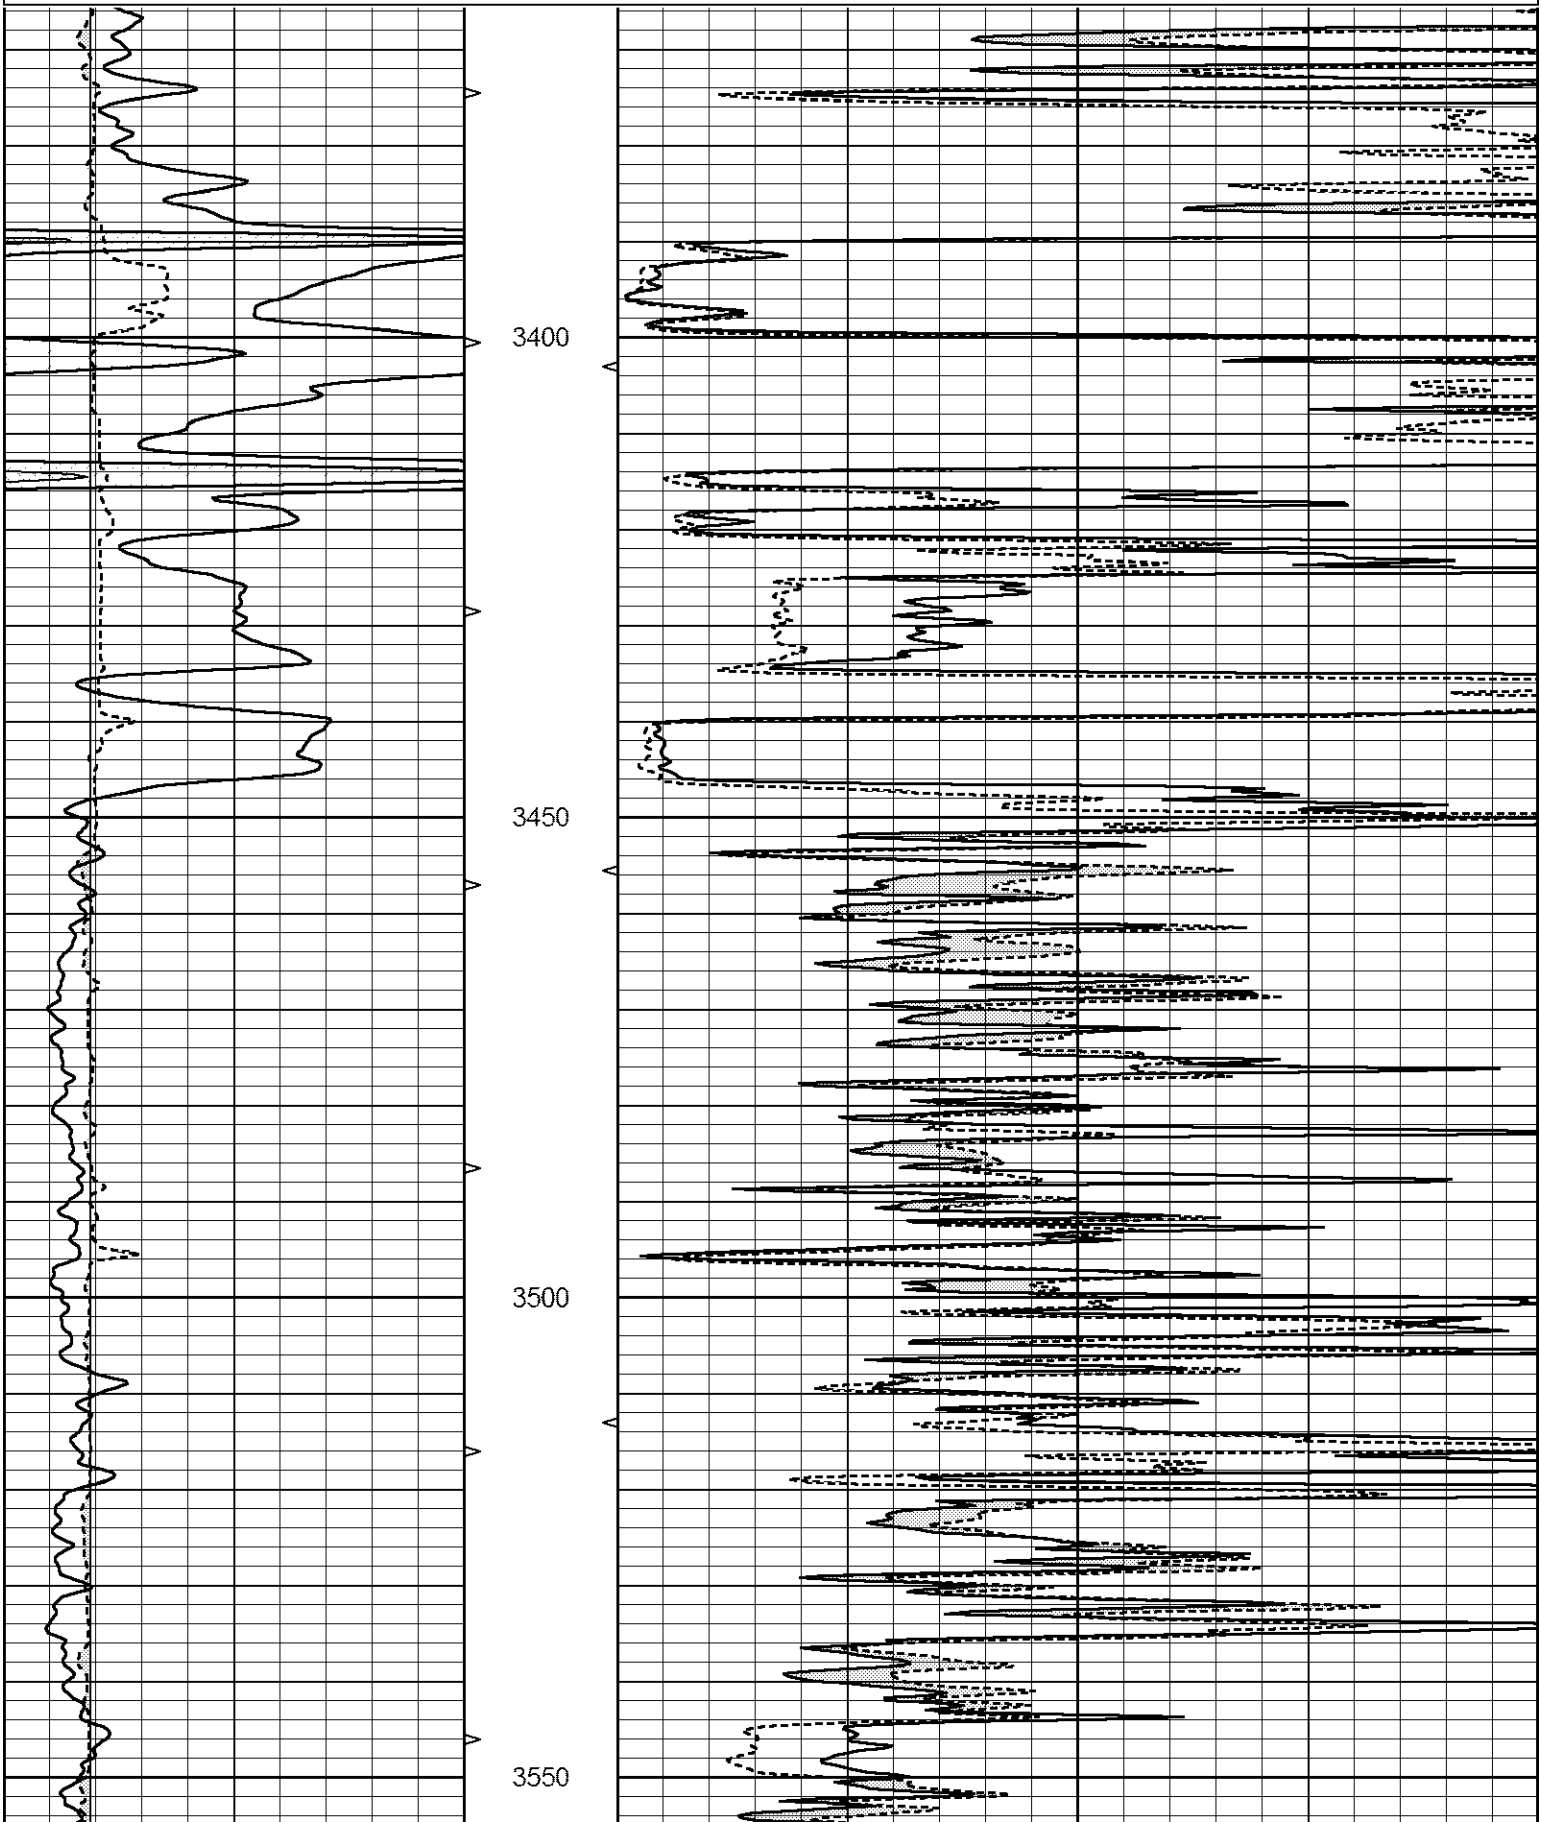

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
			TBHV		
			0 (ft3) 10		

Calibration Report		
Database File	3008ddn8.db	
Dataset Pathname	pass5.1	
Dataset Creation	Fri Oct 05 11:13:09 2018	

MICRO_USR Calibration Report		
------------------------------	--	--

Serial Number:	070910	
Tool Model:	ProbeL	
Performed:	Fri Aug 03 23:13:00 2018	

Caliper Calibration:	Gain=7.336	Offset=3.017
References	Low Cal 8.000	High Cal 14.000
Readings	0.652	1.470

1.5" Calibration:	Gain=55.000	Offset=-2.067
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.335

2" Calibration:	Gain=75.000	Offset=-2.779
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.029

Microlog Calibration Report		
-----------------------------	--	--

Serial-Model:	070910-ProbeL	
Performed:	(Not Performed)	

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report		
------------------------------	--	--

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Wed Jun 29 11:10:58 2016	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps