

MICRO LOG


Company	EDISON OPERATING COMPANY, LLC.		
Well	DOHRMAN #1-26		
Field	ORTH		
County	RICE		
State	KANSAS		
Company	EDISON OPERATING COMPANY, LLC.		
Well	DOHRMAN #1-26		
Field	ORTH		
County	RICE		
State	KANSAS		
Location:	API # : 15-159-22840-0000		Other Services CDL/CNL/PE DIL/SONIC
Permanent Datum	GROUND LEVEL		Elevation 1743
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		Elevation K.B. 1751 D.F. 1749 G.L. 1743
Date	5/31/17		
Run Number	TWO		
Depth Driller	3289		
Depth Logger	3290		
Bottom Logged Interval	3274		
Top Log Interval	2400		
Casing Driller	8 5/8"@388'		
Casing Logger	388		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 3,600 PPM
Density / Viscosity	9.3/58		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.700@82F		
Rmf @ Meas. Temp	.525@82F		
Rmc @ Meas. Temp	.840@82F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.522@110F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	2:30 A.M.		
Maximum Recorded Temperature	110F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	DEREK PATTERSON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
BUSHTON, KS.,(HWY 4 & 5TH RD.) 5S. TO "AVE. F",1/2E., N. INTO

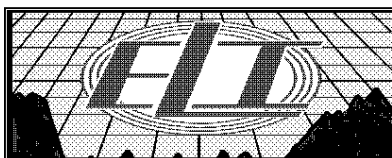


MAIN SECTION

Database File: 1425pe.db
Dataset Pathname: pass6.2
Presentation Format: micro
Dataset Creation: Wed May 31 04:54:11 2017
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
-100	SP (mV)	100	10 (ft3)	0	MEL 20 (Ohm-m)	40
6	CALIPER (in)	16	TBHV			
0	MINMK	20	0 (ft3)	10		

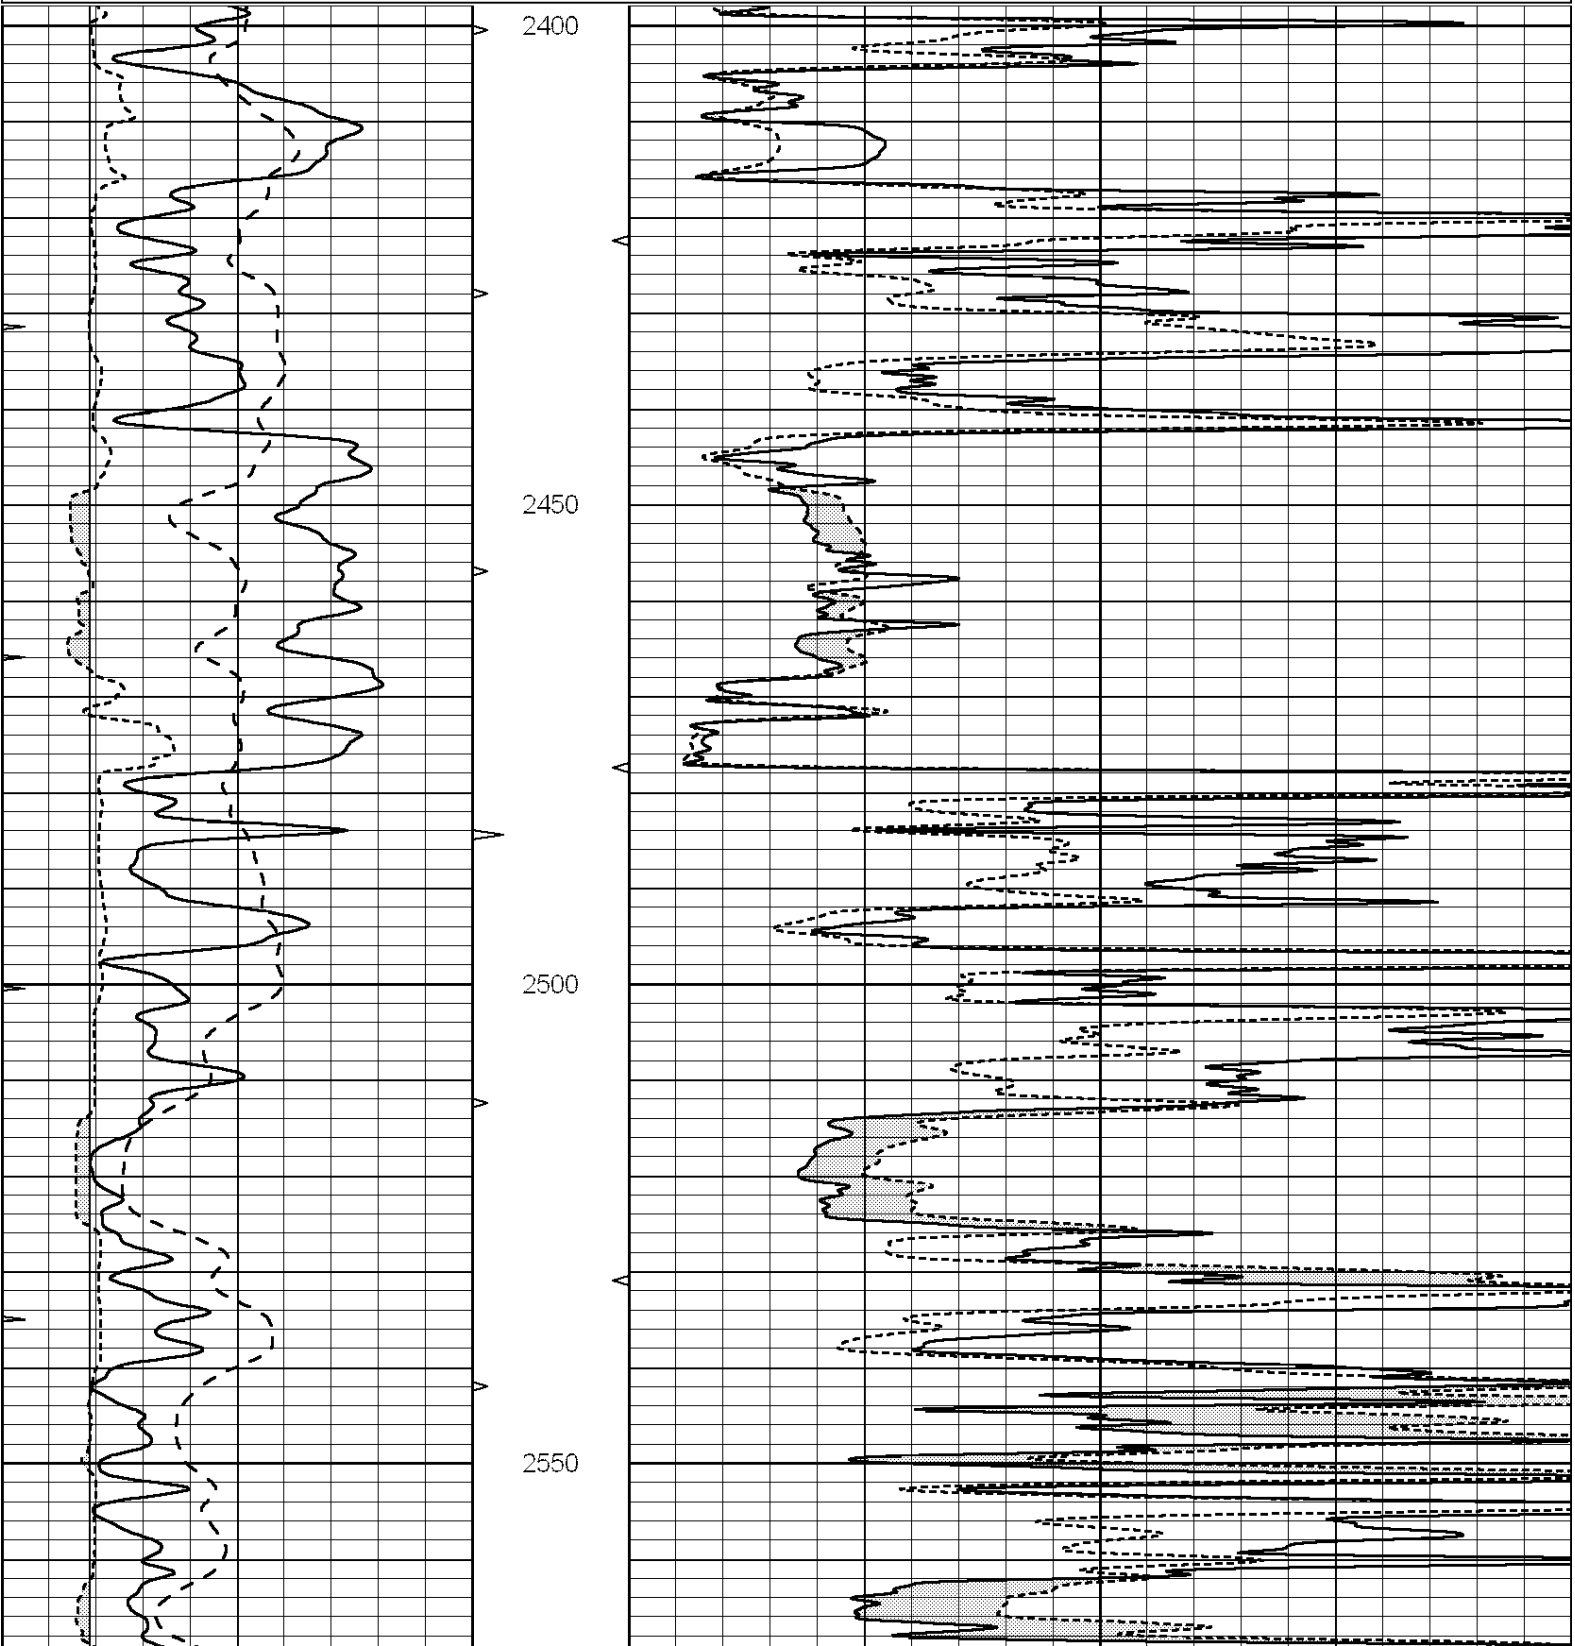

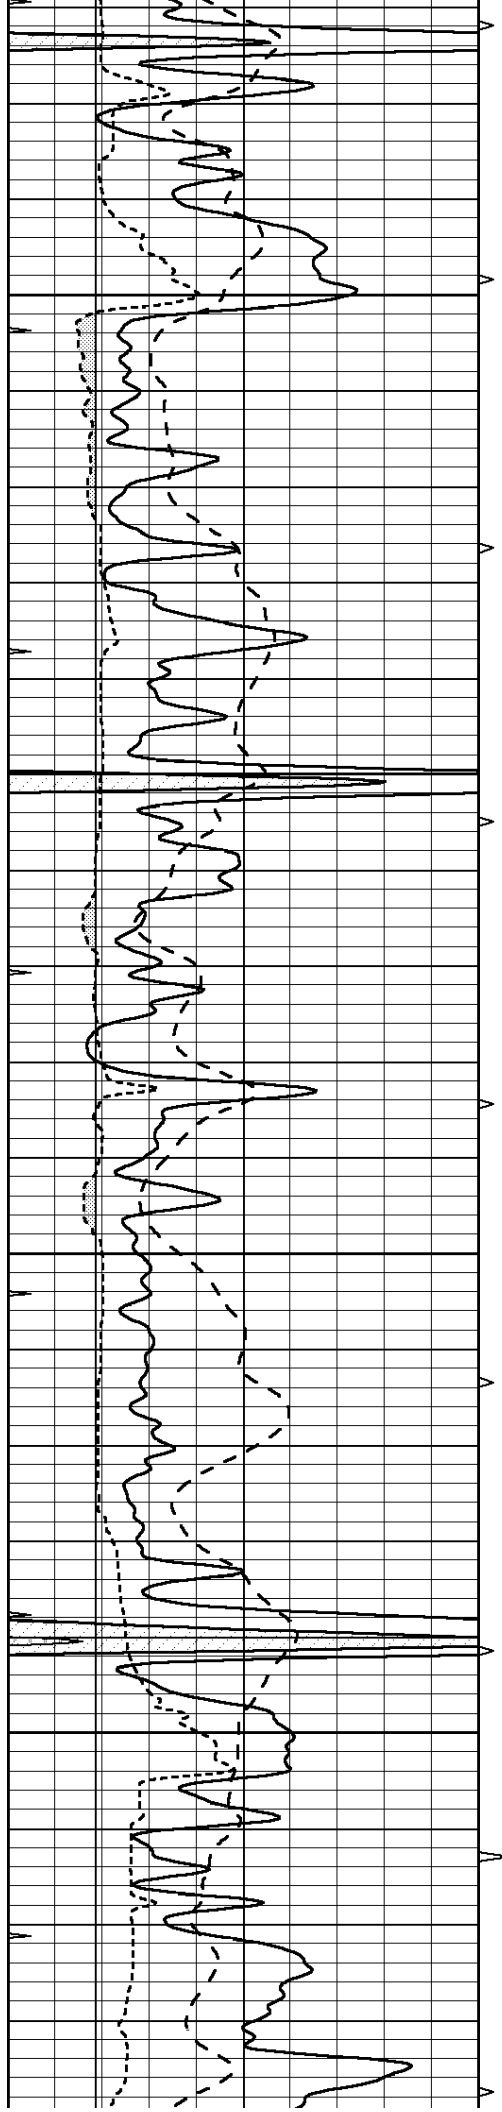




2600


2650

2700

2750

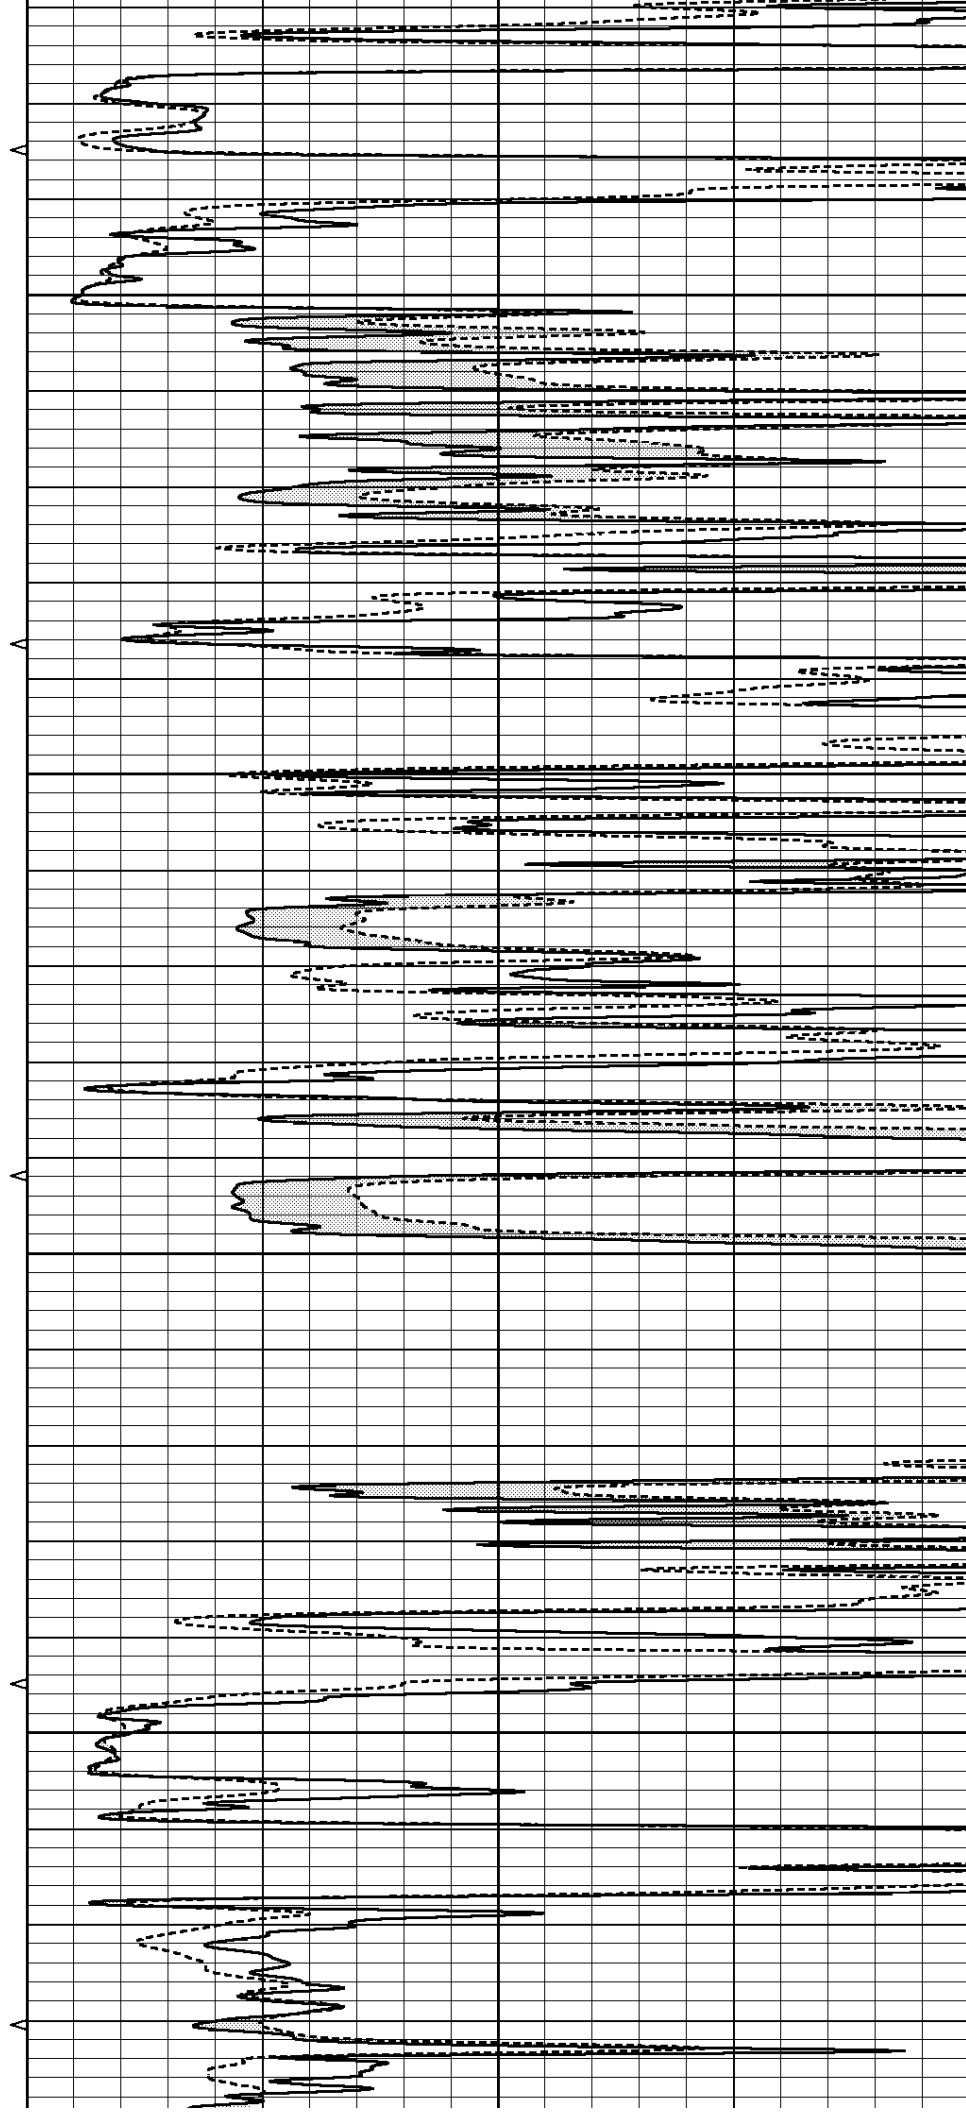

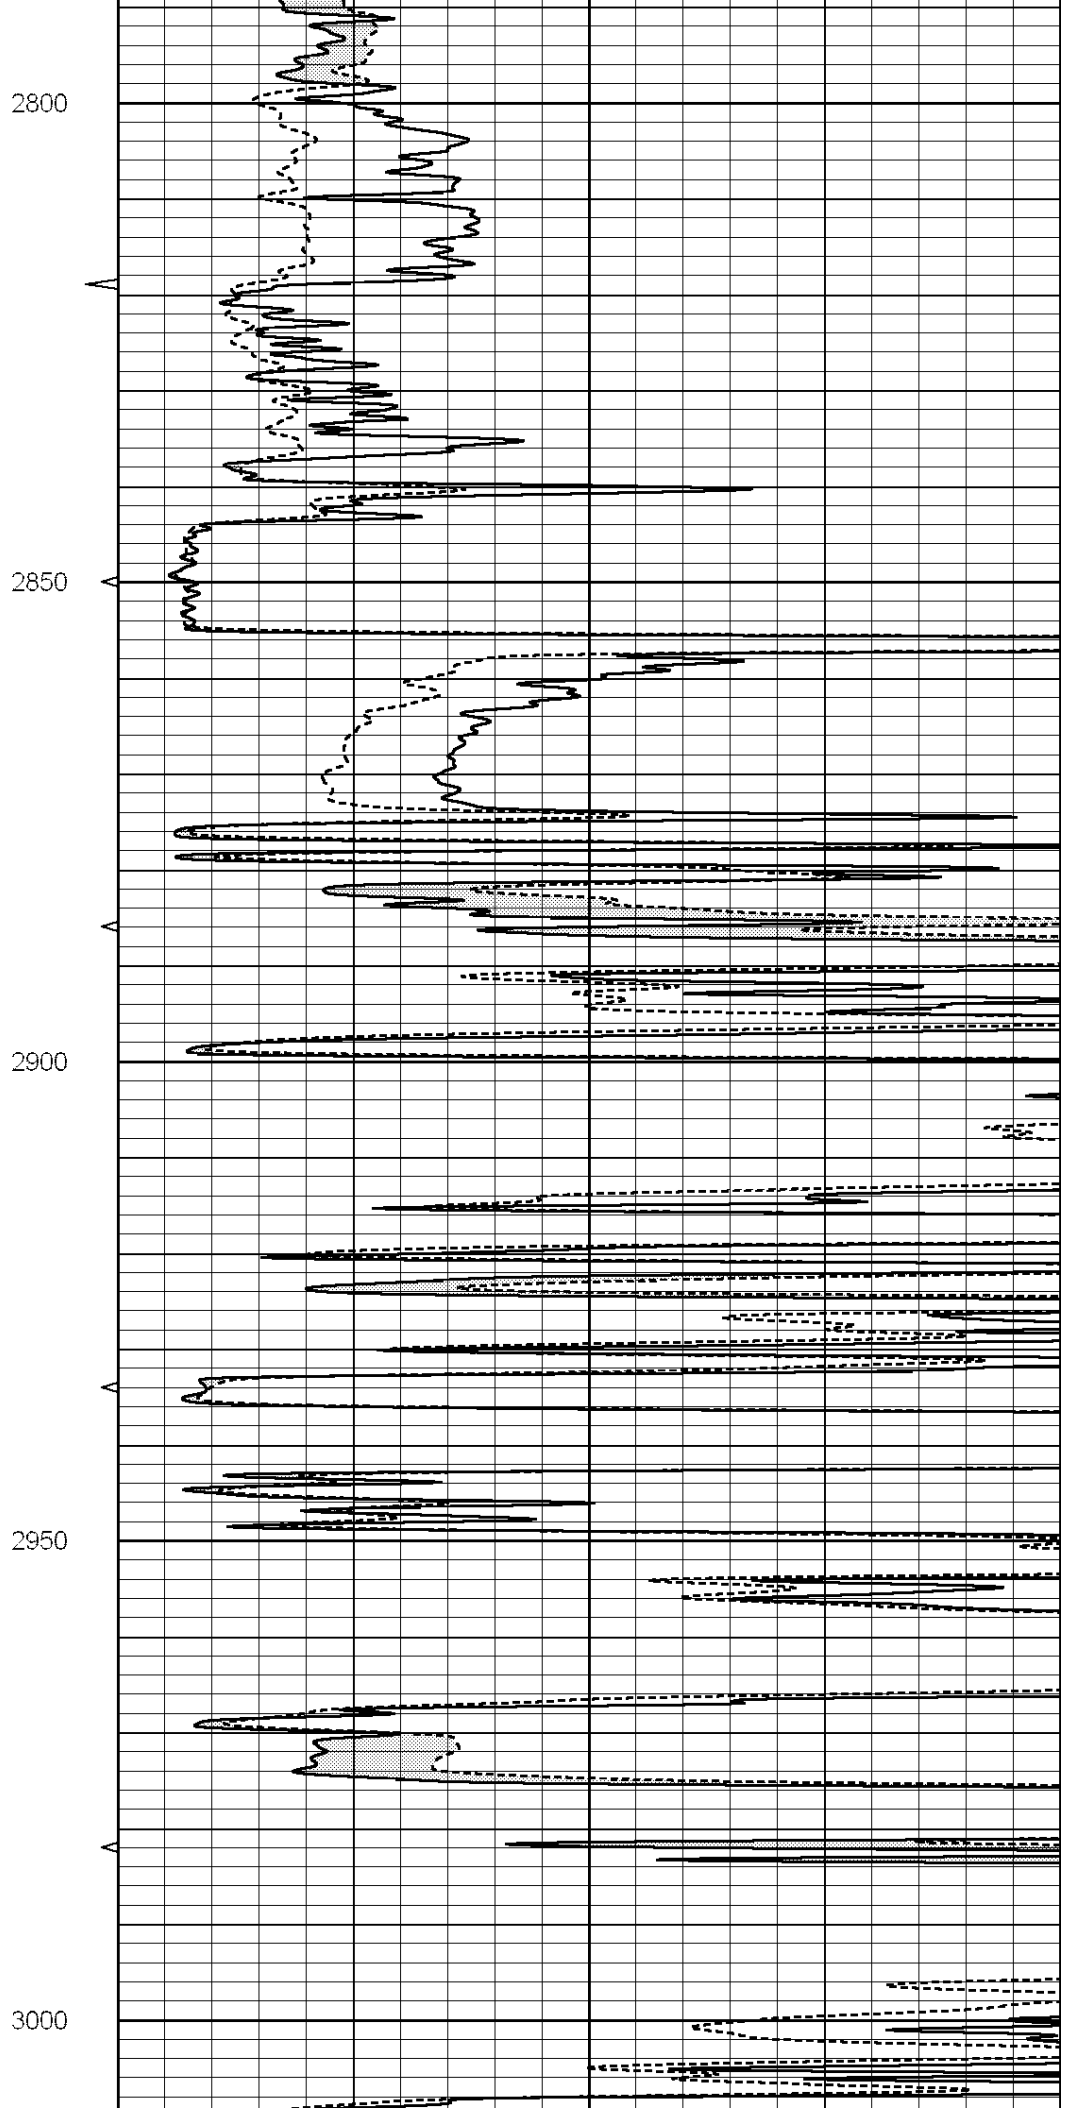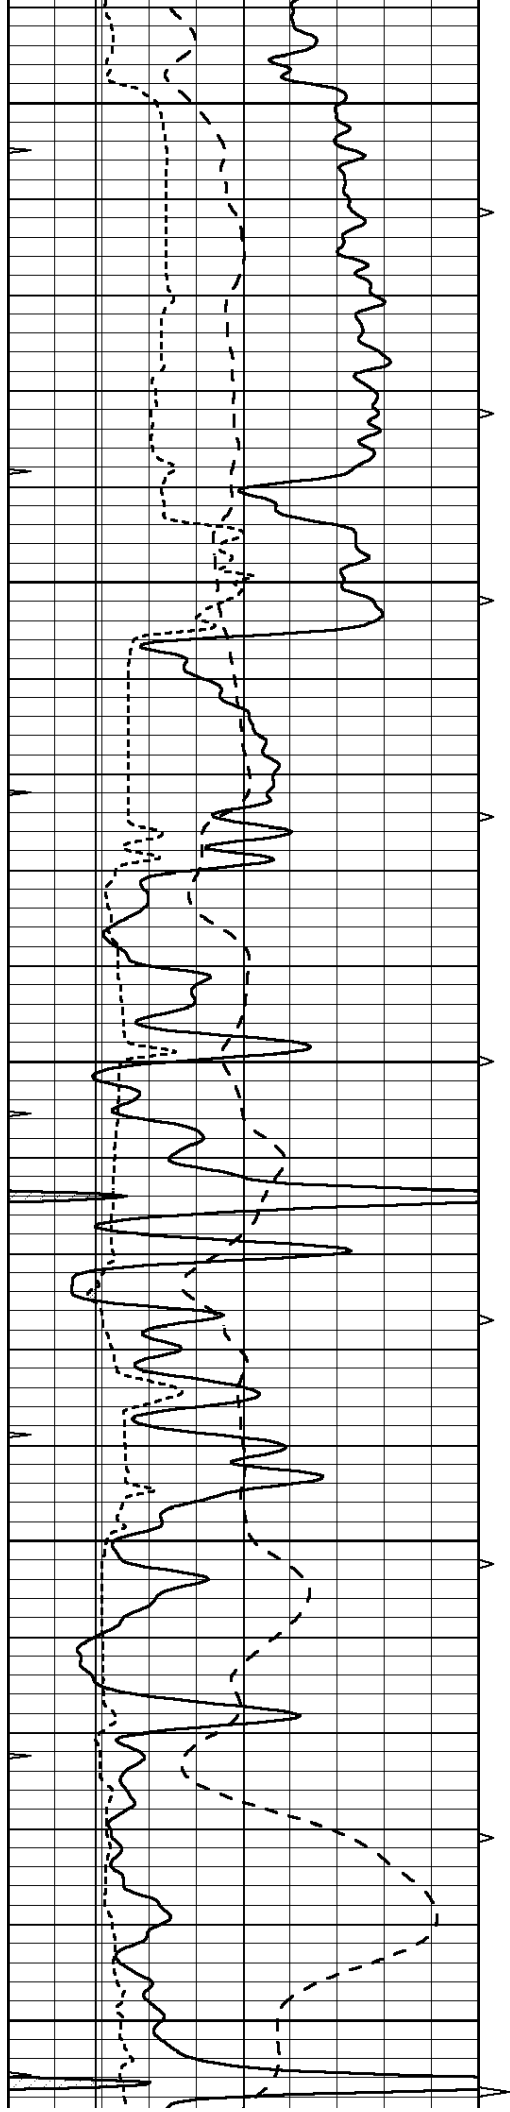

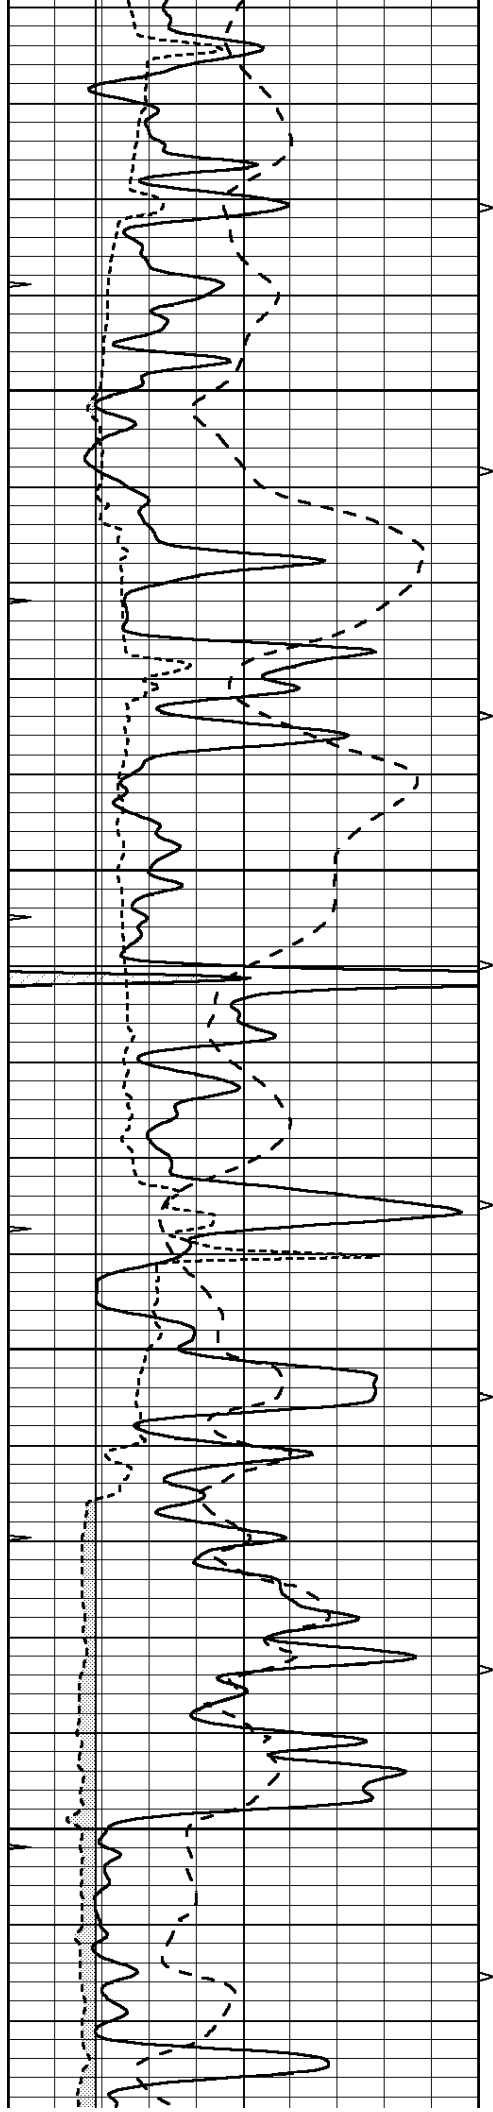


3050



3100

3150

3200



5.5" ABHV

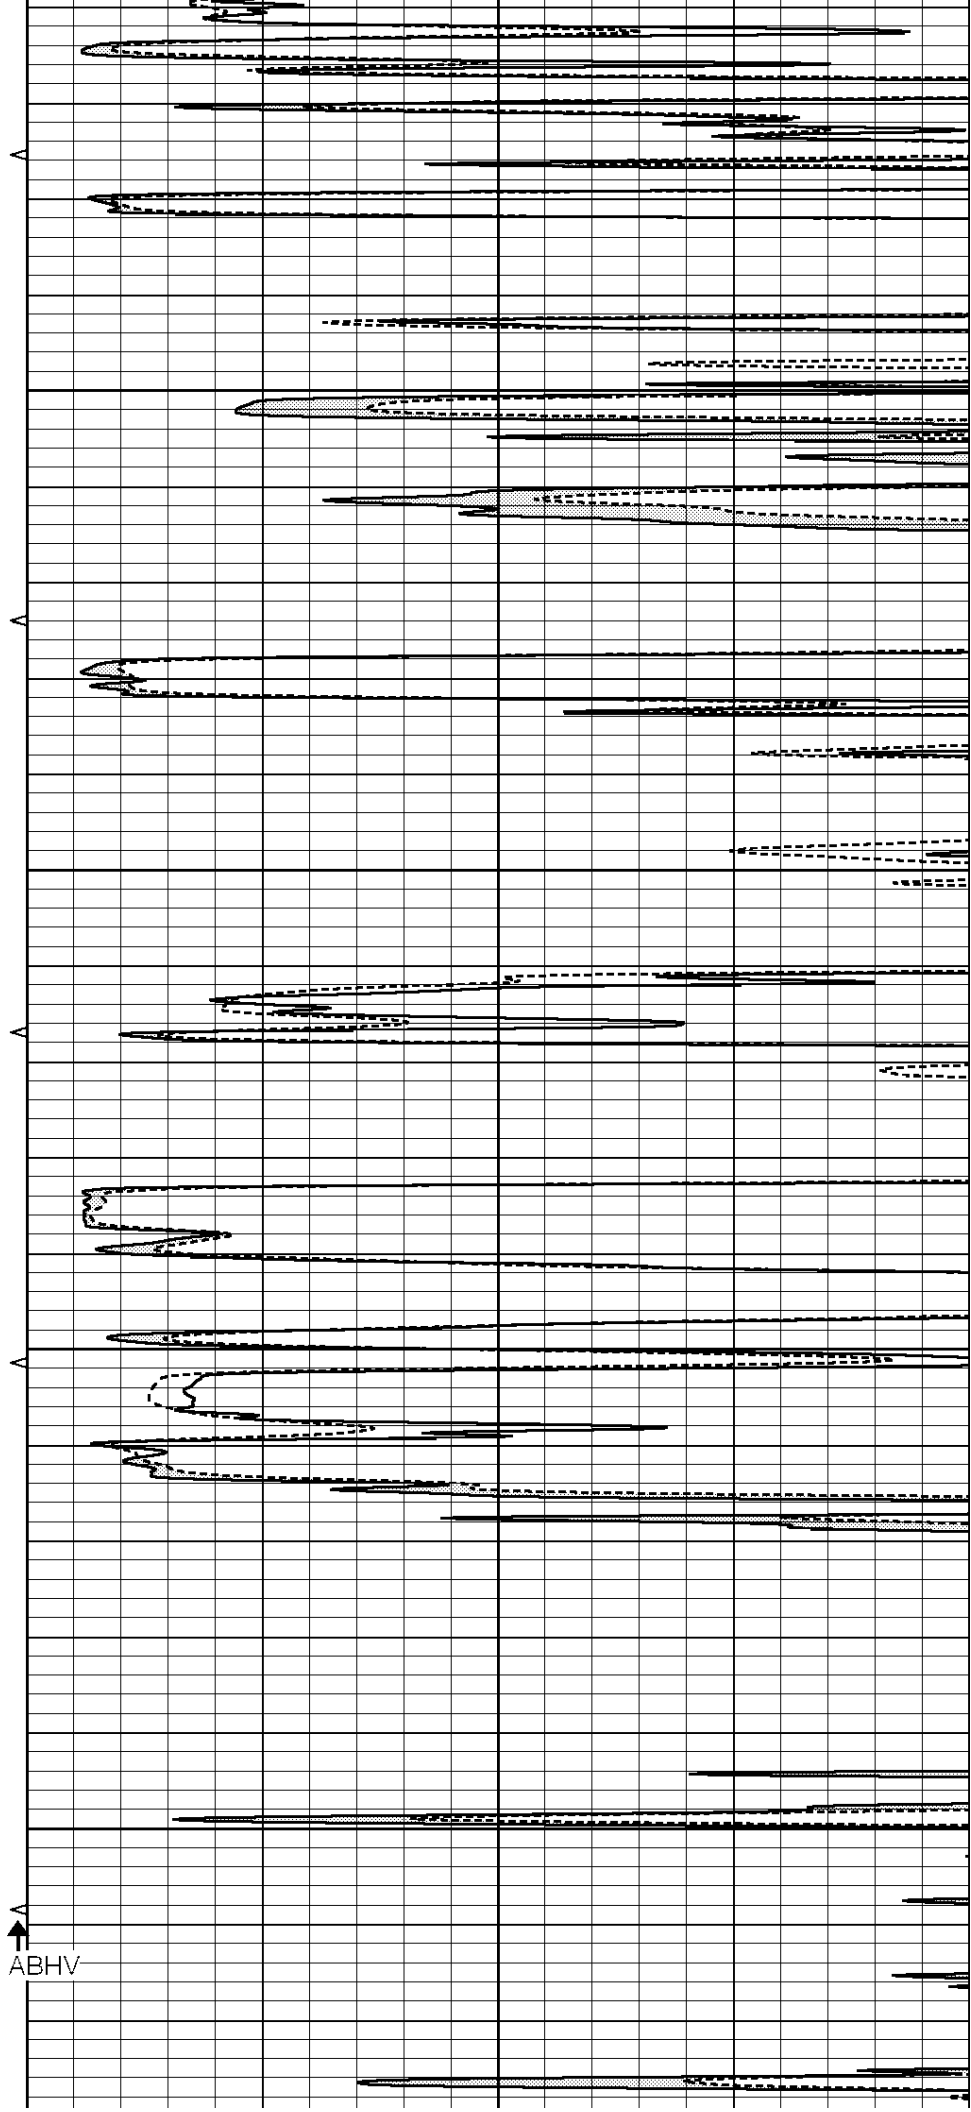


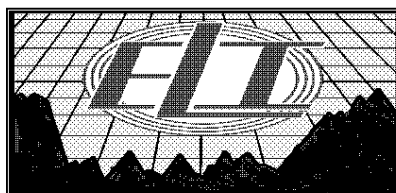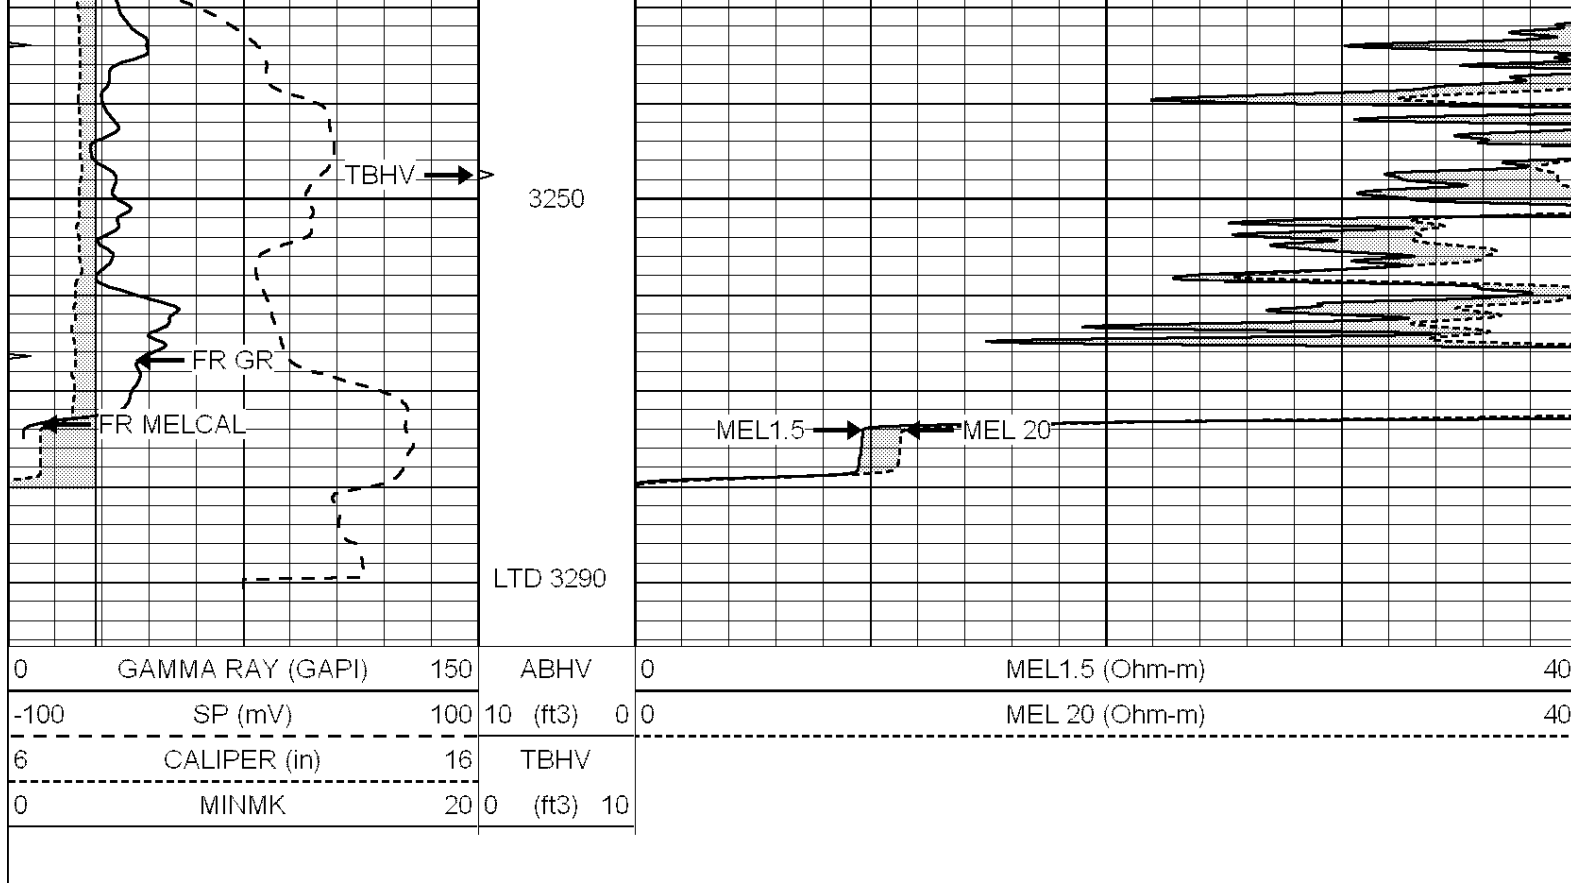

REPEAT SECTION

Database File: 1425pe.db
 Dataset Pathname: pass5.5
 Presentation Format: micro
 Dataset Creation: Wed May 31 04:53:25 2017
 Charted by: Depth in Feet scaled 1:240

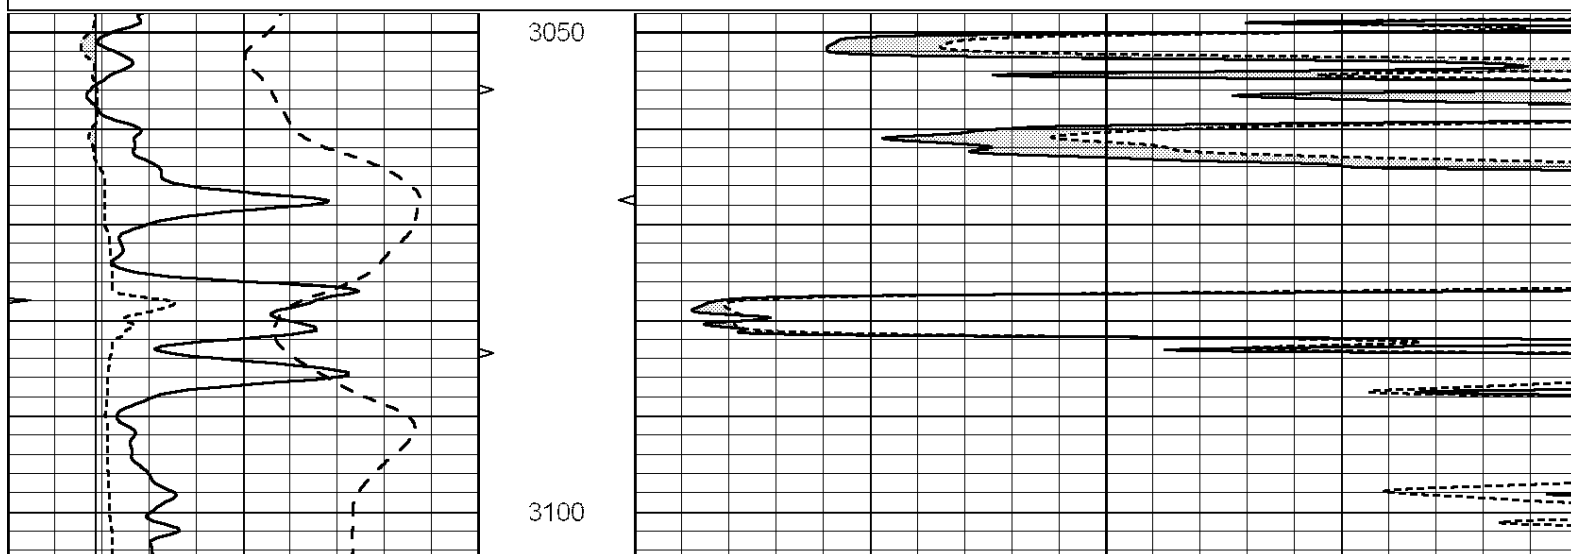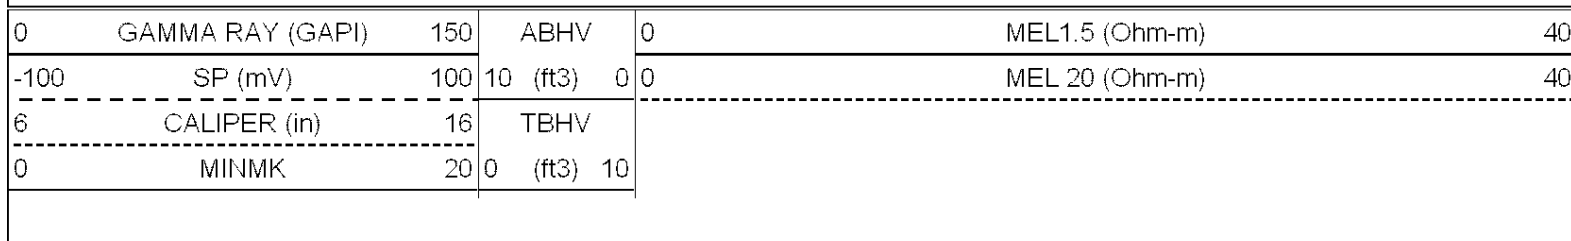

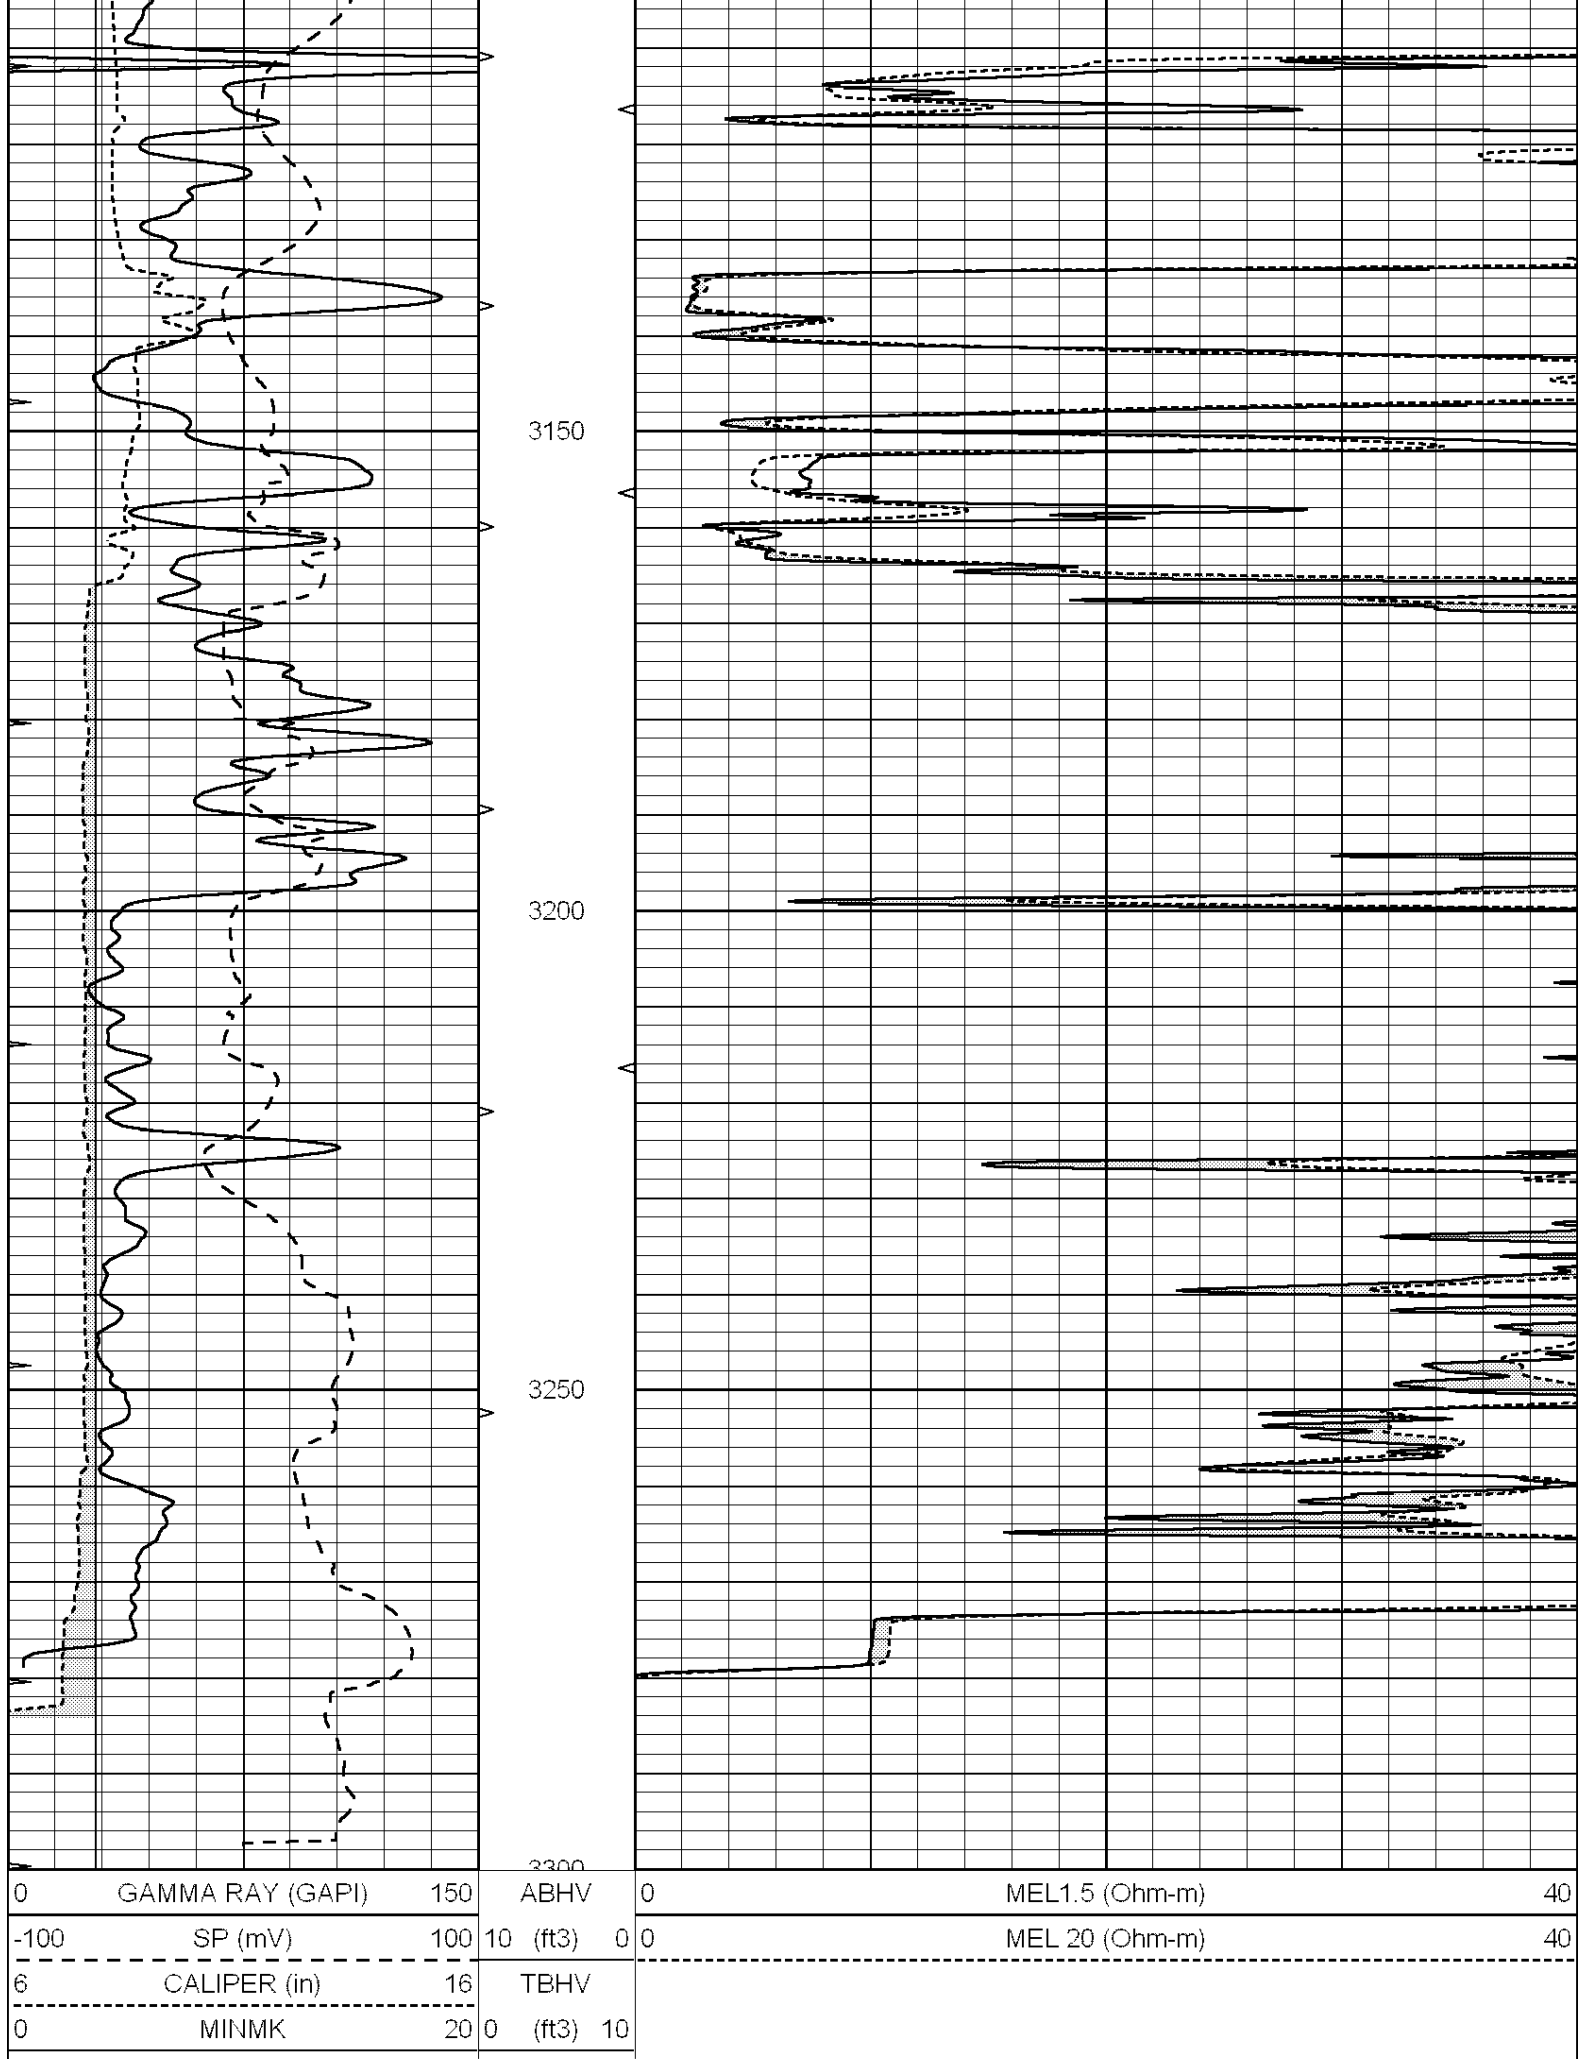

Calibration Report

Database File: 1425pe.db
 Dataset Pathname: pass6.2
 Dataset Creation: Wed May 31 04:54:11 2017

MICRO Calibration Report

Serial Number: 070912
 Tool Model: ProbeN
 Performed: Wed May 31 02:33:36 2017

Caliper Calibration: Gain=2.861 Offset=5.601

	Low Cal	High Cal
References	7.000	15.000
Readings	0.489	3.285

1.5" Calibration: Gain=40.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	1.239

2" Calibration: Gain=52.000 Offset=-0.200

	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.075

Gamma Ray Calibration Report

Serial Number: 110959
 Tool Model: OPEN_GR
 Performed: Tue May 16 21:41:22 2017

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2000 GAPI/cps