

MICRO LOG

Company	DIXON OPERATING COMPANY, LLC.	
Well	ARDREY #1-35	
Field	ZENITH PEACE CREEK	
County	STAFFORD	State KANSAS
Location:	API # : 15-185-23988-0000	Other Services CDL/CNL/PE DIL/SON
Permanent Datum	500' FSL & 1080' FEL	Elevation
Log Measured From	GROUND LEVEL	K.B. 1813
Drilling Measured From	KELLY BUSHING 9' A.G.L	D.F. 1811
		G.L. 1804
Date	6/22/17	
Run Number	TWO	
Depth Driller	4000	
Depth Logger	4001	
Bottom Logged Interval	3983	
Top Log Interval	2800	
Casing Driller	8 5/8" @ 306'	
Casing Logger	304'	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 11600 PPM
Density / Viscosity	9.2/68	
pH / Fluid Loss	10.0/12.8	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.35 @ 89F	
Rmf @ Meas. Temp	.26 @ 89F	
Rmc @ Meas. Temp	.42 @ 89F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.27 @ 115F	
Time Circulation Stopped	2 HOURS	
Time Logger on Bottom		
Maximum Recorded Temperature	115F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	JASON CAPPELLUCCI	
Witnessed By	CHUCK SCHMALTZ	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
ZENITH, KS. - 3 1/8 MILES NORTH ON 140TH RD. - WEST INTO




MAIN SECTION

Database File	1563pe8.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Thu Jun 22 09:37:44 2017
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

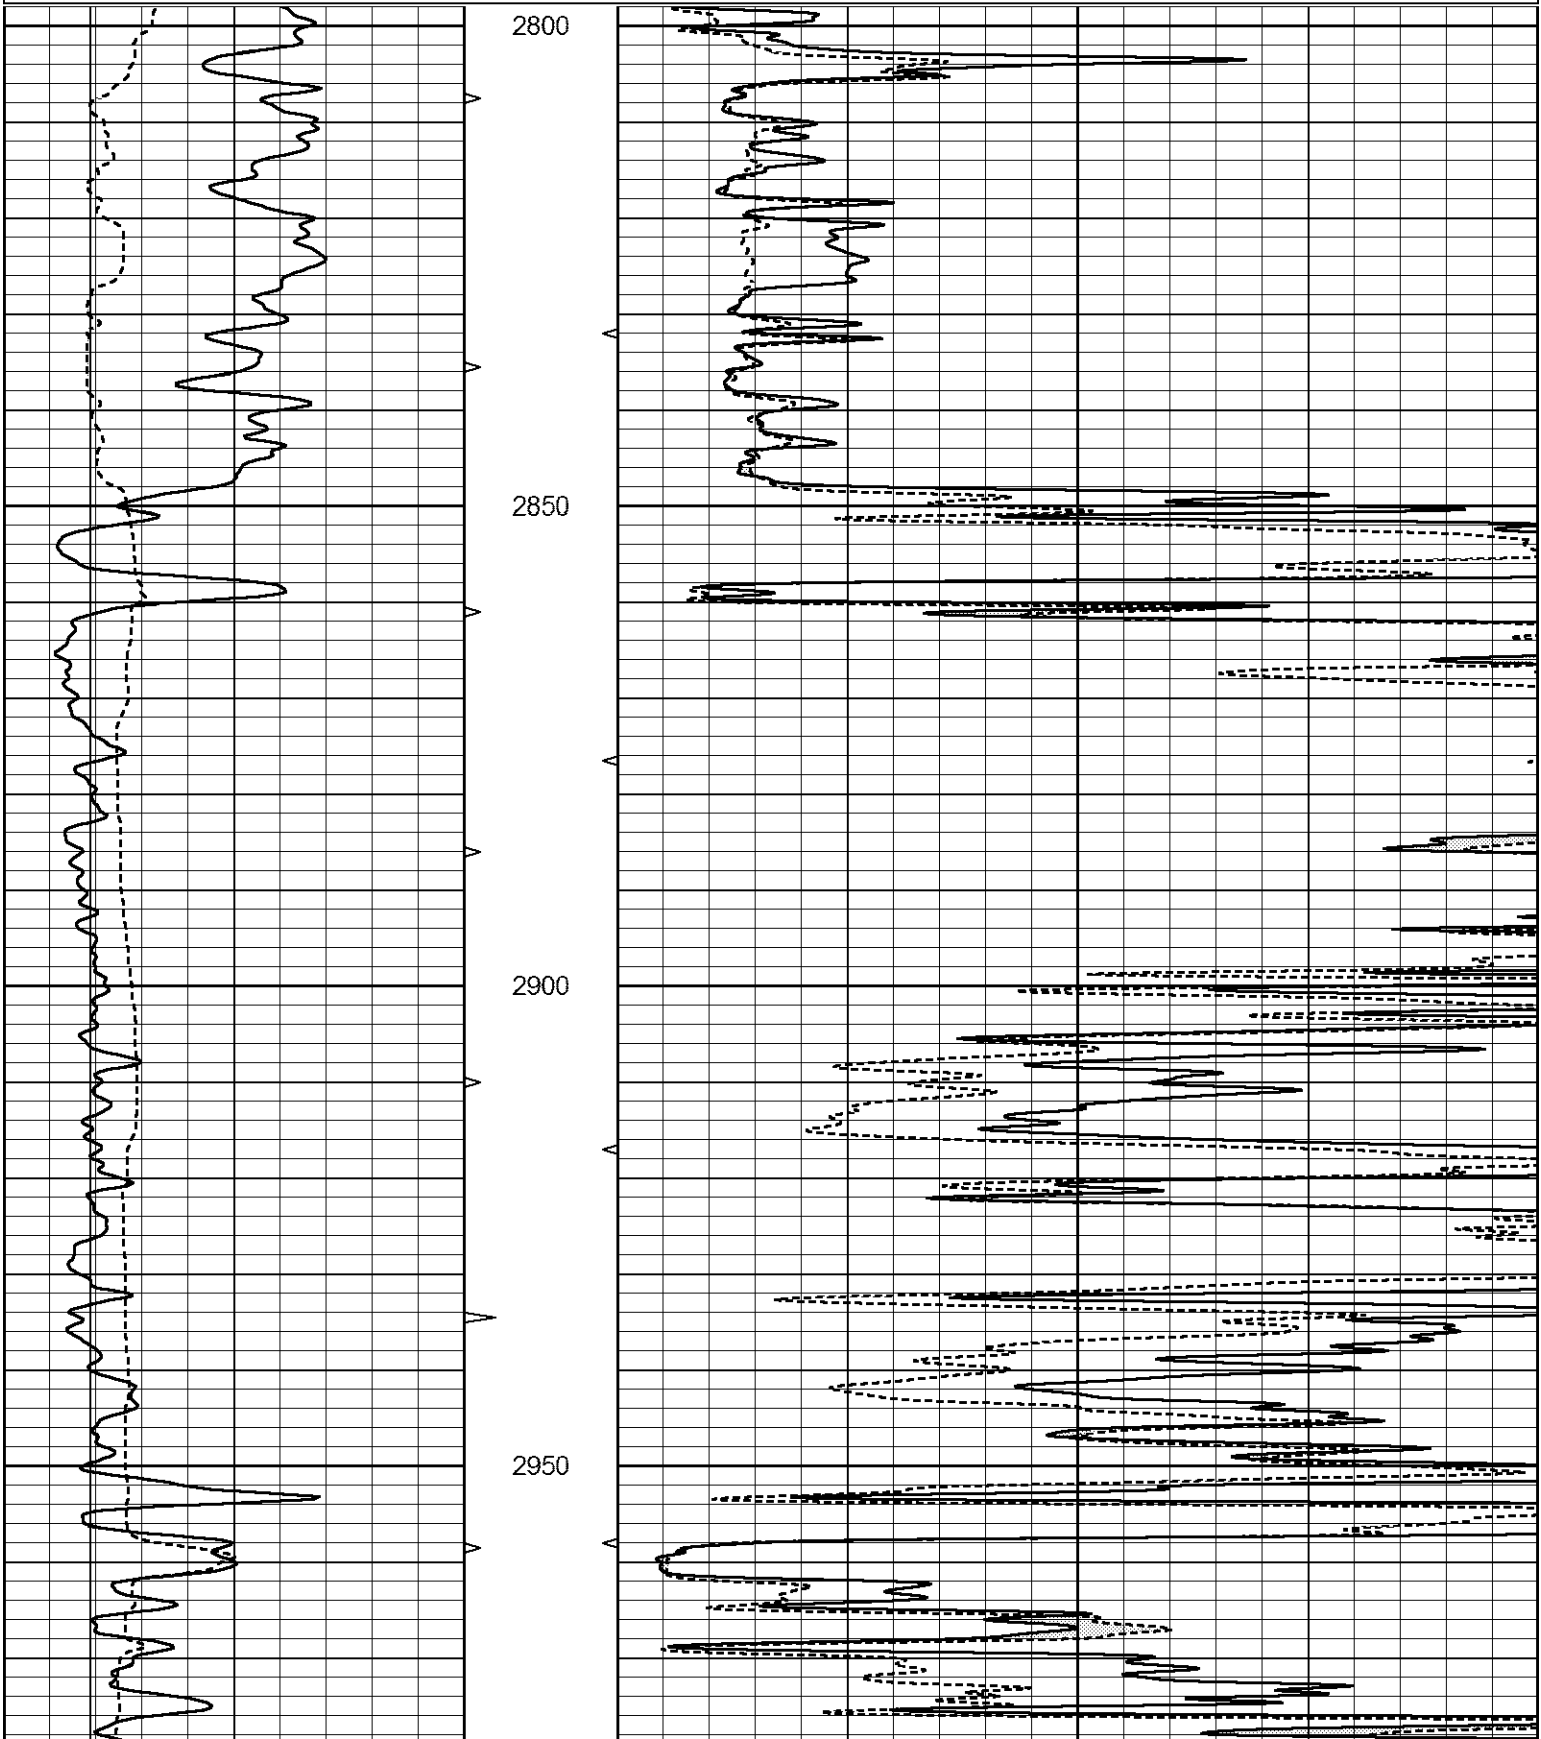

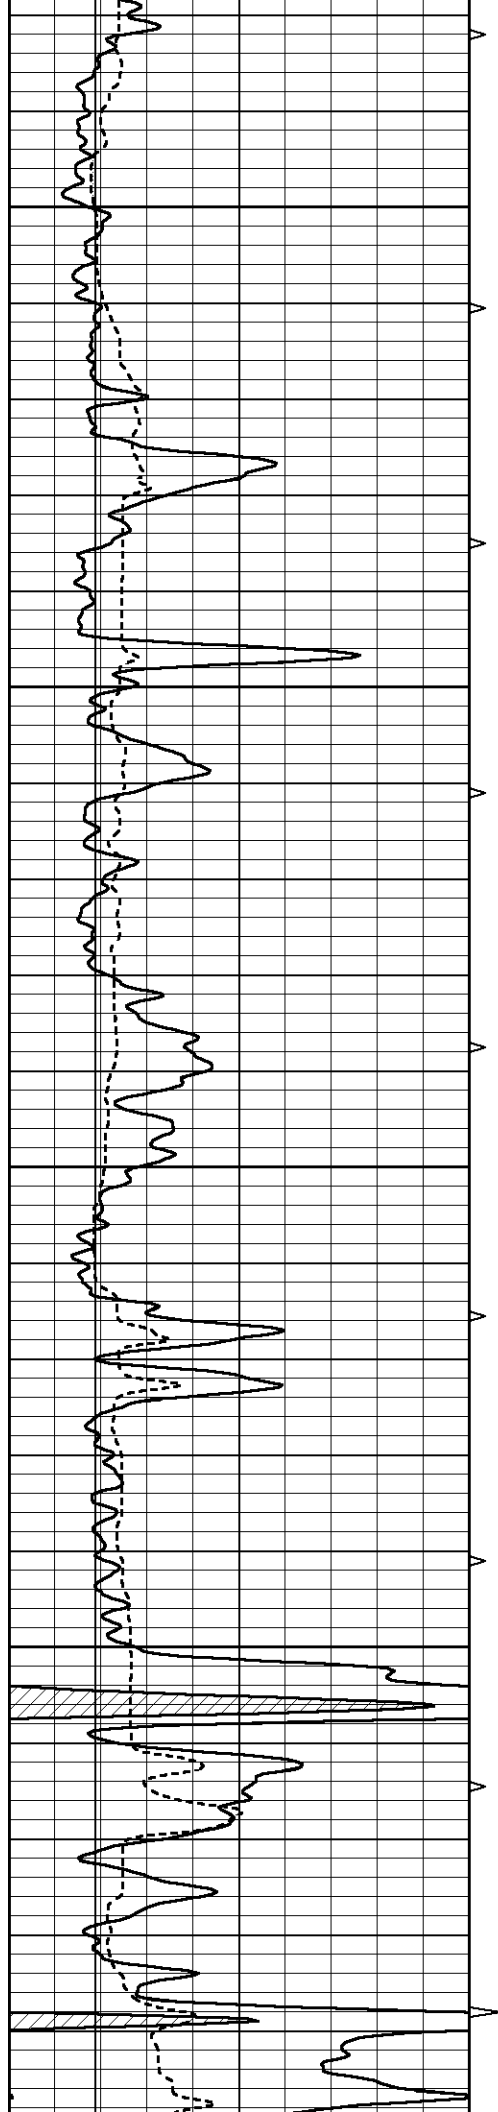



3000

3050

3100

3150

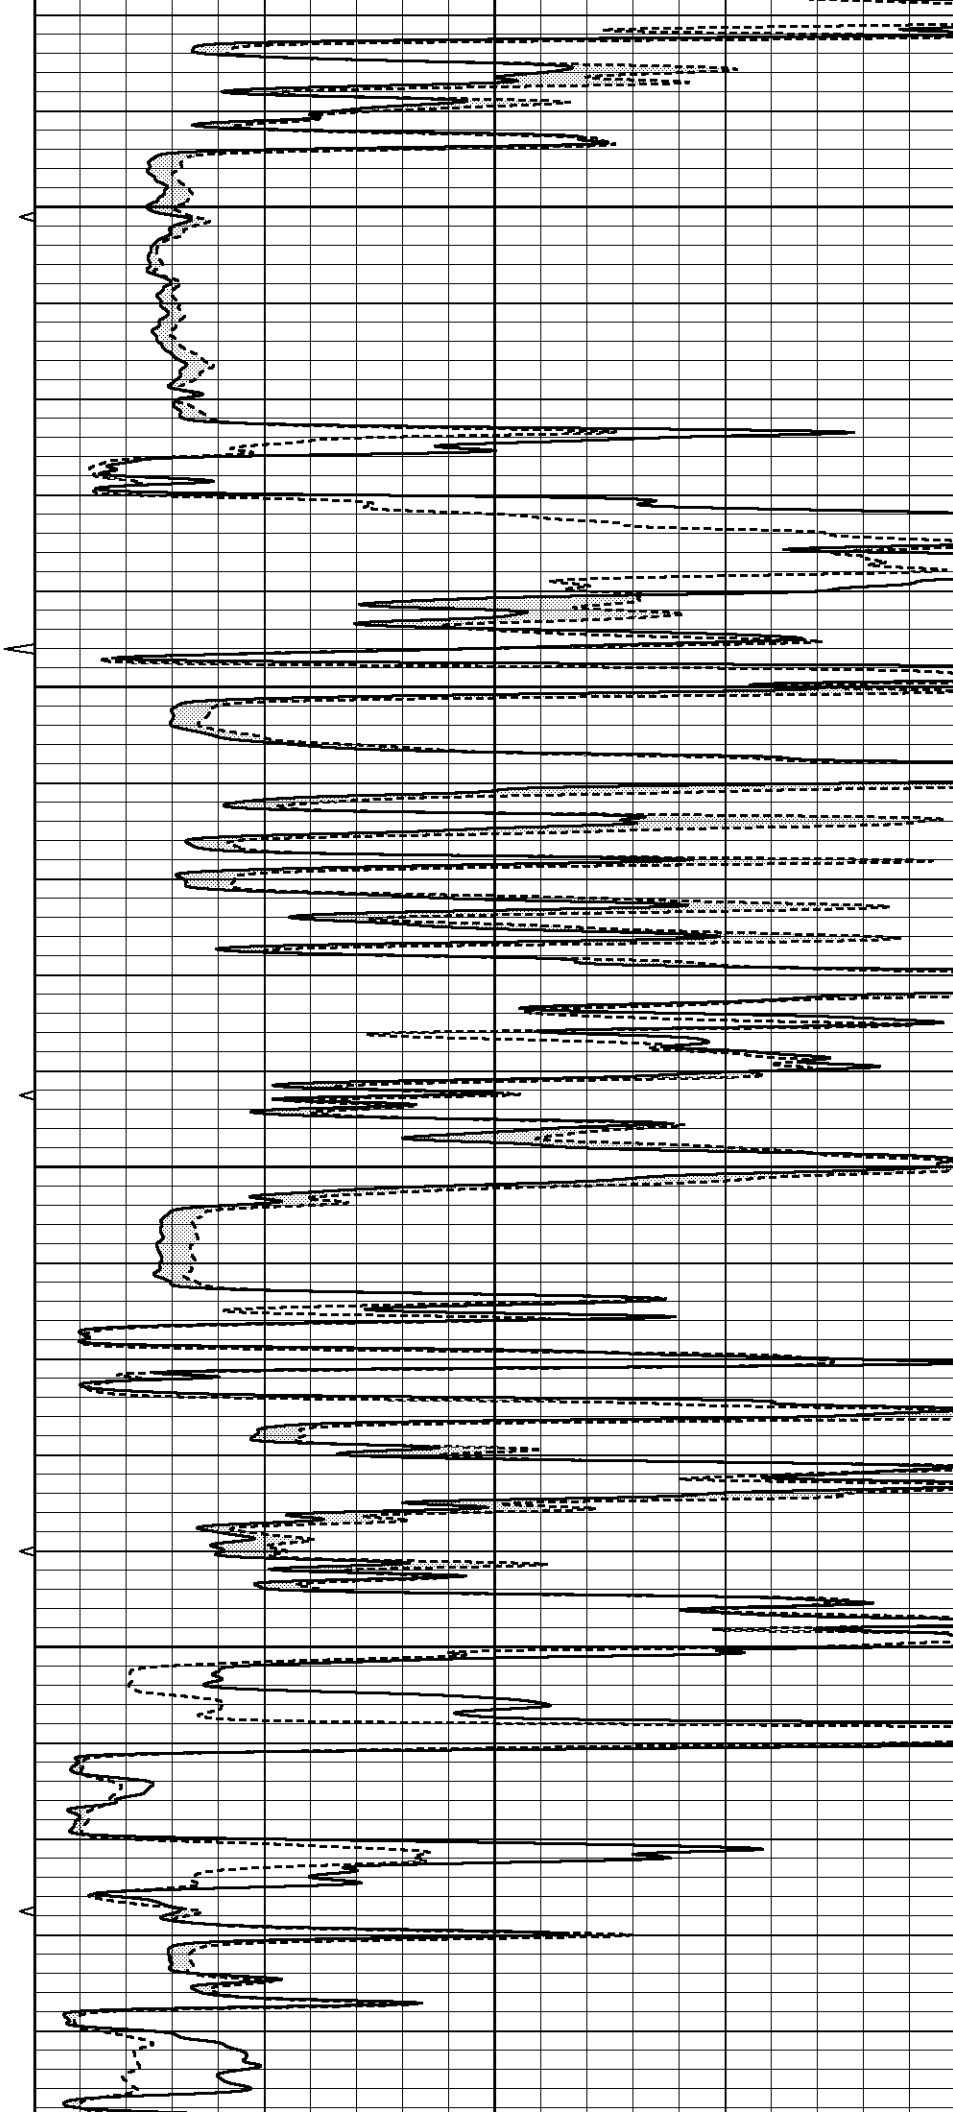

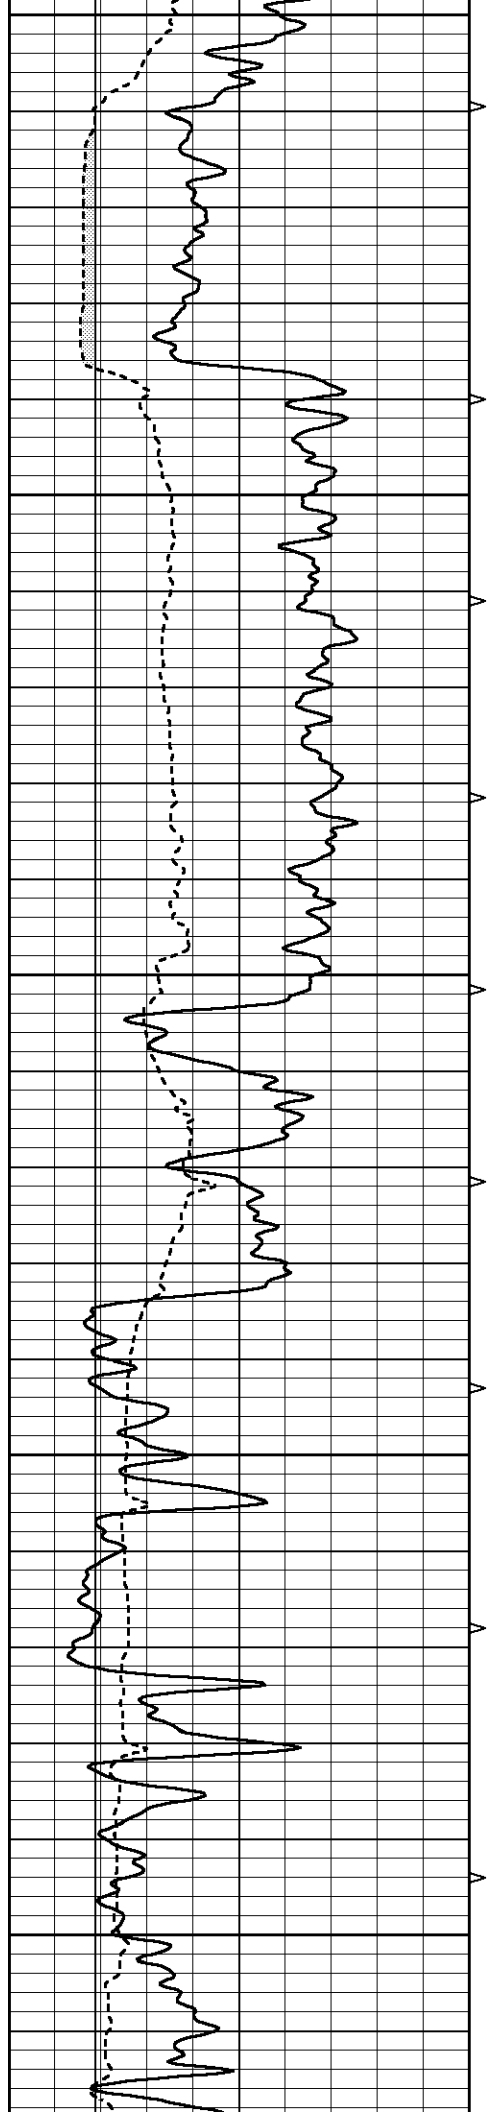


3200


3250


3300



3350

3400

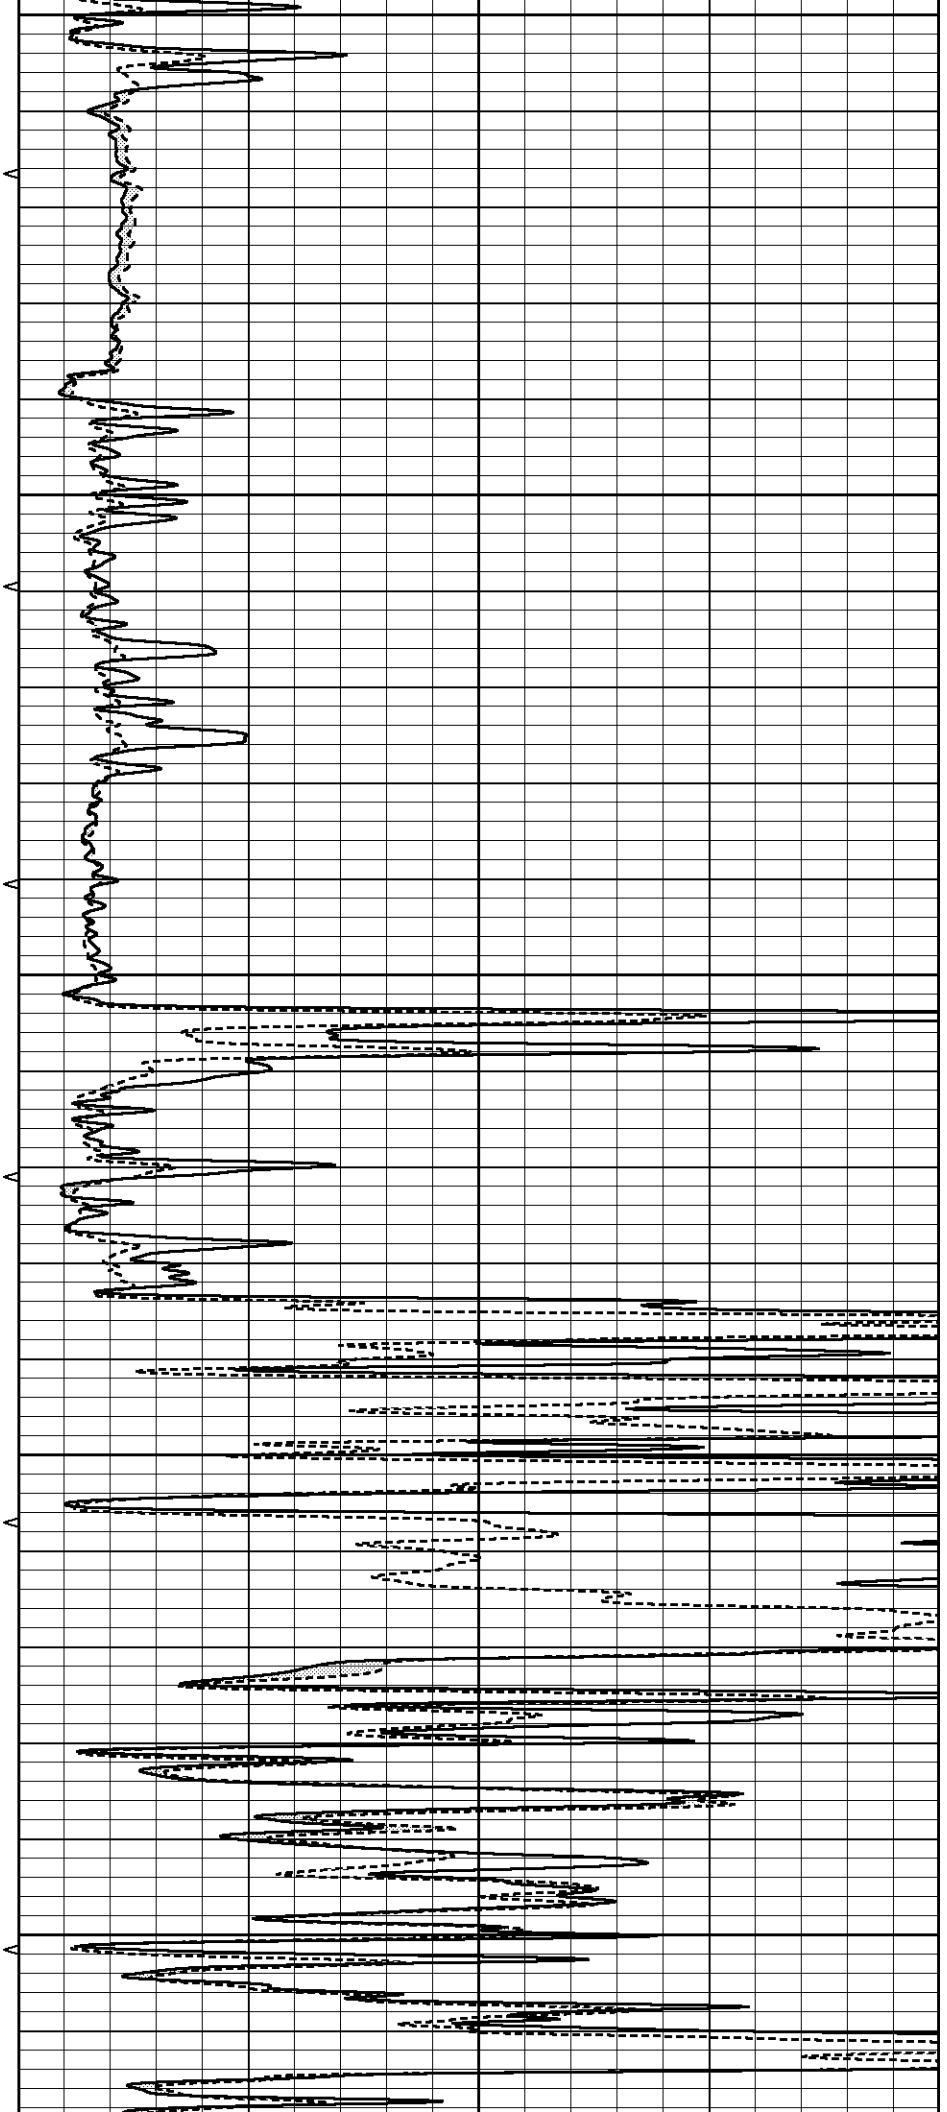

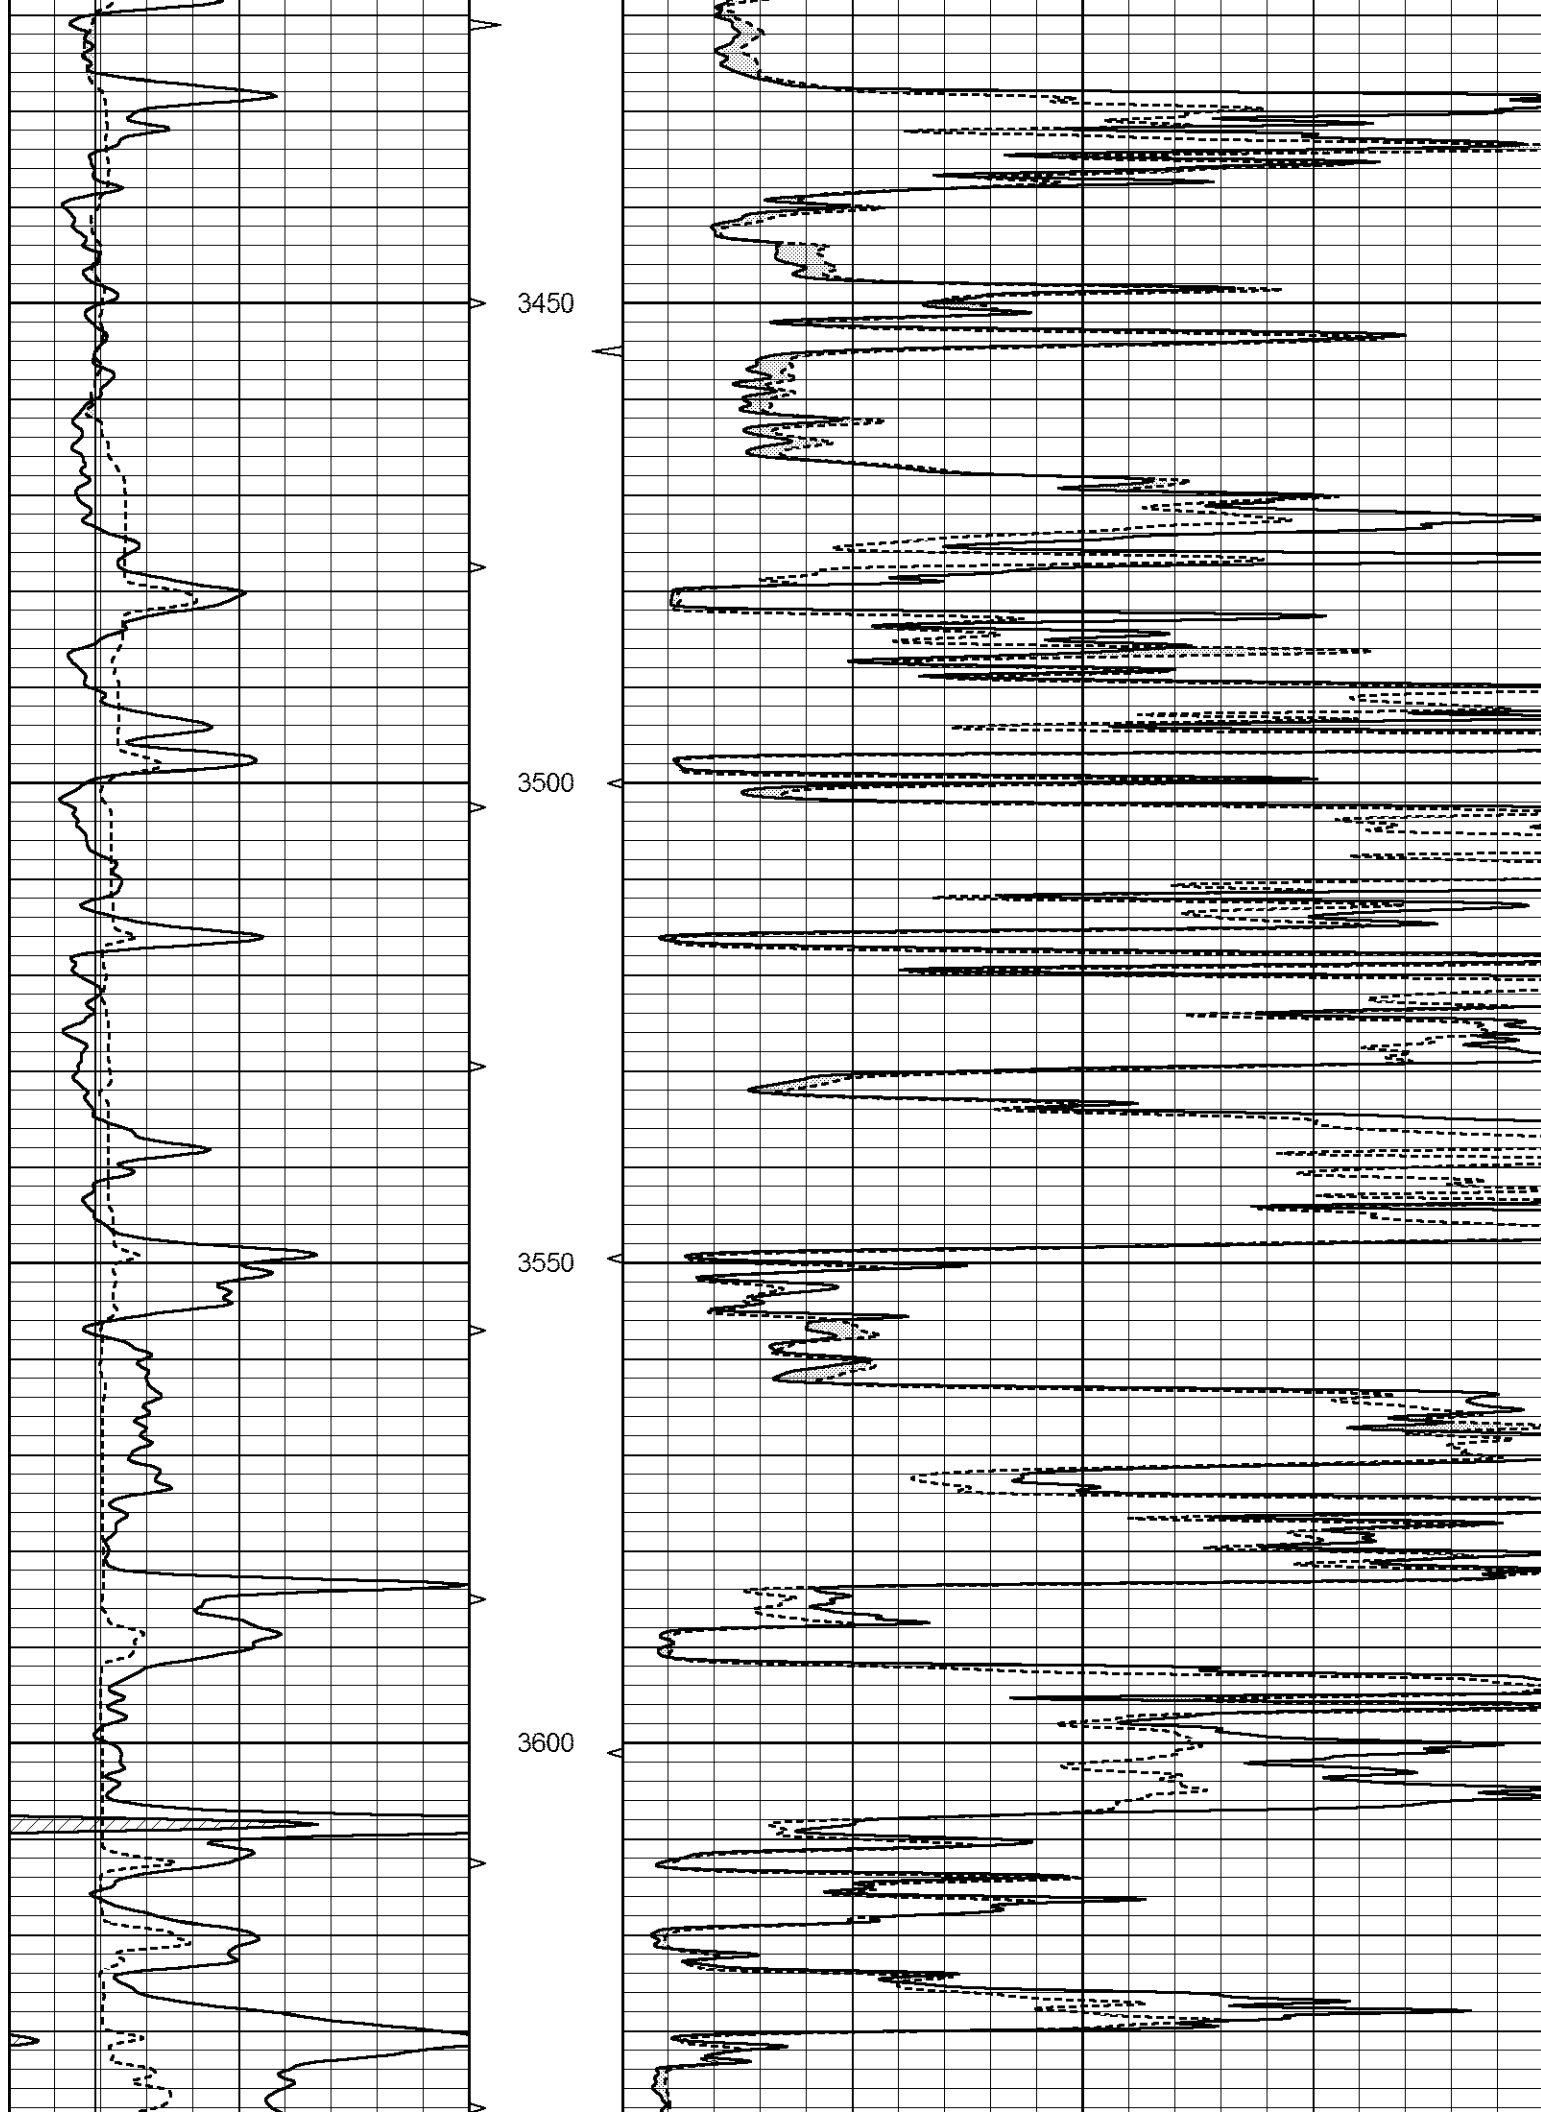

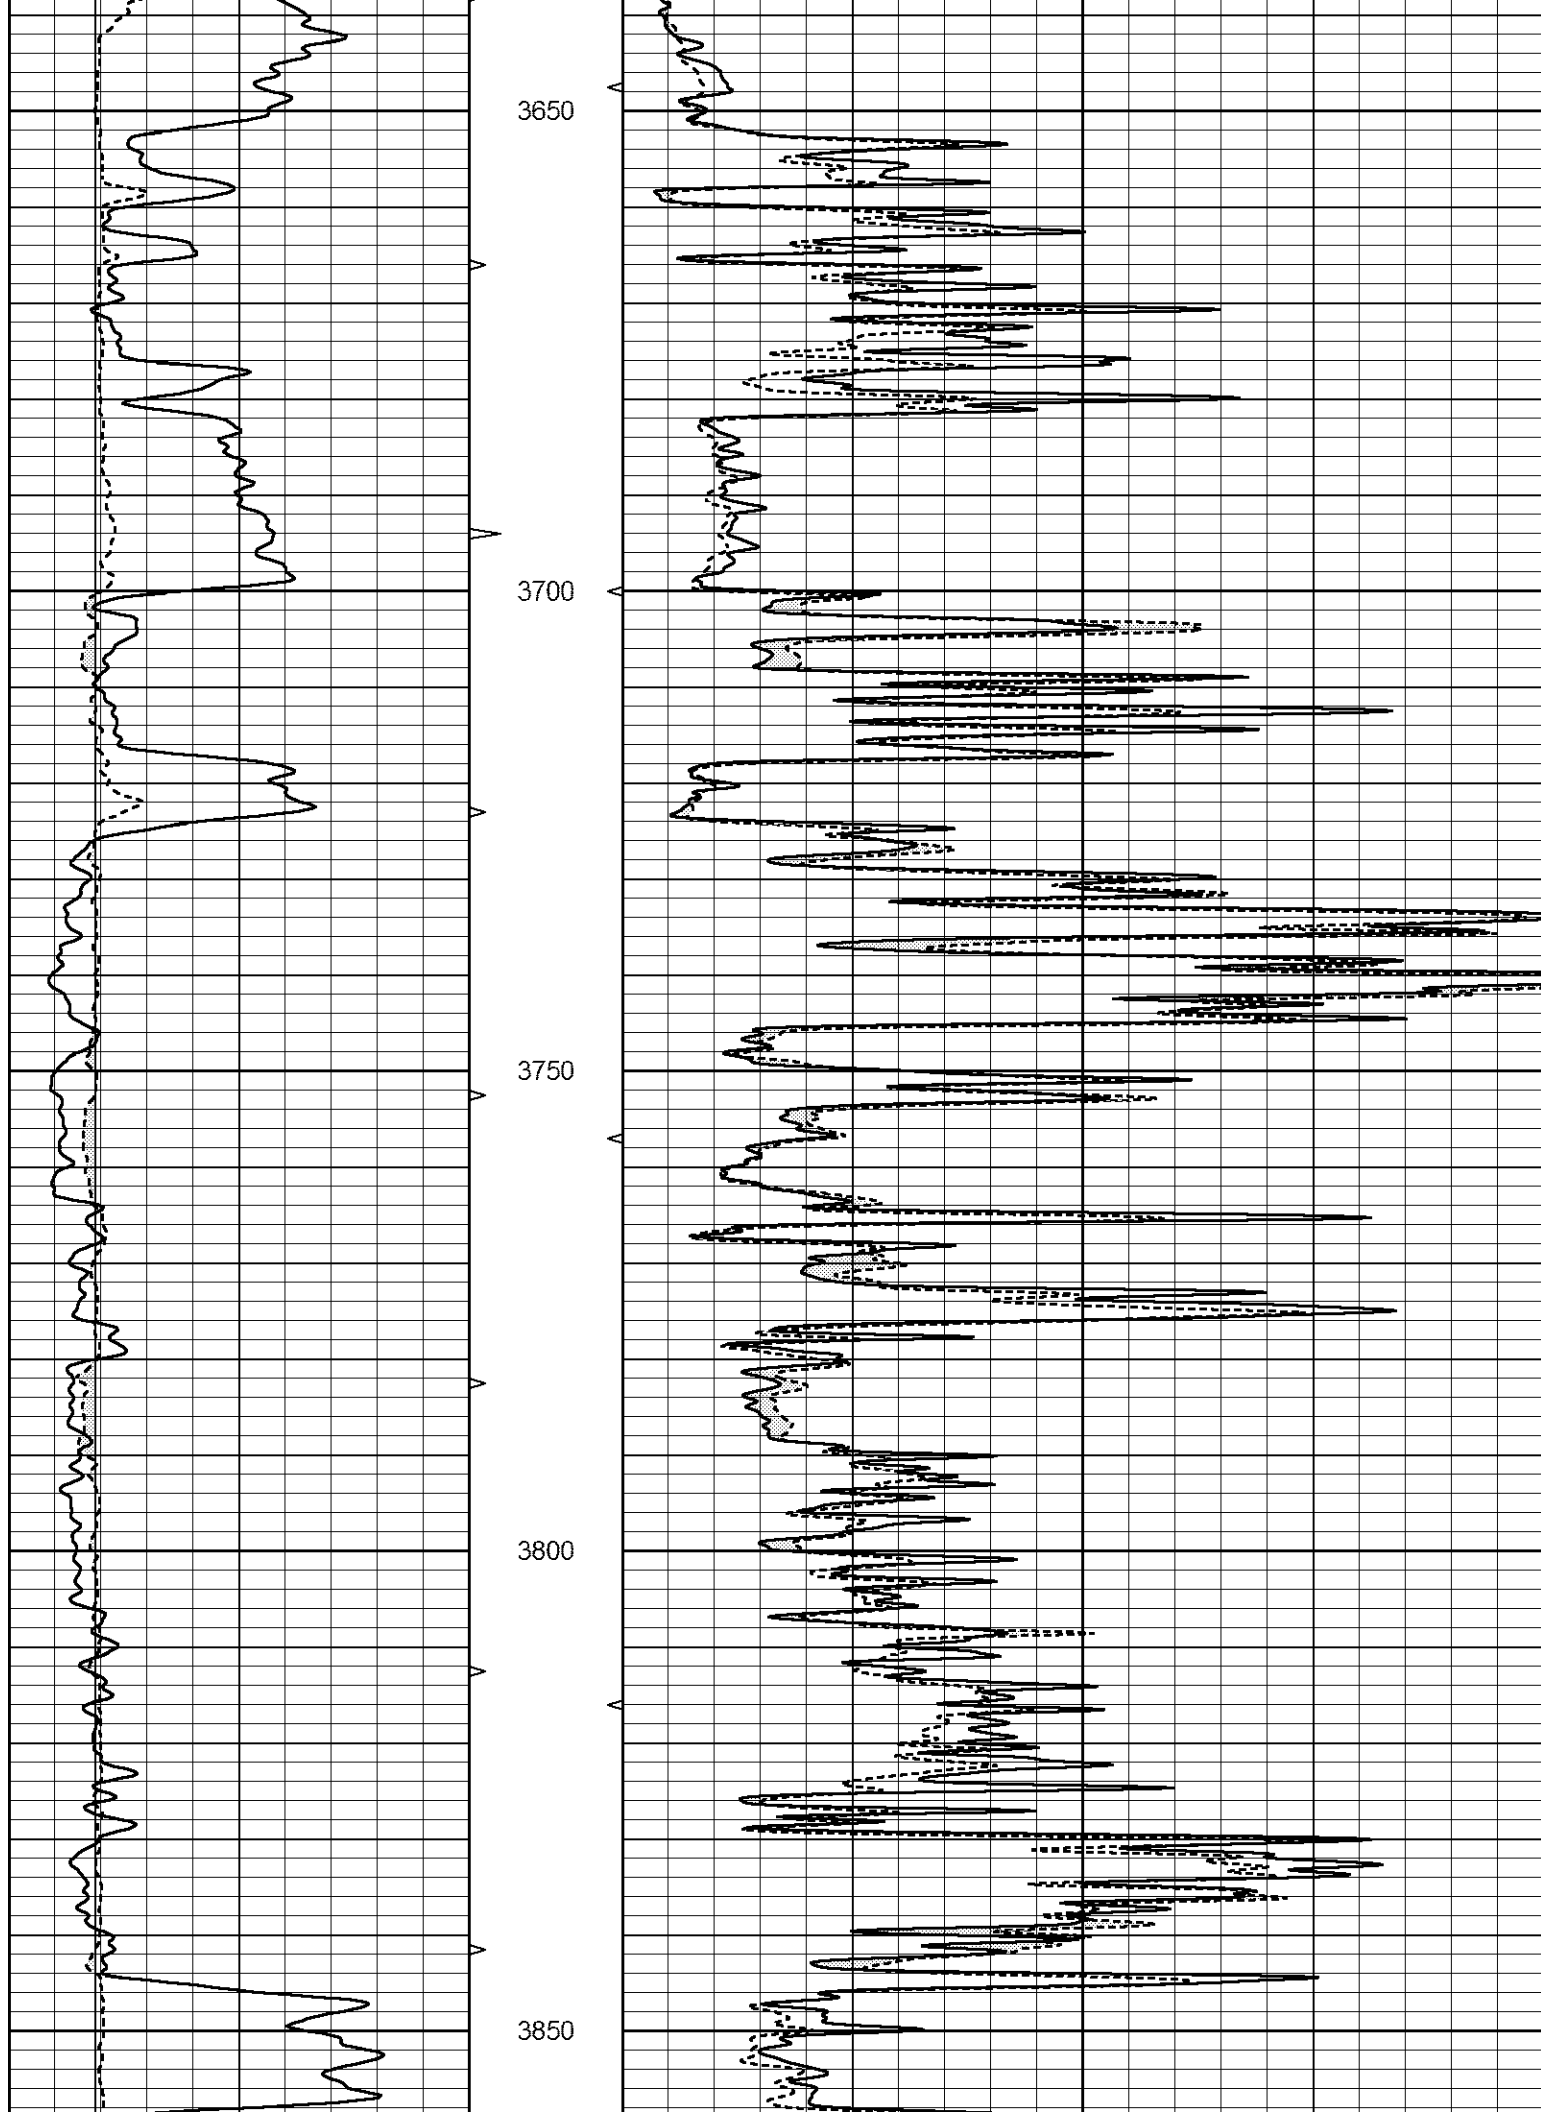


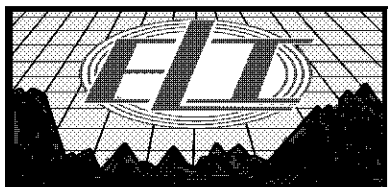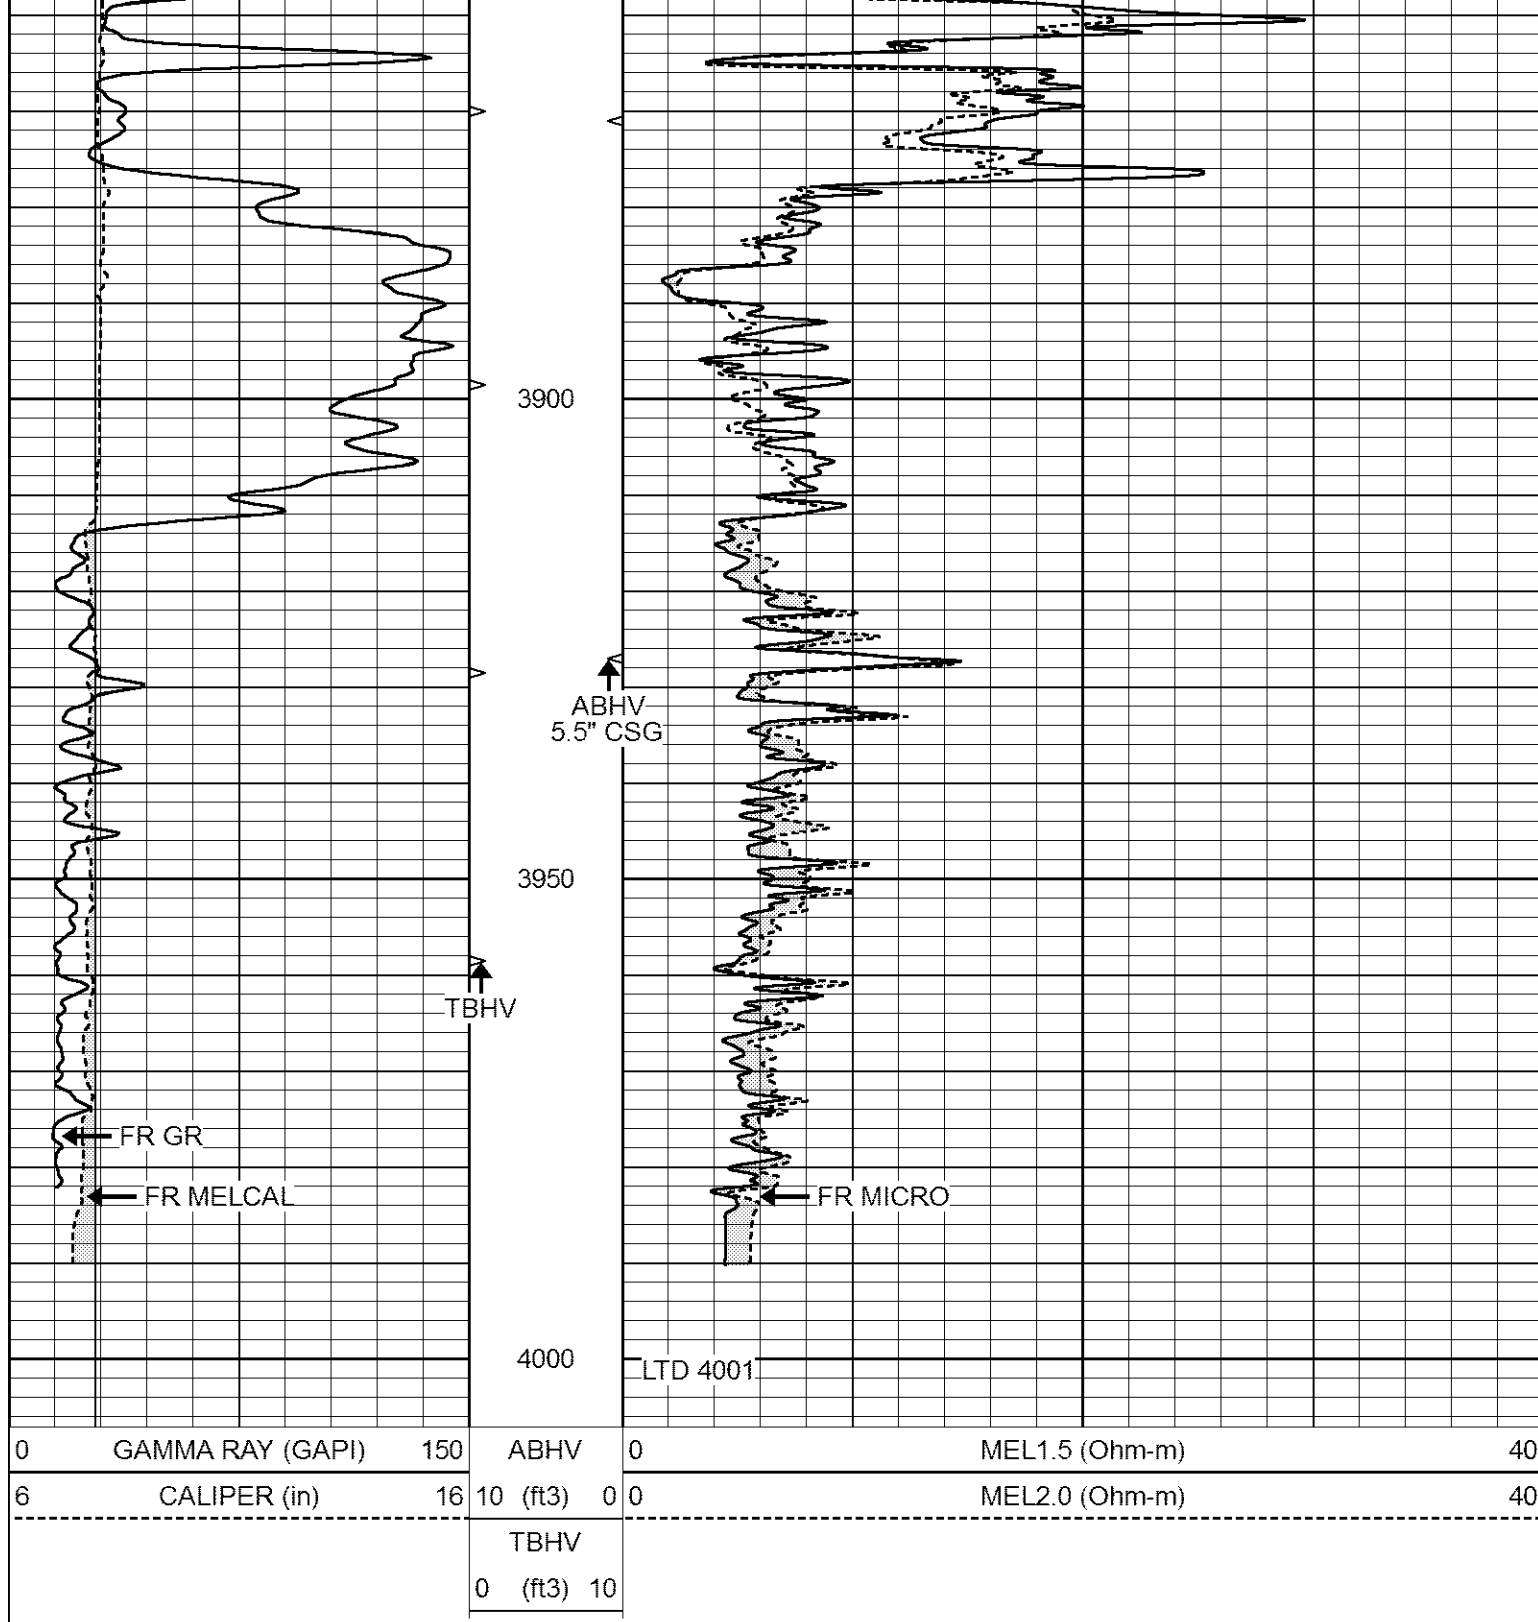


REPEAT SECTION

Database File 1563pe8.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Thu Jun 22 09:21:51 2017
 Charted by Depth in Feet scaled 1:240



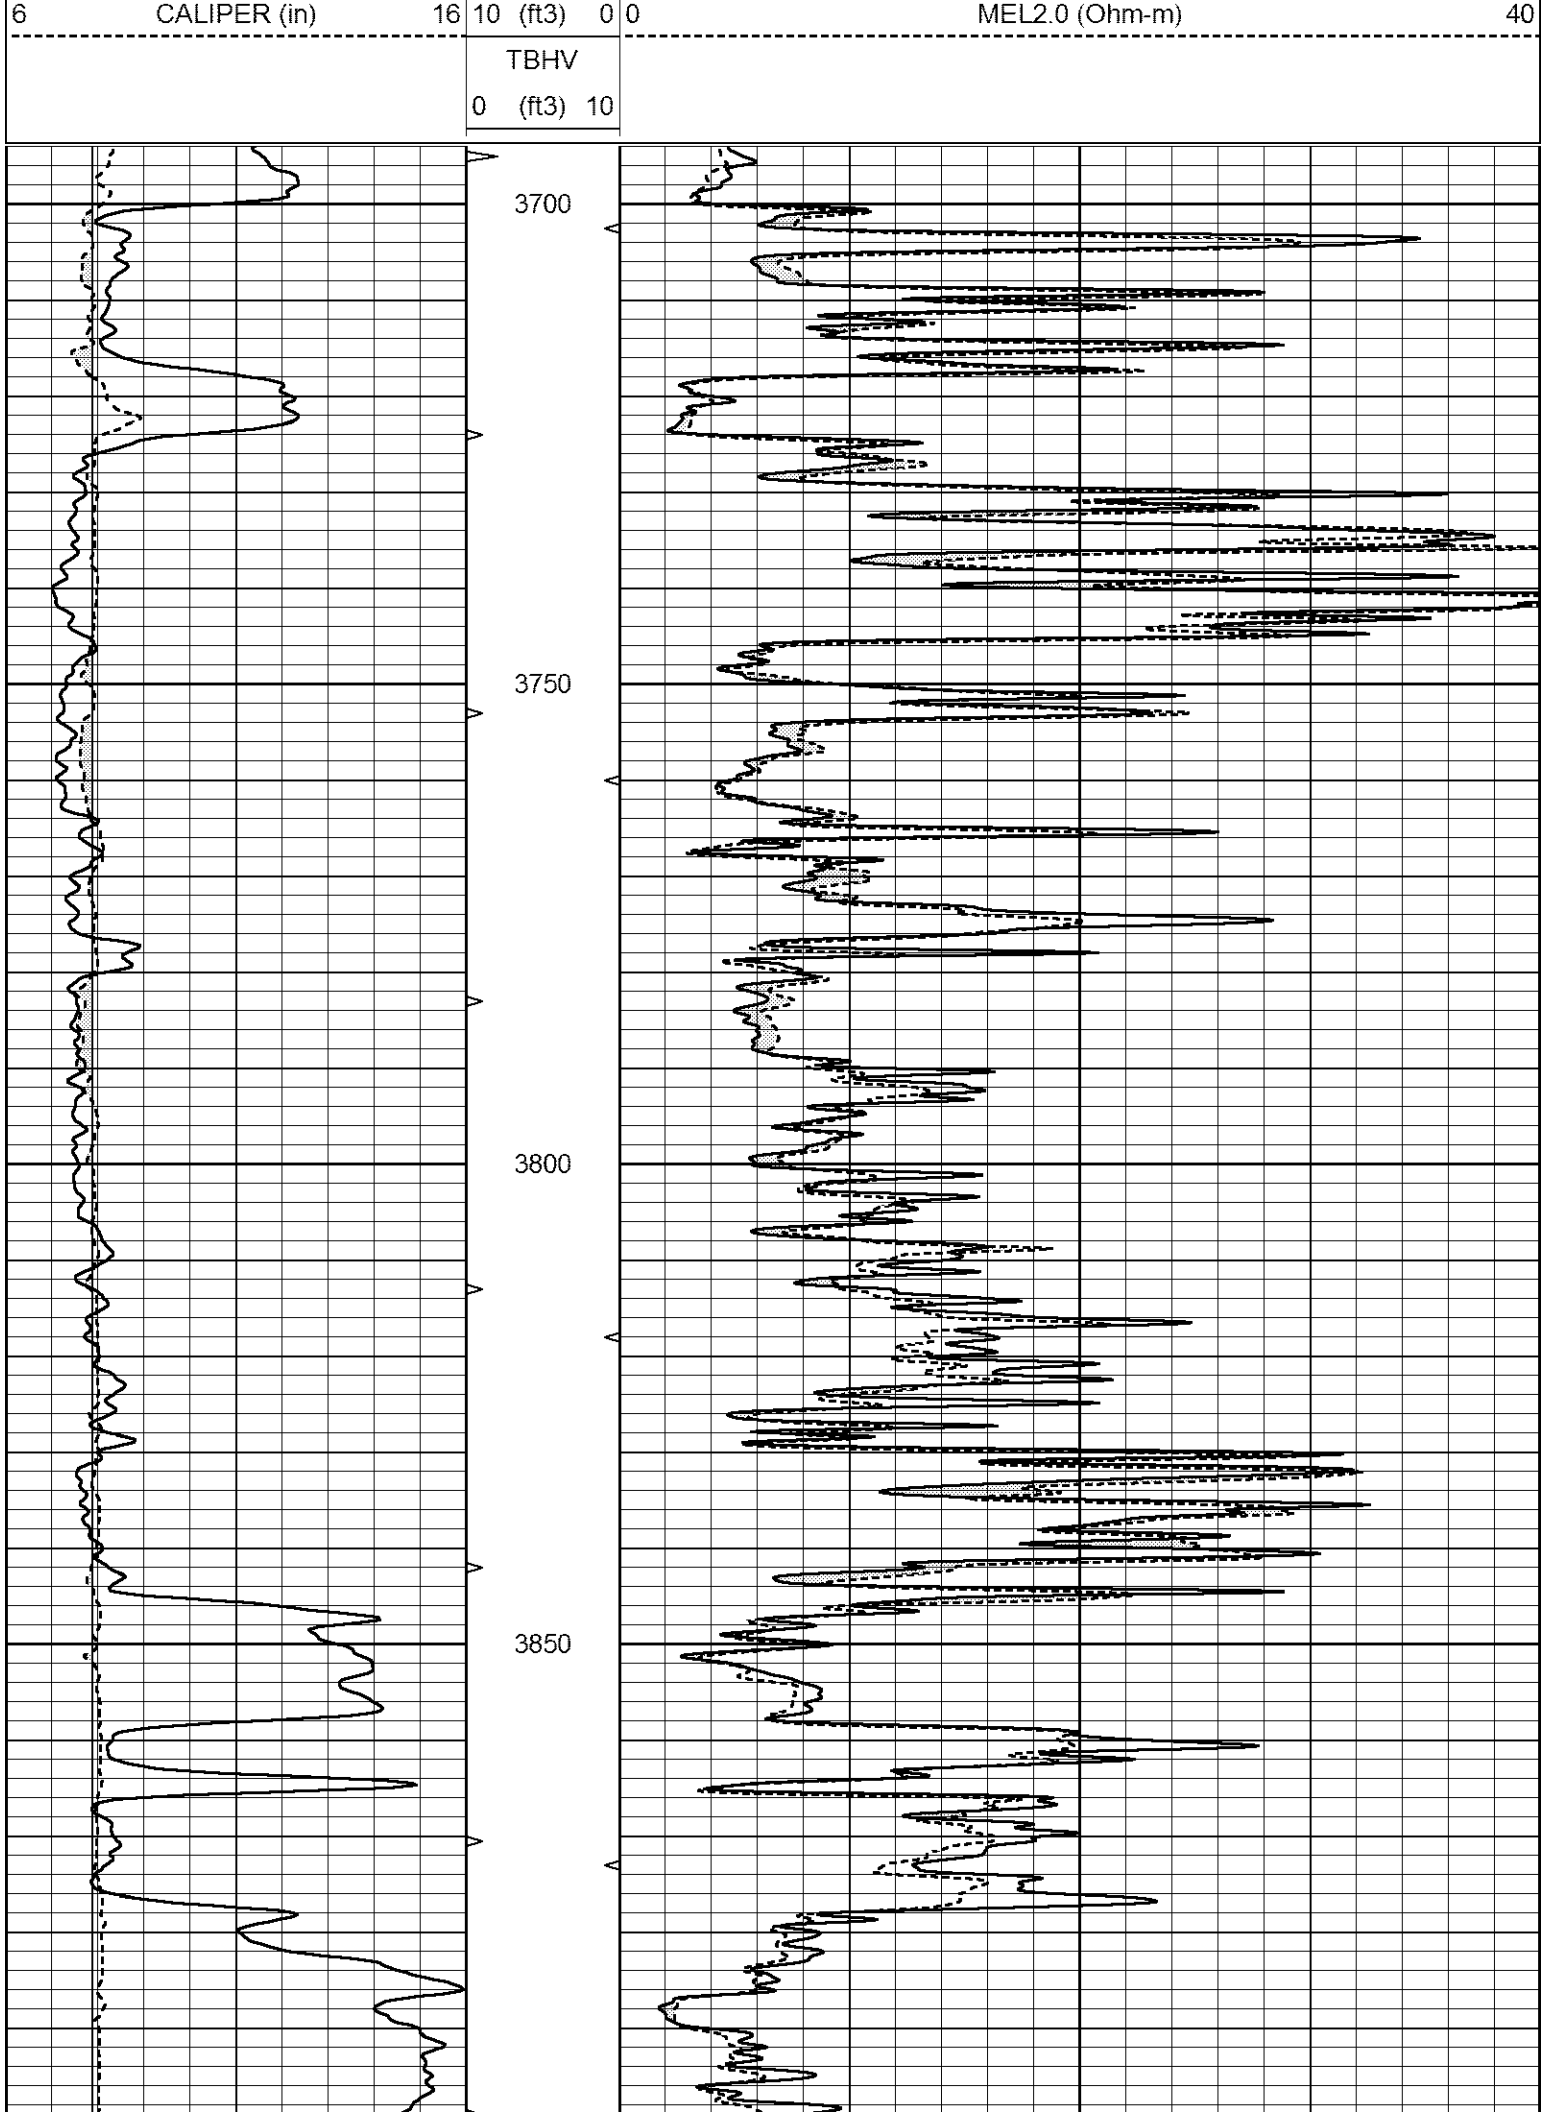

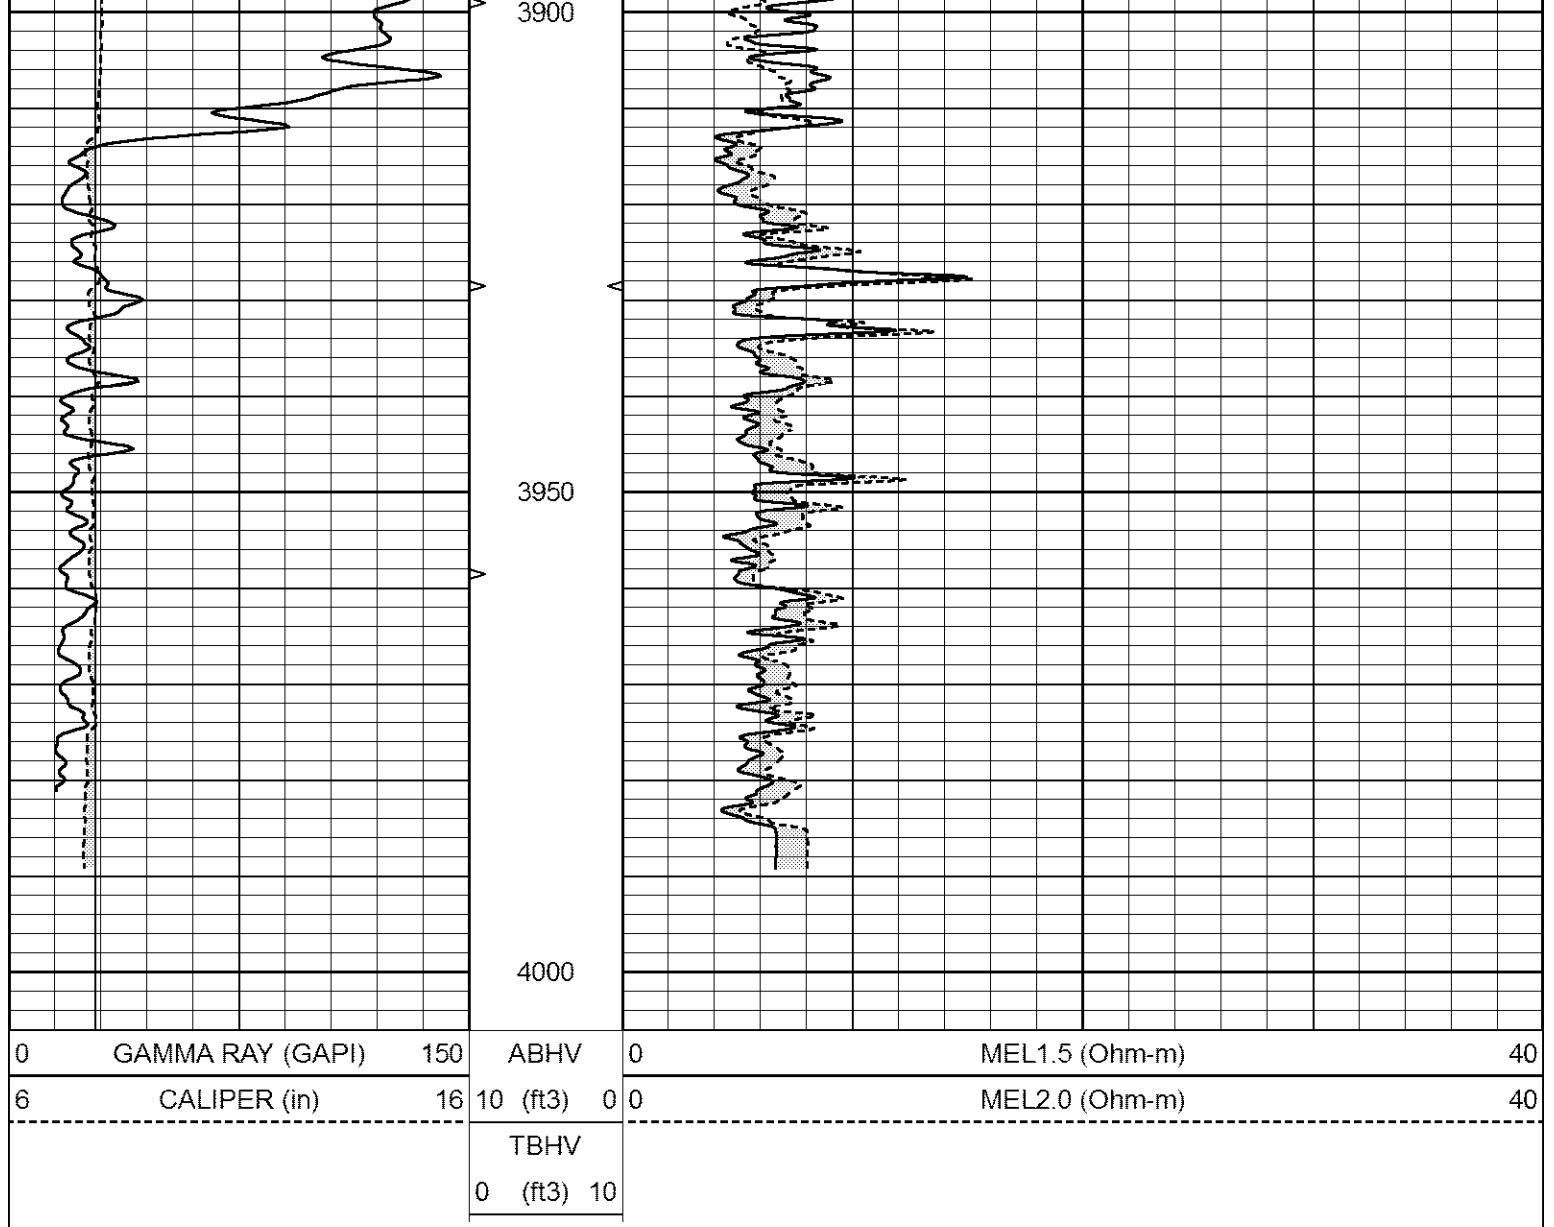

Calibration Report			
Database File	1563pe8.db		
Dataset Pathname	pass5.1		
Dataset Creation	Thu Jun 22 09:21:51 2017		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Thu Dec 08 13:09:11 2016		
Caliper Calibration:	Gain=4.161	Offset=1.500	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.333	2.775	
1.5" Calibration:	Gain=37.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=35.000	Offset=0.650	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	

References	0.000	20.000
Readings	0.021	0.810

Microlog Calibration Report

Serial-Model:	070911-ProbeL
Performed:	Sat Apr 11 01:13:01 2015

Readings			References			Results		
	Zero	Cal		Zero	Cal	m	b	
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Wed Jun 29 11:10:58 2016	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.4000	GAPI/cps