

MICRO LOG

Company	TRANS PACIFIC OIL CORPORATION		
Well	MCMANNIS B UNIT #1-34		
Field	WILDCAT		
County	PRATT		
State	KANSAS		
Location:	API # : 15-151-22462-00-00		Other Services
	105' FSL & 840' FWL		CDL/CNL
	SEC 34 TWP 26S RGE 15W		DIL/SONIC
Permanent Datum	GROUND LEVEL		Elevation
Log Measured From	KELLY BUSHING 11' A.G.L.		K.B. 2066
Drilling Measured From	KELLY BUSHING		D.F. 2053
			G.L. 2055
Date	06/09/17		
Run Number	TWO		
Depth Driller	4530		
Depth Logger	4531		
Bottom Logged Interval	4510		
Top Log Interval	3200		
Casing Driller	8 5/8" @ 264		
Casing Logger	264		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 5000 PPM
Density / Viscosity	9.1/55		
pH / Fluid Loss	10.0/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.7@82		
Rmt @ Meas. Temp	.52@82		
Rmc @ Meas. Temp	.84@82		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.47@120		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	120F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	MAX LOVELY		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
WEST OF PRATT TO BYERS RD. NORTH TO 50 RD.
3 WEST, 1 NORTH,
1 WEST.

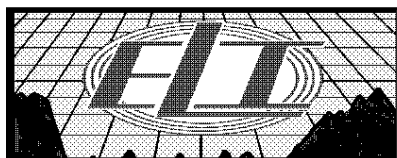


MAIN PASS

Database File: 1470ddn.db
Dataset Pathname: passMIC
Presentation Format: _micro
Dataset Creation: Sat Jun 10 02:26:37 2017 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

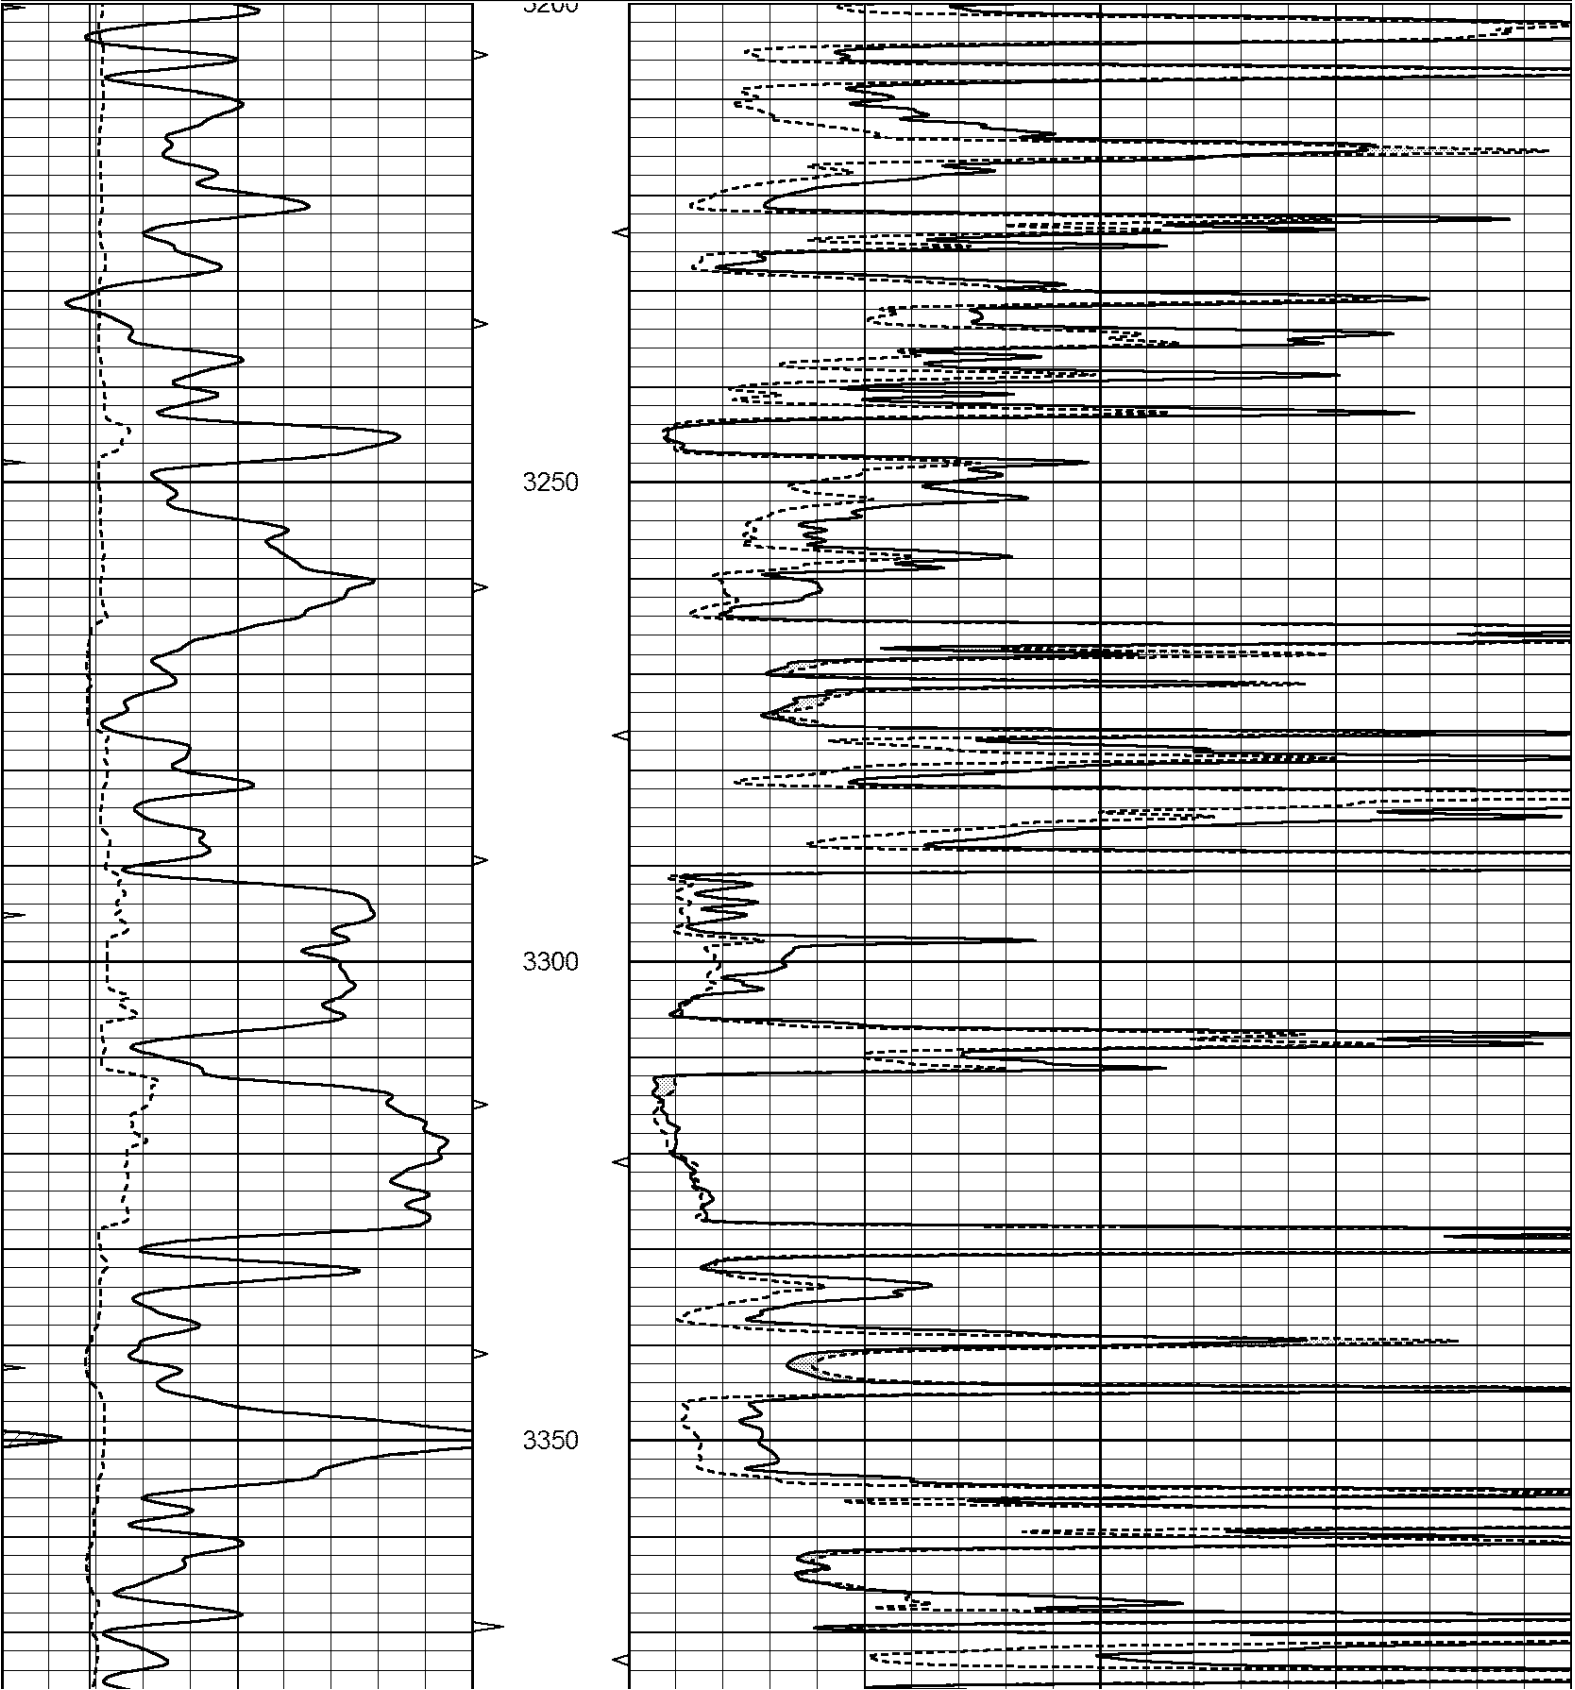

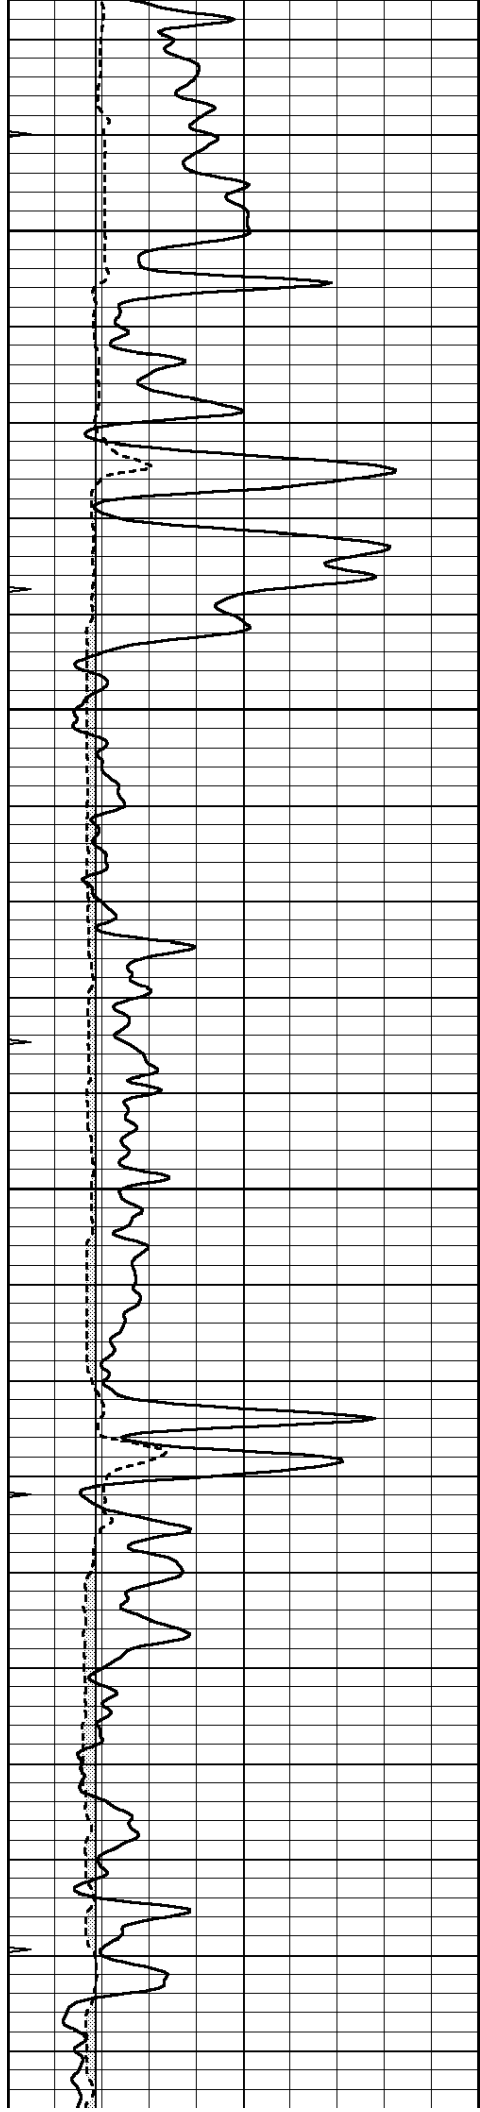




3400


3450

3500

3550

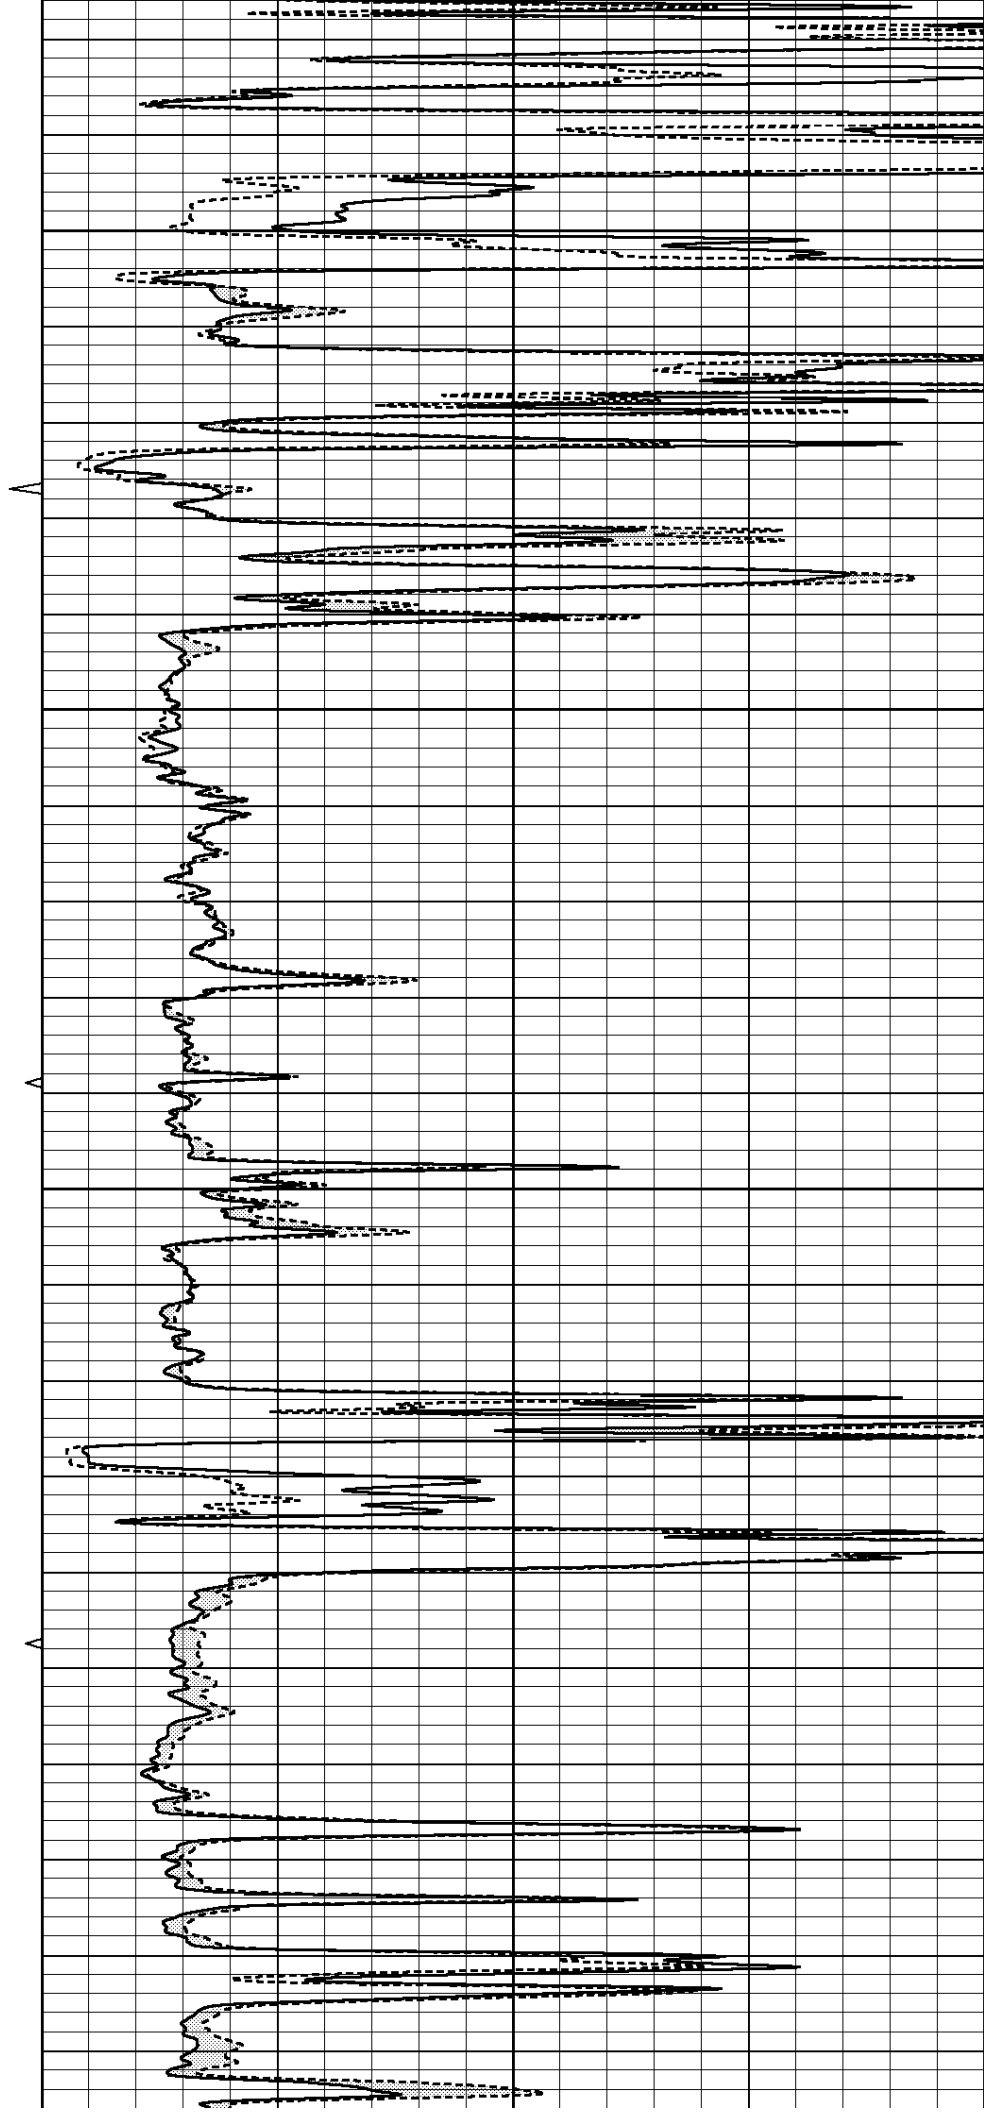

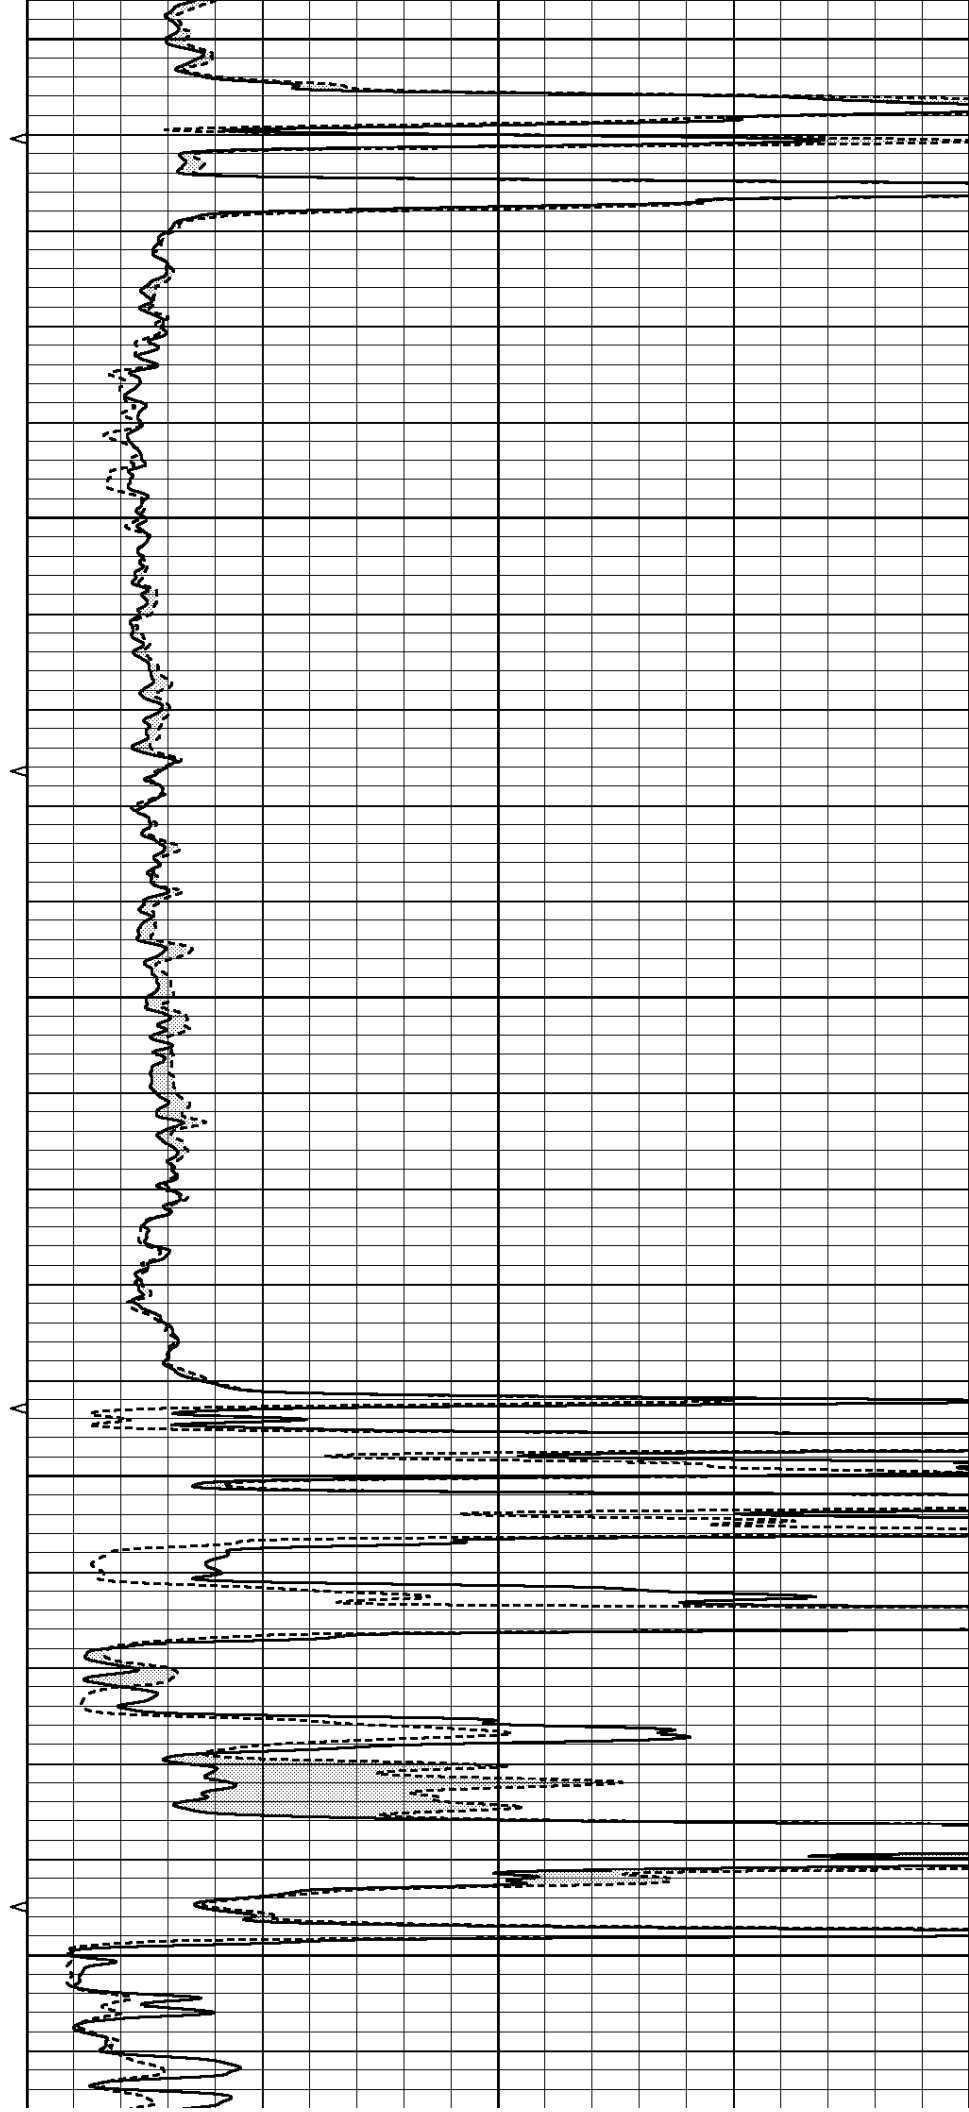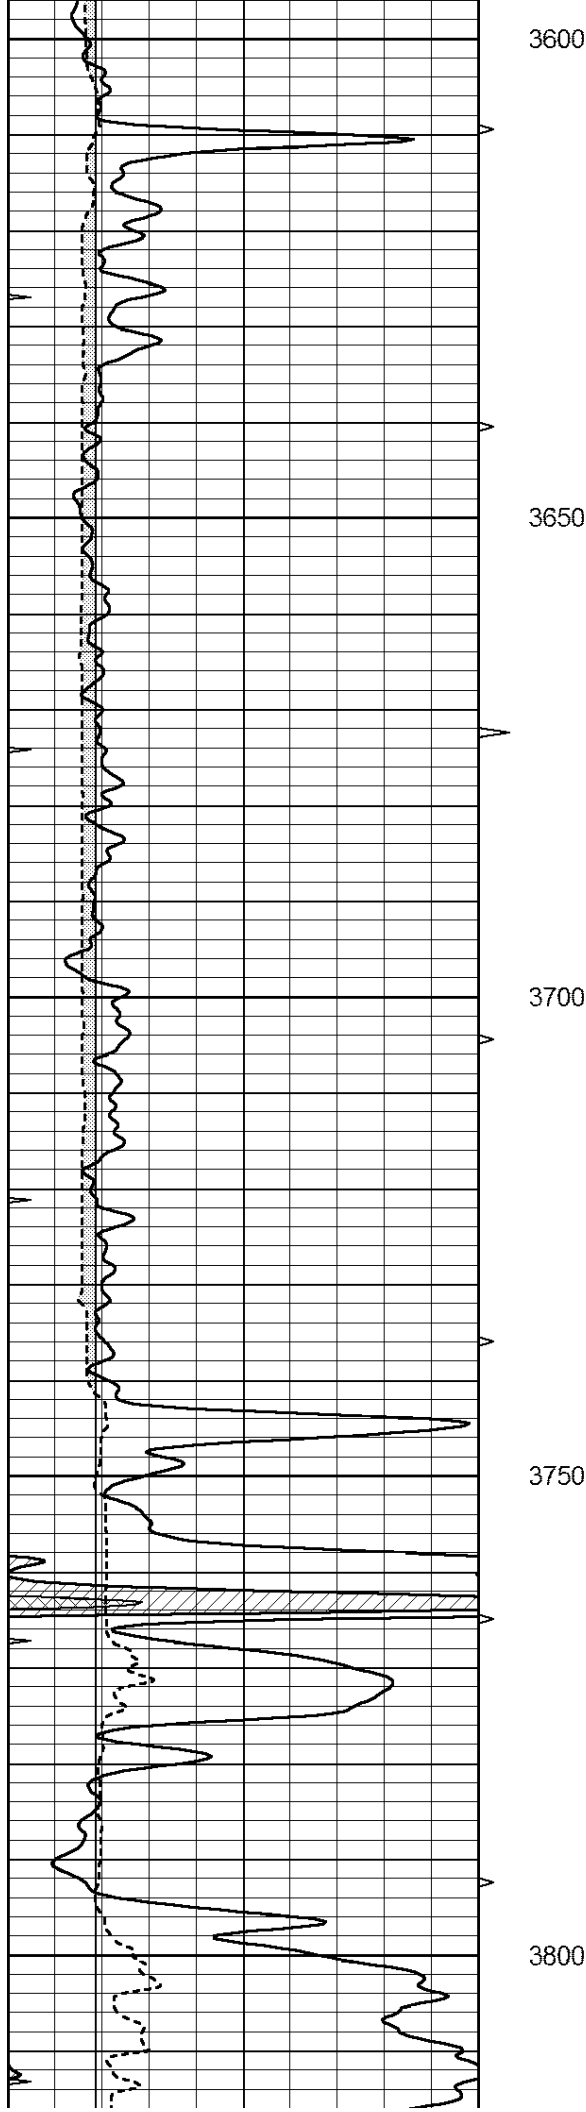

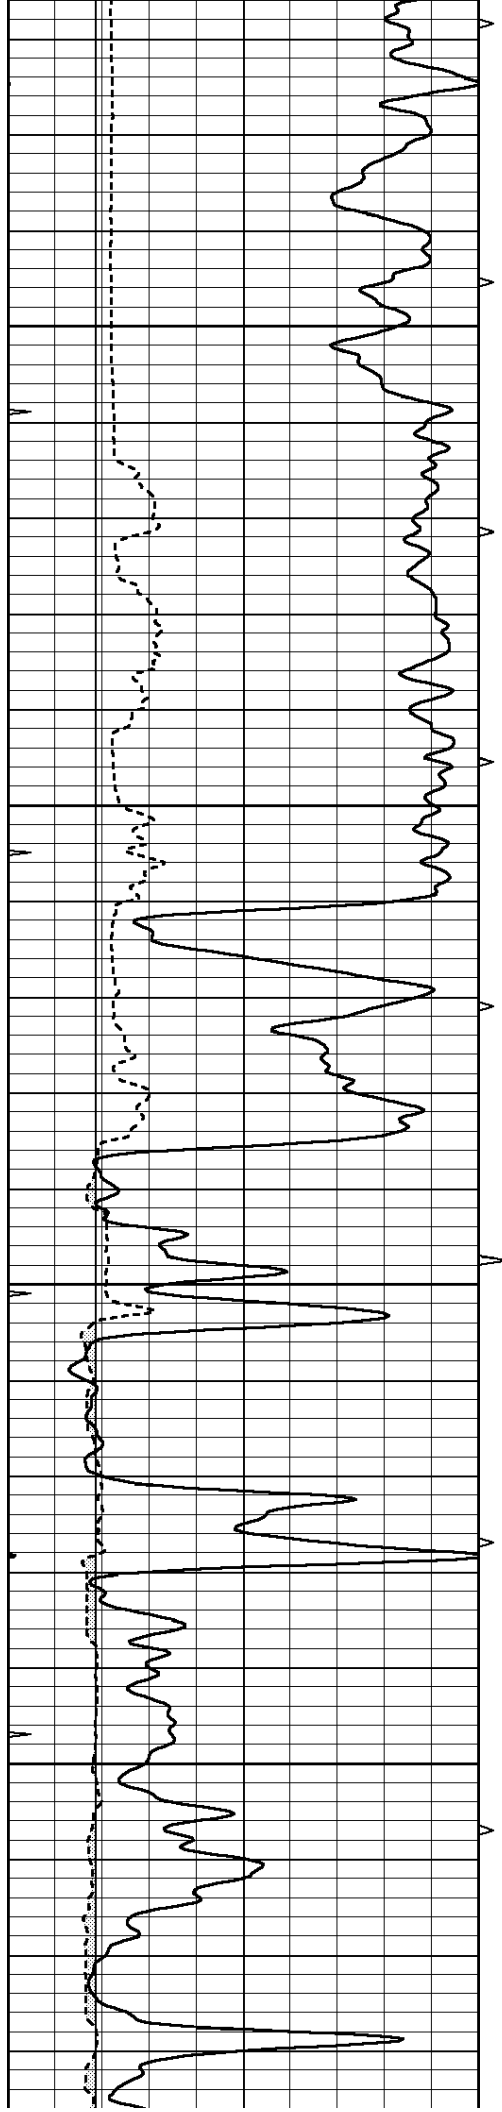



3850

3900

3950

4000

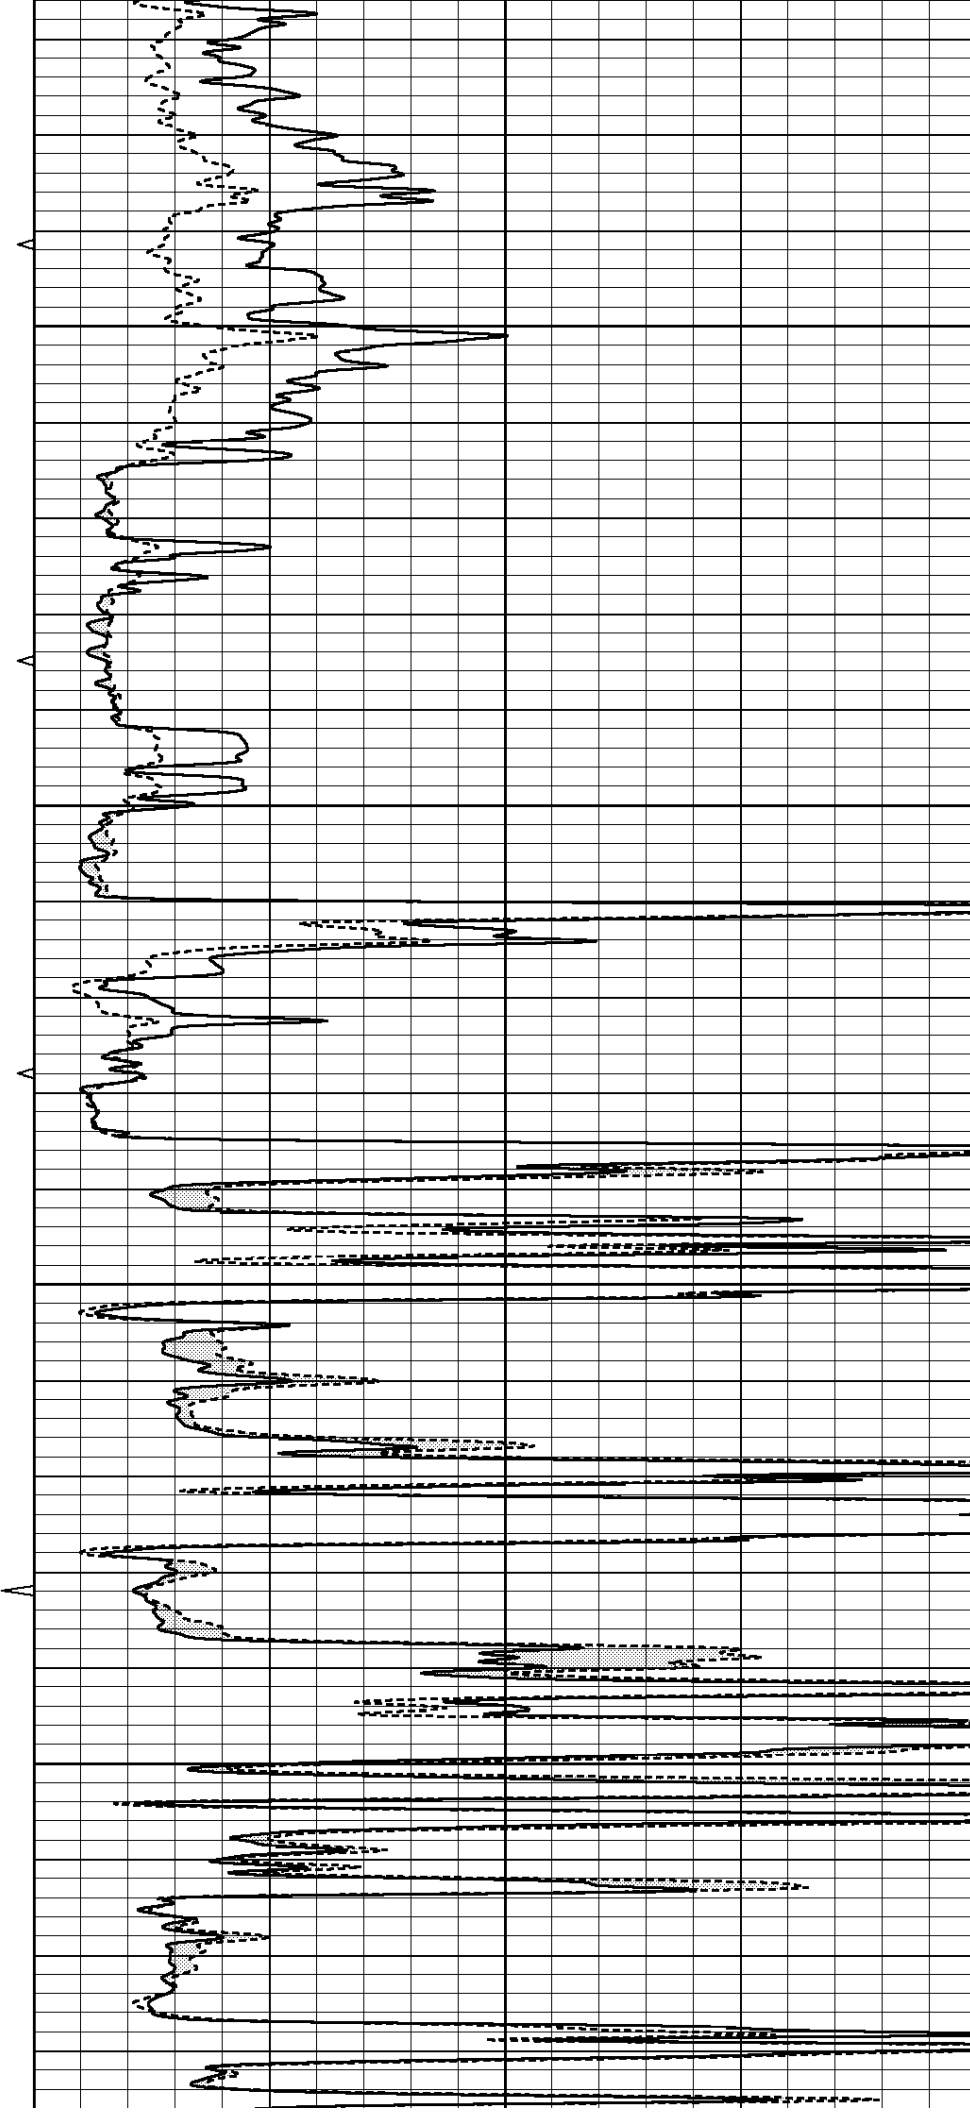

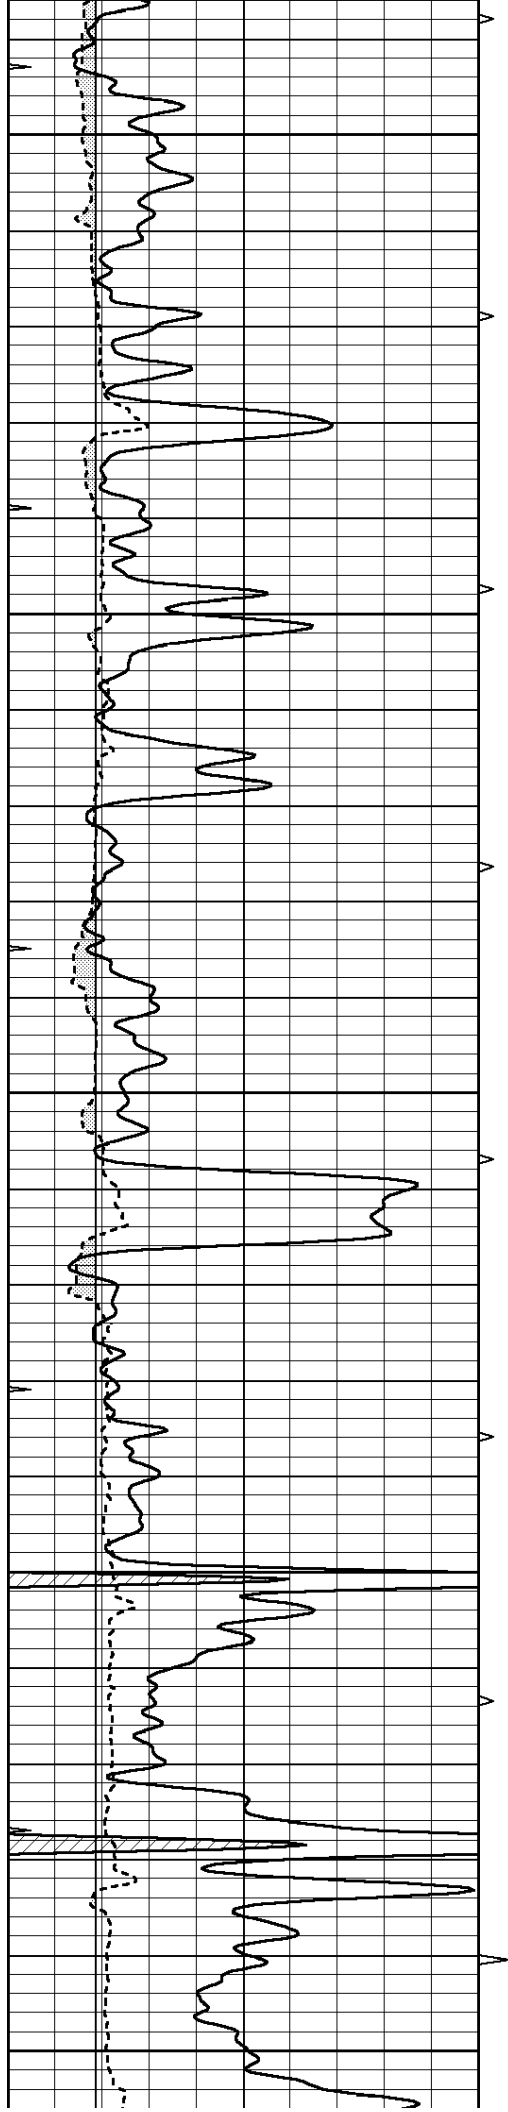


4050



4100



4150

4200

4250

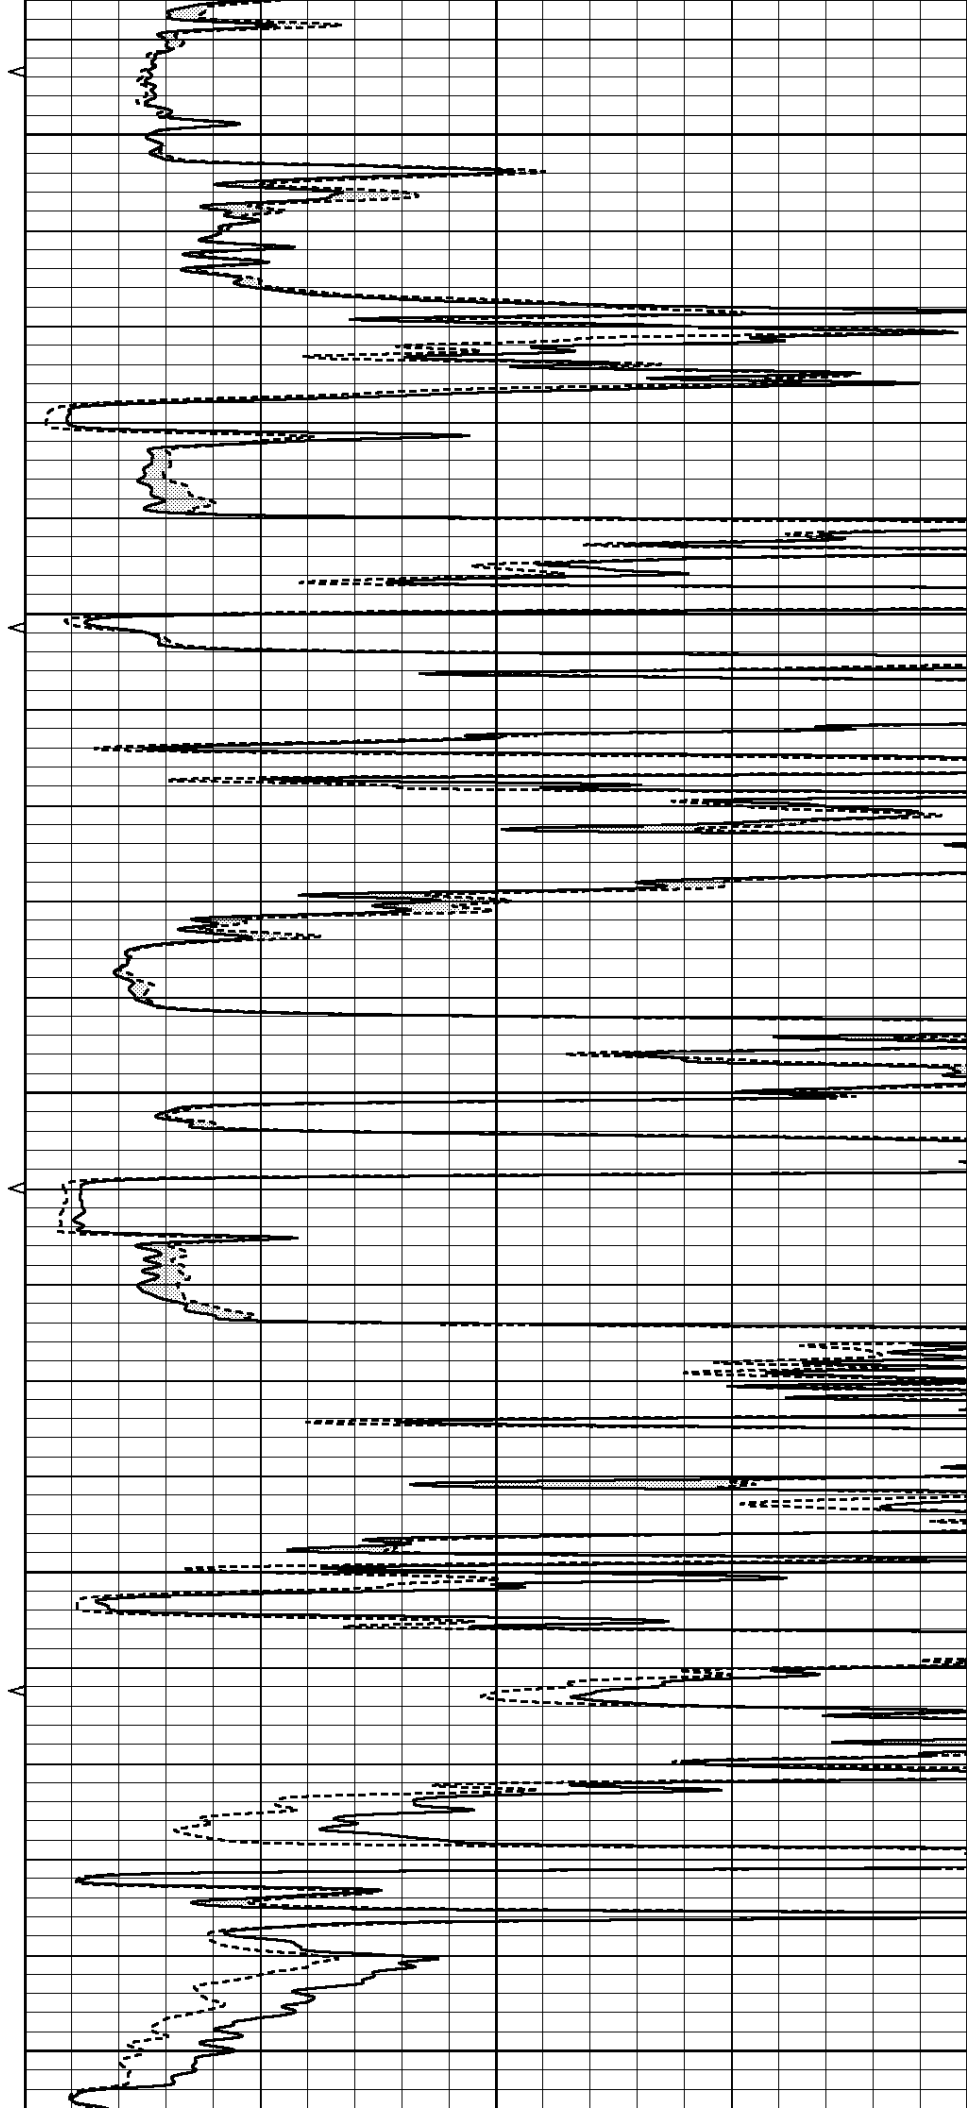

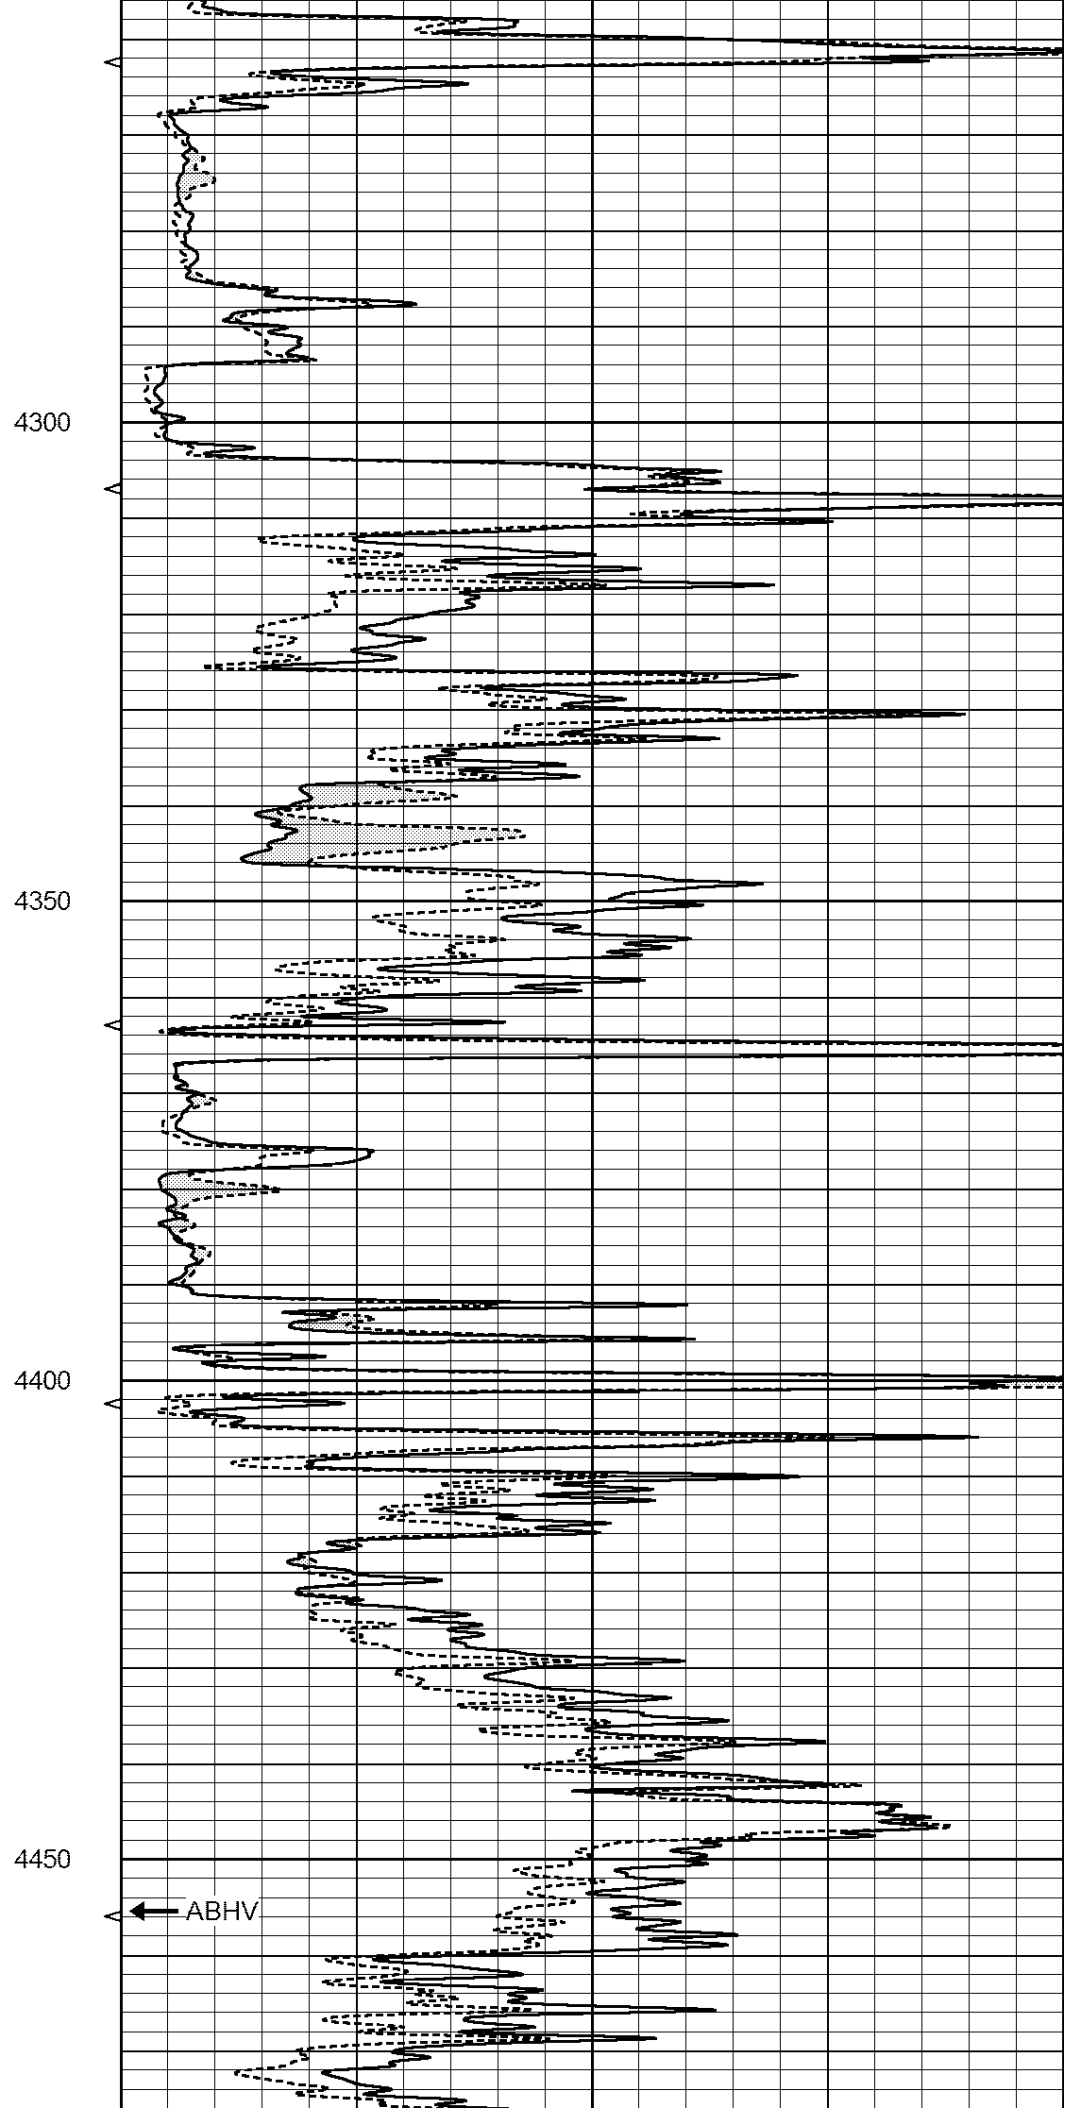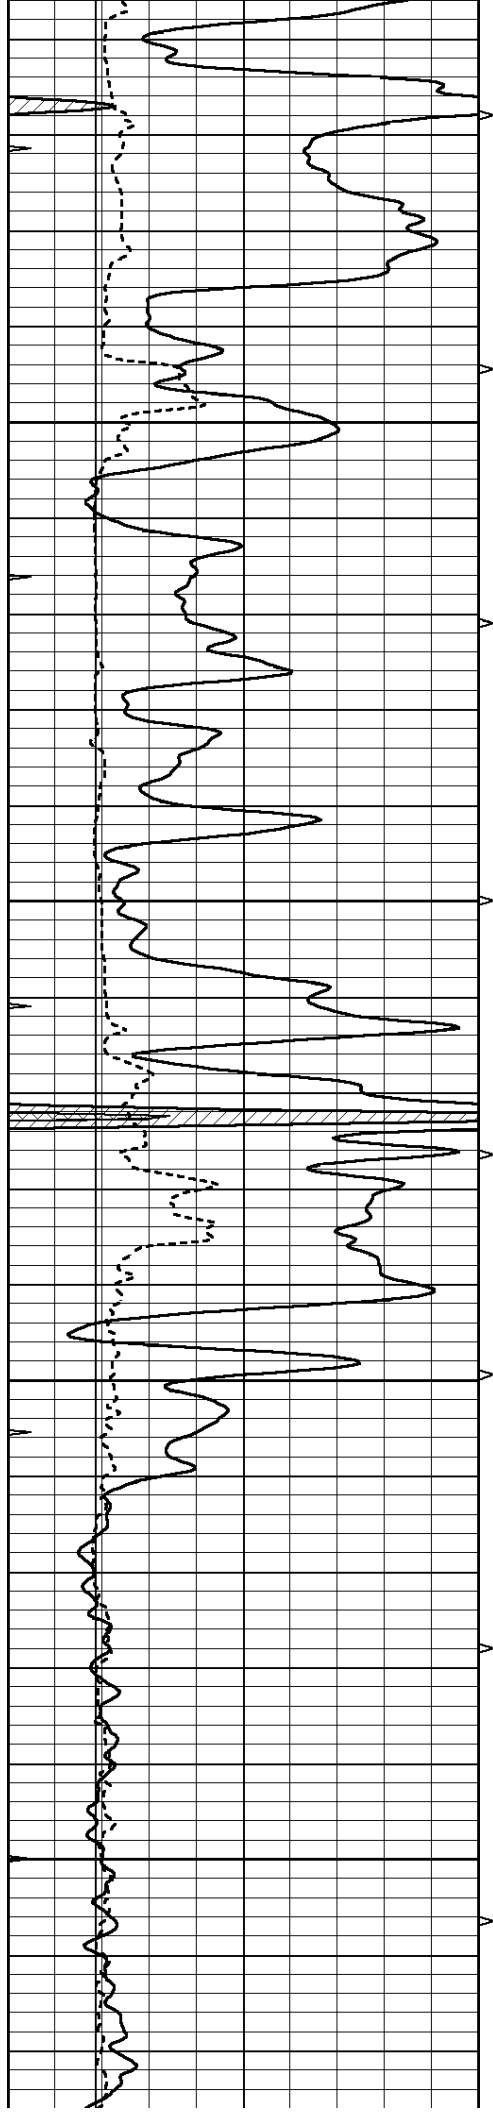


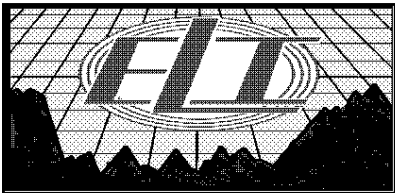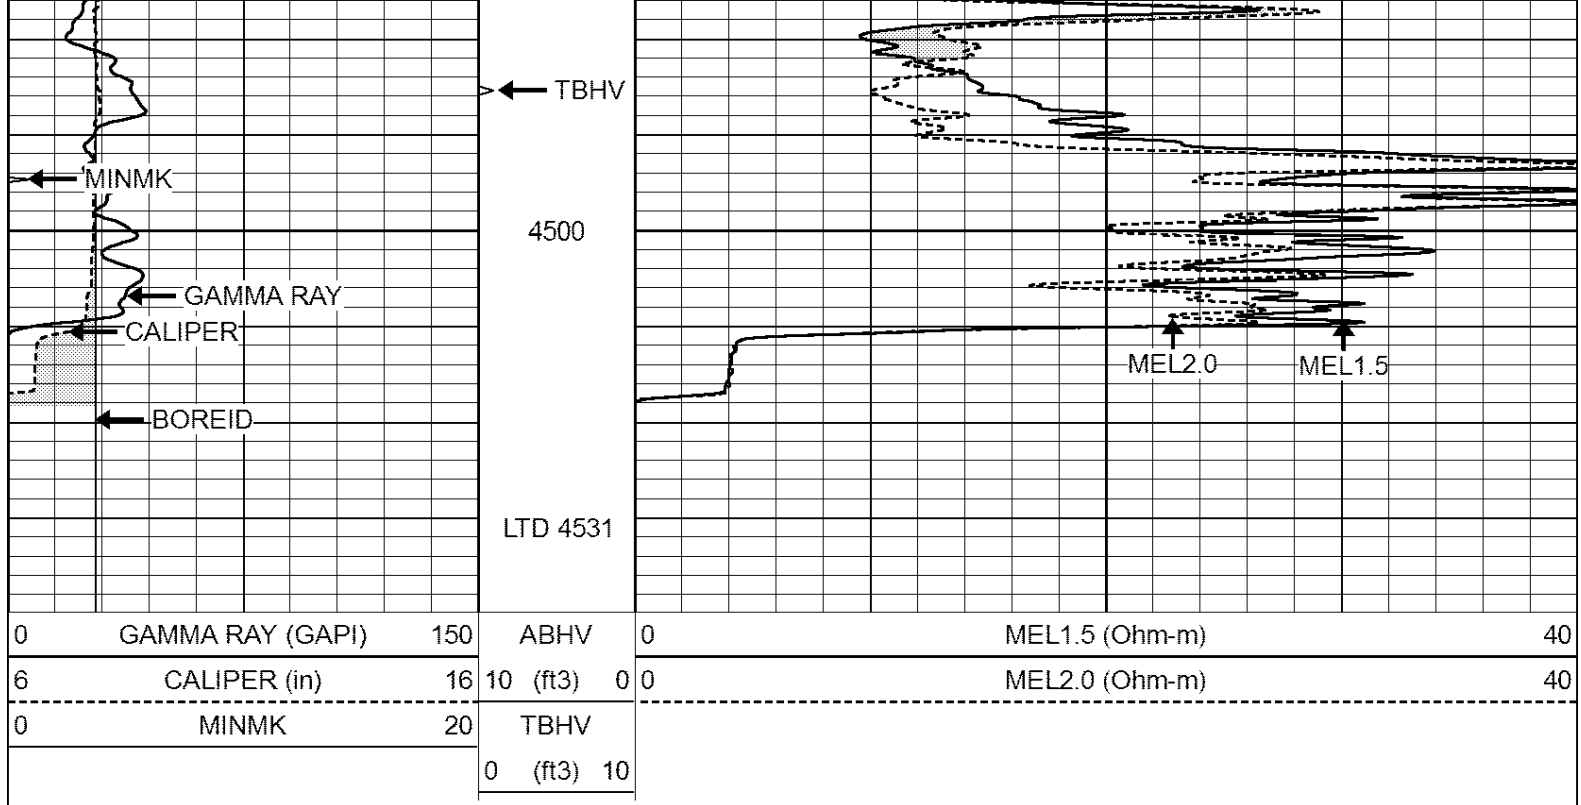


REPEAT SECTION

Database File: 1470ddn.db
 Dataset Pathname: pass5.1
 Presentation Format: _micro
 Dataset Creation: Sat Jun 10 02:05:28 2017 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

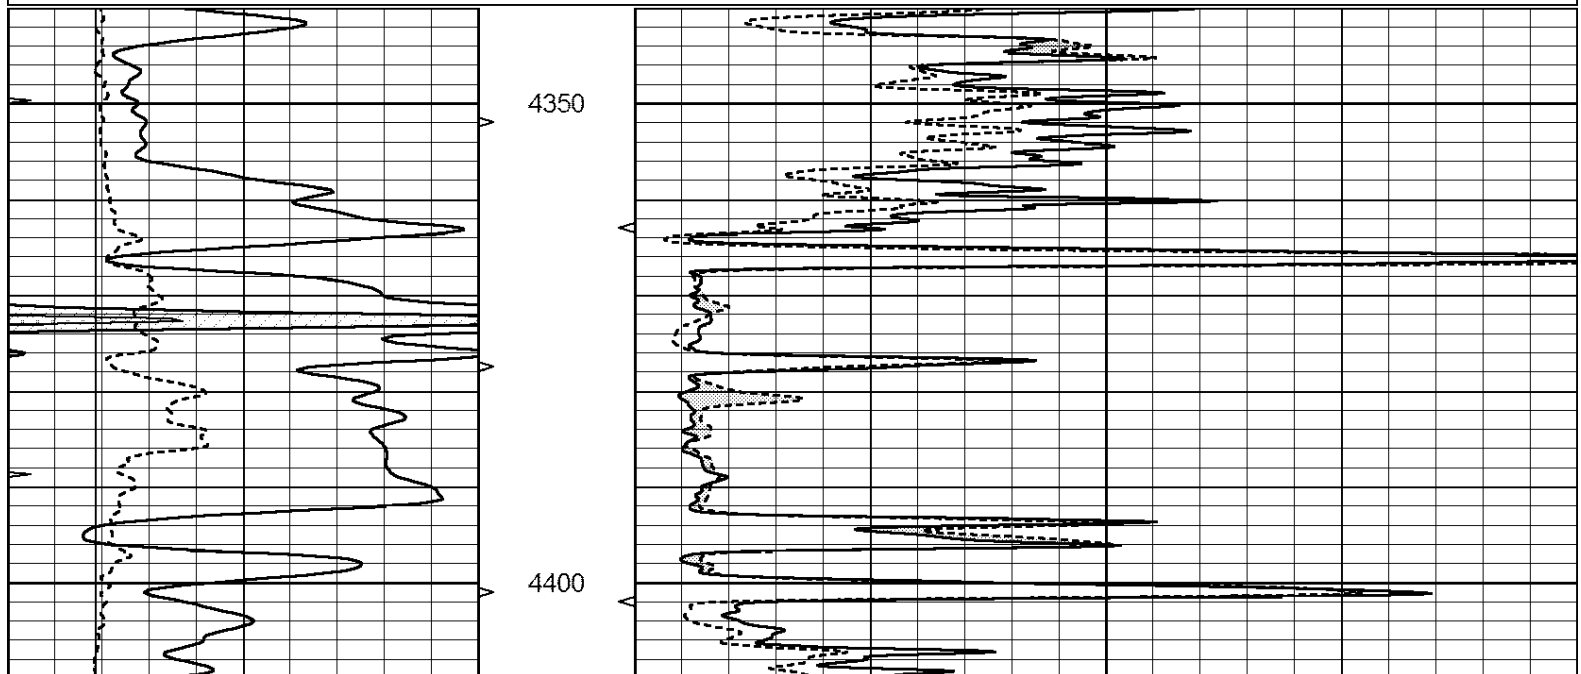

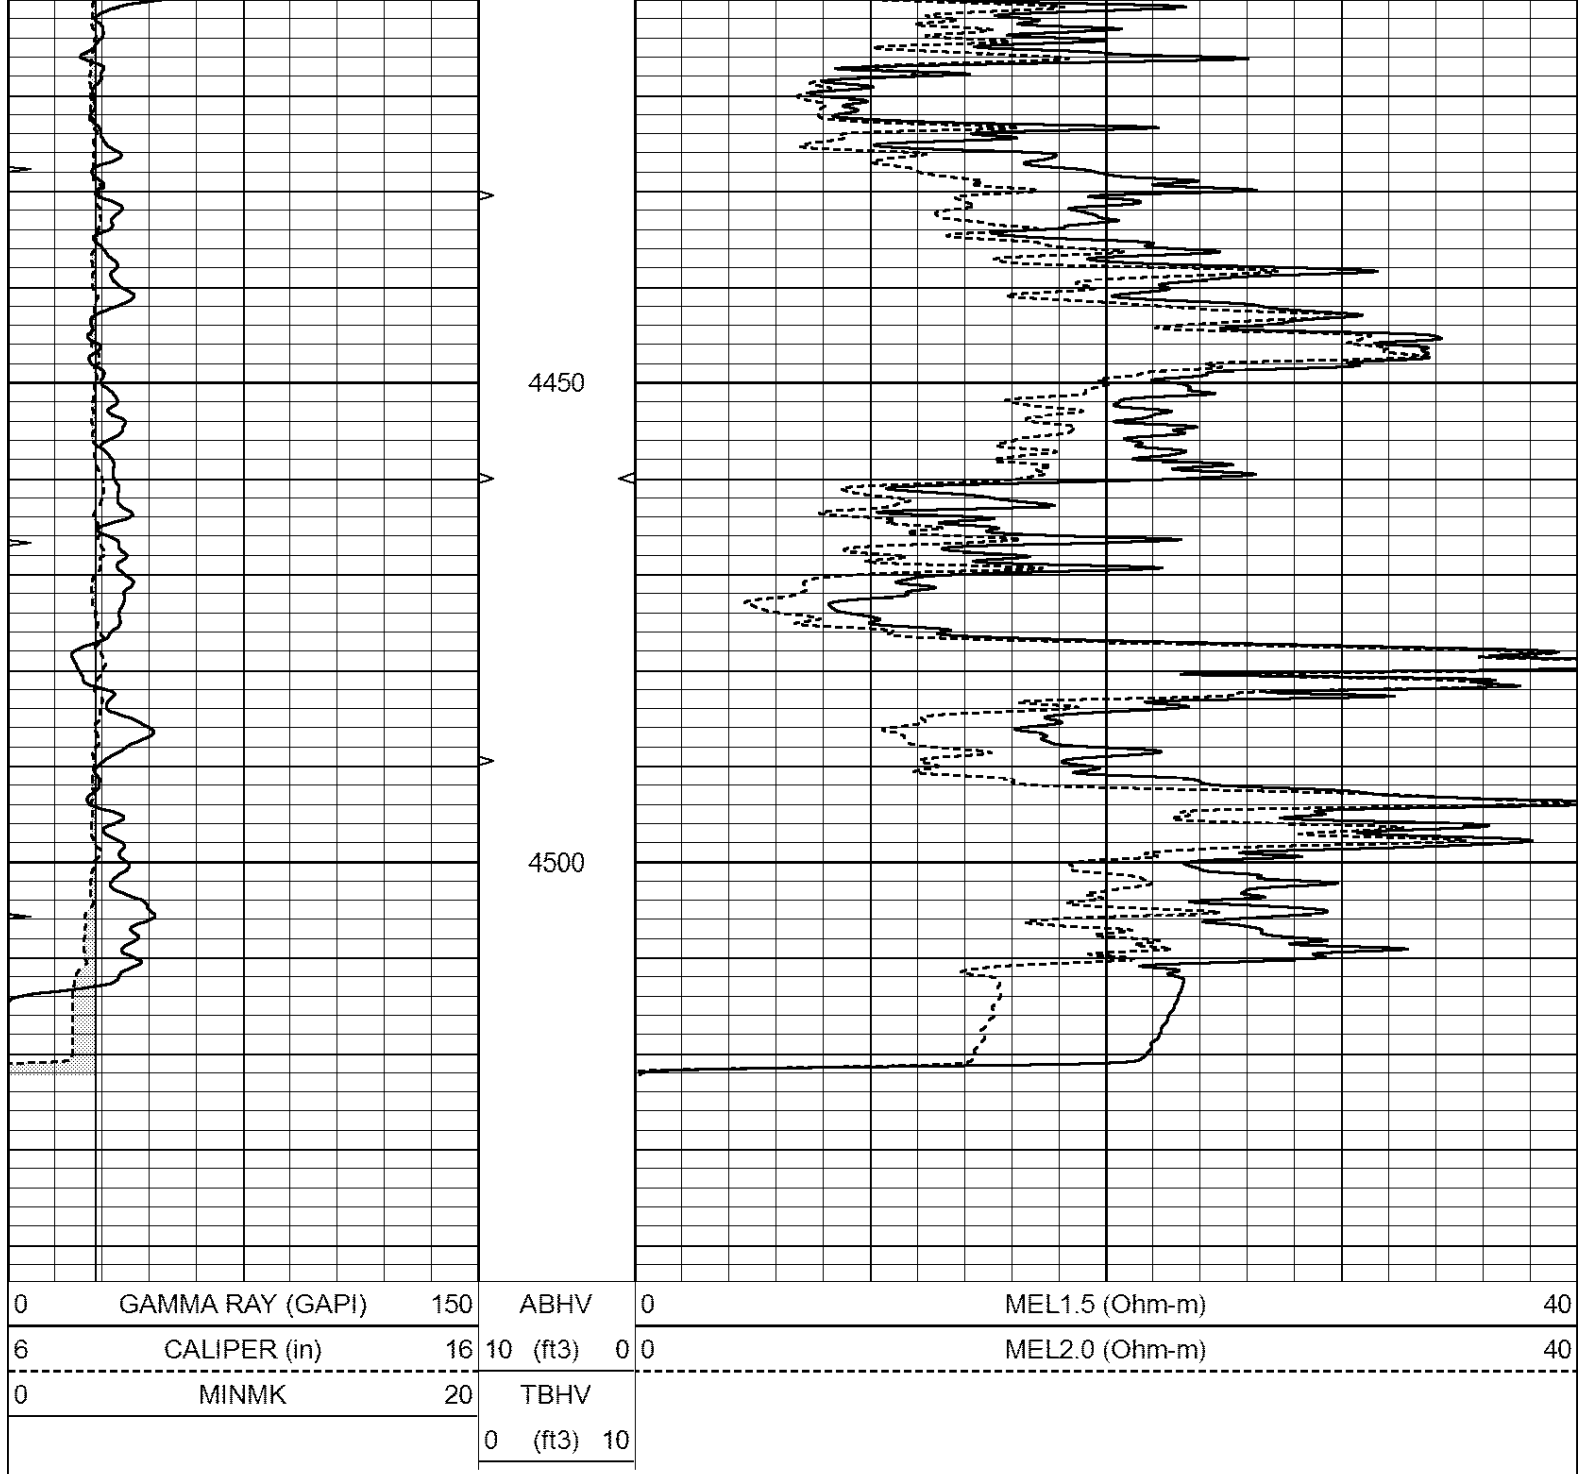

Calibration Report			
Database File:	1470ddn.db		
Dataset Pathname:	pass5.1		
Dataset Creation:	Sat Jun 10 02:05:28 2017 by Calc Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	MICRO3		
Tool Model:	PROBE		
Performed:	Wed Jun 07 21:35:28 2017		
Caliper Calibration:	Gain=3.745	Offset=-8.917	
References	Low Cal	High Cal	
Readings	7.000	14.000	
	3.930	5.799	
1.5" Calibration:	Gain=130.000	Offset=0.200	

References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	0.228
2" Calibration:	Gain=110.553	Offset=-1.220
References	Low Cal	High Cal
Readings	0.000	20.000
	0.005	0.175
Gamma Ray Calibration Report		
Serial Number:	GR2	
Tool Model:	OPEN	
Performed:	Wed Jun 07 21:43:13 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3800	GAPI/cps