

MICRO LOG

Company		VINCENT OIL CORPORATION	
Well		KEOUGH #6-34	
Field		MULLBERRY CREEK	
County		FORD	
State		KANSAS	
Location:		APL # : 15-057-20981-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		2140' FSL & 1458' FWL	
Drilling Measured From		SW - NW - NE - SW	
SEC 34 TWP 28S RGE 23W		Elevation 2531	
Other Services		CDL/CNL/PE	
		DIL/SONIC	
Elevation		K.B. 2544	
		D.F. 2542	
		G.L. 2531	
Date	7/7/17		
Run Number	TWO		
Depth Driller	5370		
Depth Logger	5368		
Bottom Logged Interval	5352		
Top Log Interval	4200		
Casing Driller	8 5/8"@648'		
Casing Logger	648		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 11,500 PPM	
Density / Viscosity	9.1/89		
pH / Fluid Loss	9.9/13.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.950@90F		
Rmf @ Meas. Temp	.713@90F		
Rmc @ Meas. Temp	1.14@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.668@128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	10:45 P.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TOM DUDGEON		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS


KINGSDOWN, KS. & HWY 54, 2N. ON "RD. 125" TO "WILBURN RD.", 4W., N. INTO ACROSS FROM HOUSE


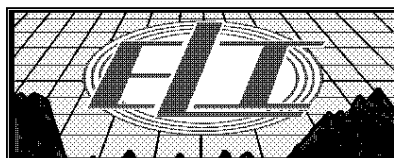




MAIN SECTION


Database File: 1584pe.db
Dataset Pathname: pass7.2
Presentation Format: micro
Dataset Creation: Sat Jul 08 00:42:08 2017
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

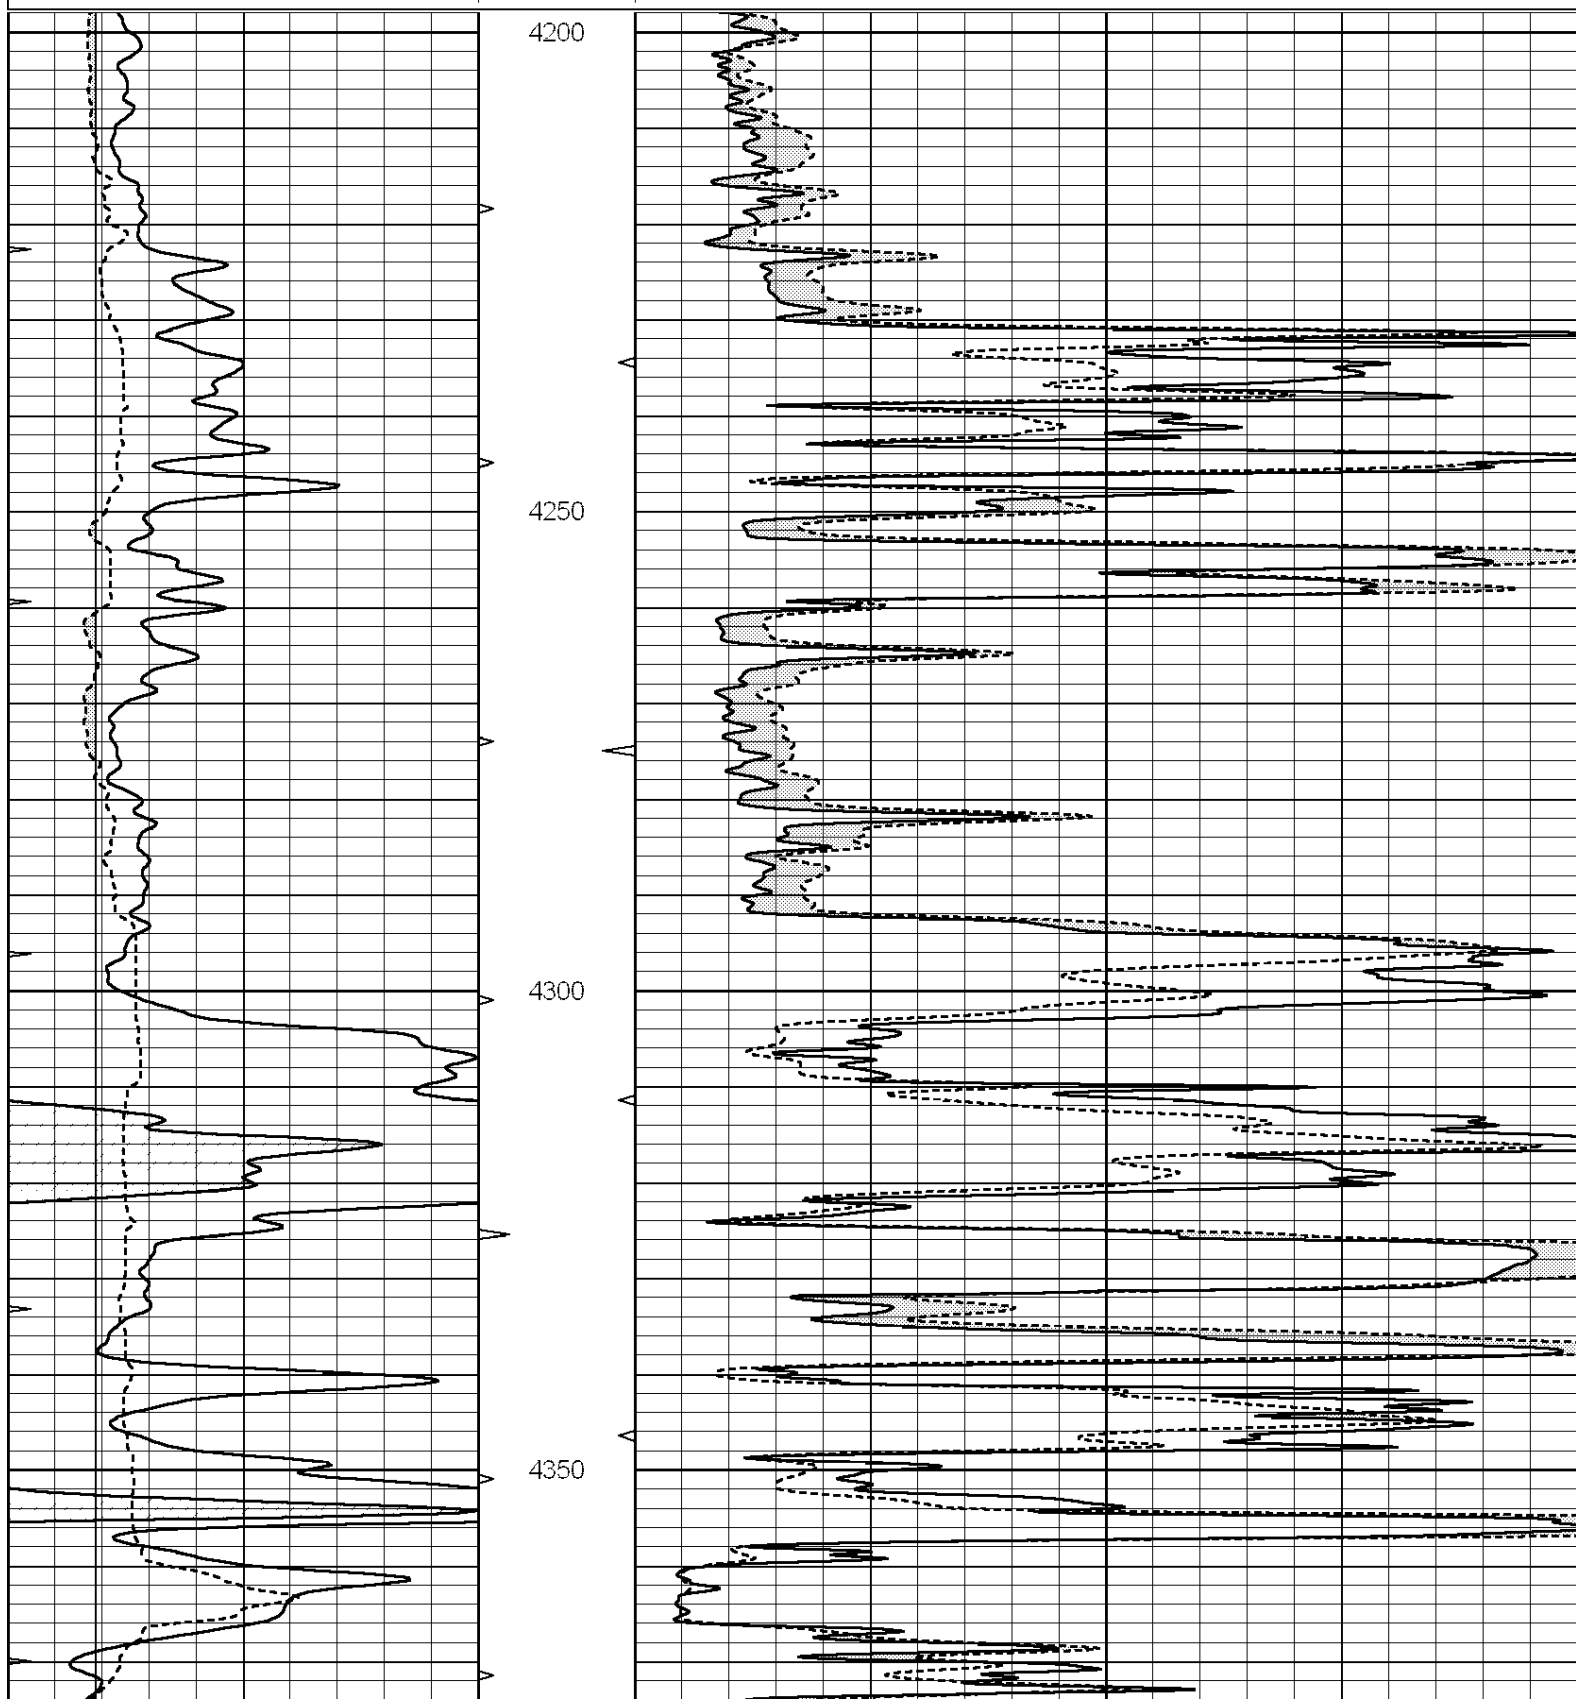

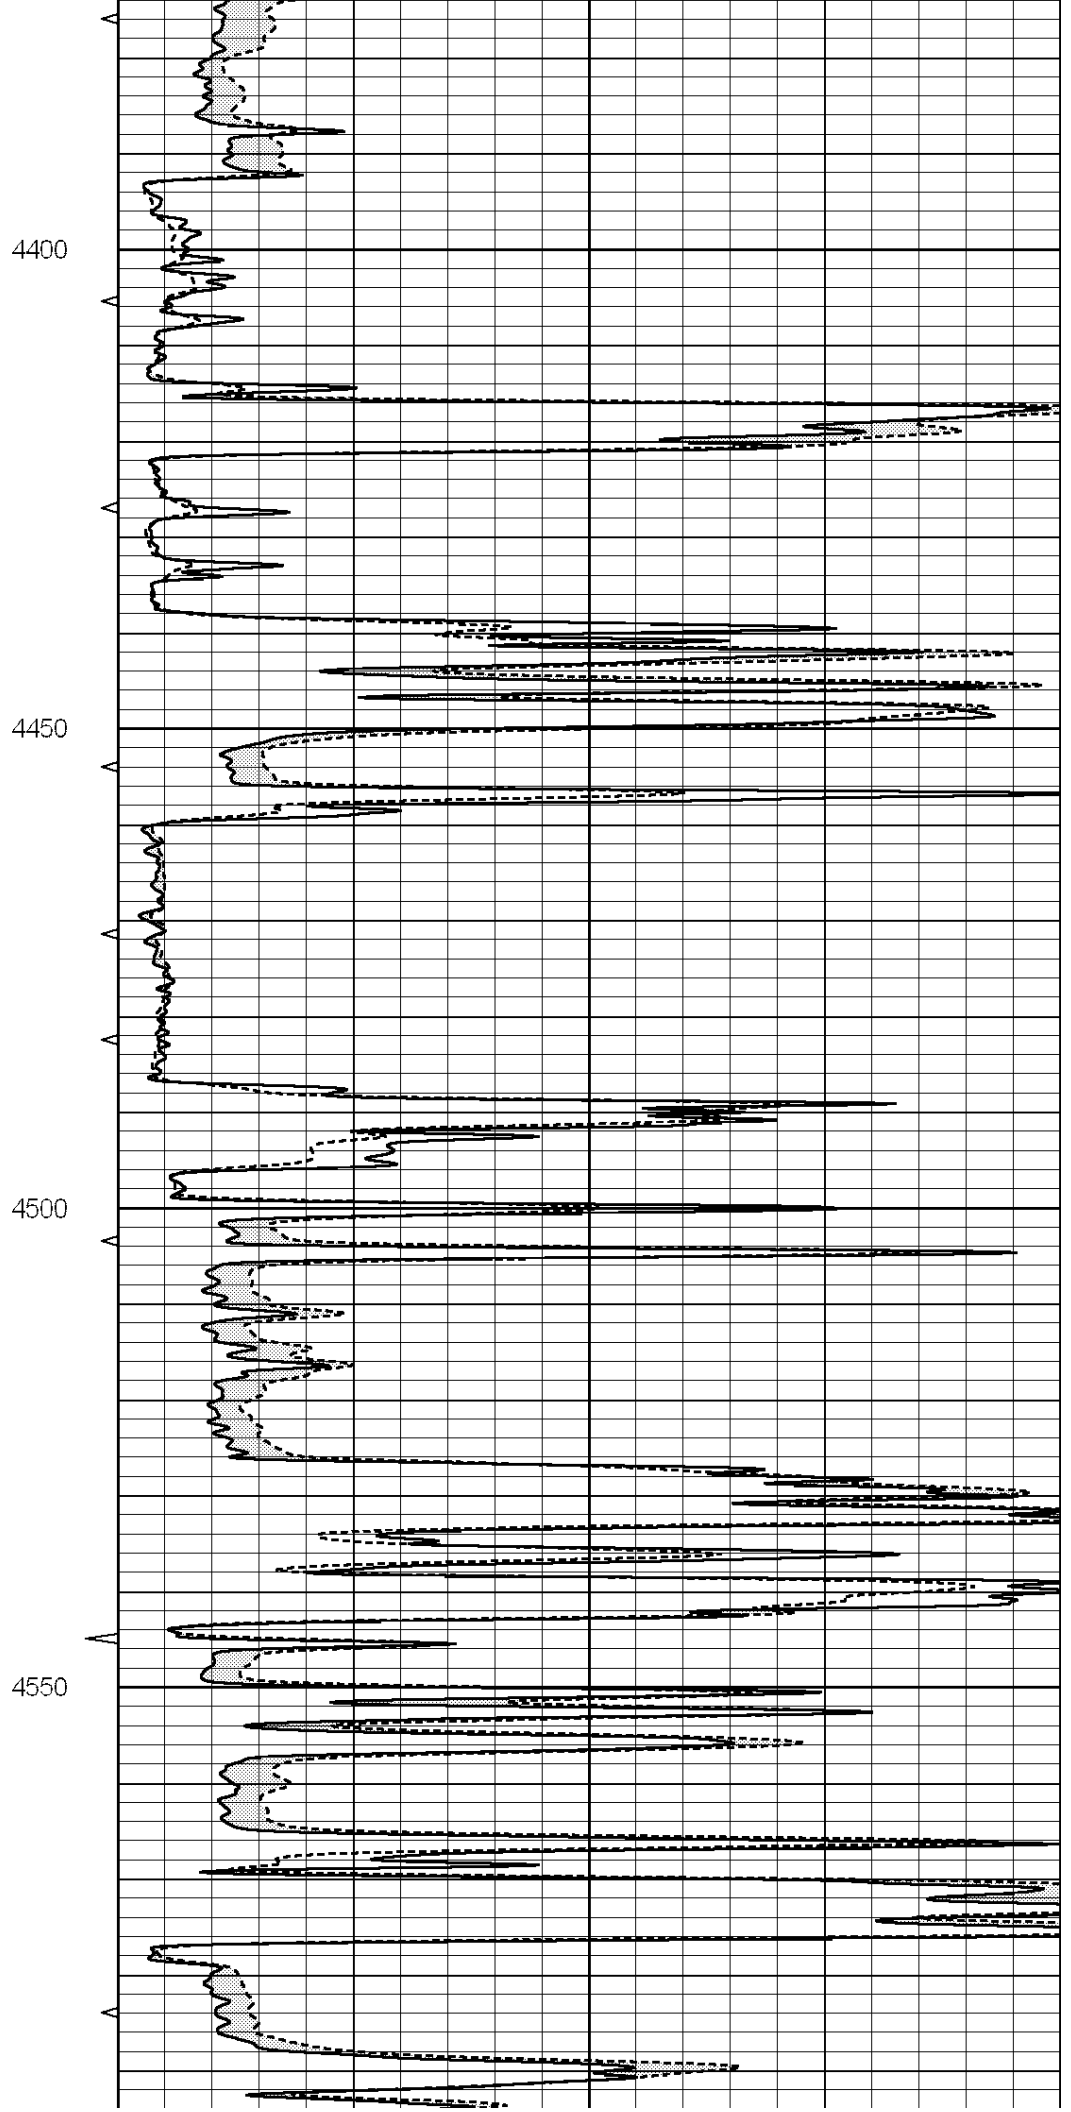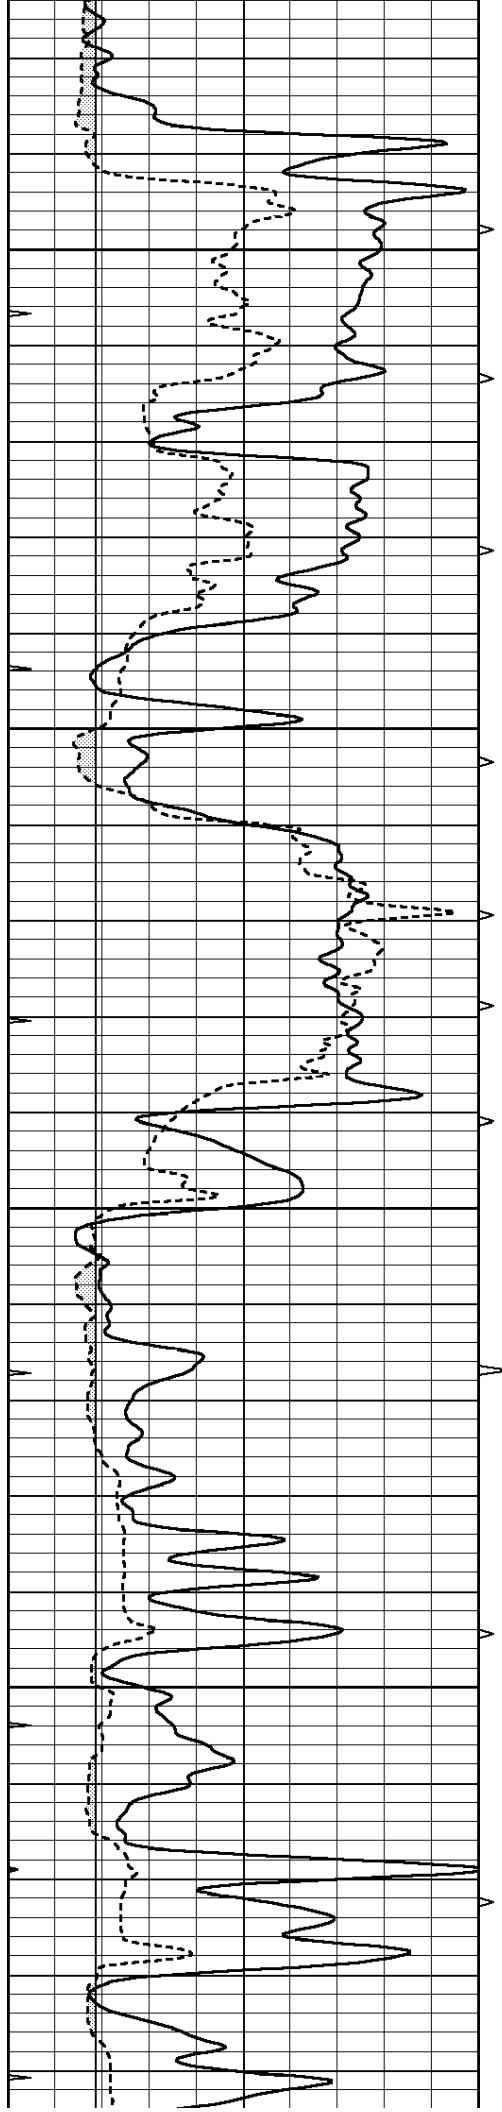

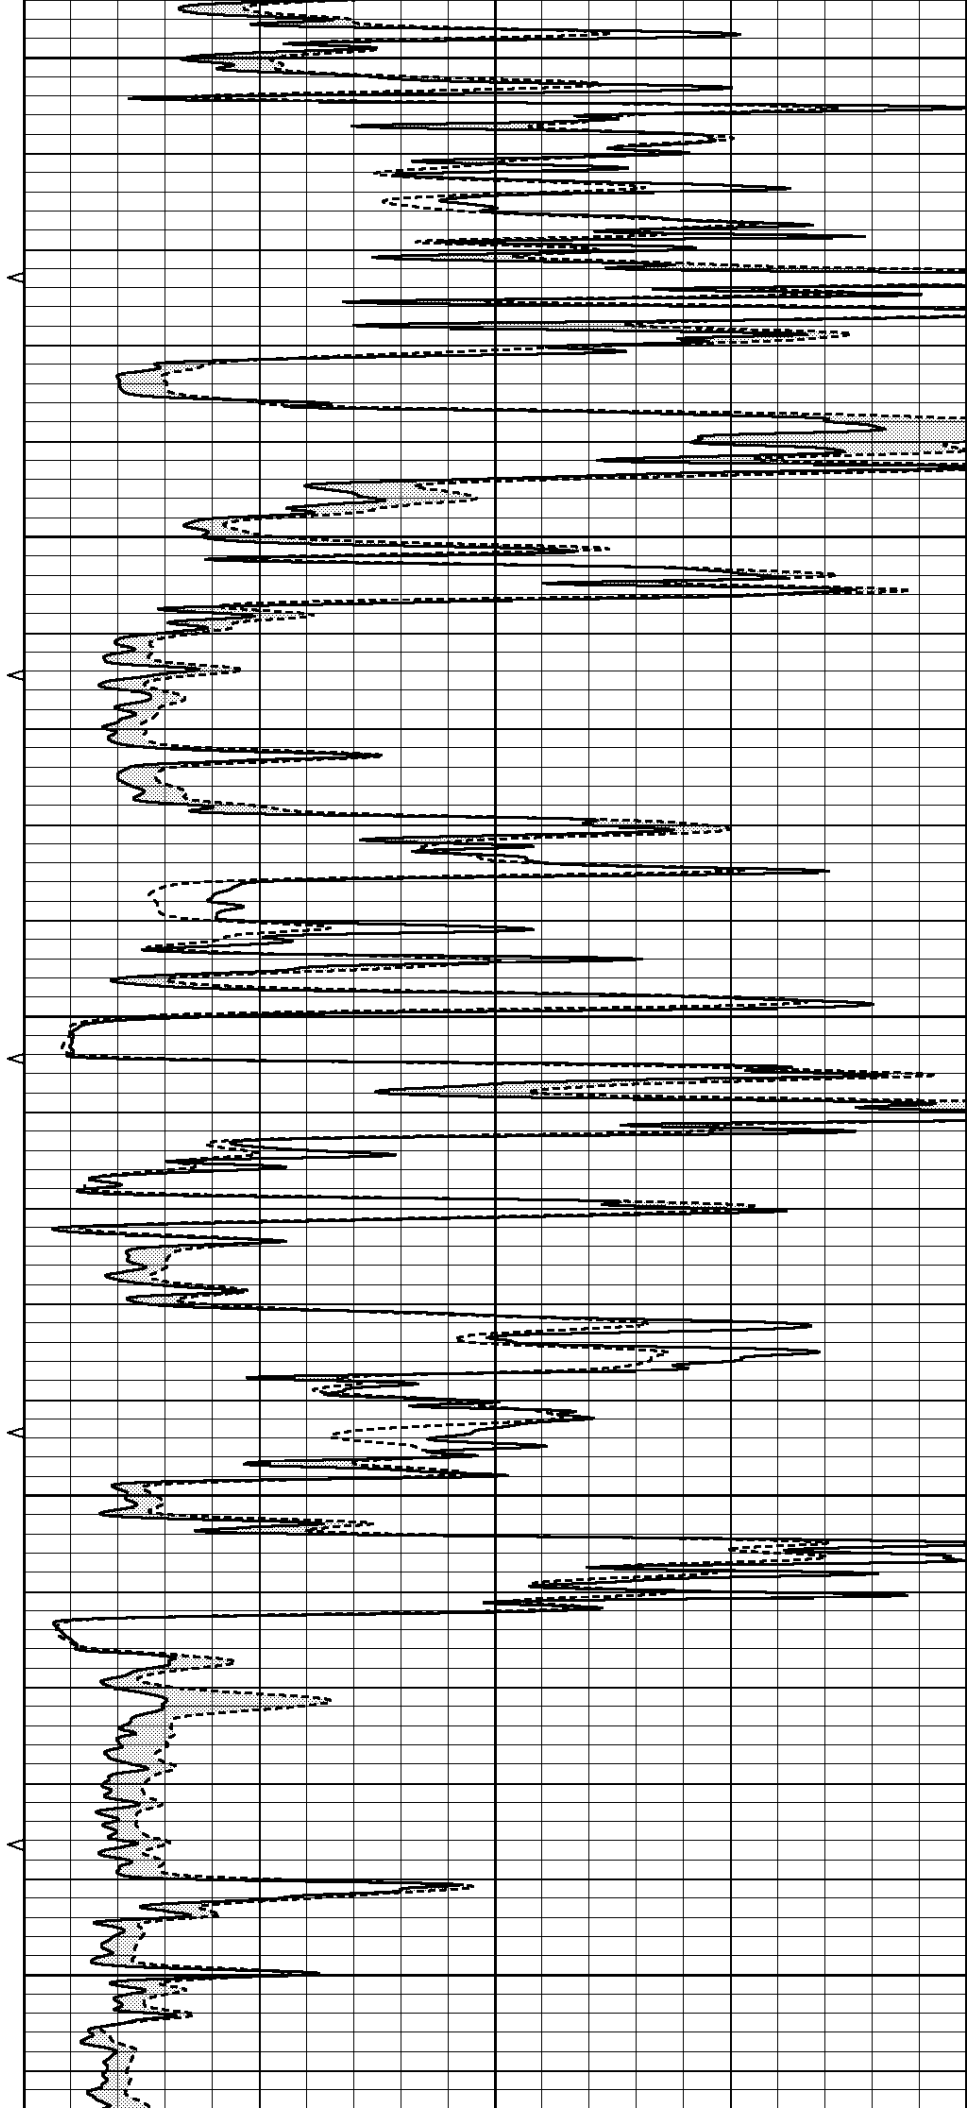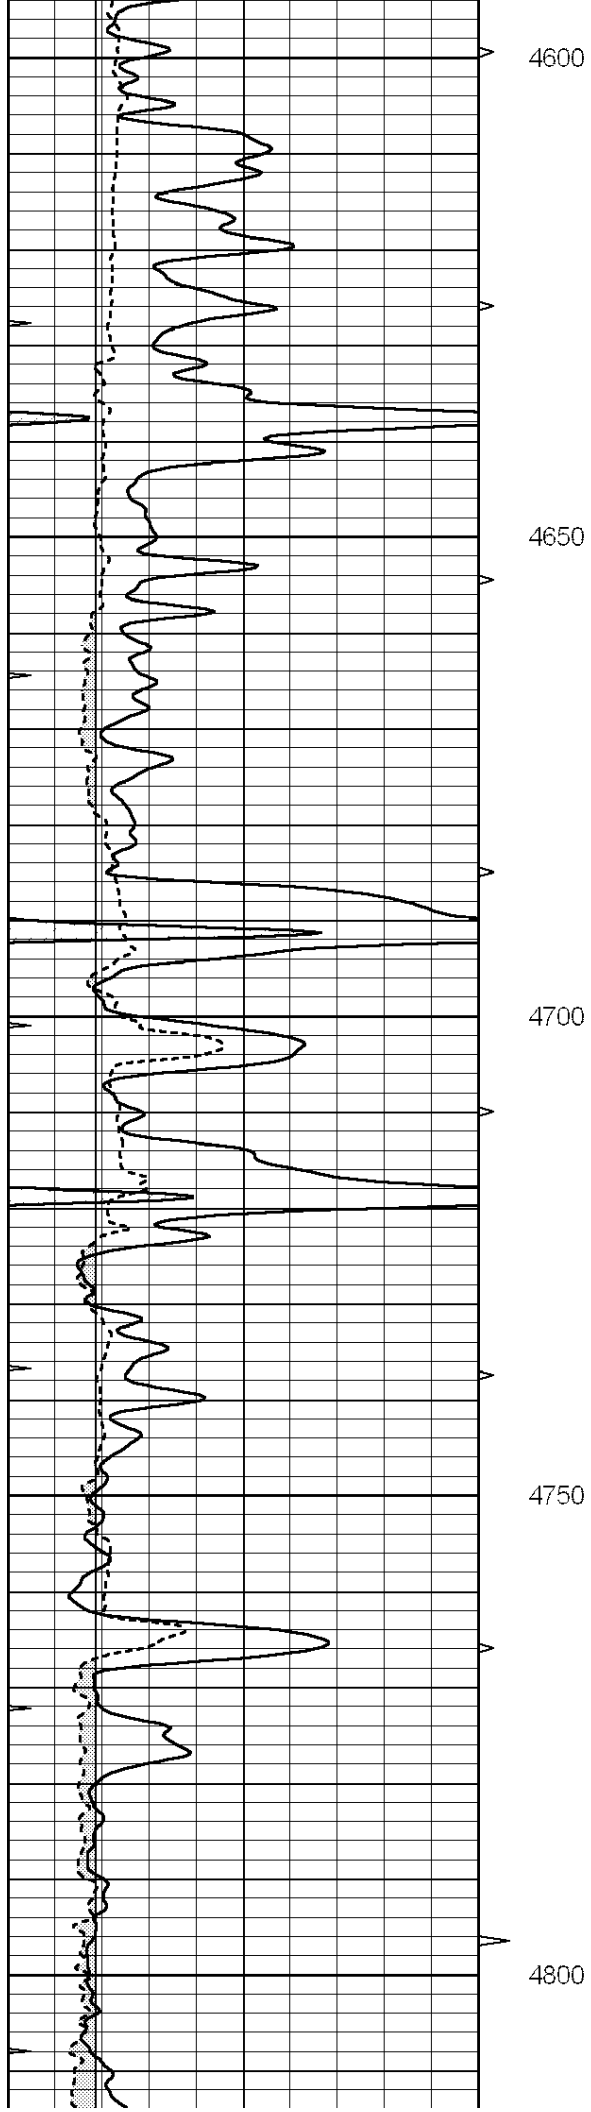

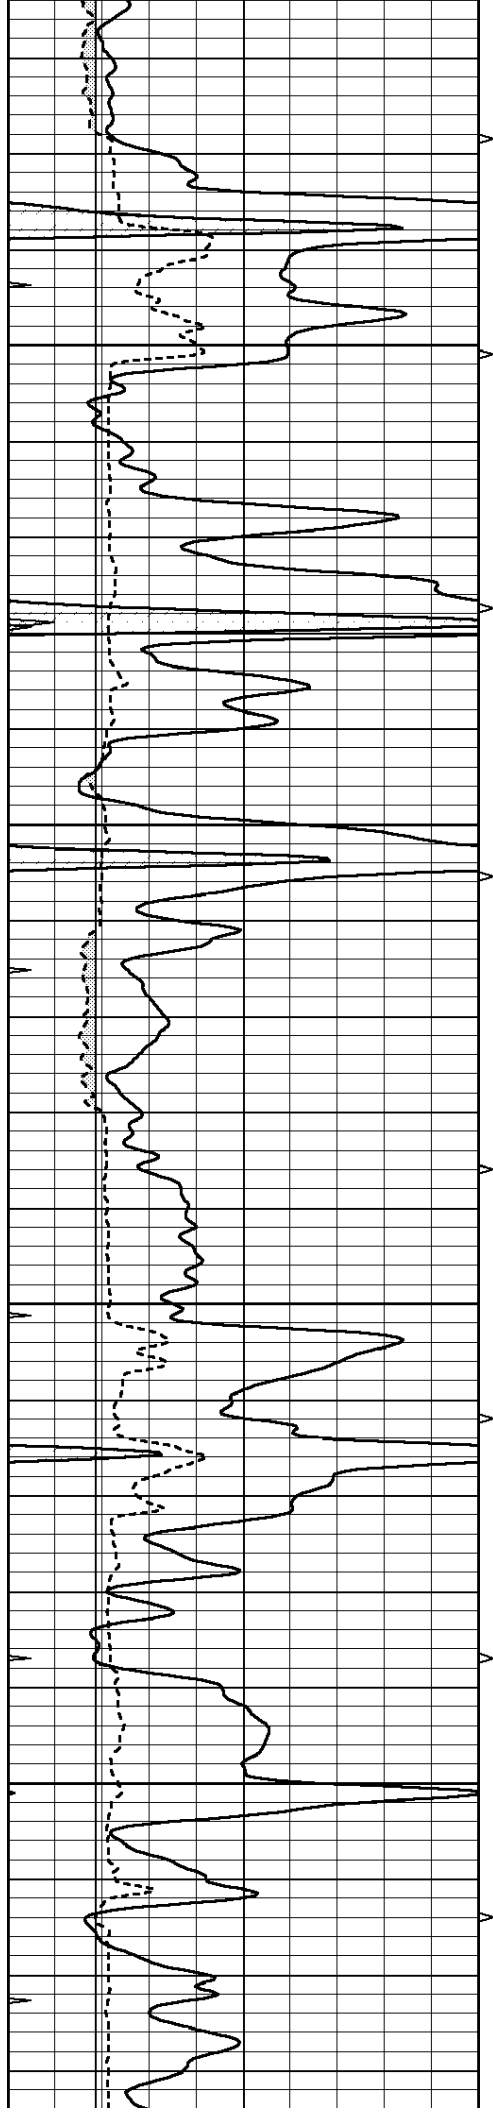



4850

4900

4950

5000

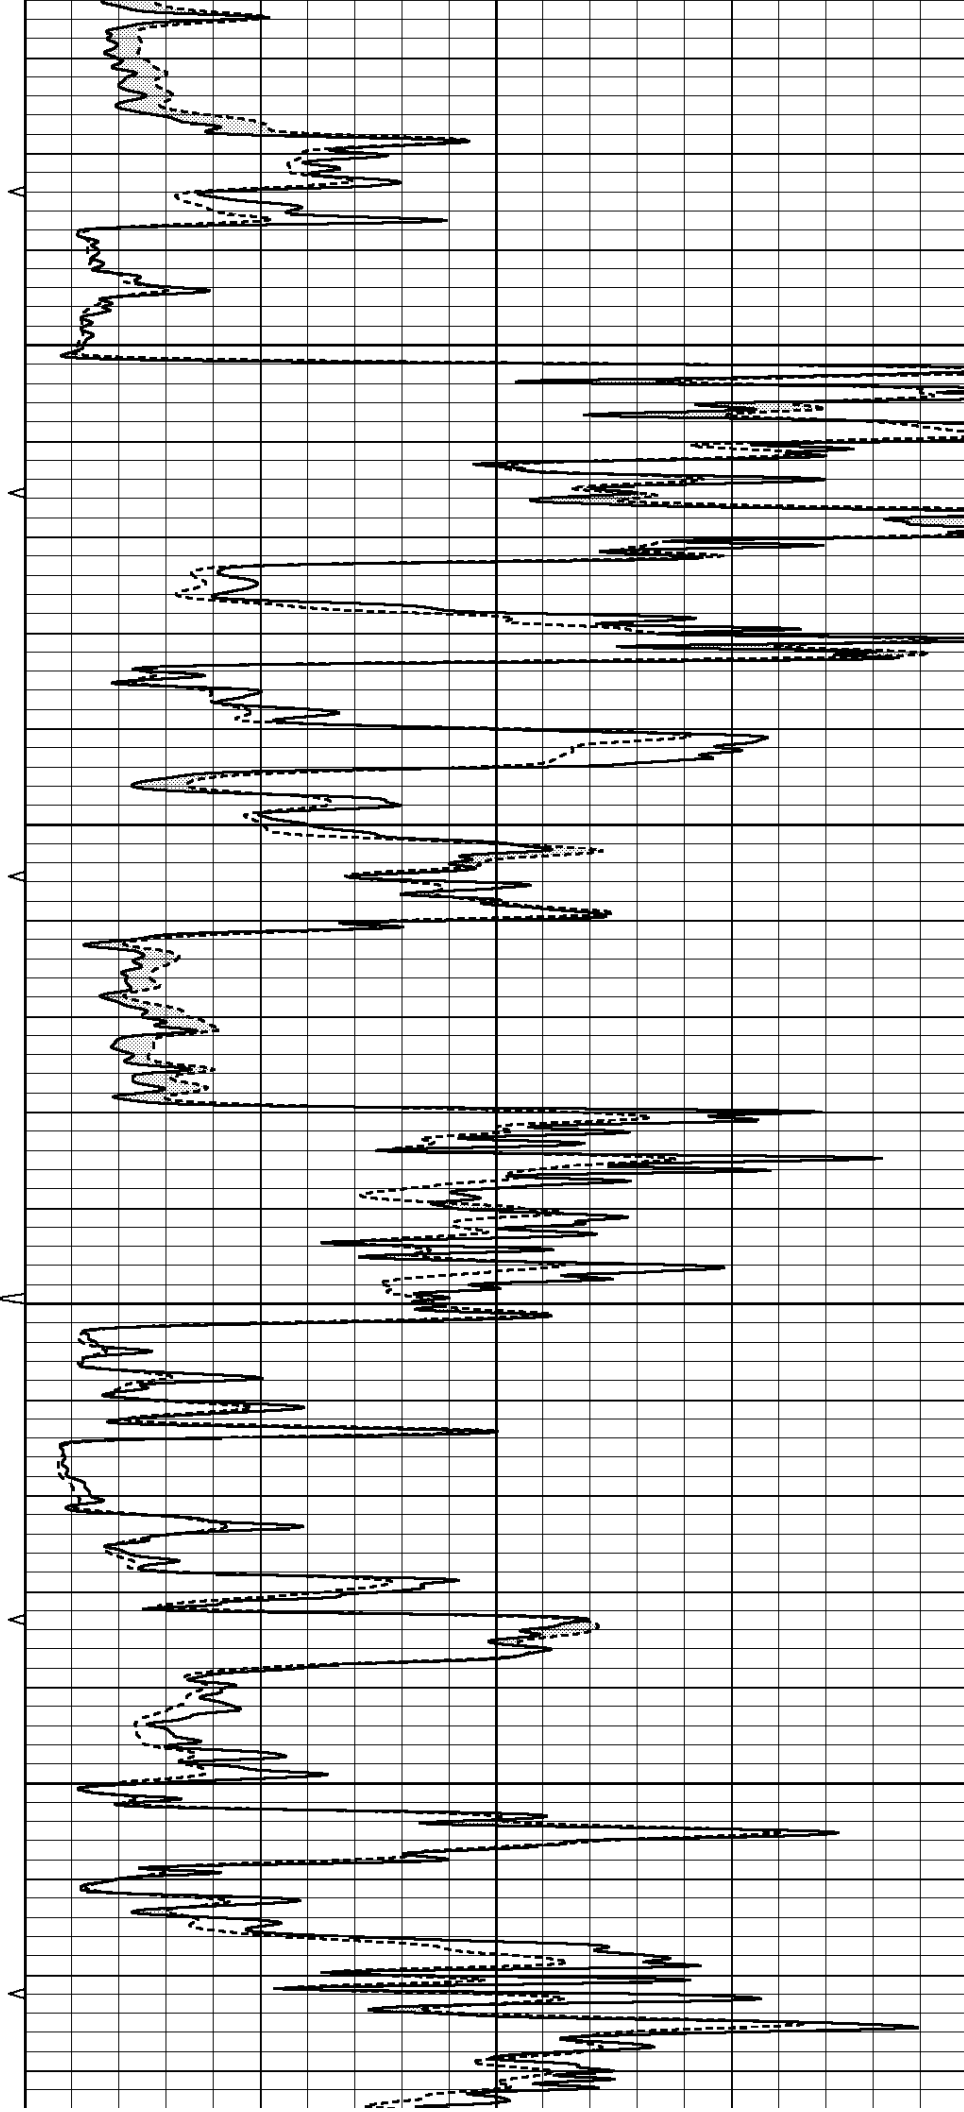

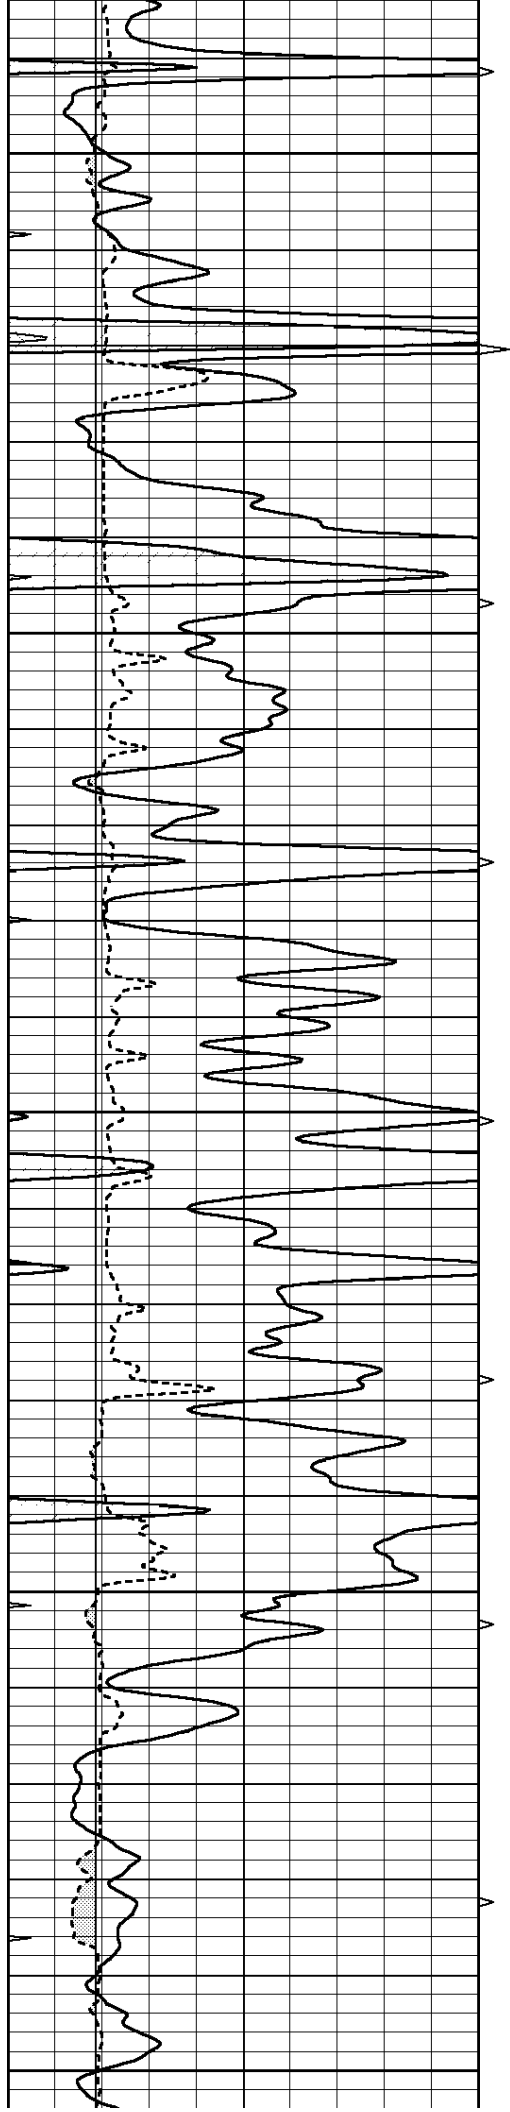


5050



5100

5150

5200


5250

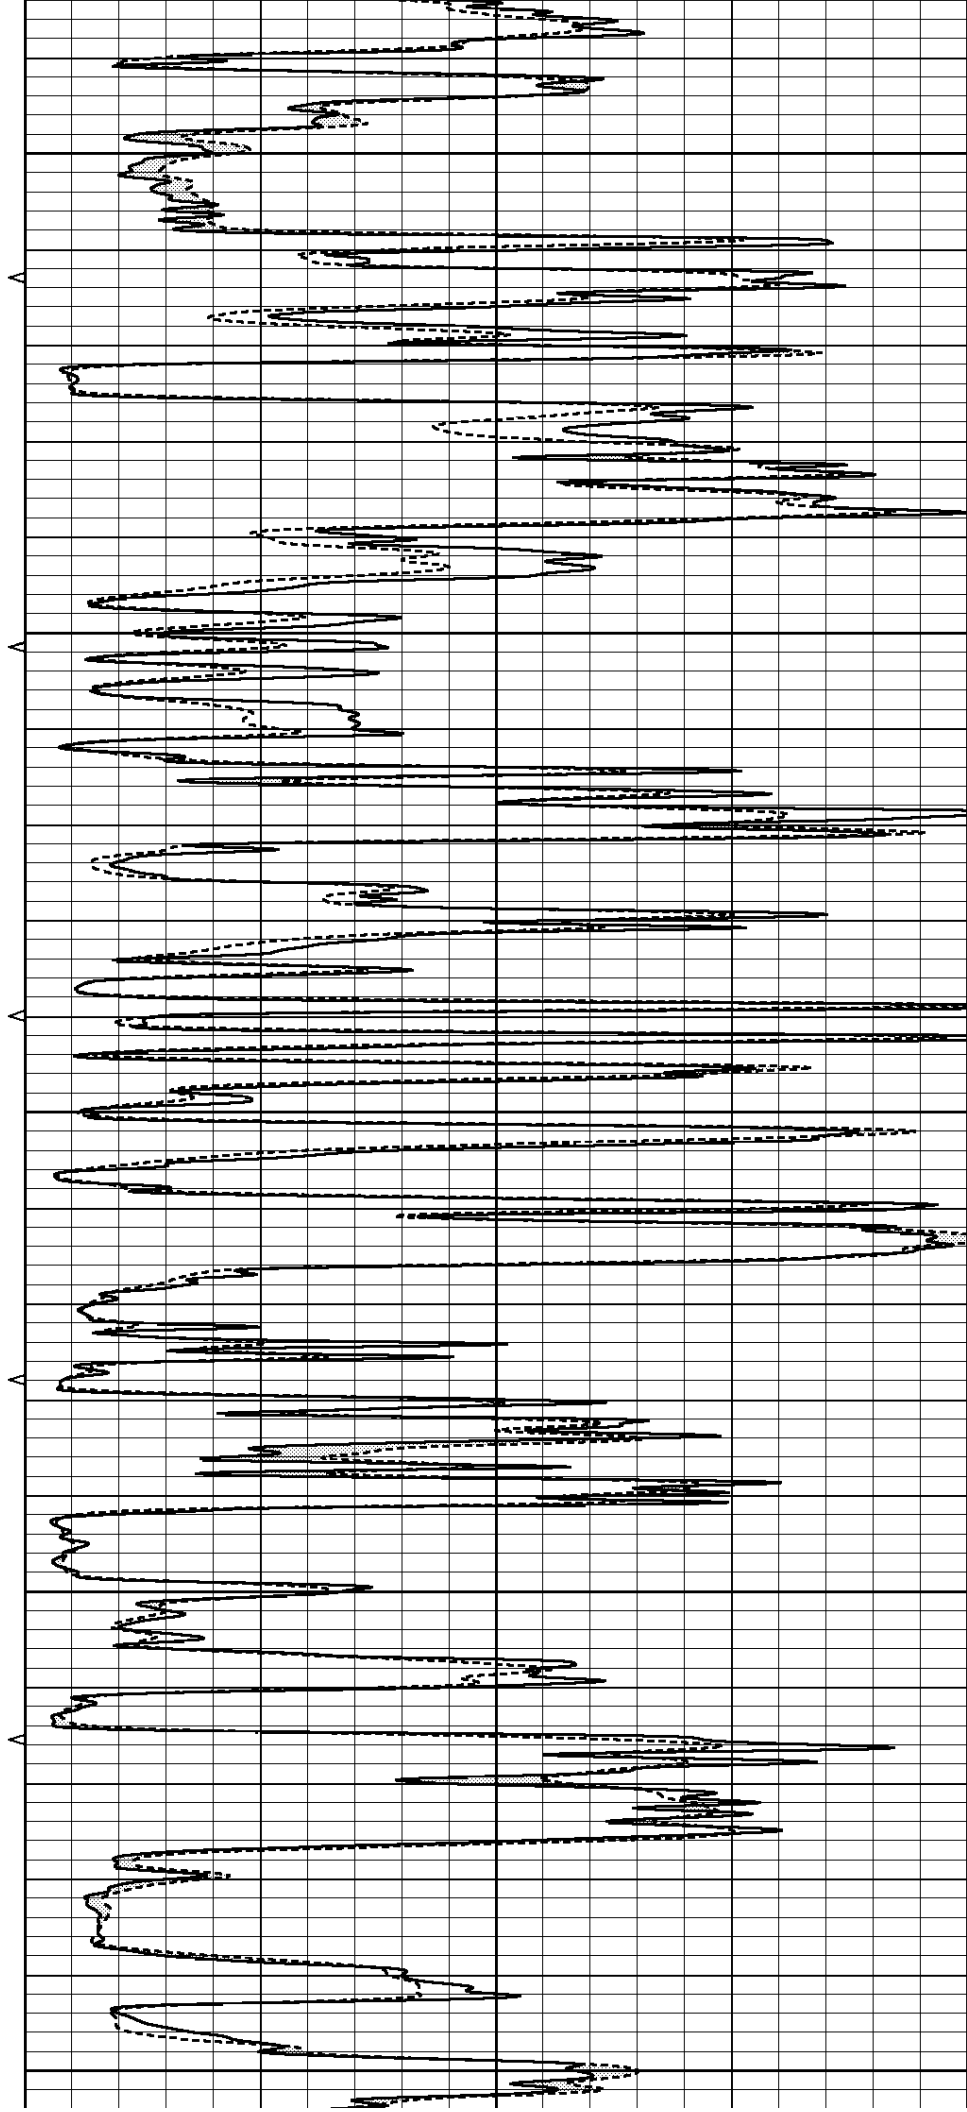


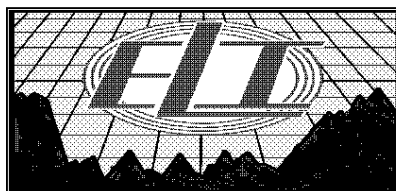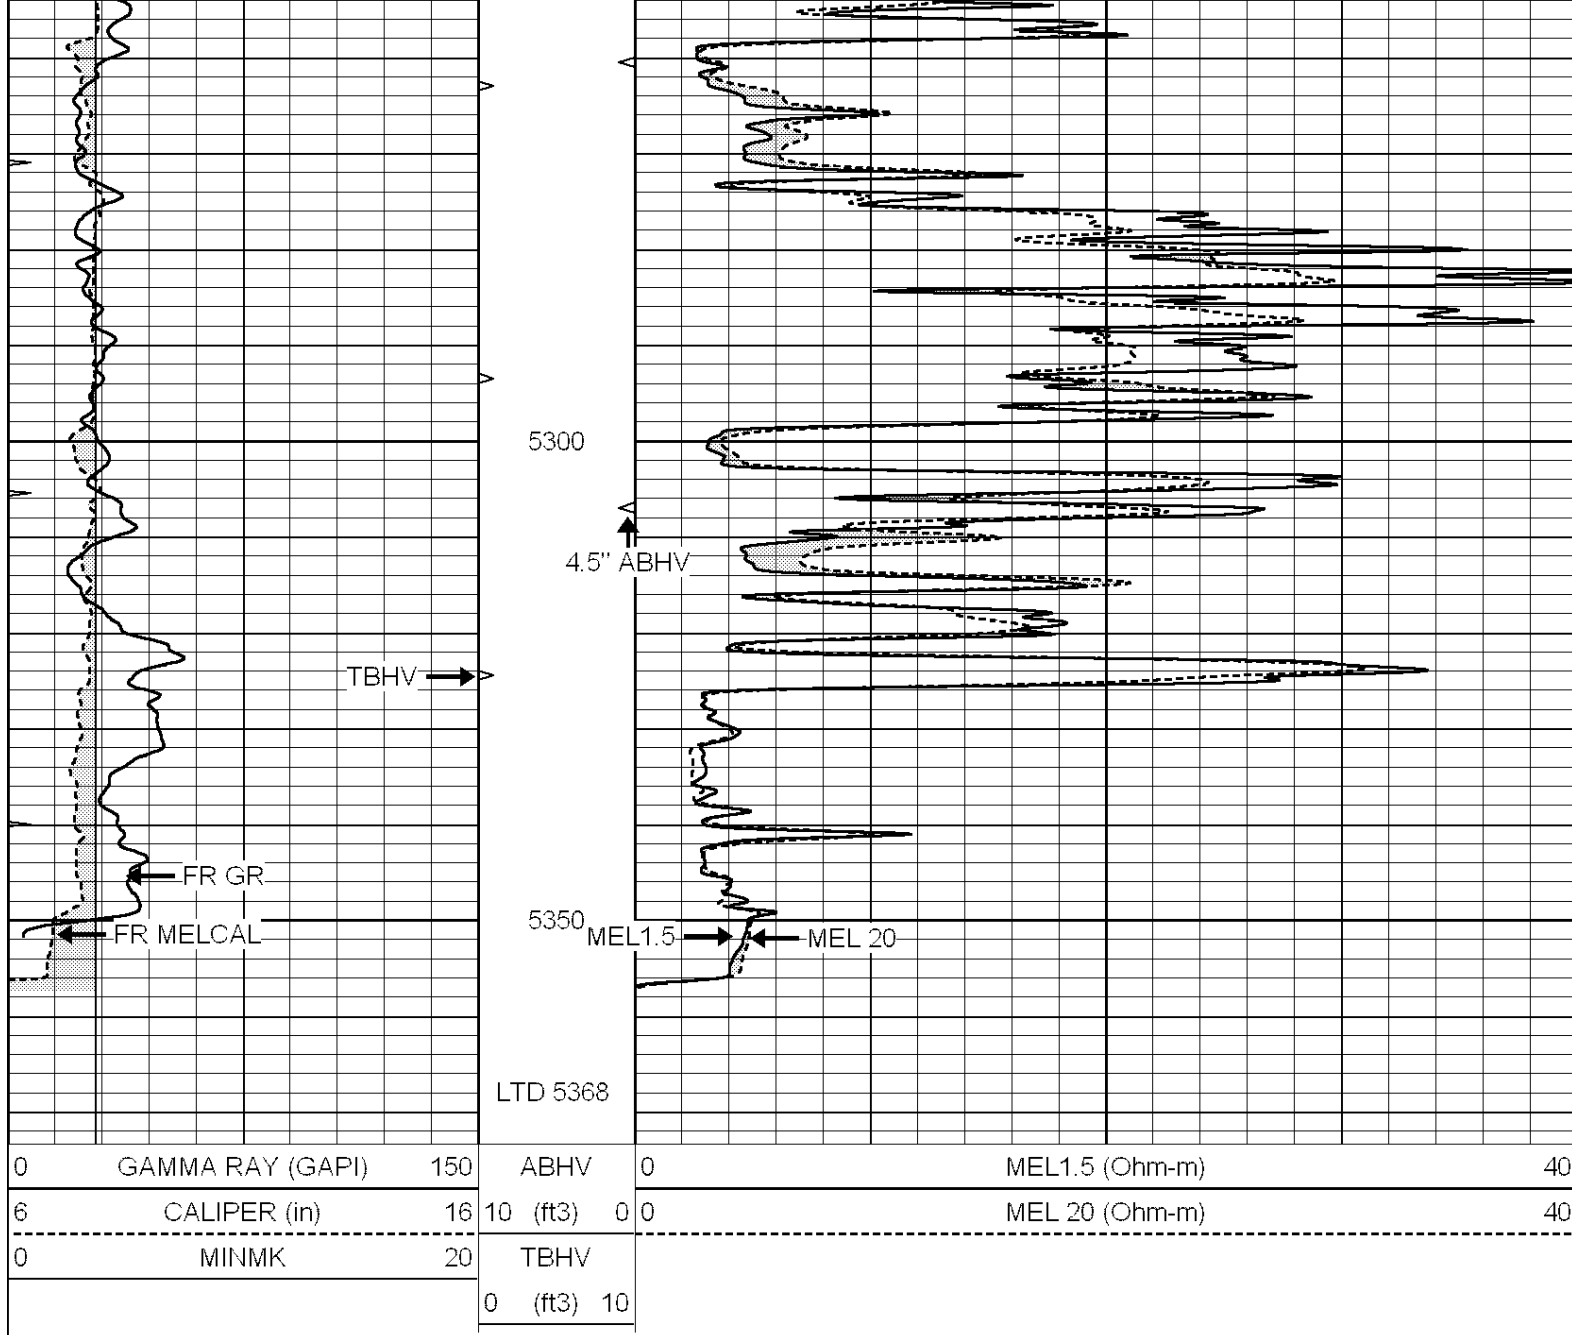

REPEAT SECTION

Database File: 1584pe.db
 Dataset Pathname: pass5.1
 Presentation Format: micro
 Dataset Creation: Fri Jul 07 22:49:53 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

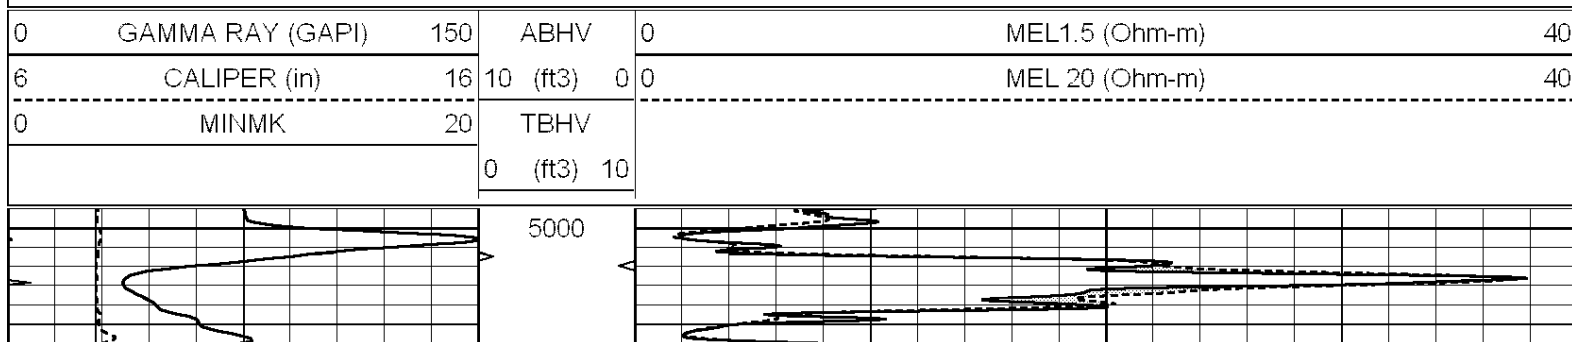

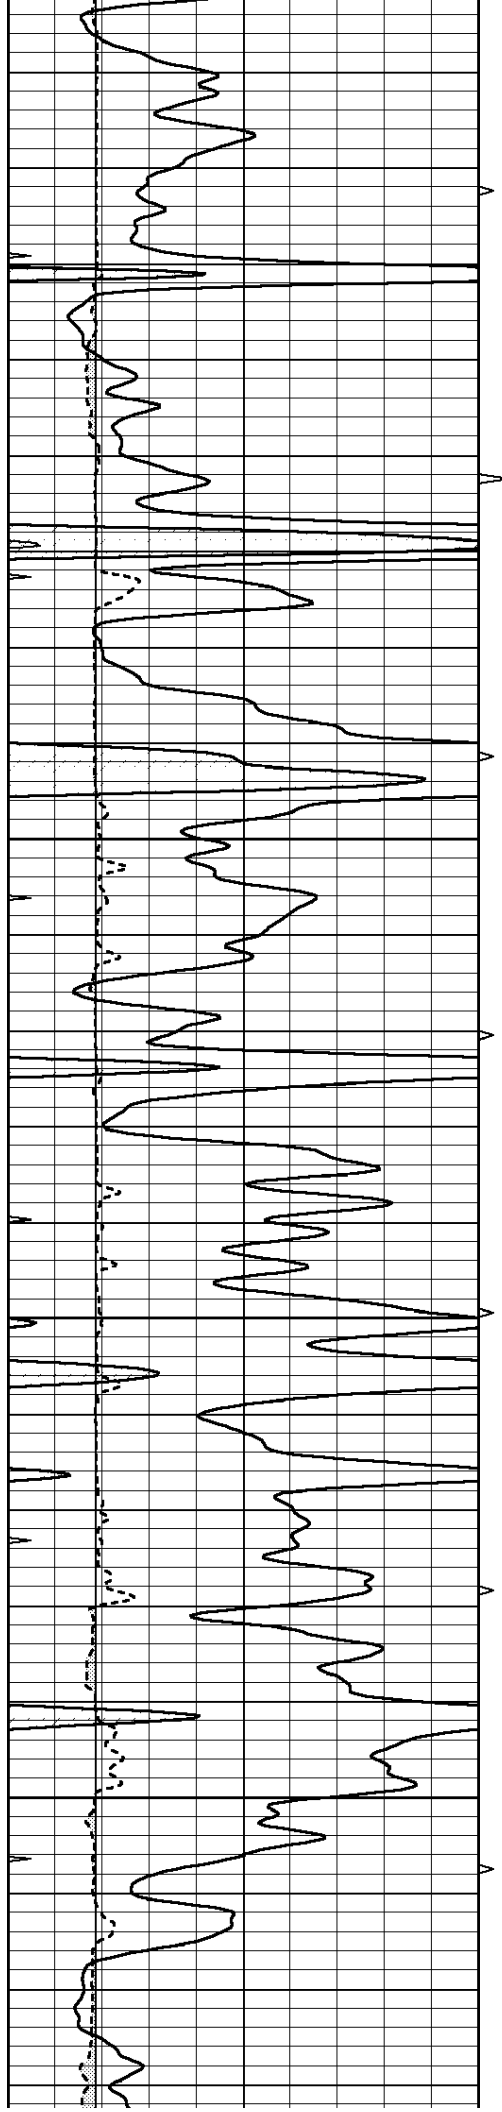



5050

5100

5150

5200

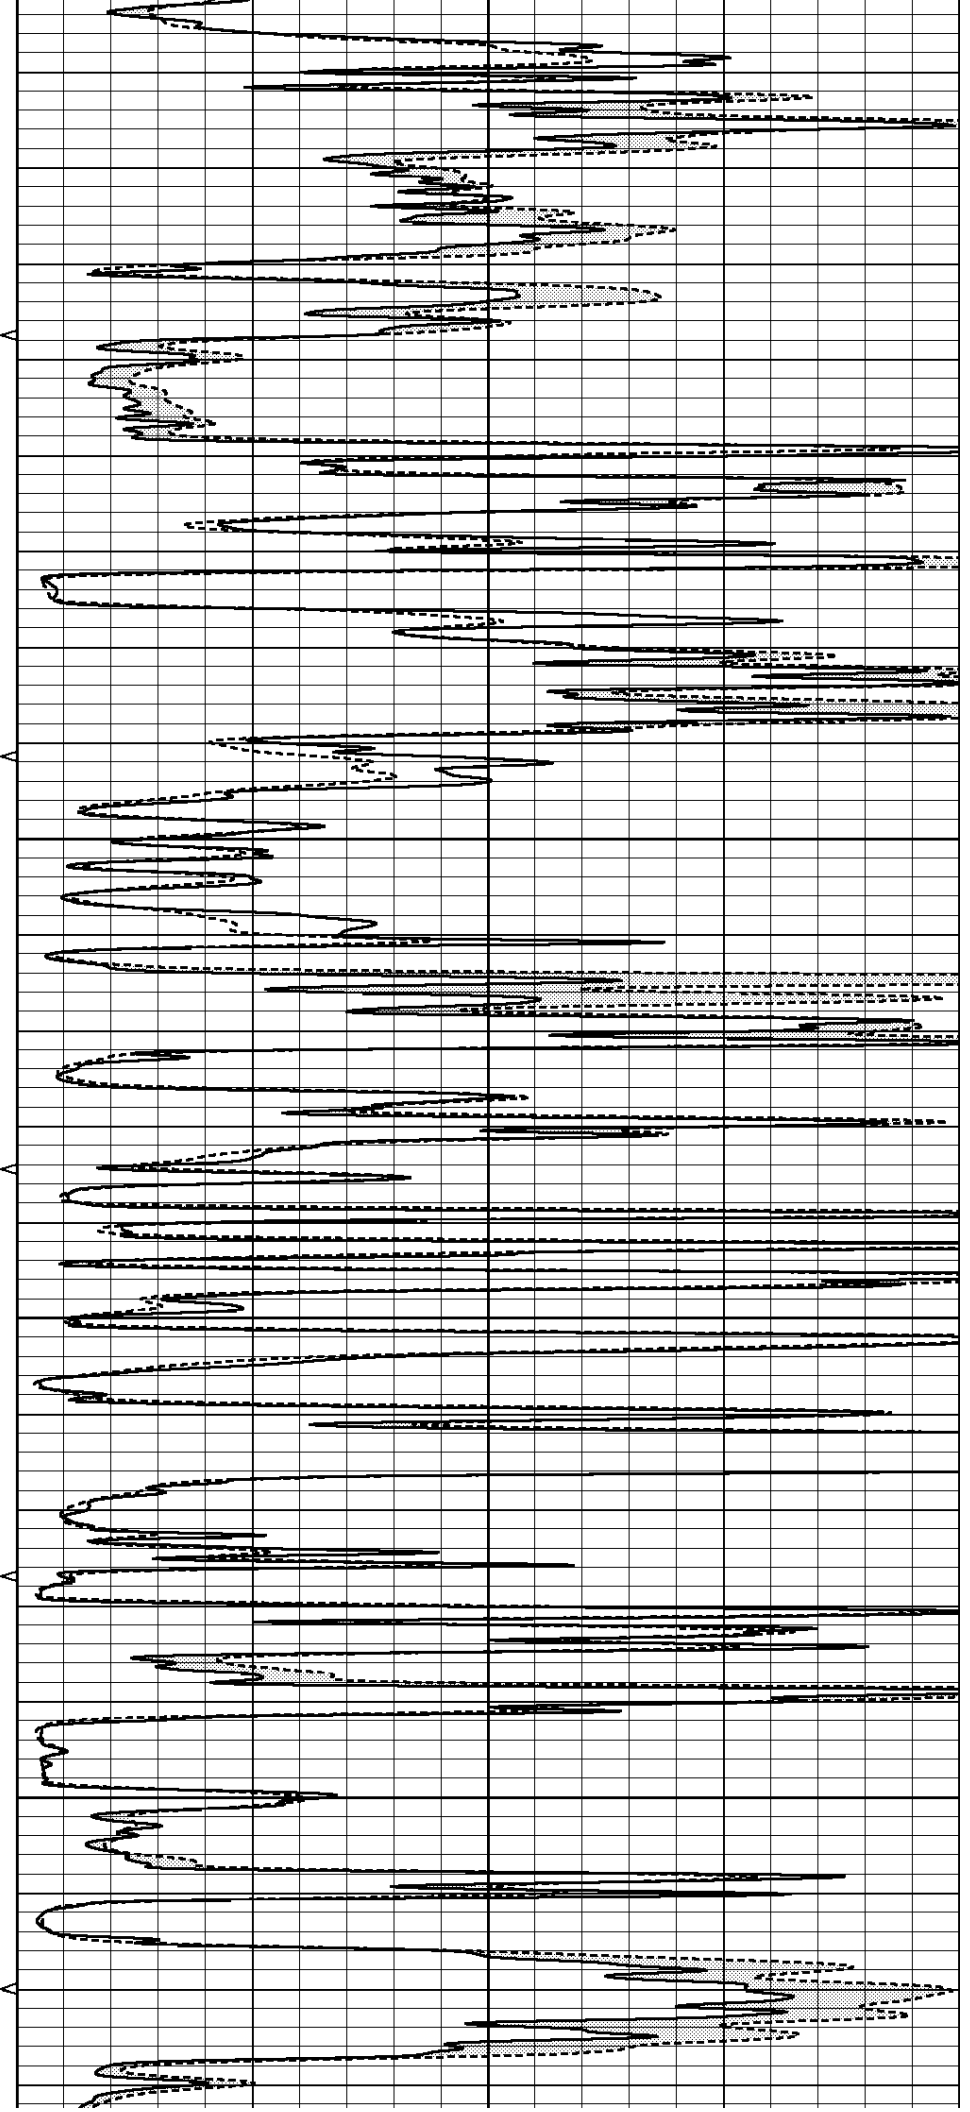

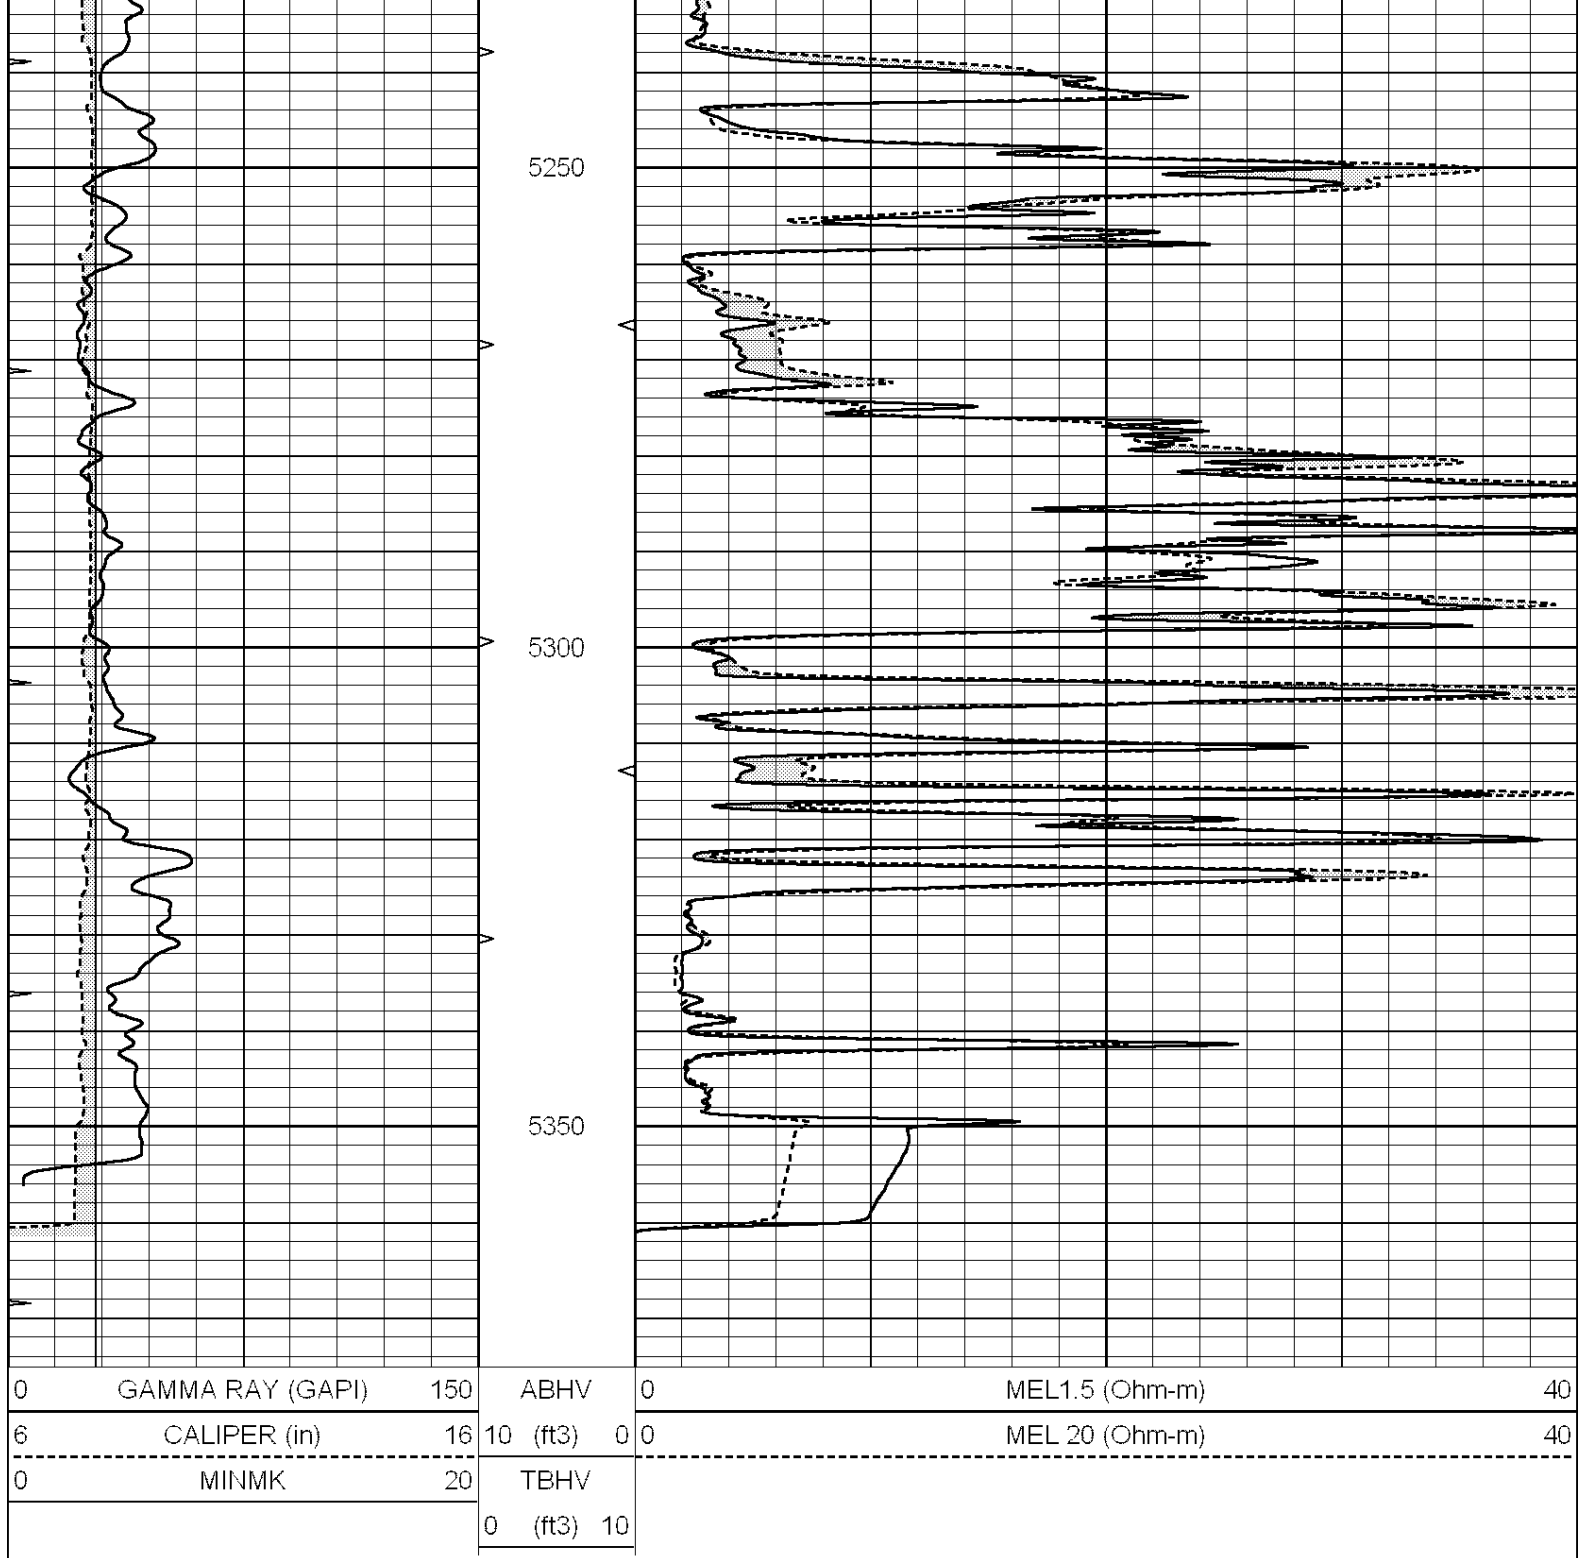

Calibration Report

Database File: 1584pe.db
Dataset Pathname: pass7.1
Dataset Creation: Sat Jul 08 00:32:03 2017 by Calc SOC 120430

MICRO Calibration Report

Serial Number: 070911
Tool Model: ProbeN
Performed: Fri Jul 07 23:50:52 2017

Caliper Calibration: Gain=5.858 Offset=-1.221

References	Low Cal	High Cal
Readings	7.800	18.000
	1.540	3.281

1.5" Calibration:	Gain=42.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.001	1.240
2" Calibration:	Gain=46.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.001	1.076
Gamma Ray Calibration Report		
Serial Number:	110959	
Tool Model:	OPEN_GR	
Performed:	Fri Jul 07 22:30:51 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2100	GAPI/cps