

COMPENSATED DENSITY / NEUTRON LOG


Company	TRANS - PACIFIC OIL CORP.		
Well	YOUNKIN "E" #1-35		
Field	LONE BUTTE S.E.		
County	LOGAN	State	KANSAS
Location:	2265' FNL & 1174' FEL NW - SW - SE - NE SEC 35 TWP 14S RGE 34W		Other Services DIL
Permanent Datum	GROUND LEVEL	Elevation	2948
Log Measured From	KELLY BUSHING	8' A.G.L.	
Drilling Measured From	KELLY BUSHING		
Date	9/1/17		
Run Number	ONE		
Depth Driller	4650		
Depth Logger	4649		
Bottom Logged Interval	4625		
Top Log Interval	3600	2400-200	
Casing Driller	8 5/8" @ 263'		
Casing Logger	263		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7,200 PPM	
Density / Viscosity	9.0/67		
pH / Fluid Loss	10.0/10.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.400 @ 80F		
Rmf @ Meas. Temp	.300 @ 80F		
Rmc @ Meas. Temp	.480 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.262 @ 122F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	10:45 P.M.		
Maximum Recorded Temperature	122F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	AARON YOUNG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
MONUMENT, KS. & OLD 40, 20S. TO "INDIAN RD." (DEAD END), 3W. TO "RD. 320", 1S., 1/2 E. INTO AT
TANK BATTERY THEN BACK SOUTH

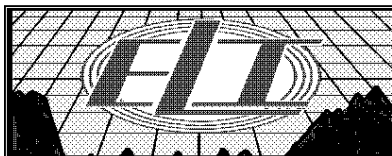



UPPER SECTION


Database File: 1600ddn.db
Dataset Pathname: pass3.8
Presentation Format: den_neu
Dataset Creation: Sat Sep 02 00:39:12 2017 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

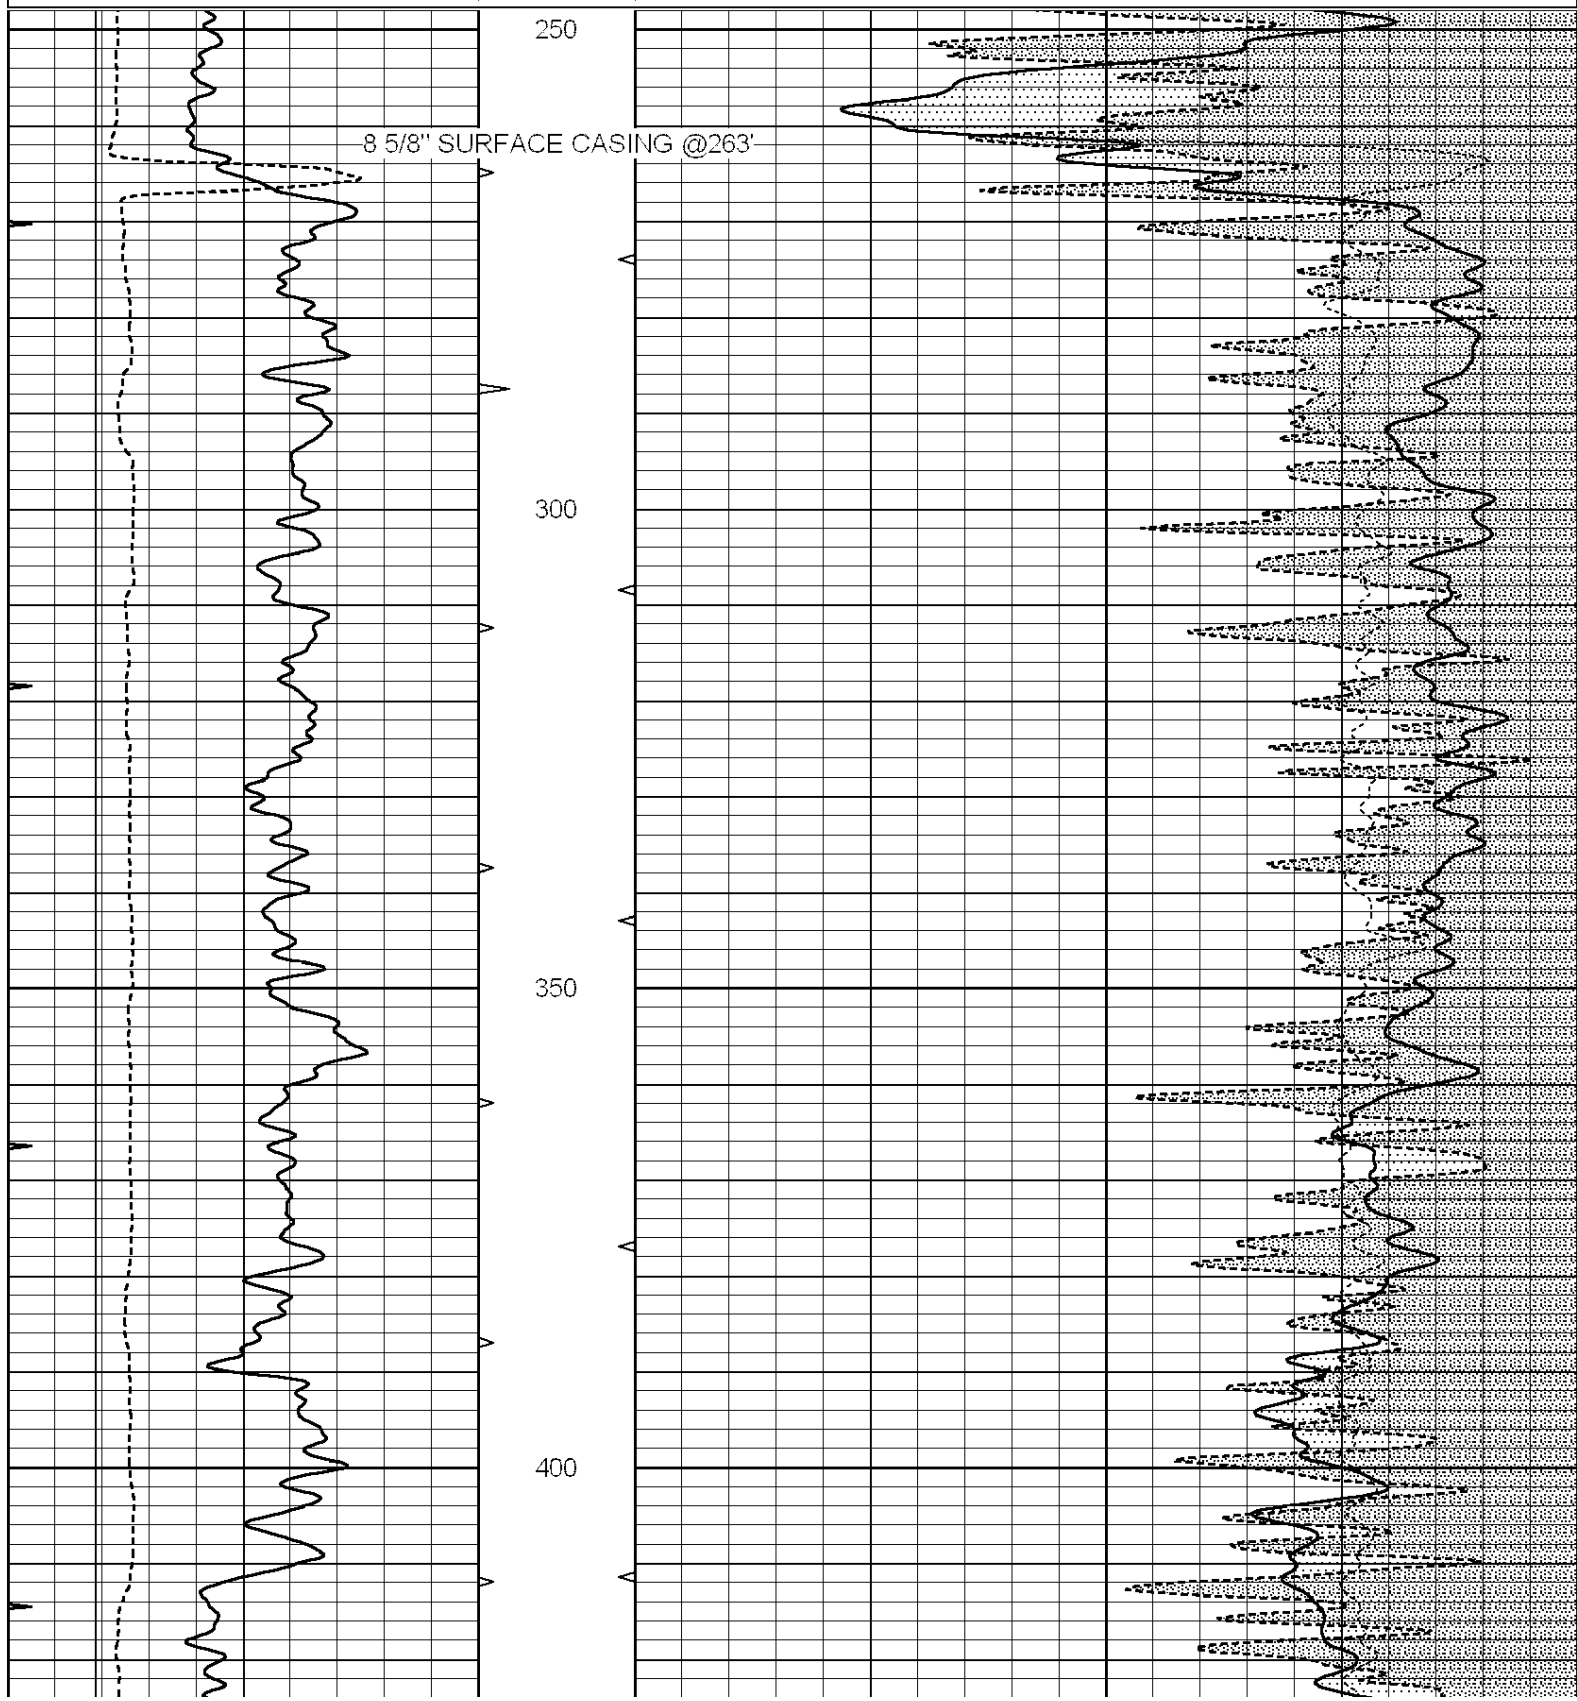

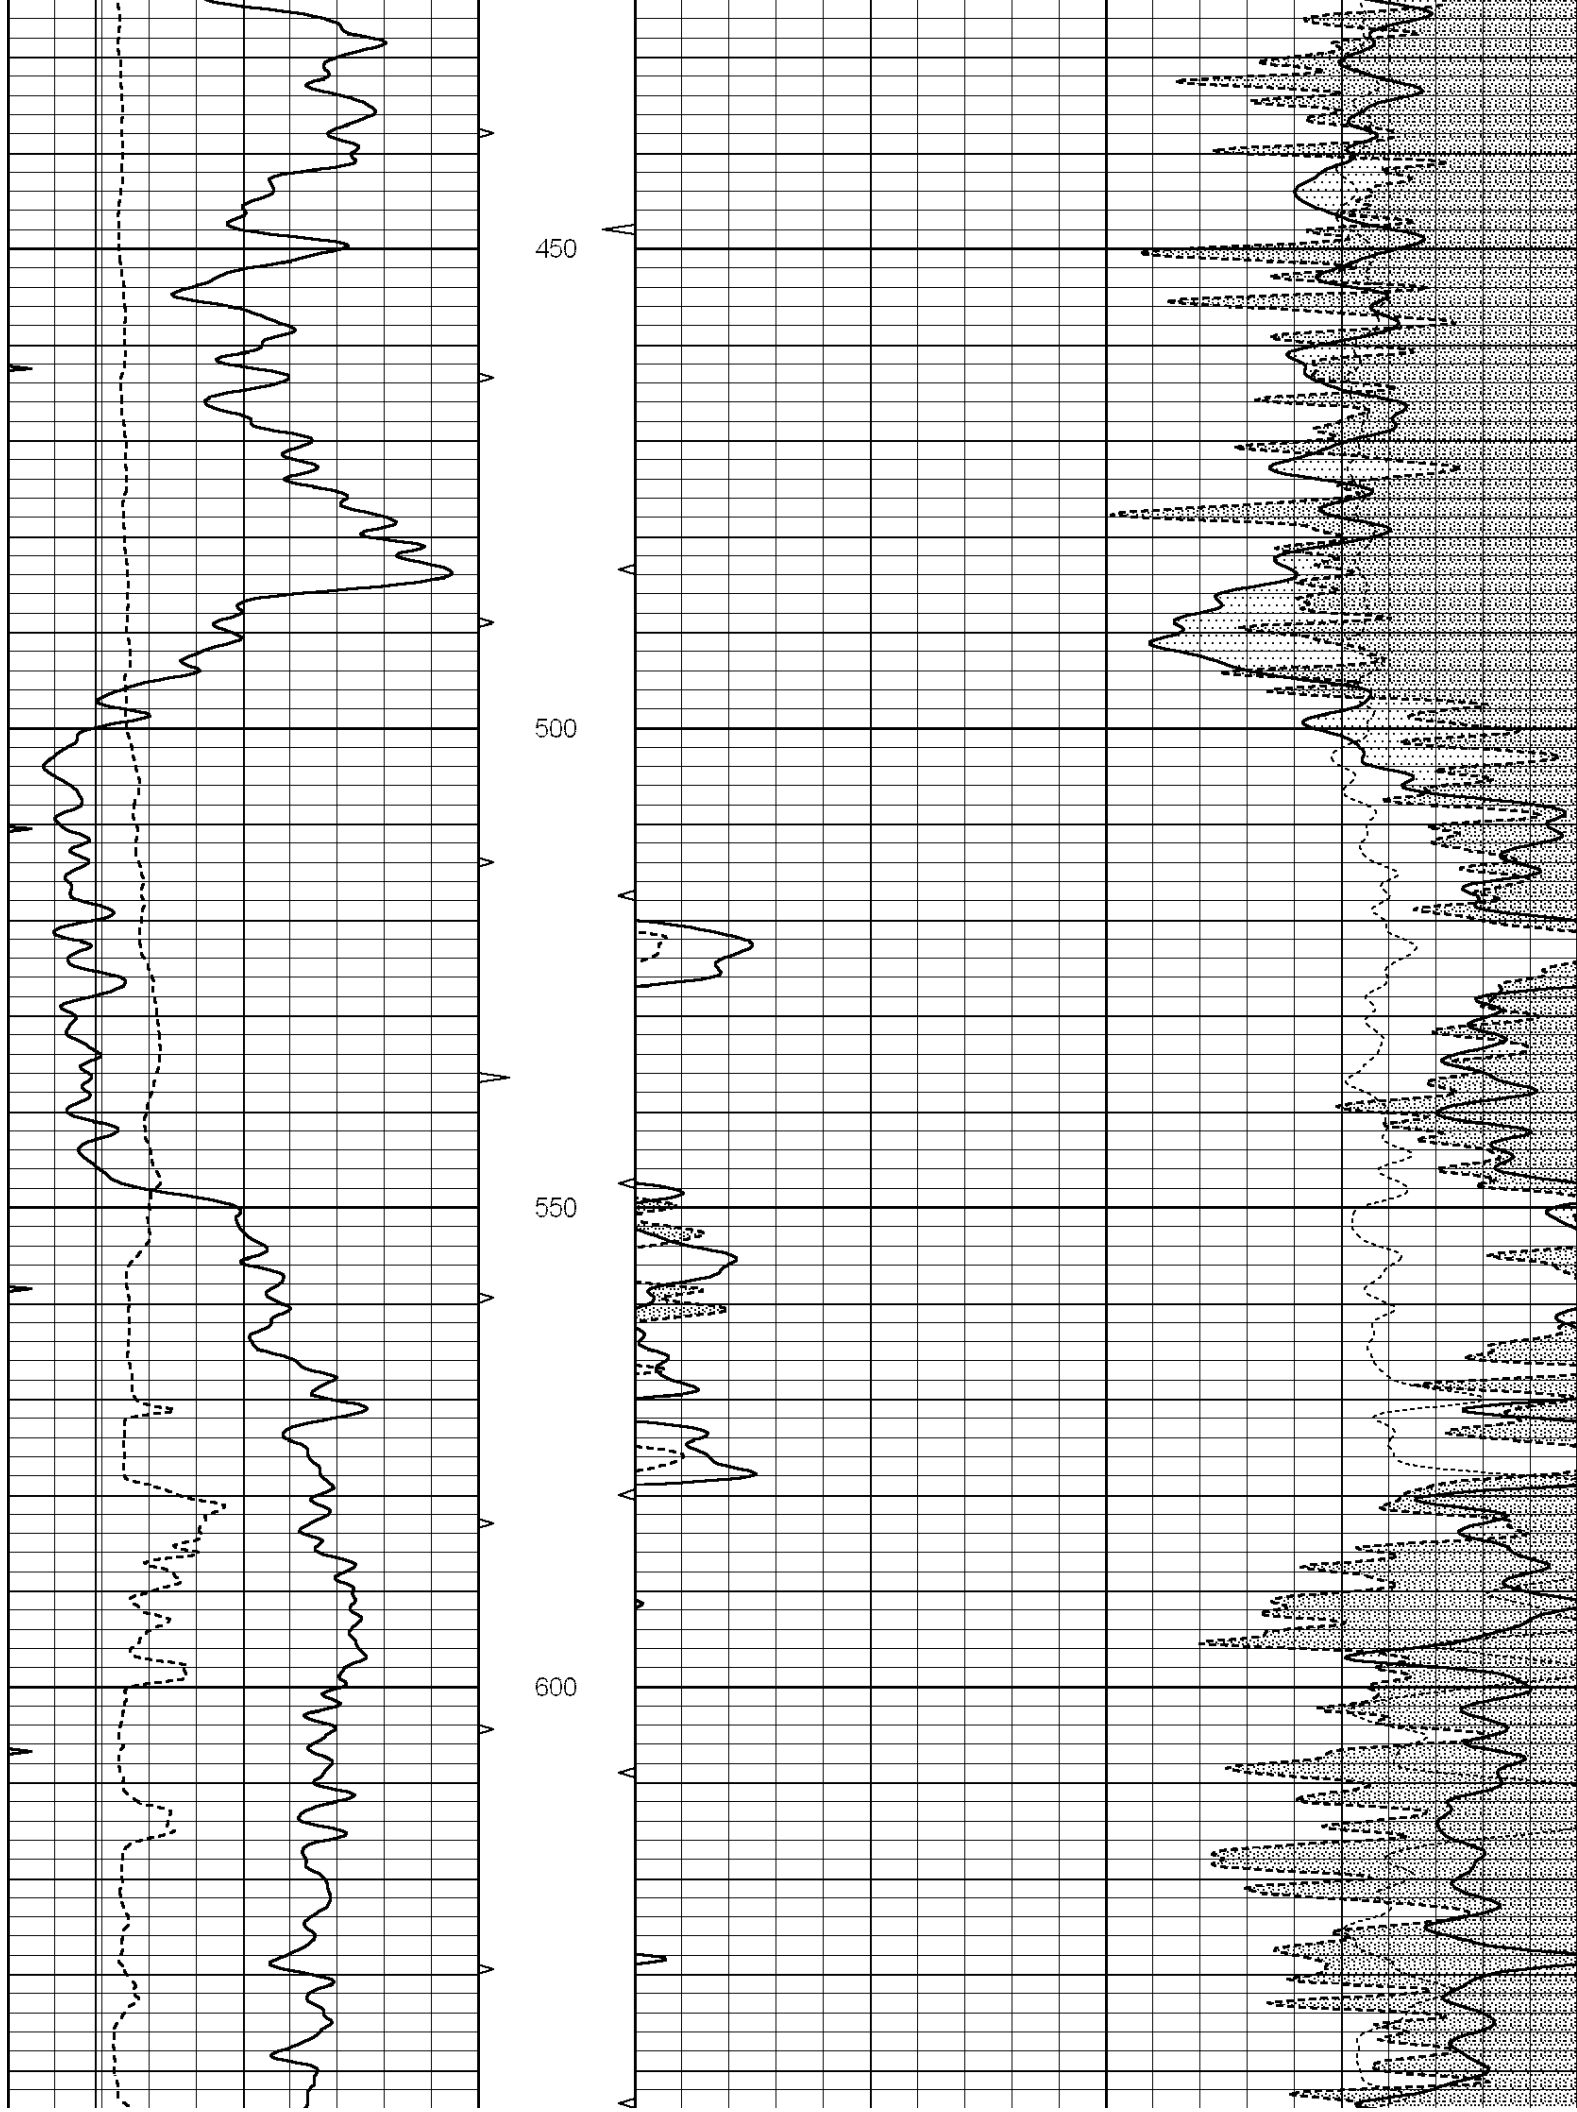

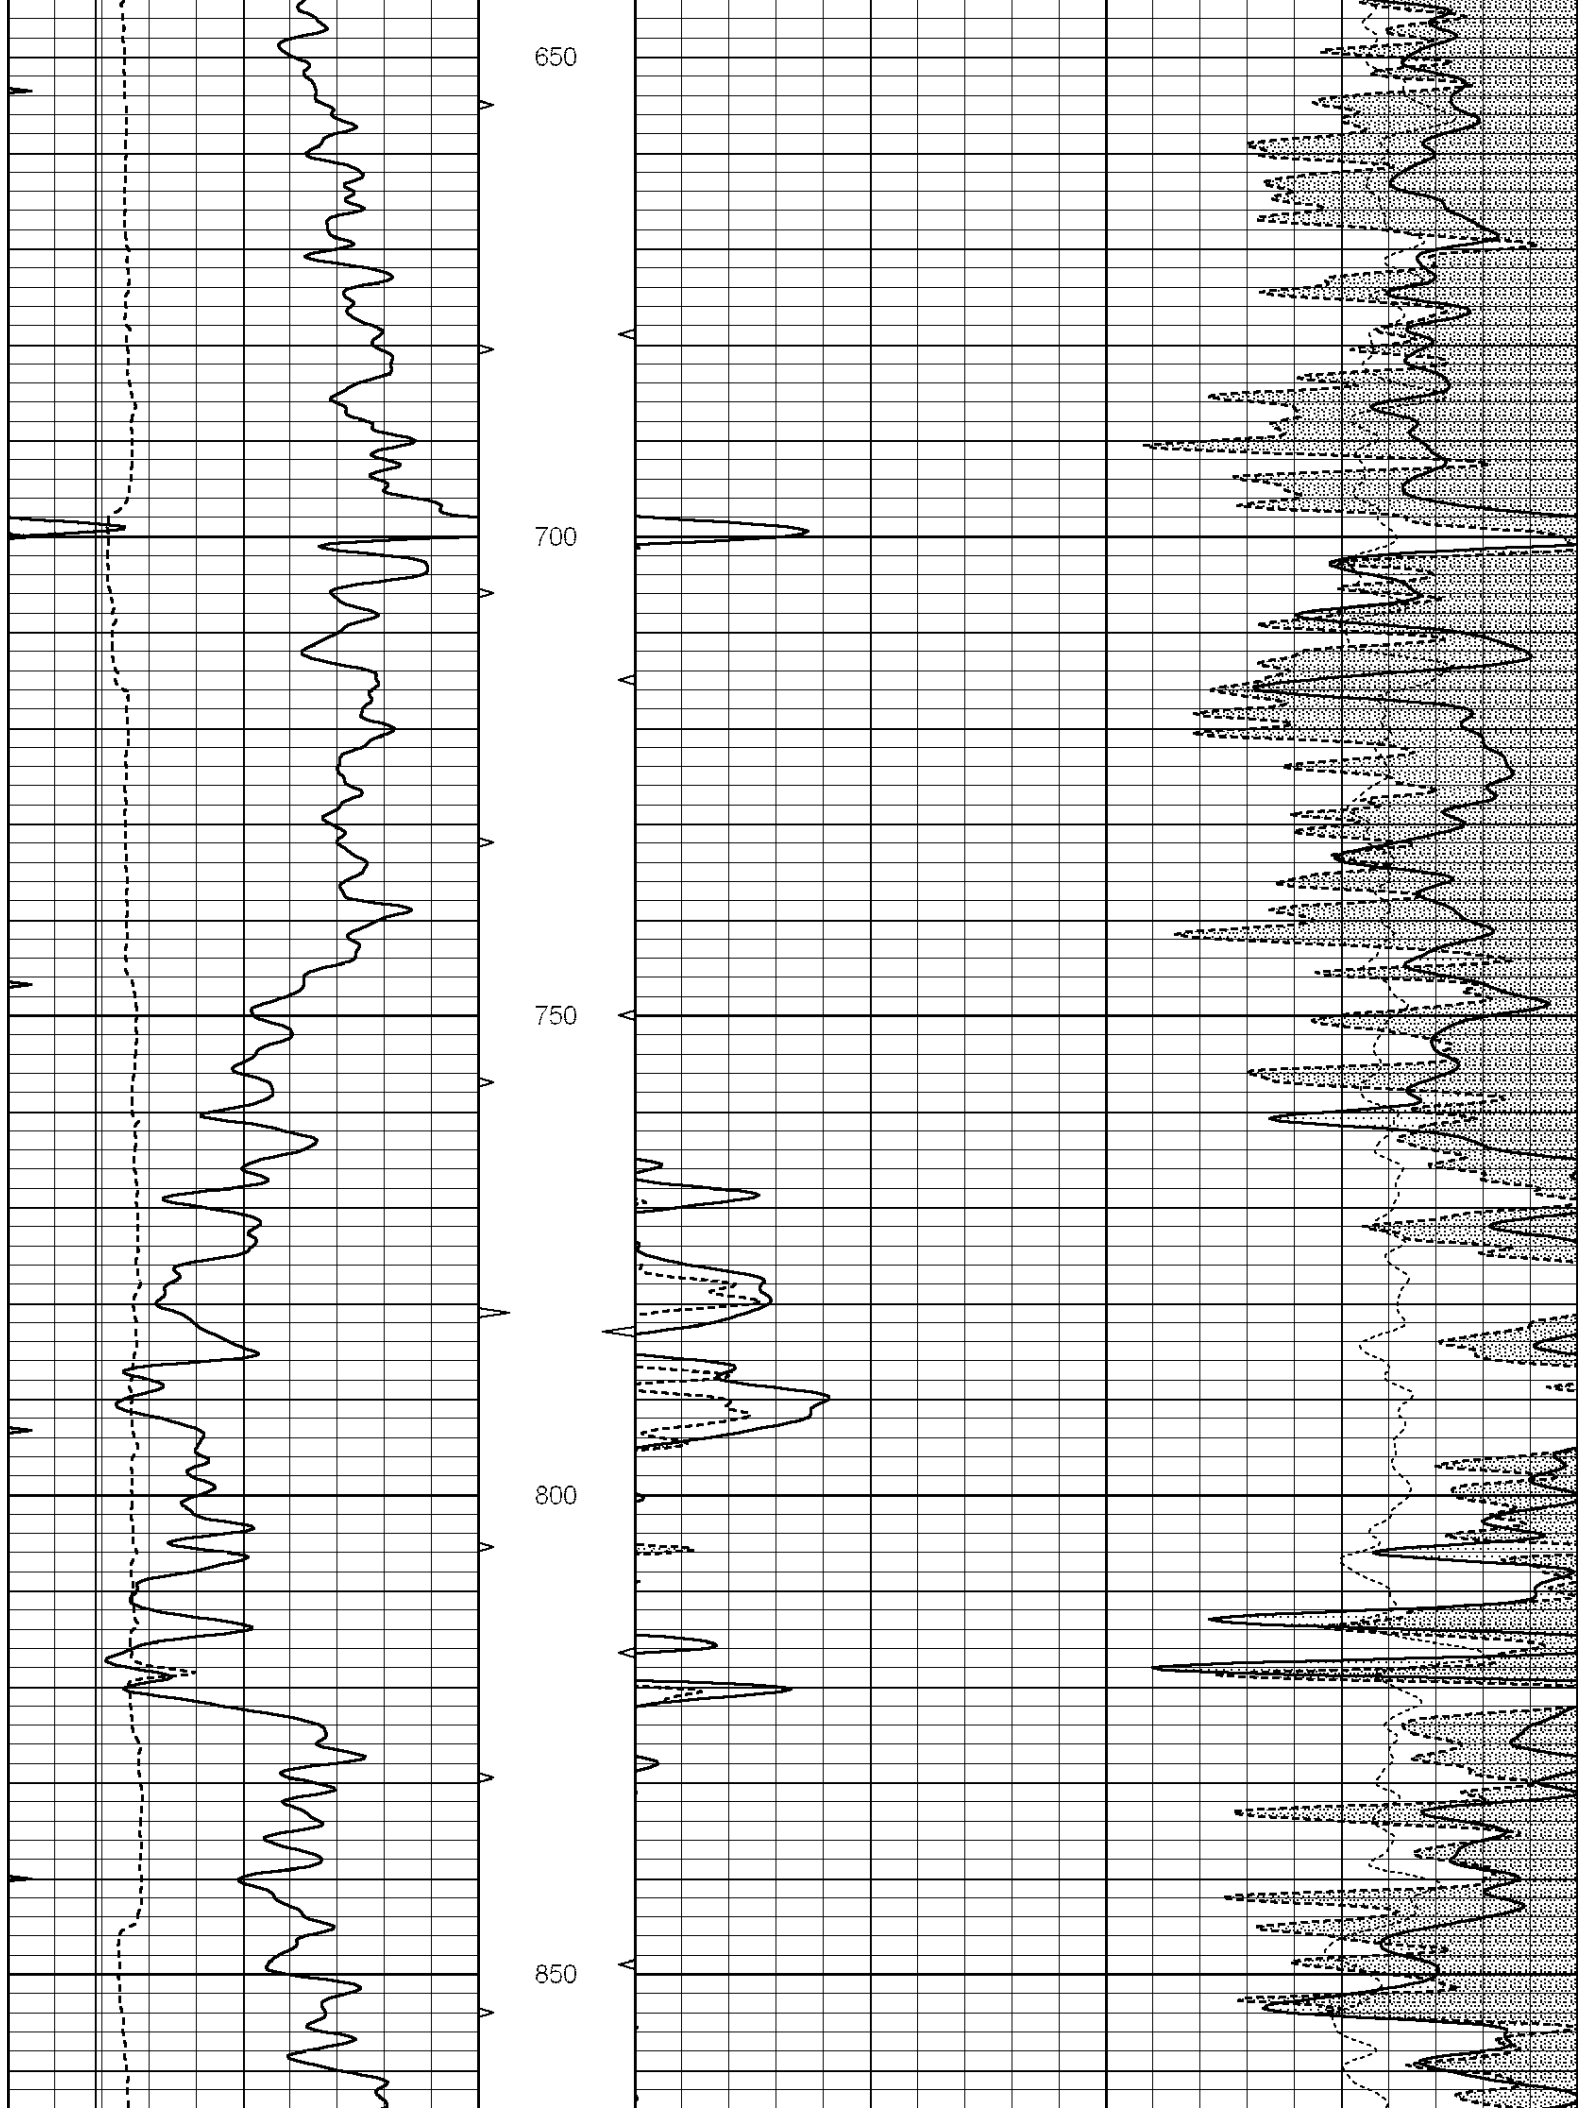

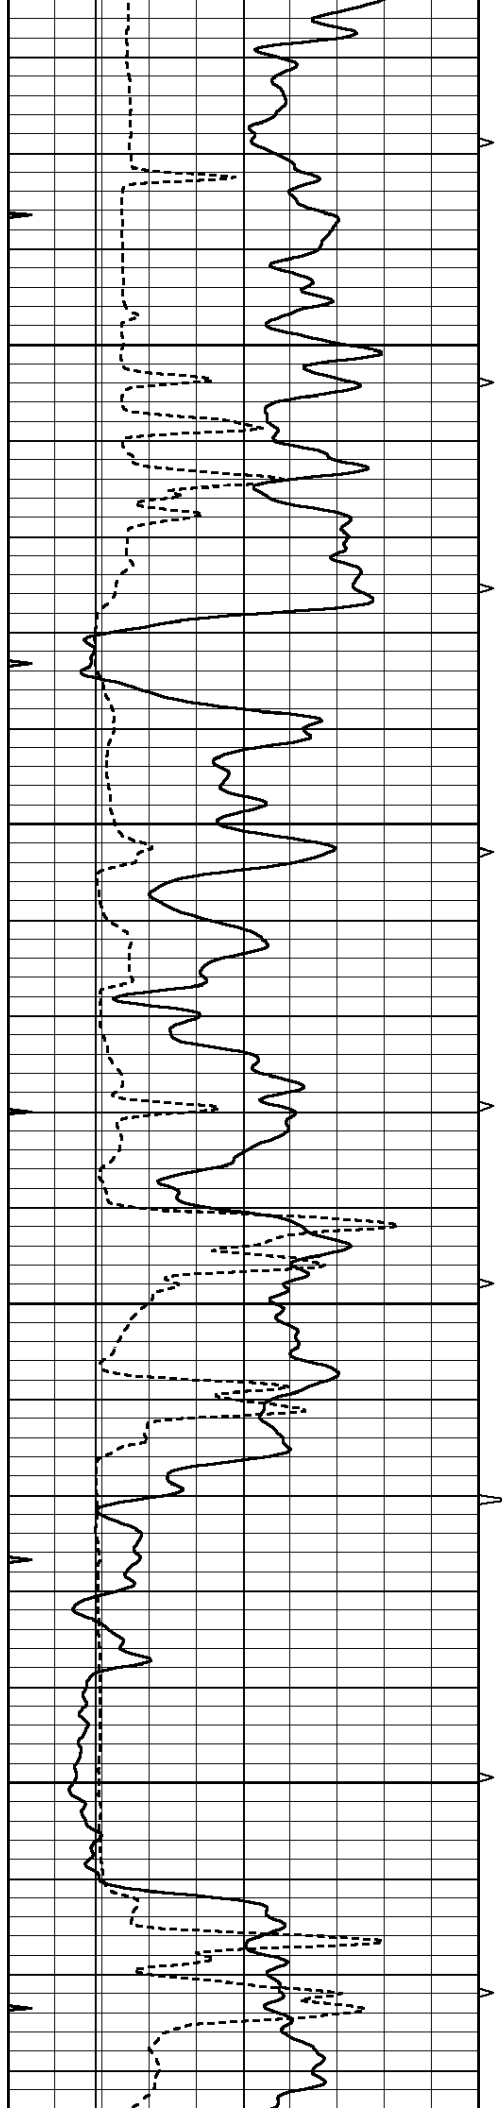



900


950


1000

1050

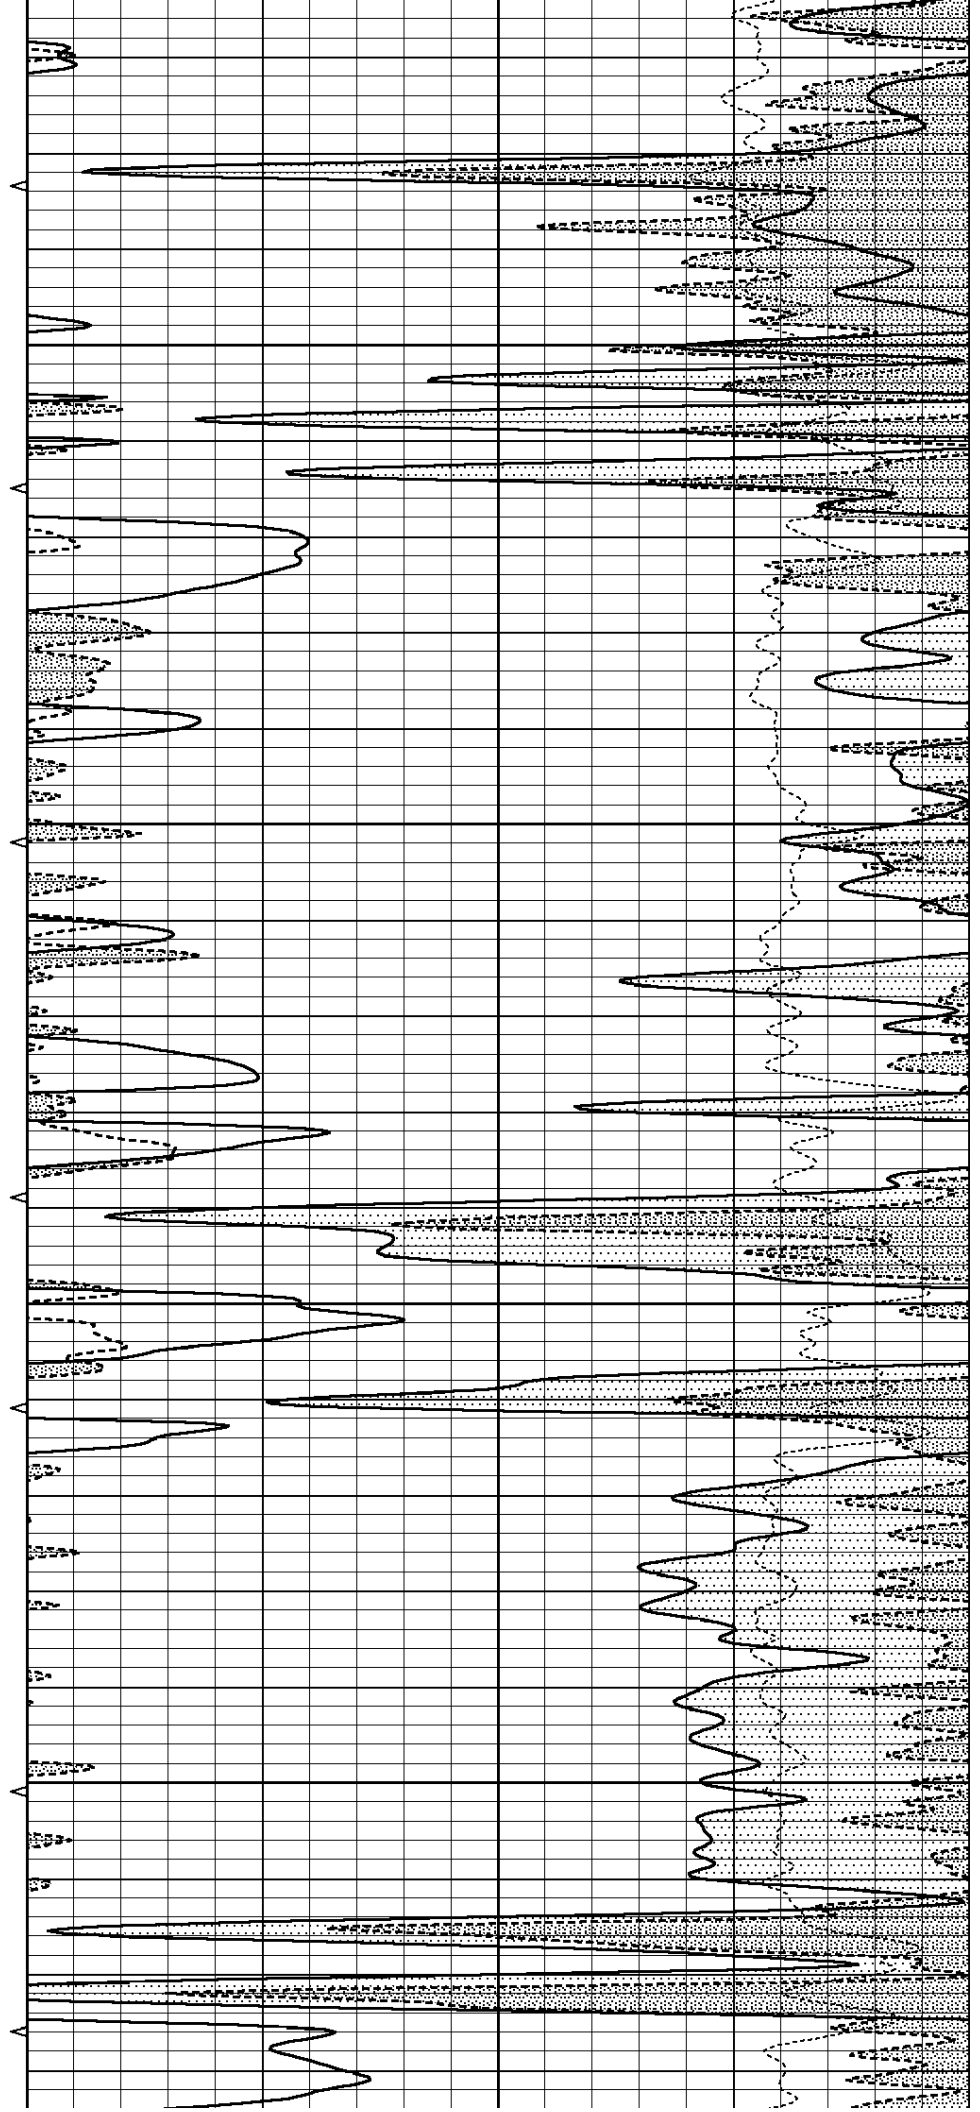

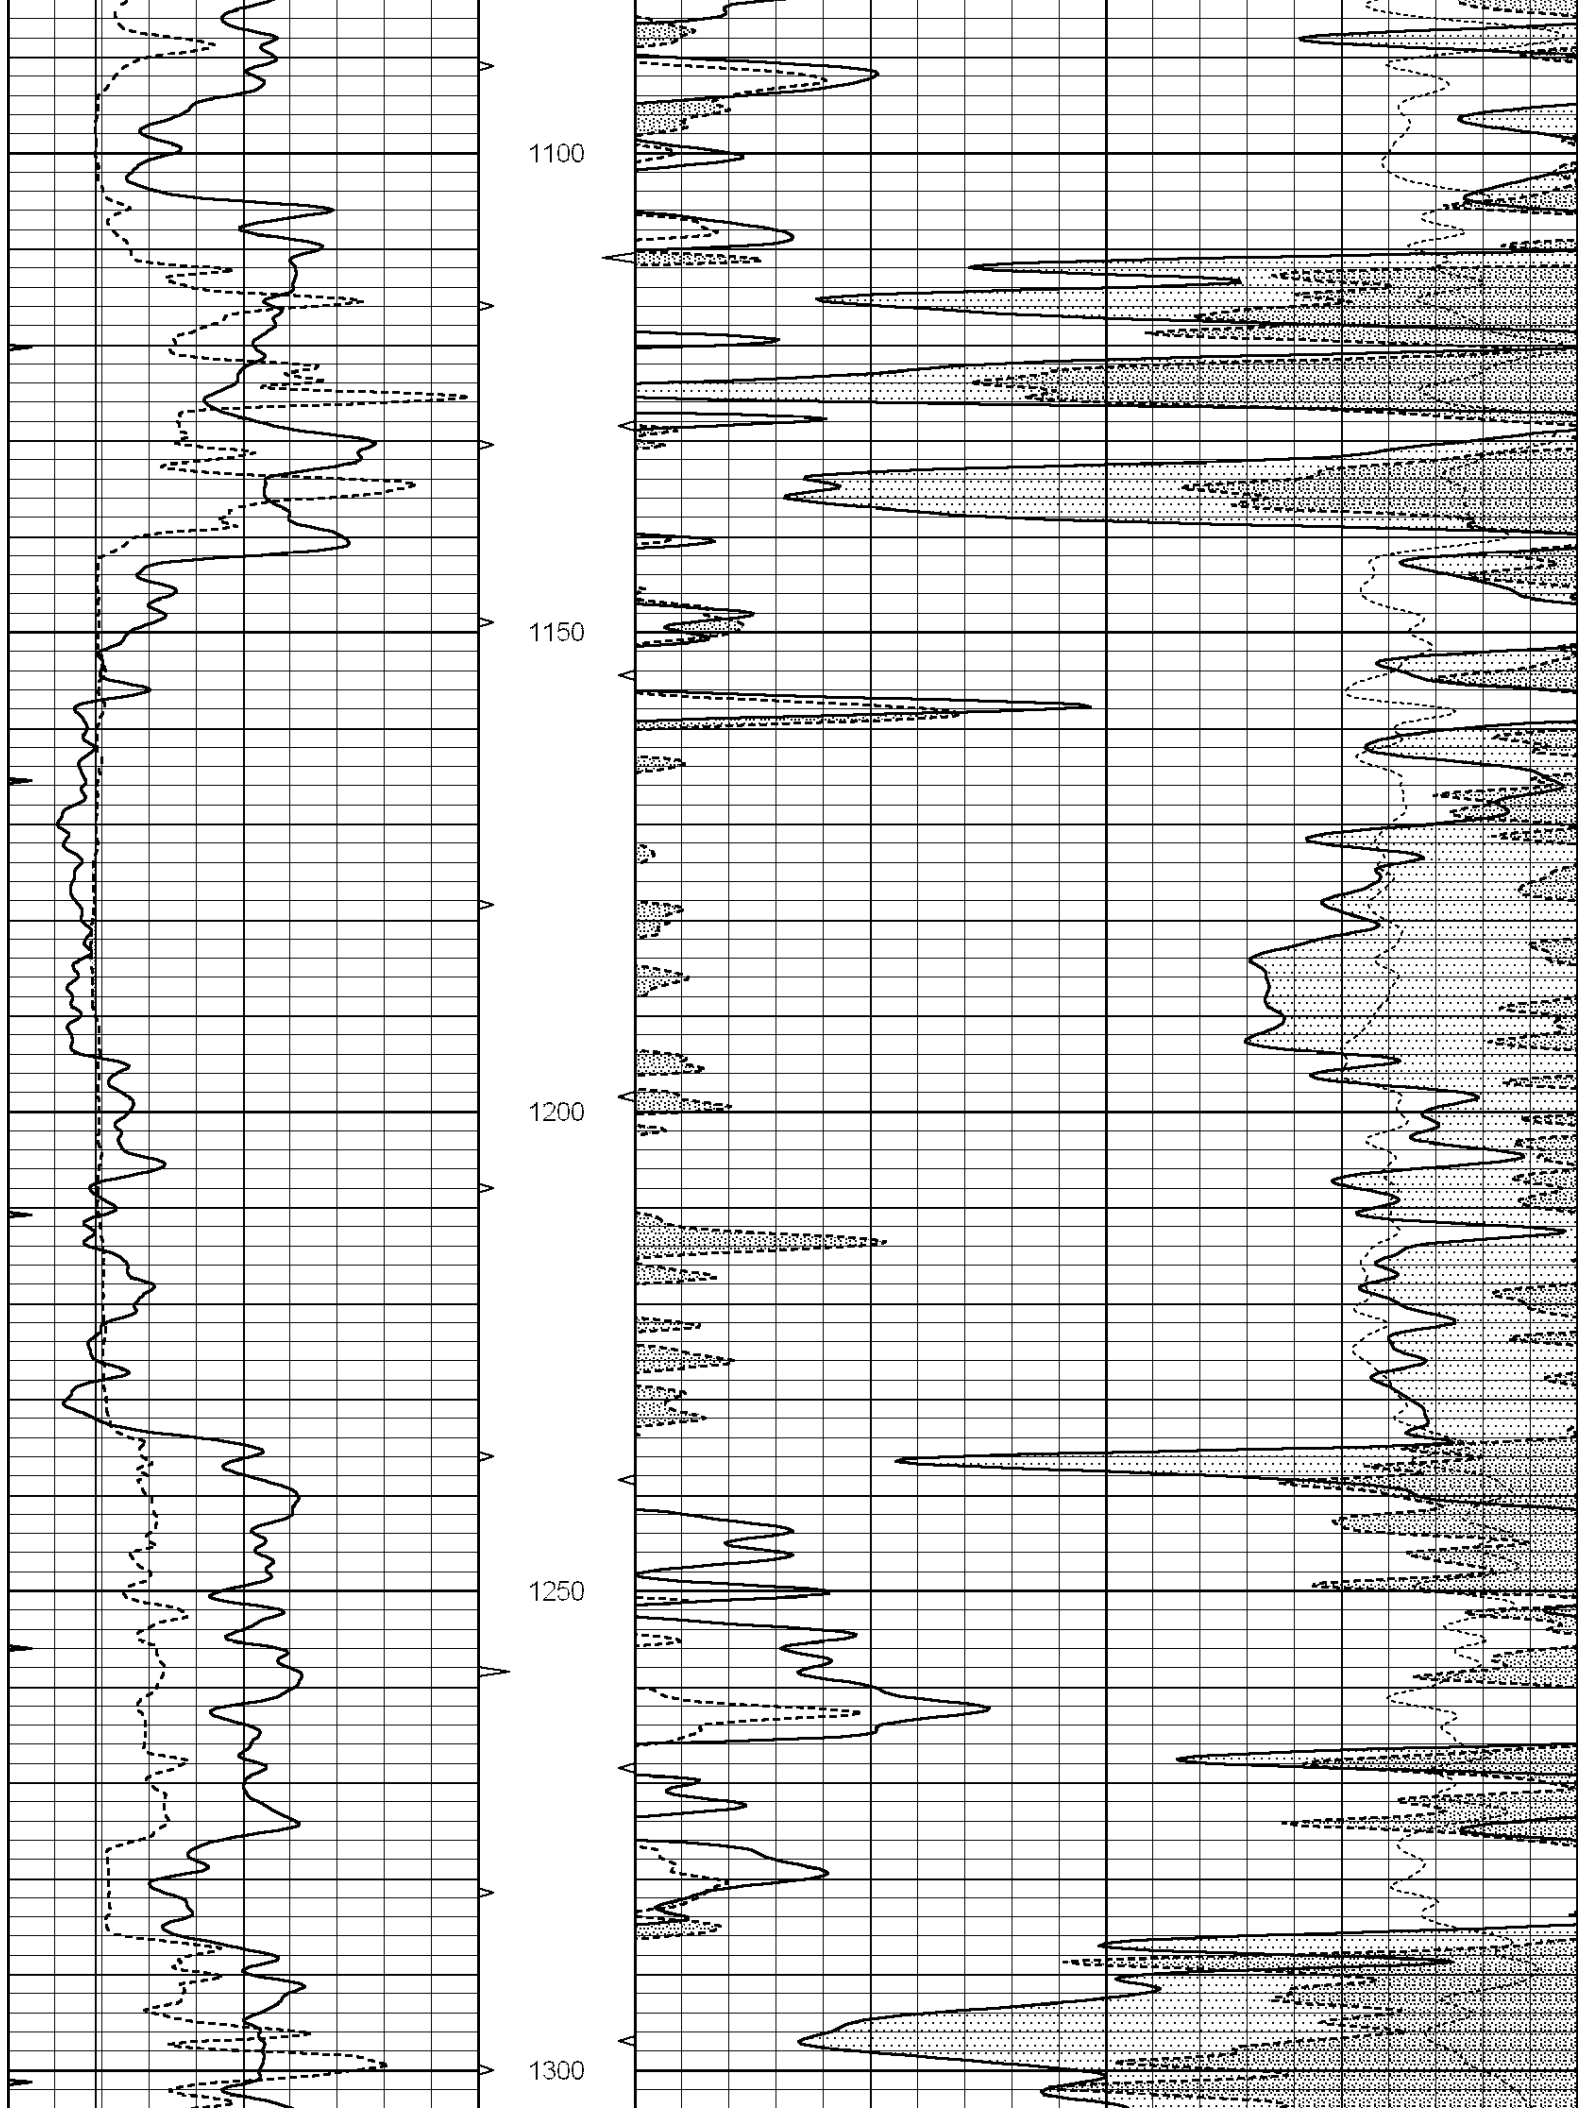

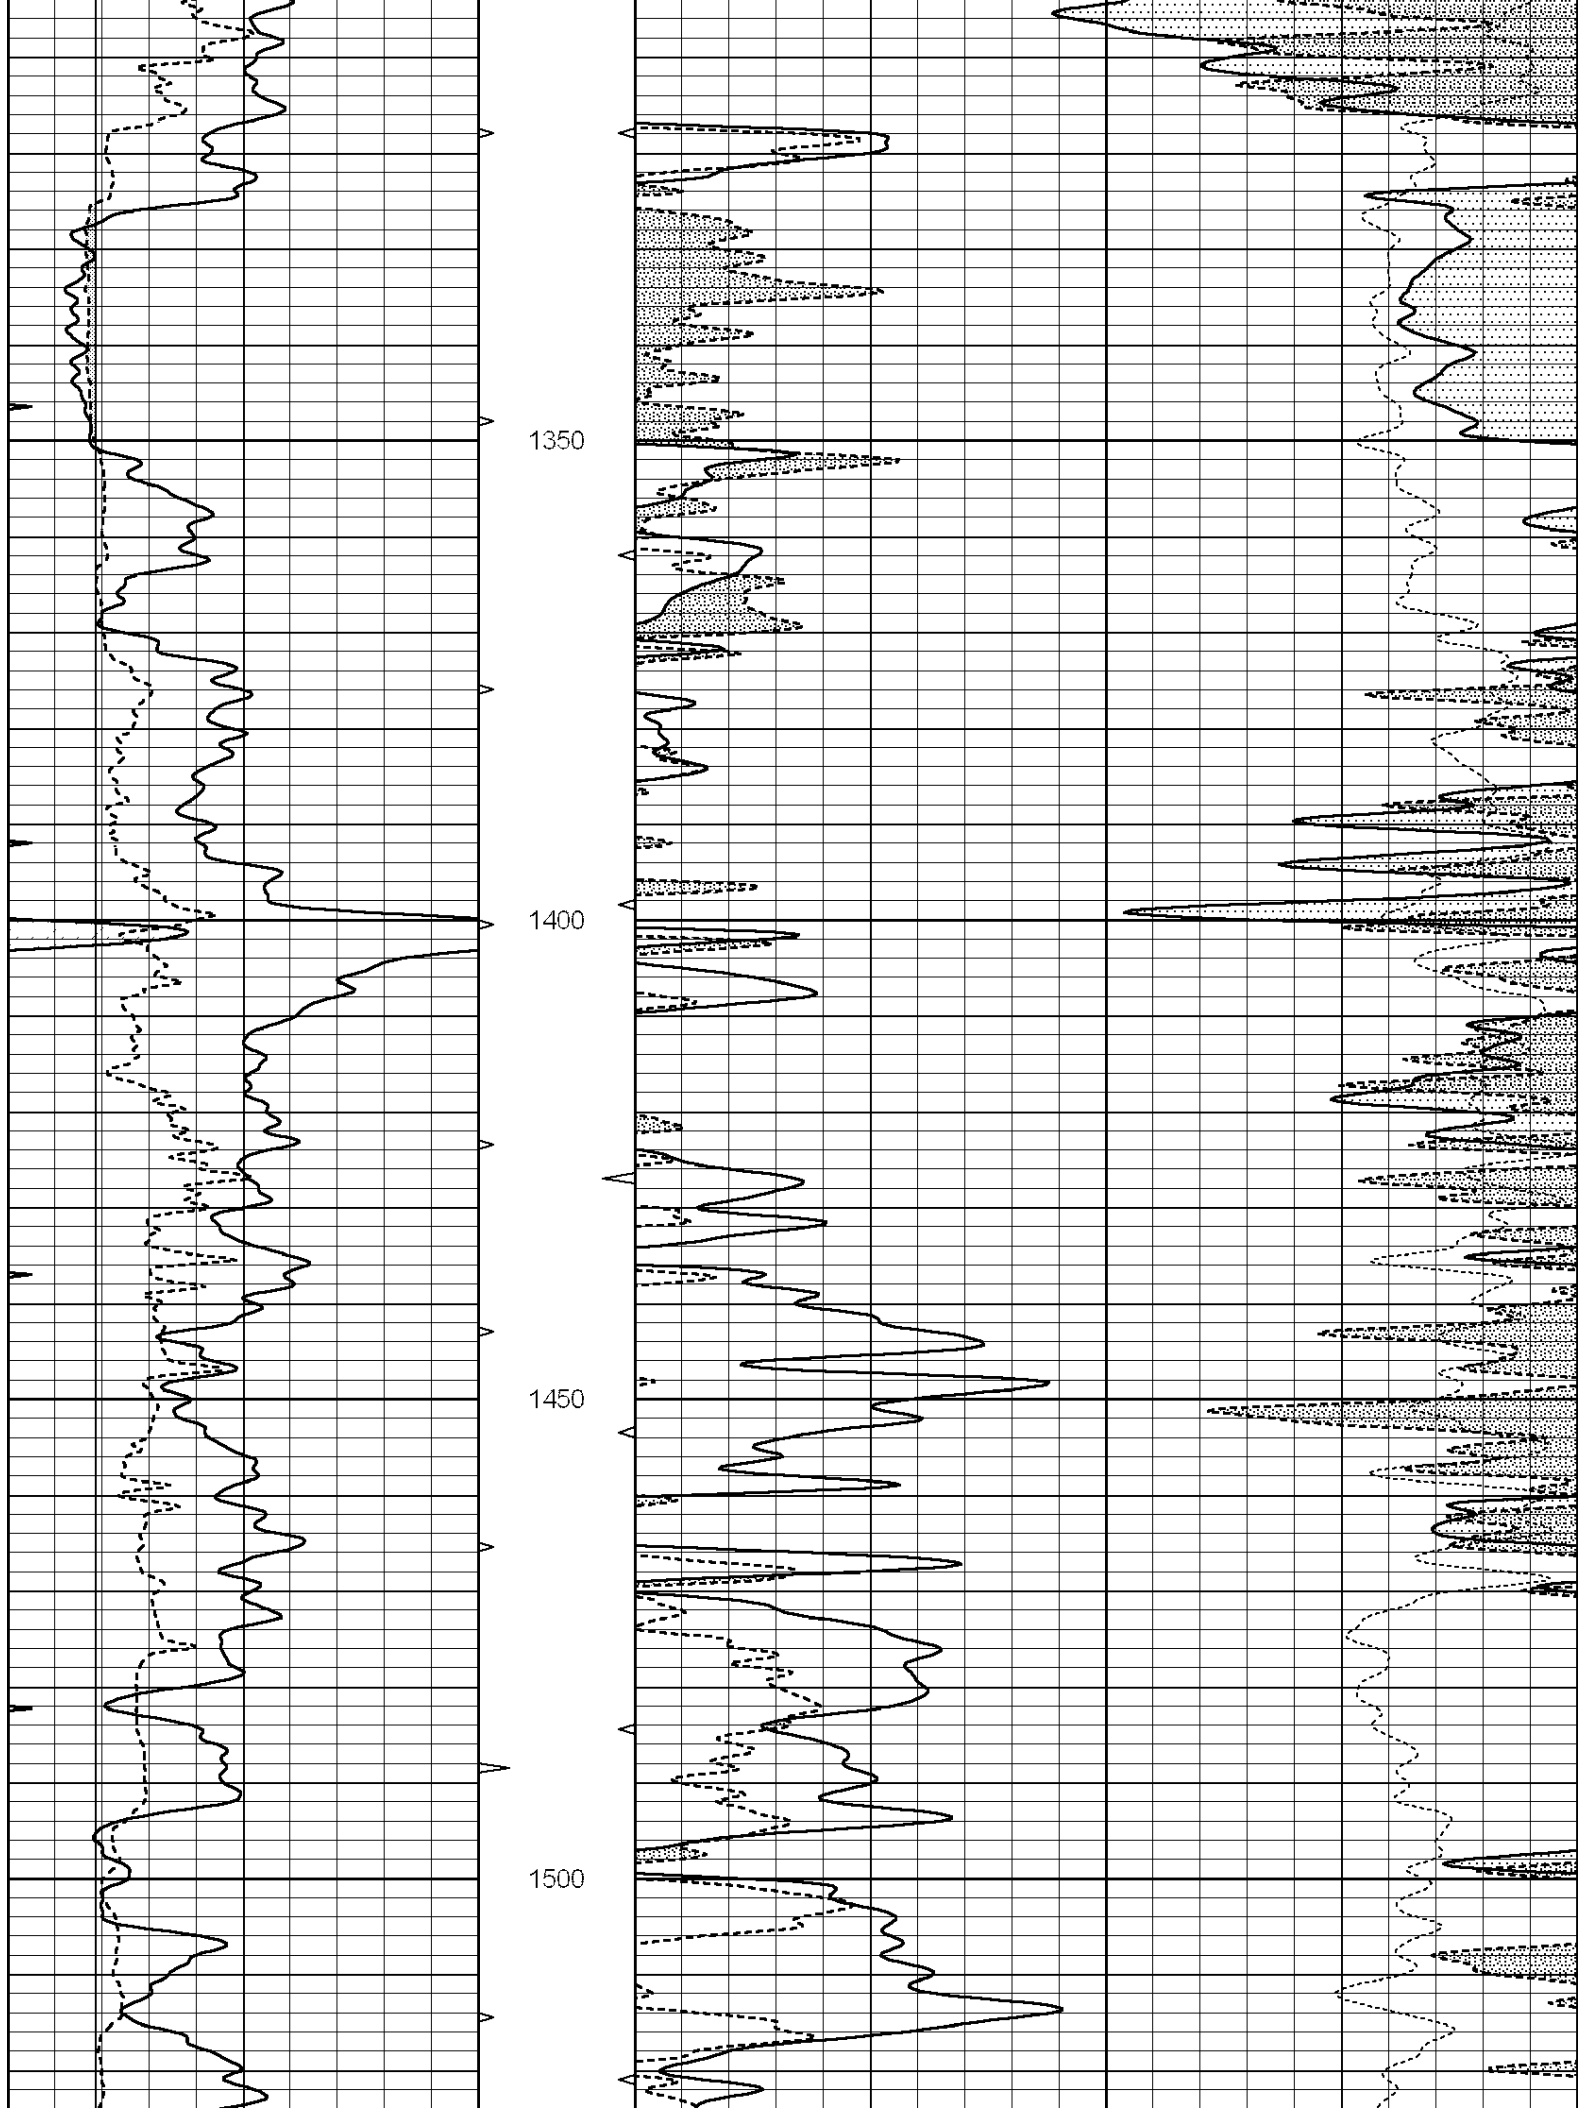

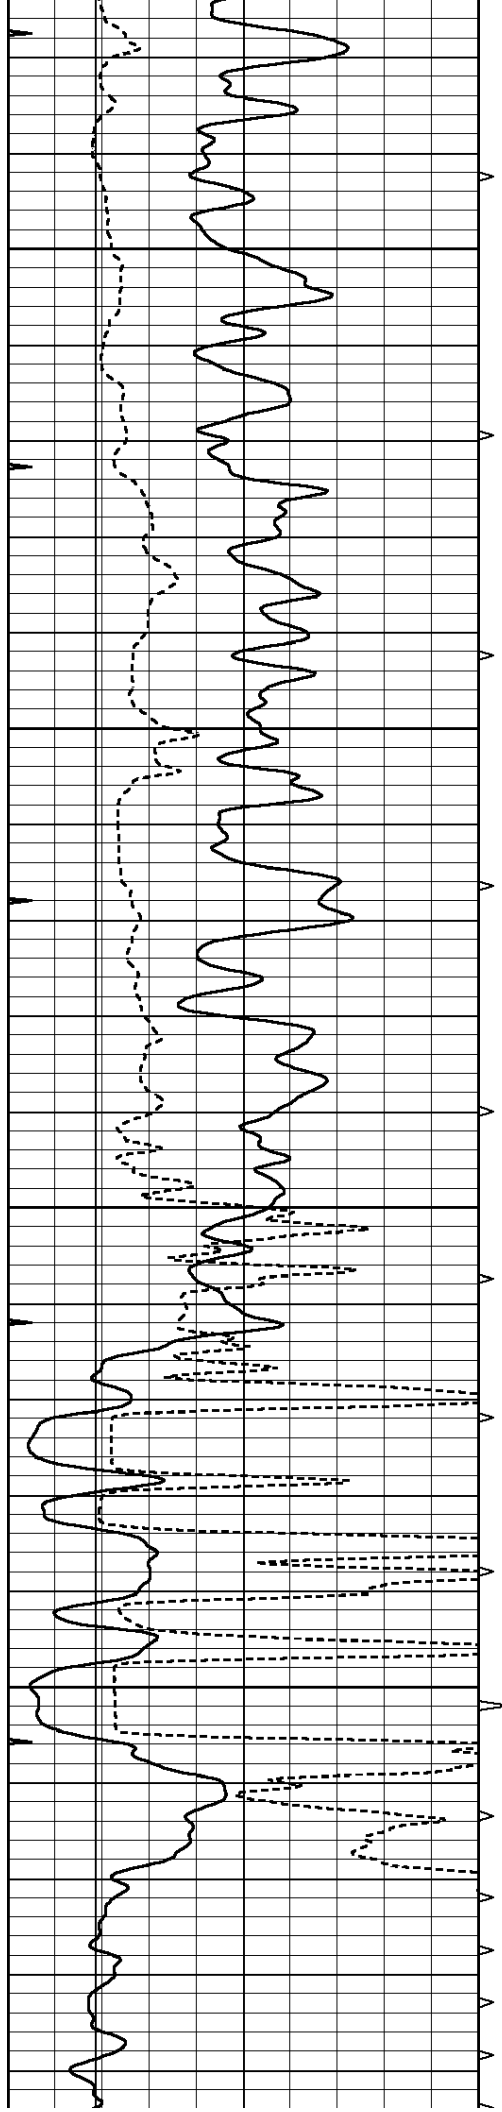



1550


1600


1650

1700

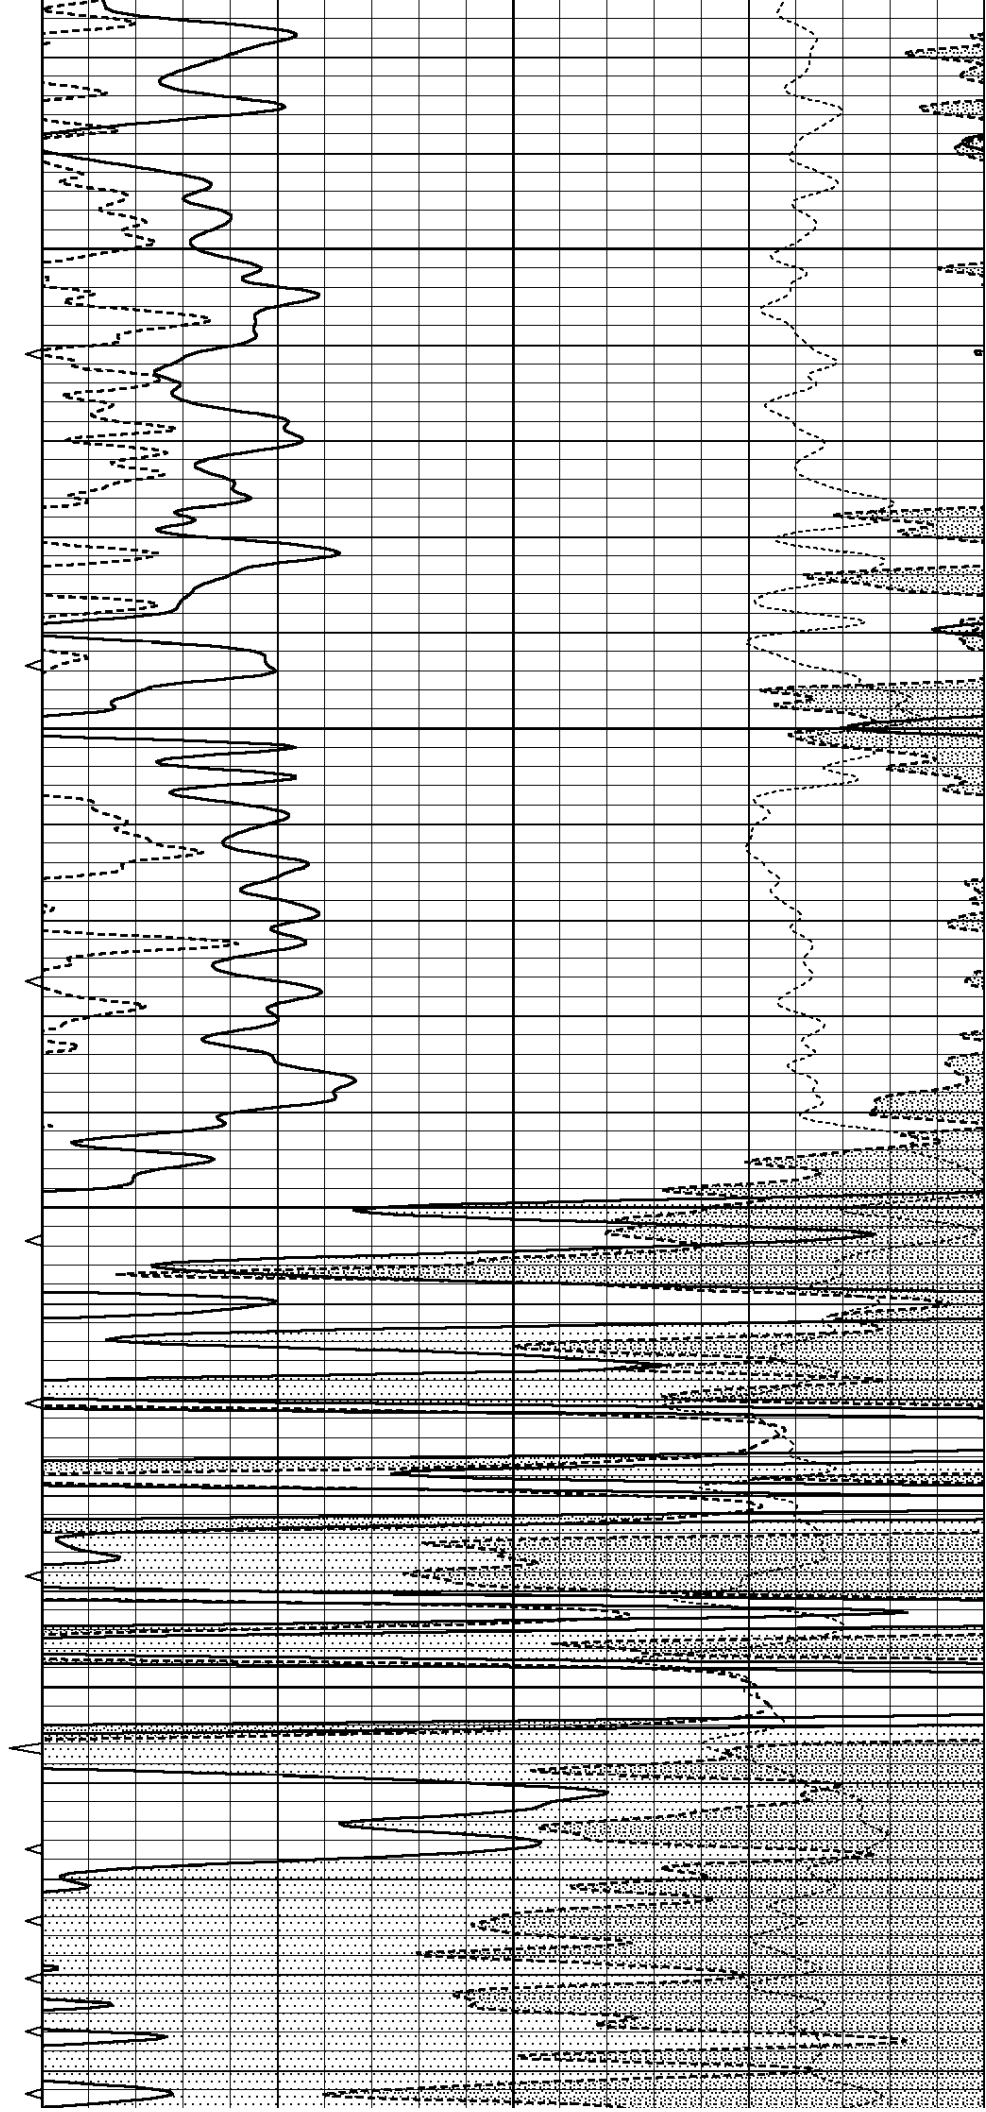


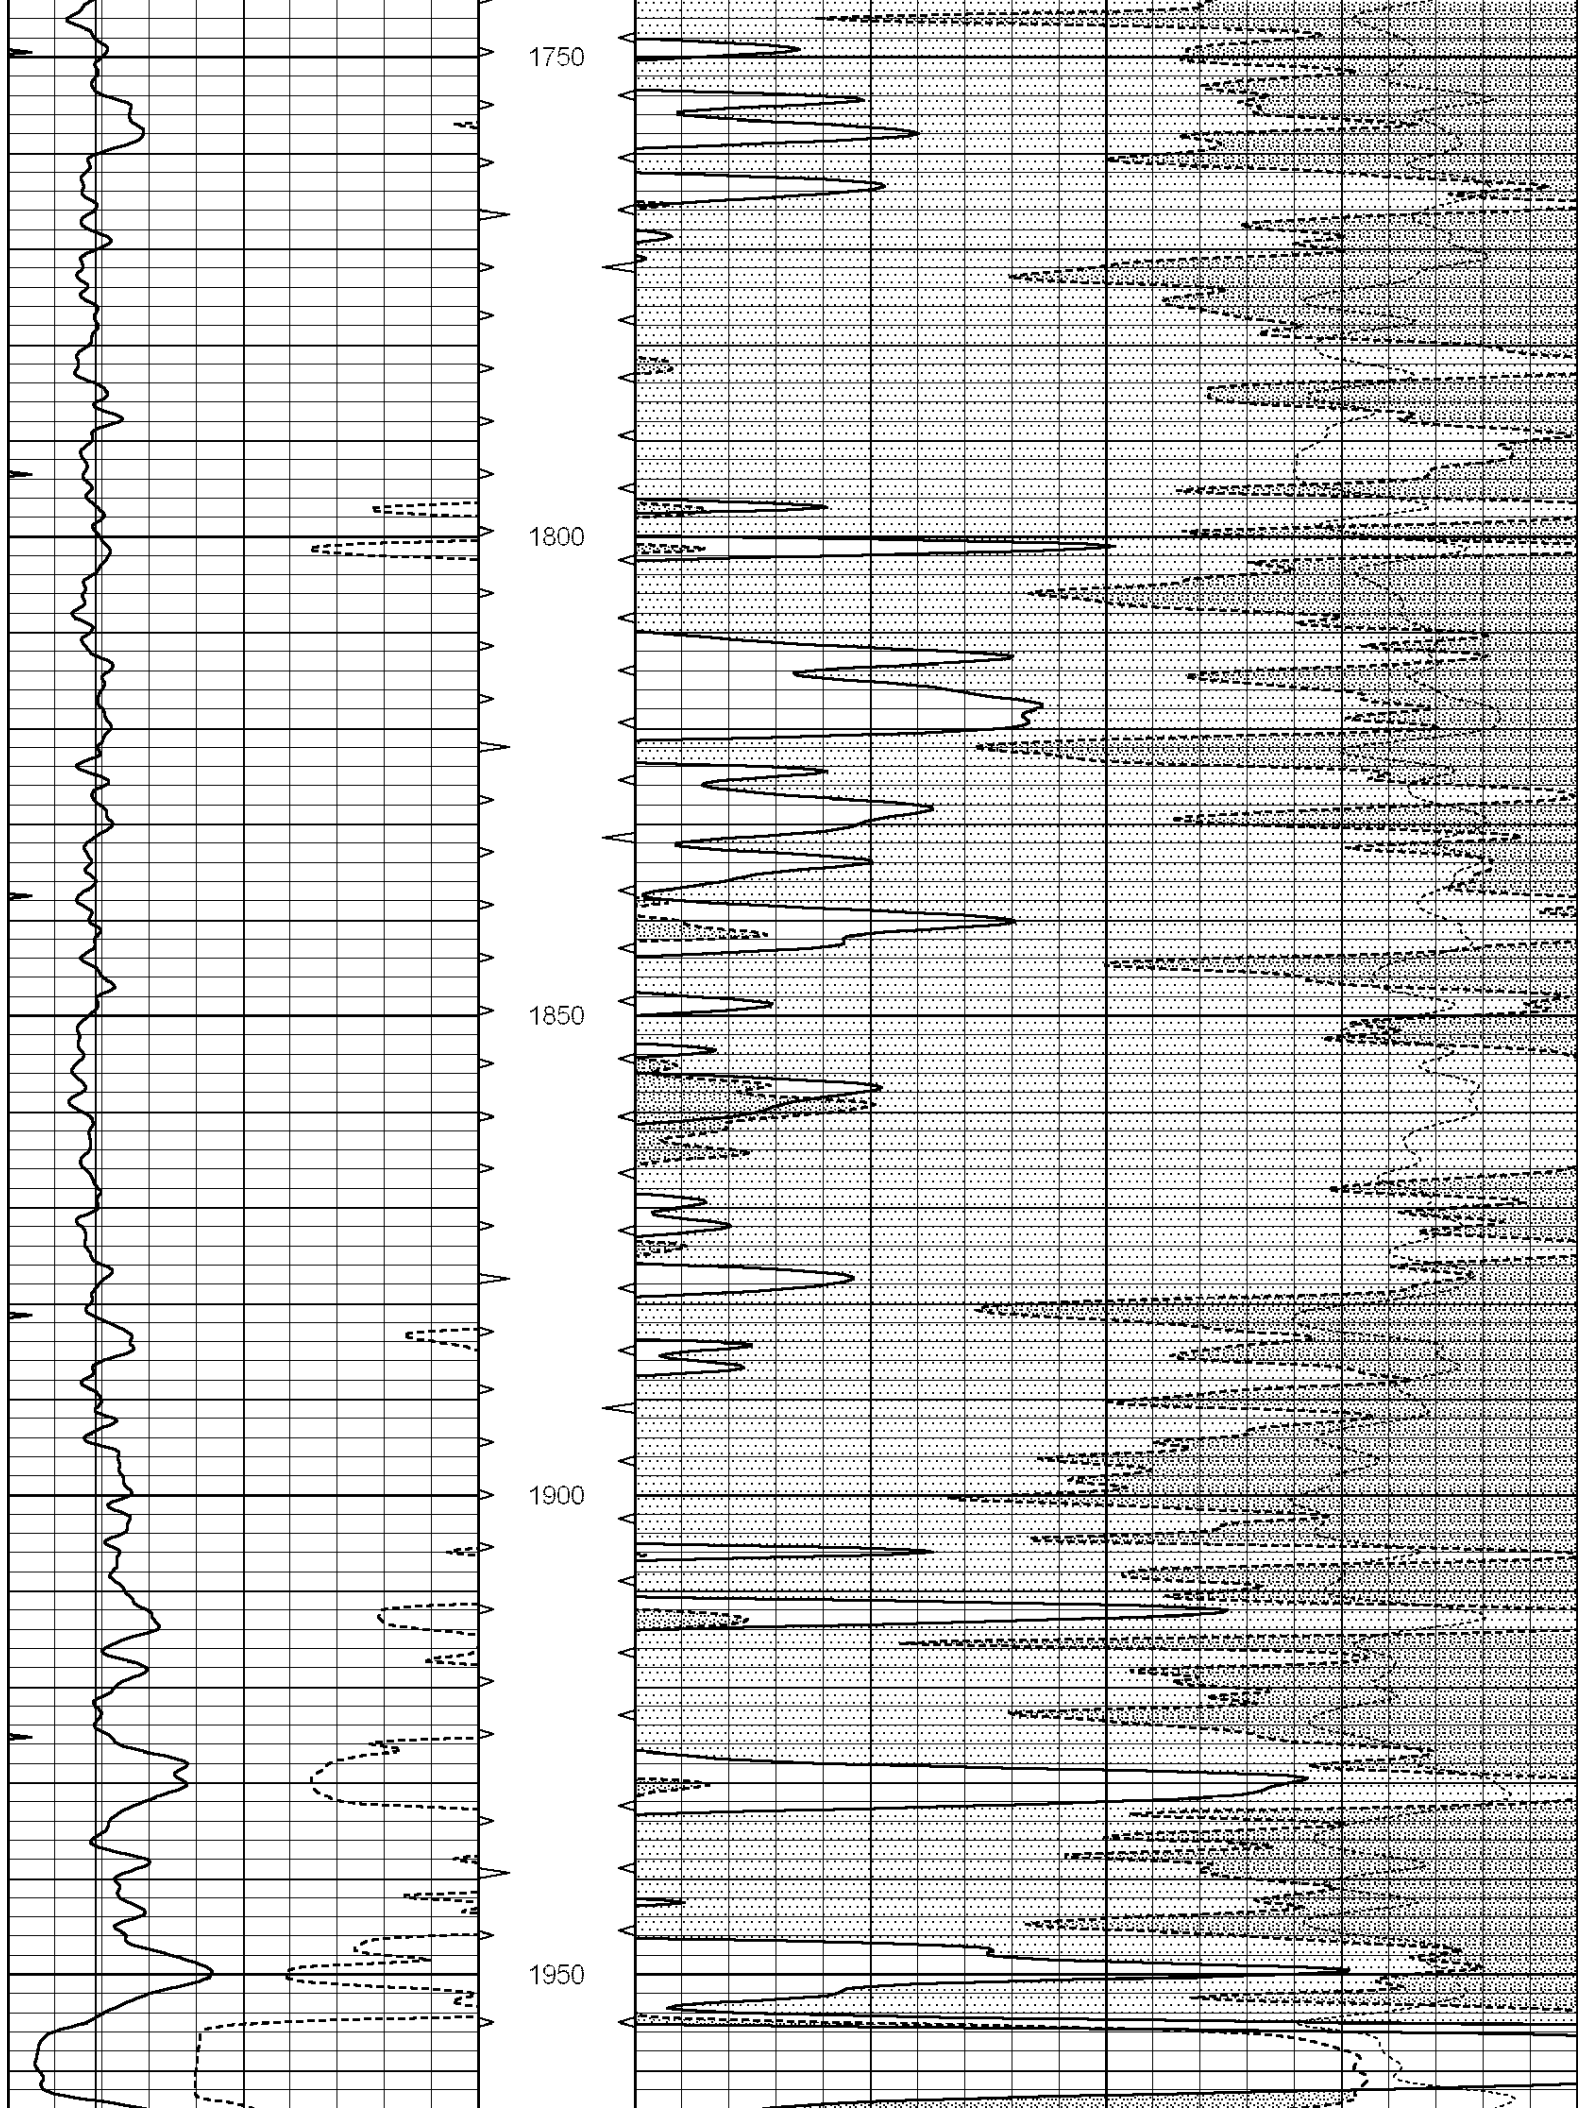

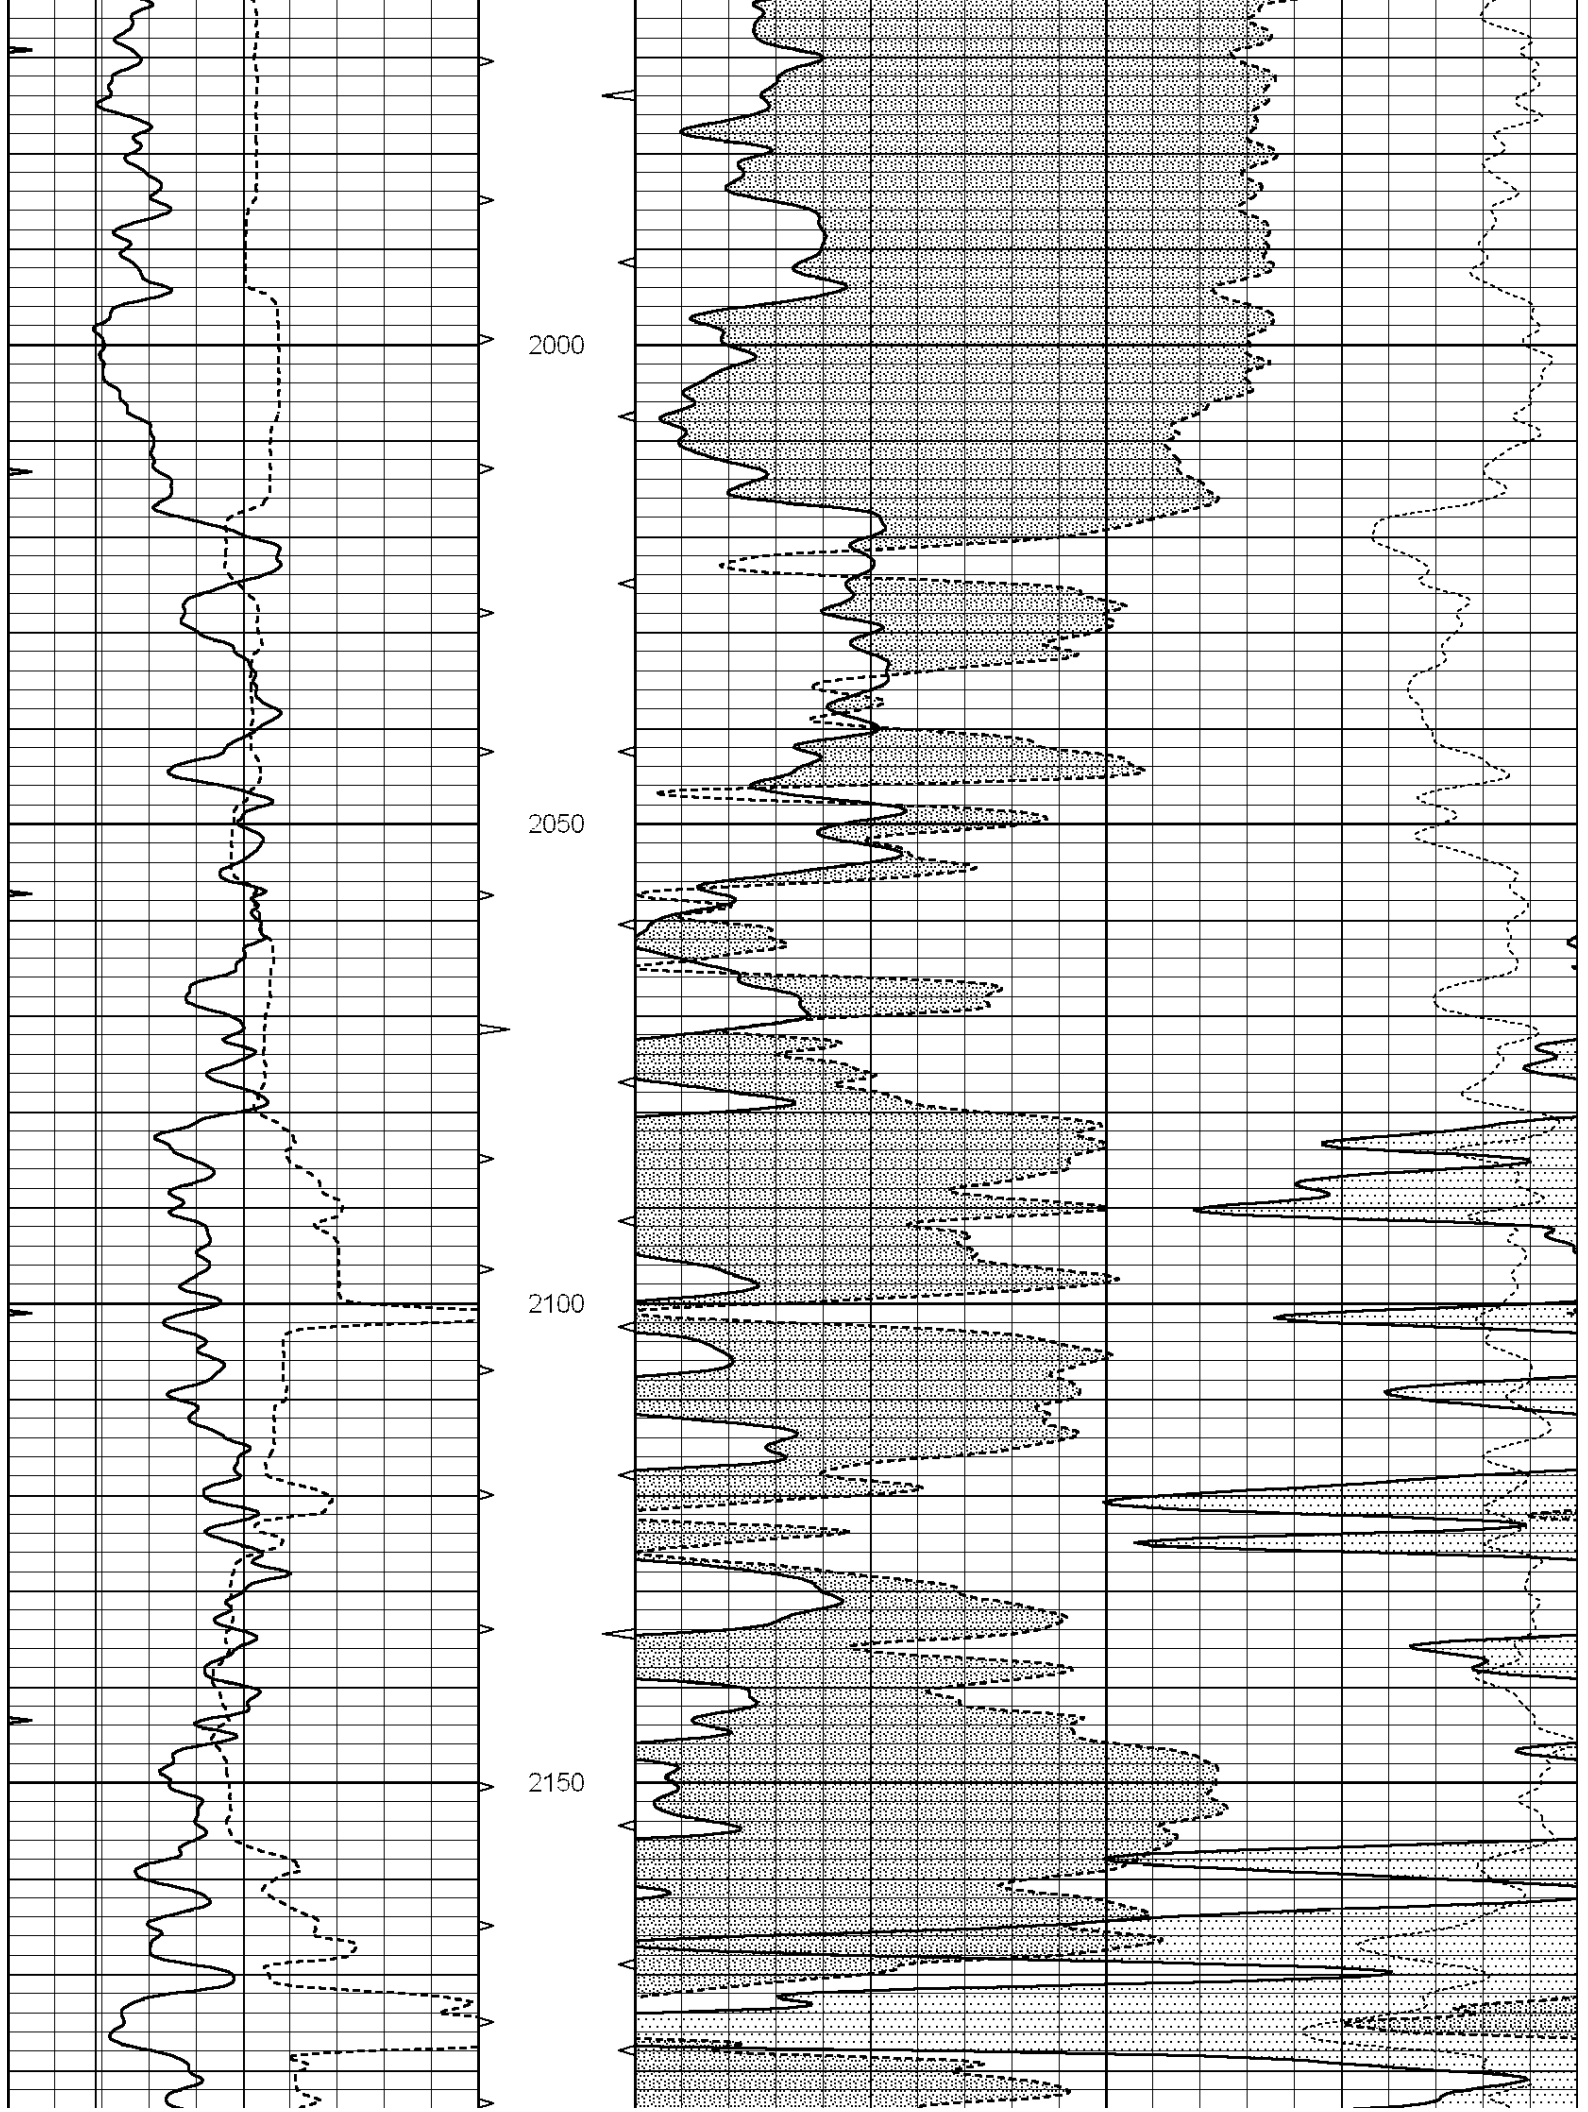

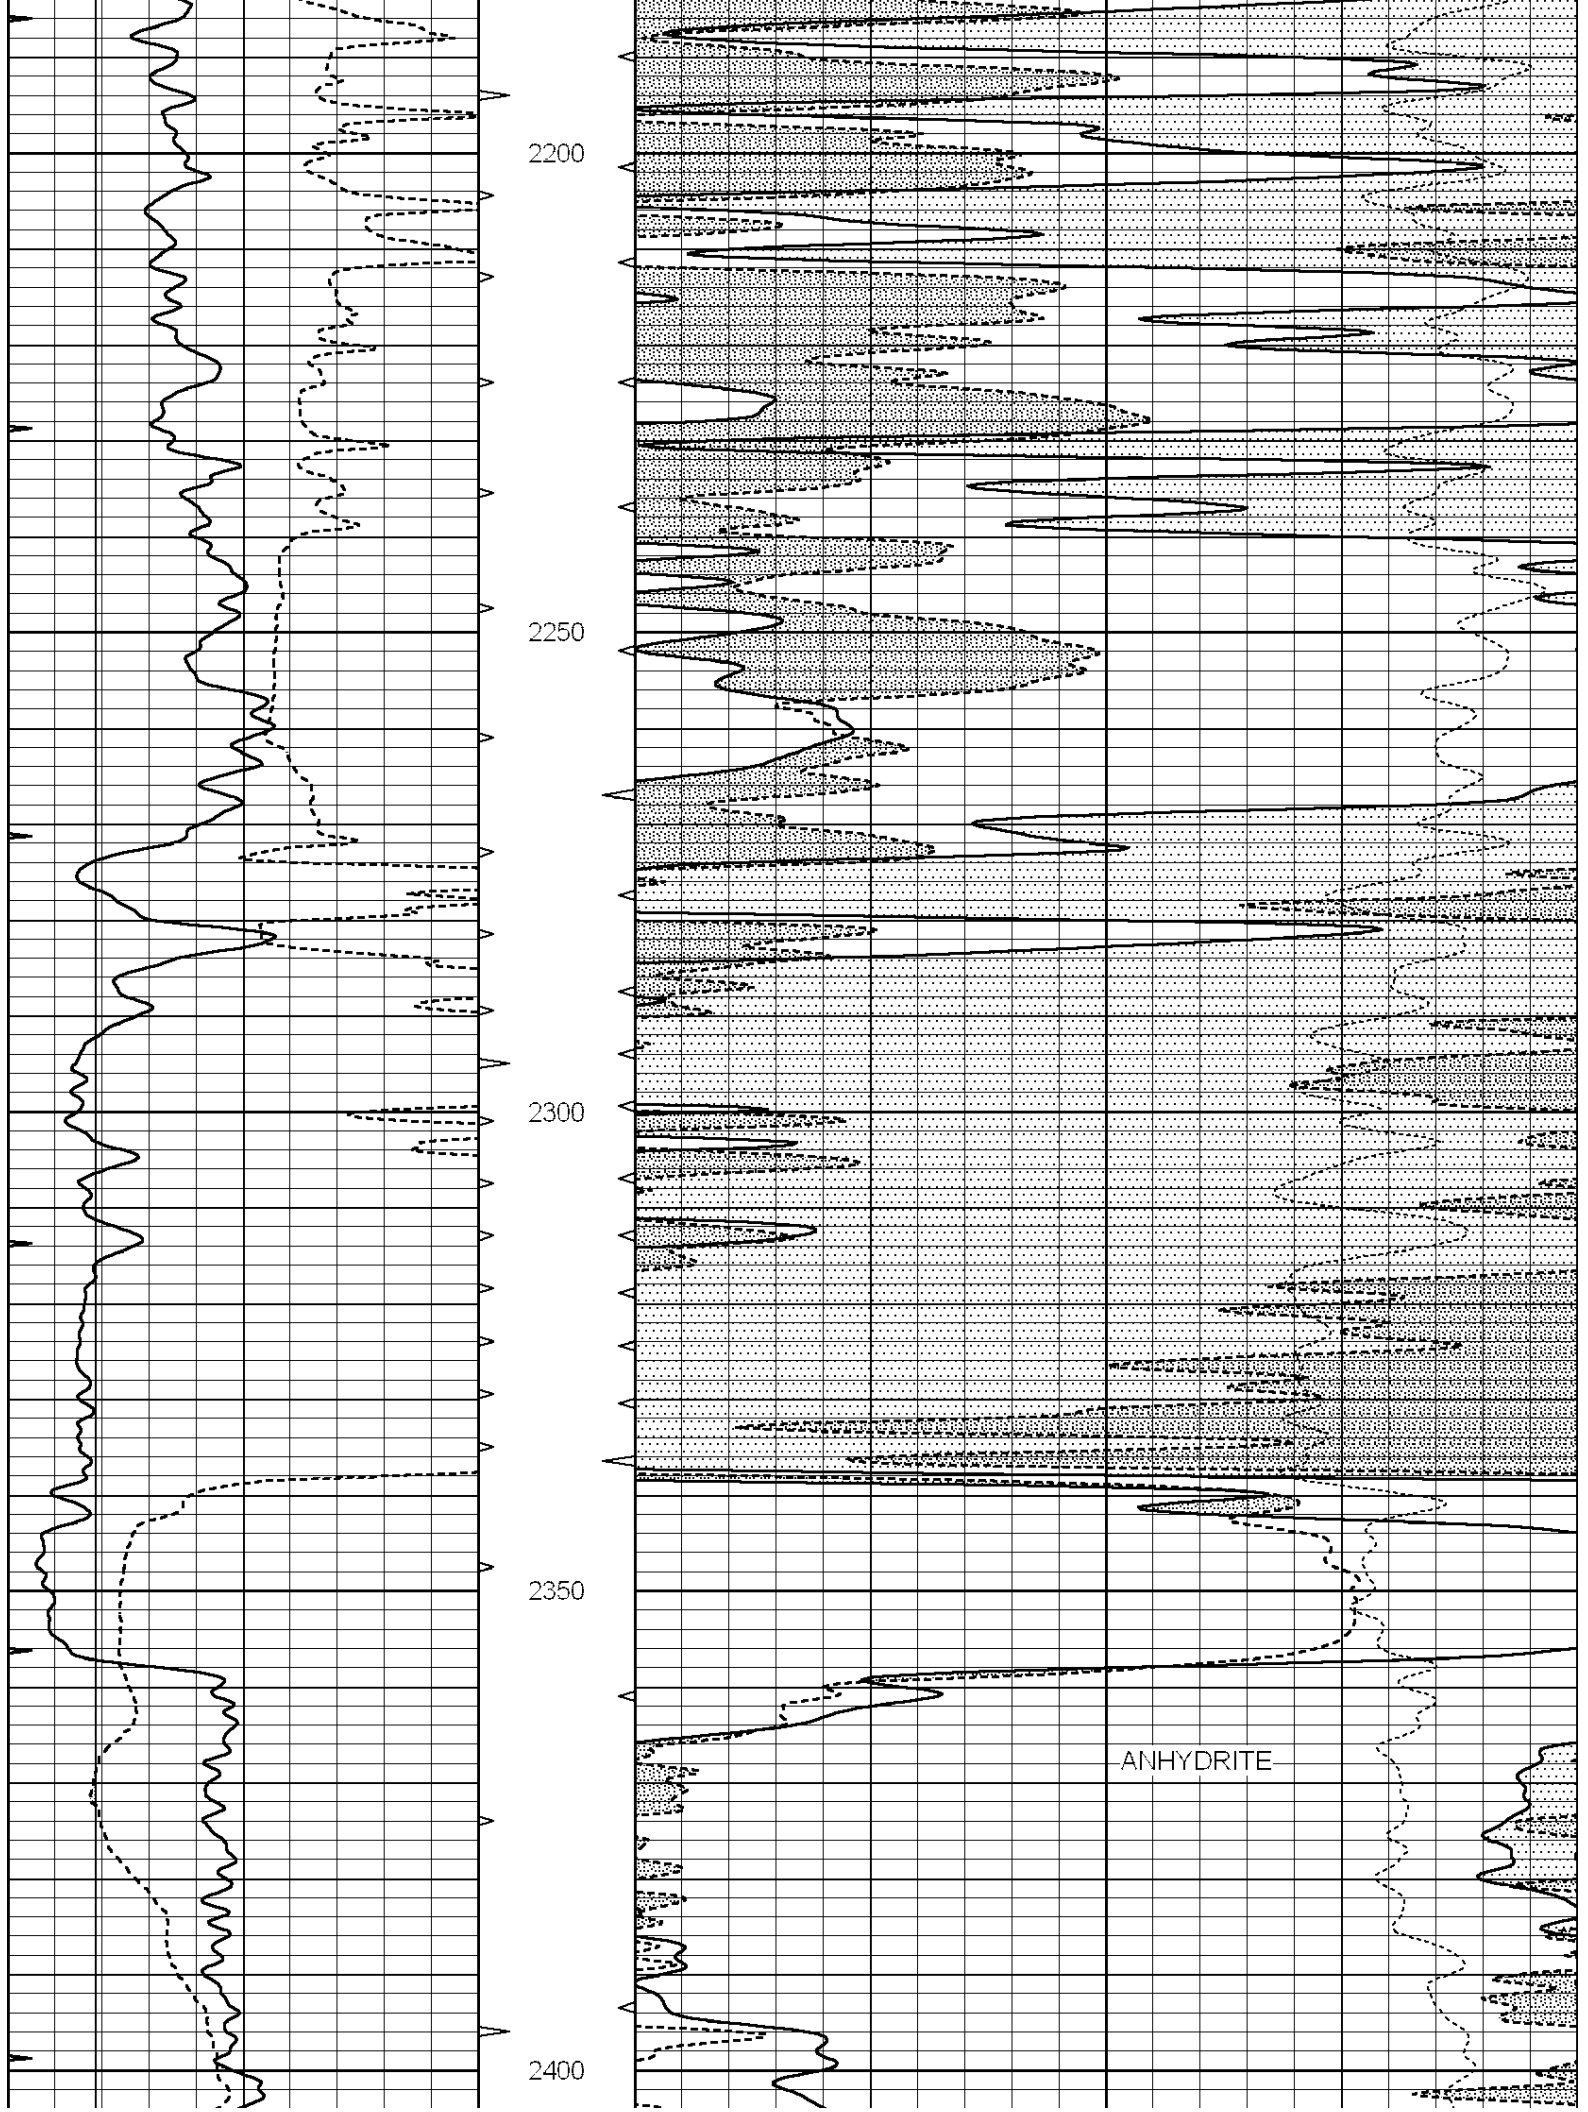


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

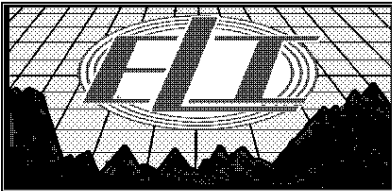



MAIN SECTION


Database File: 1600ddn.db
 Dataset Pathname: pass3.2
 Presentation Format: den_neu
 Dataset Creation: Fri Sep 01 23:29:09 2017 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

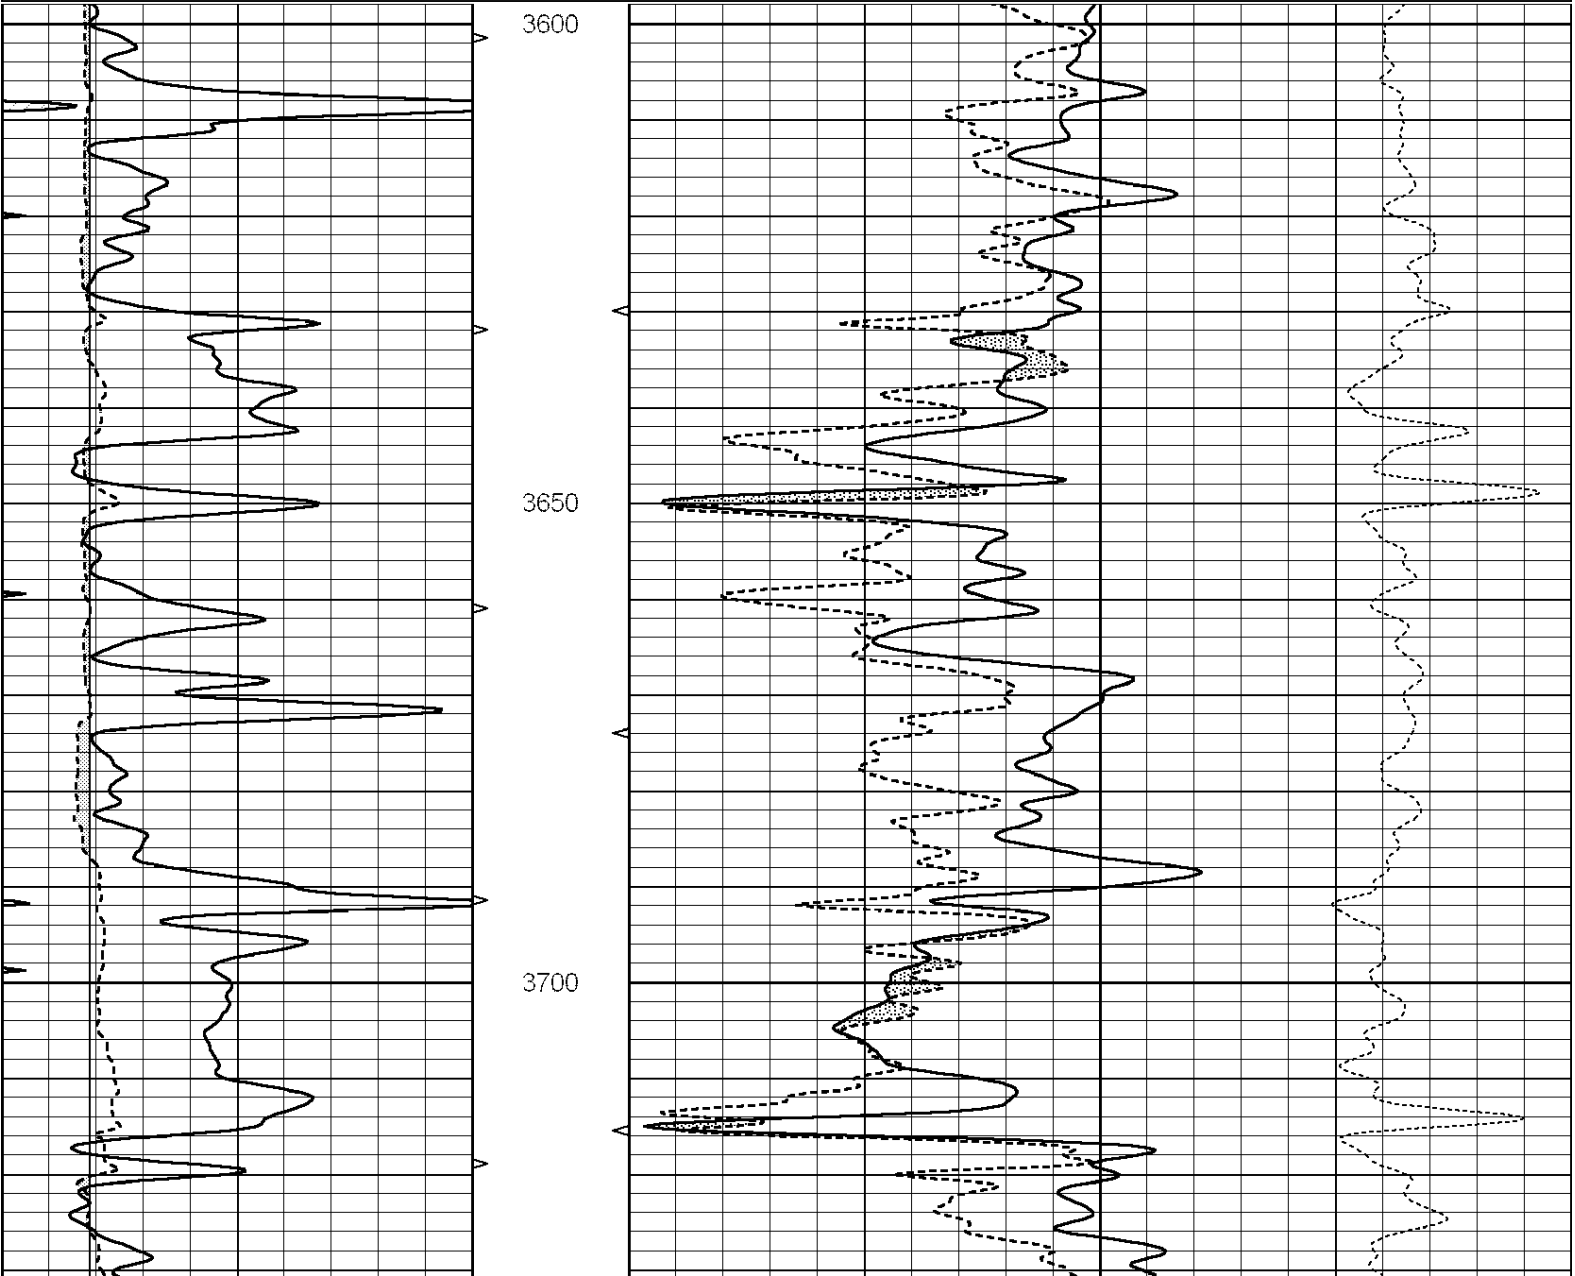


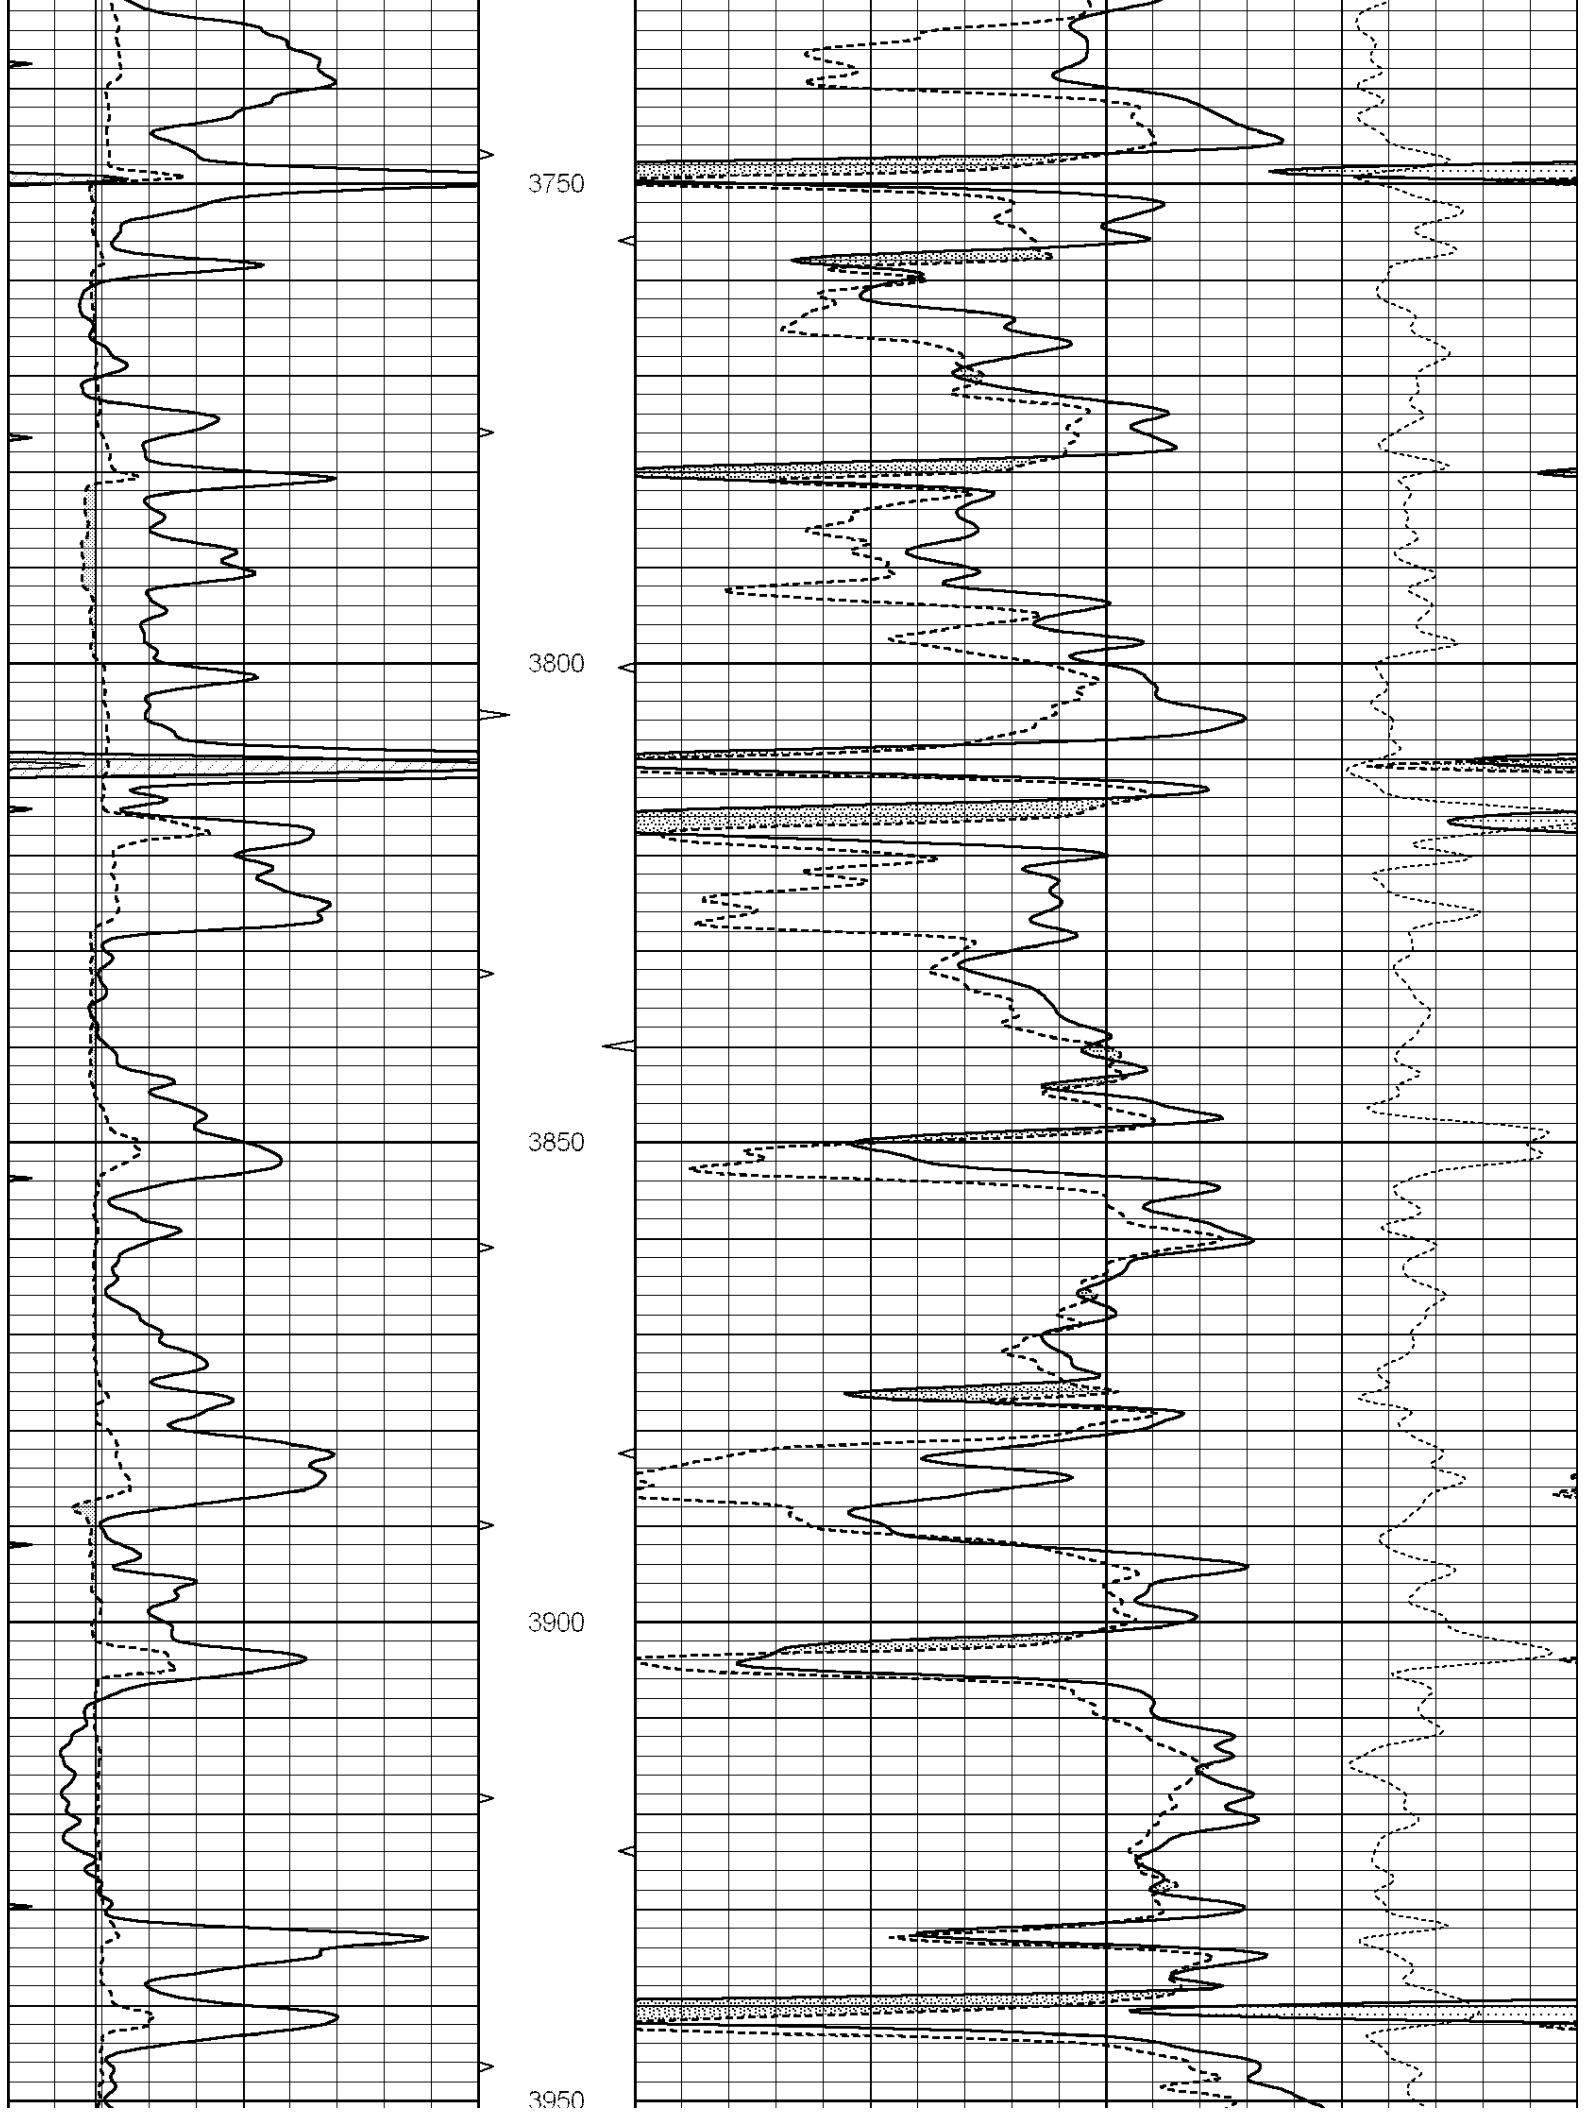

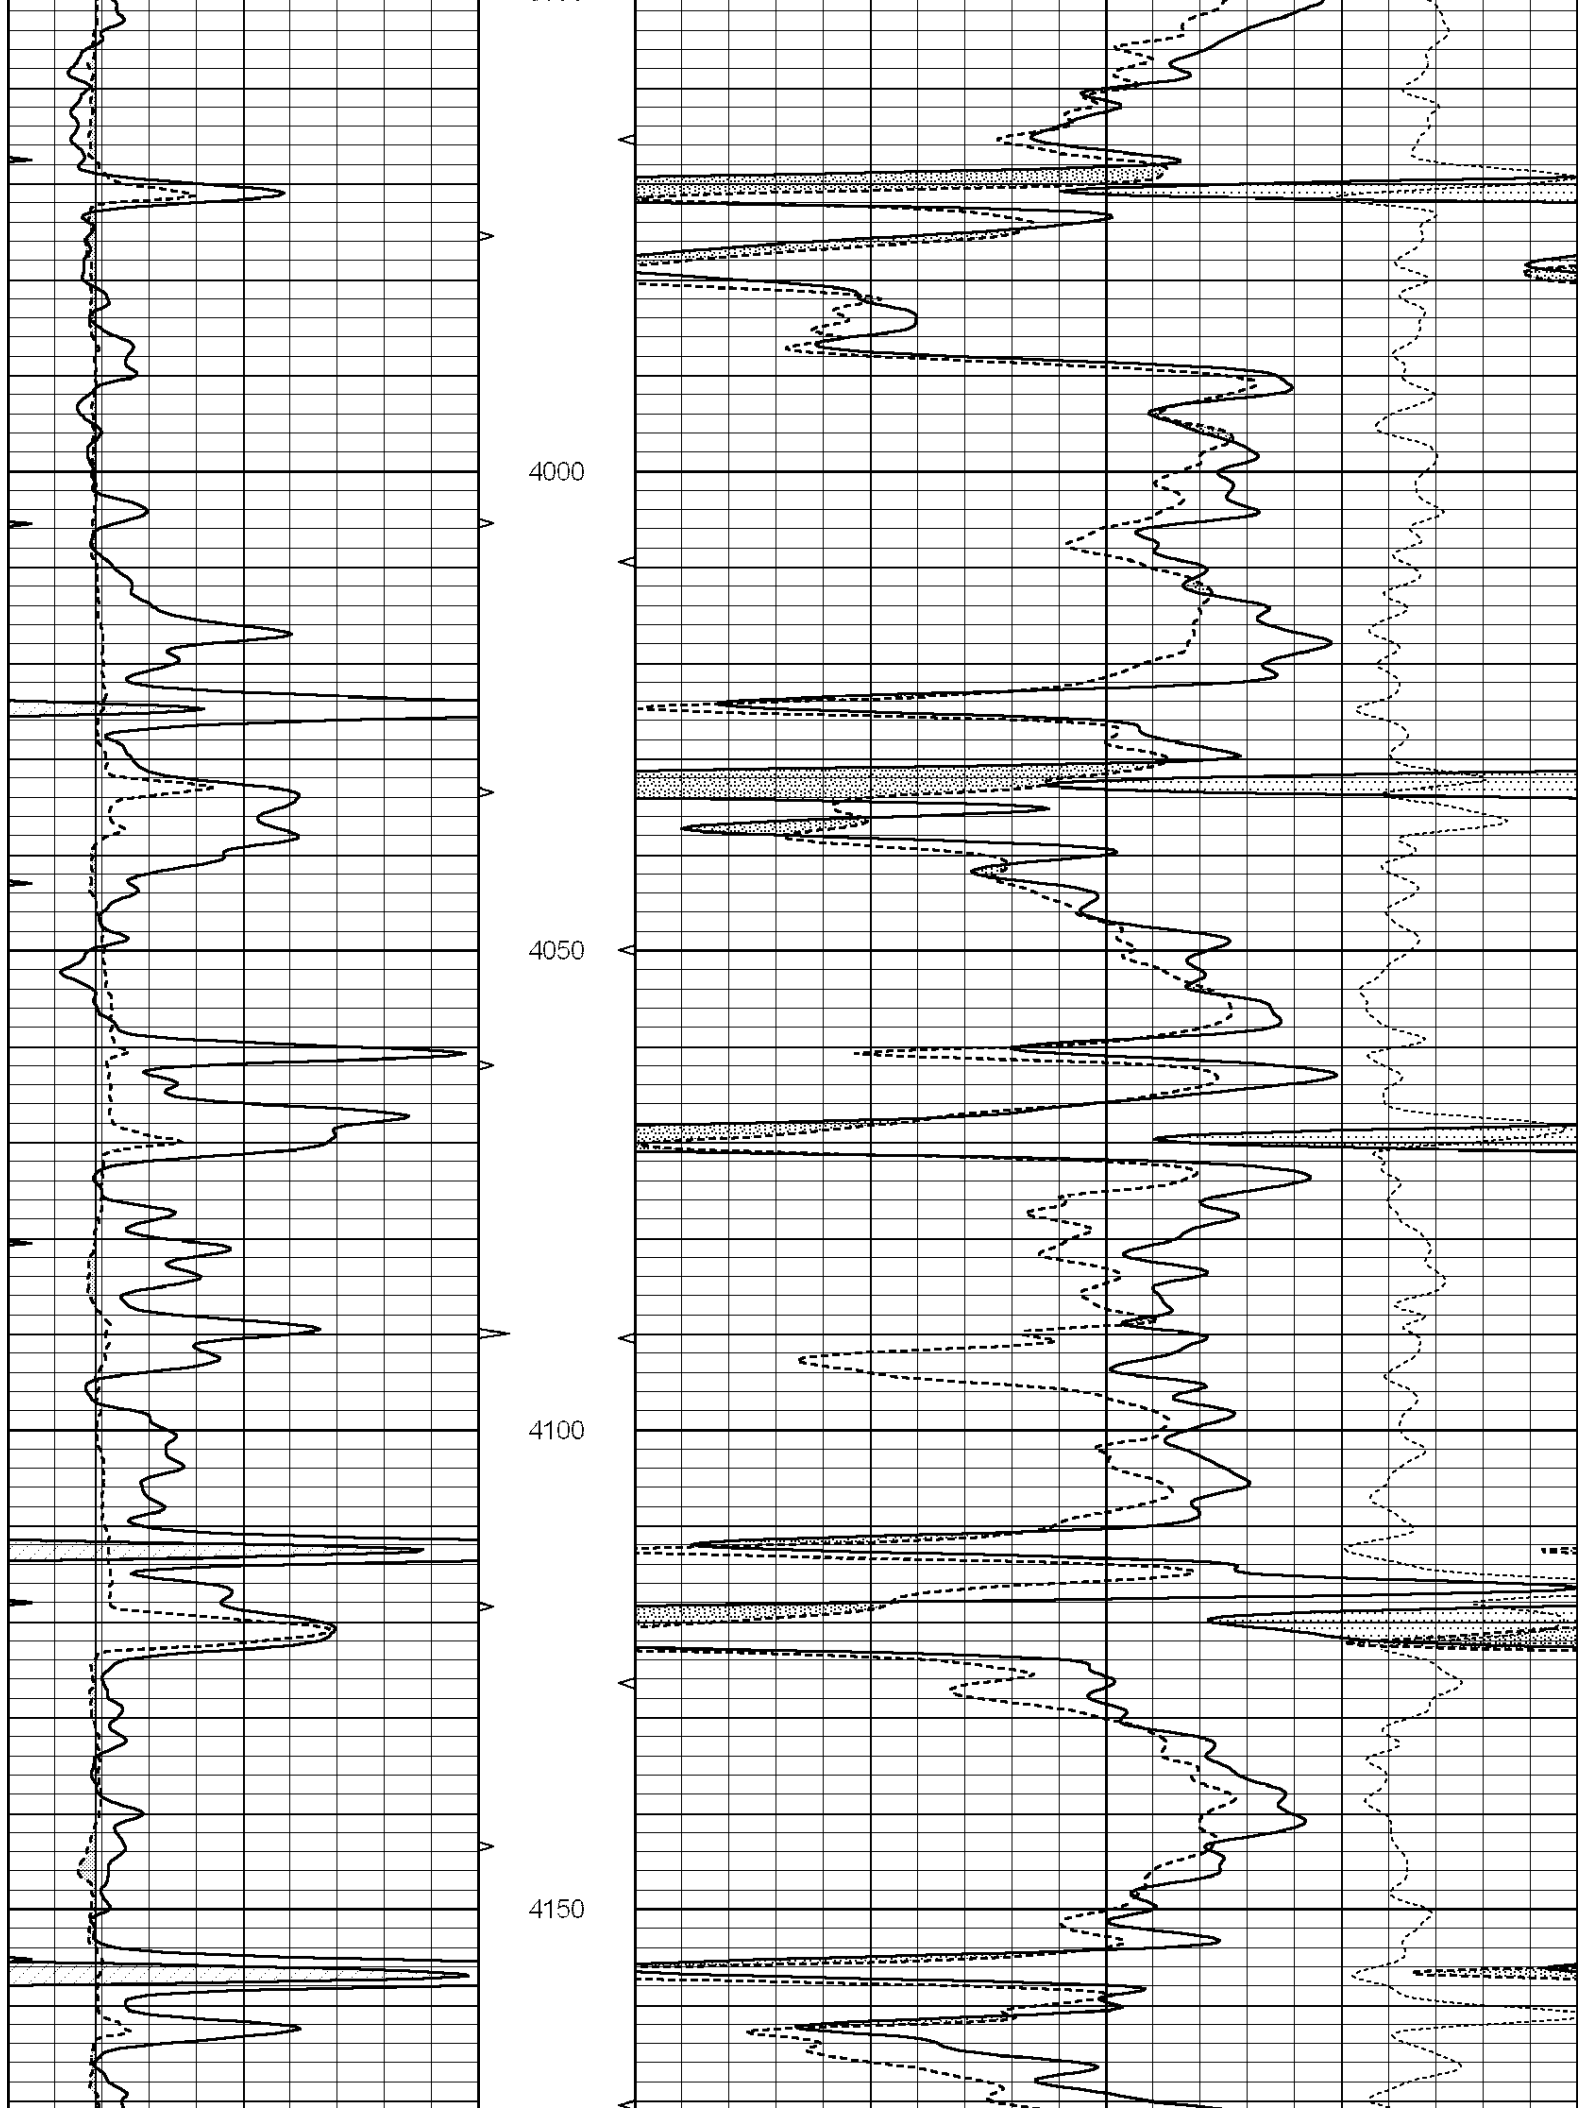


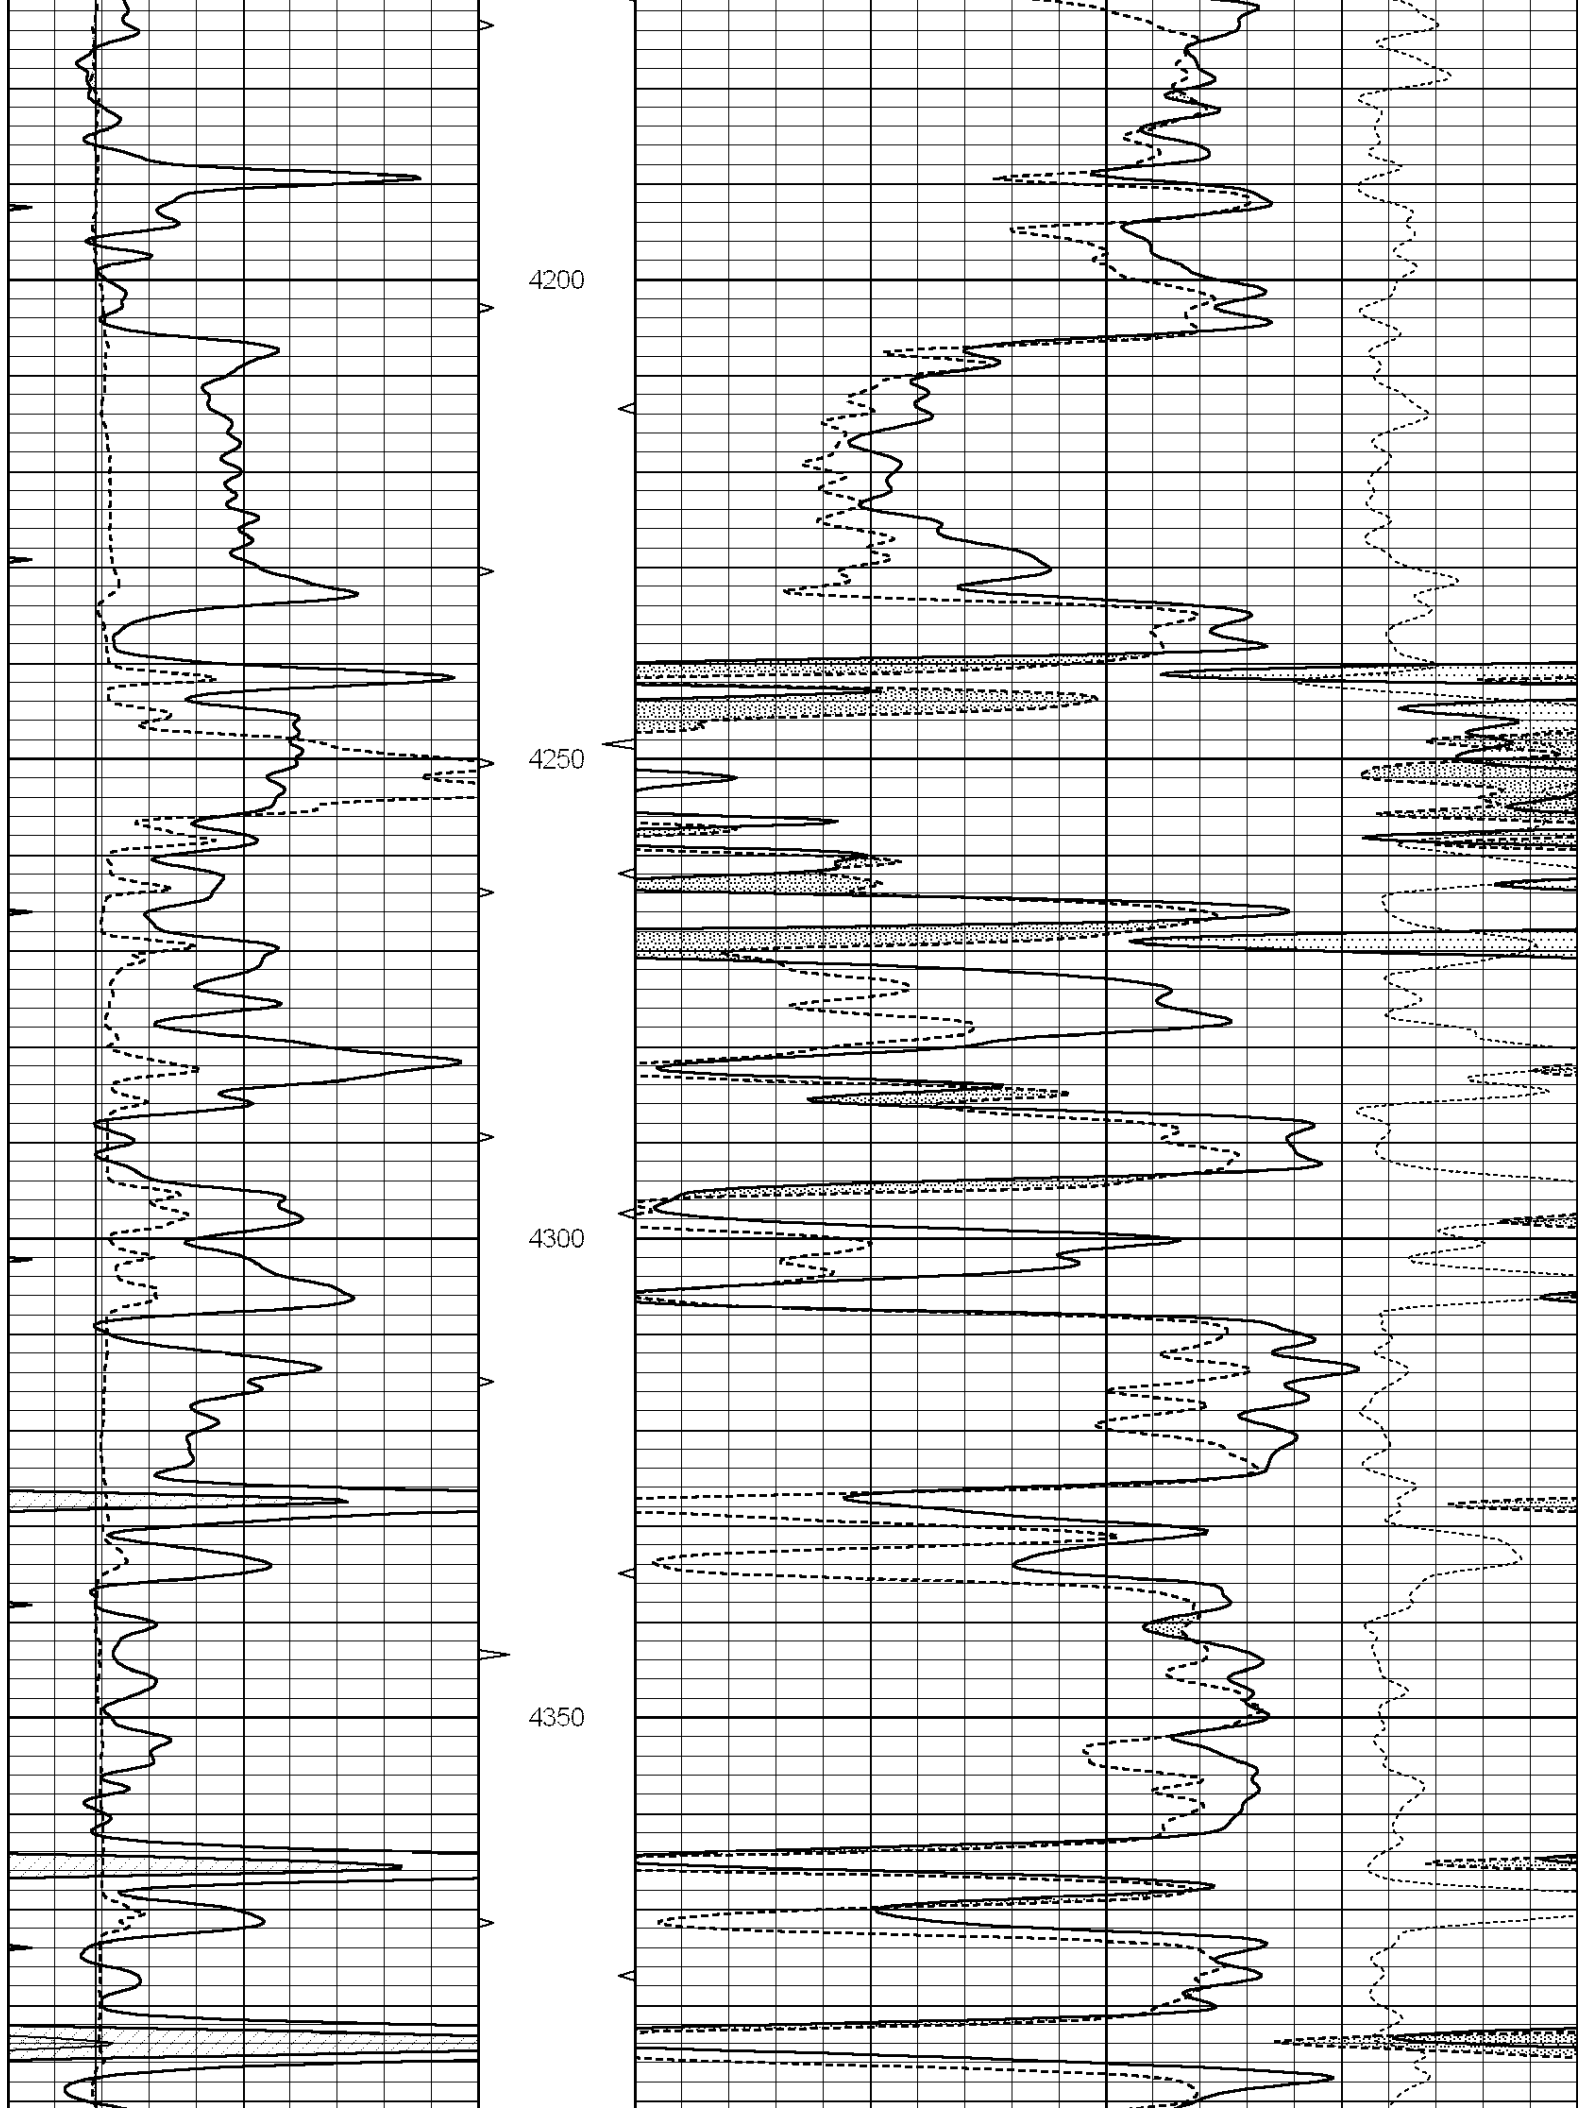

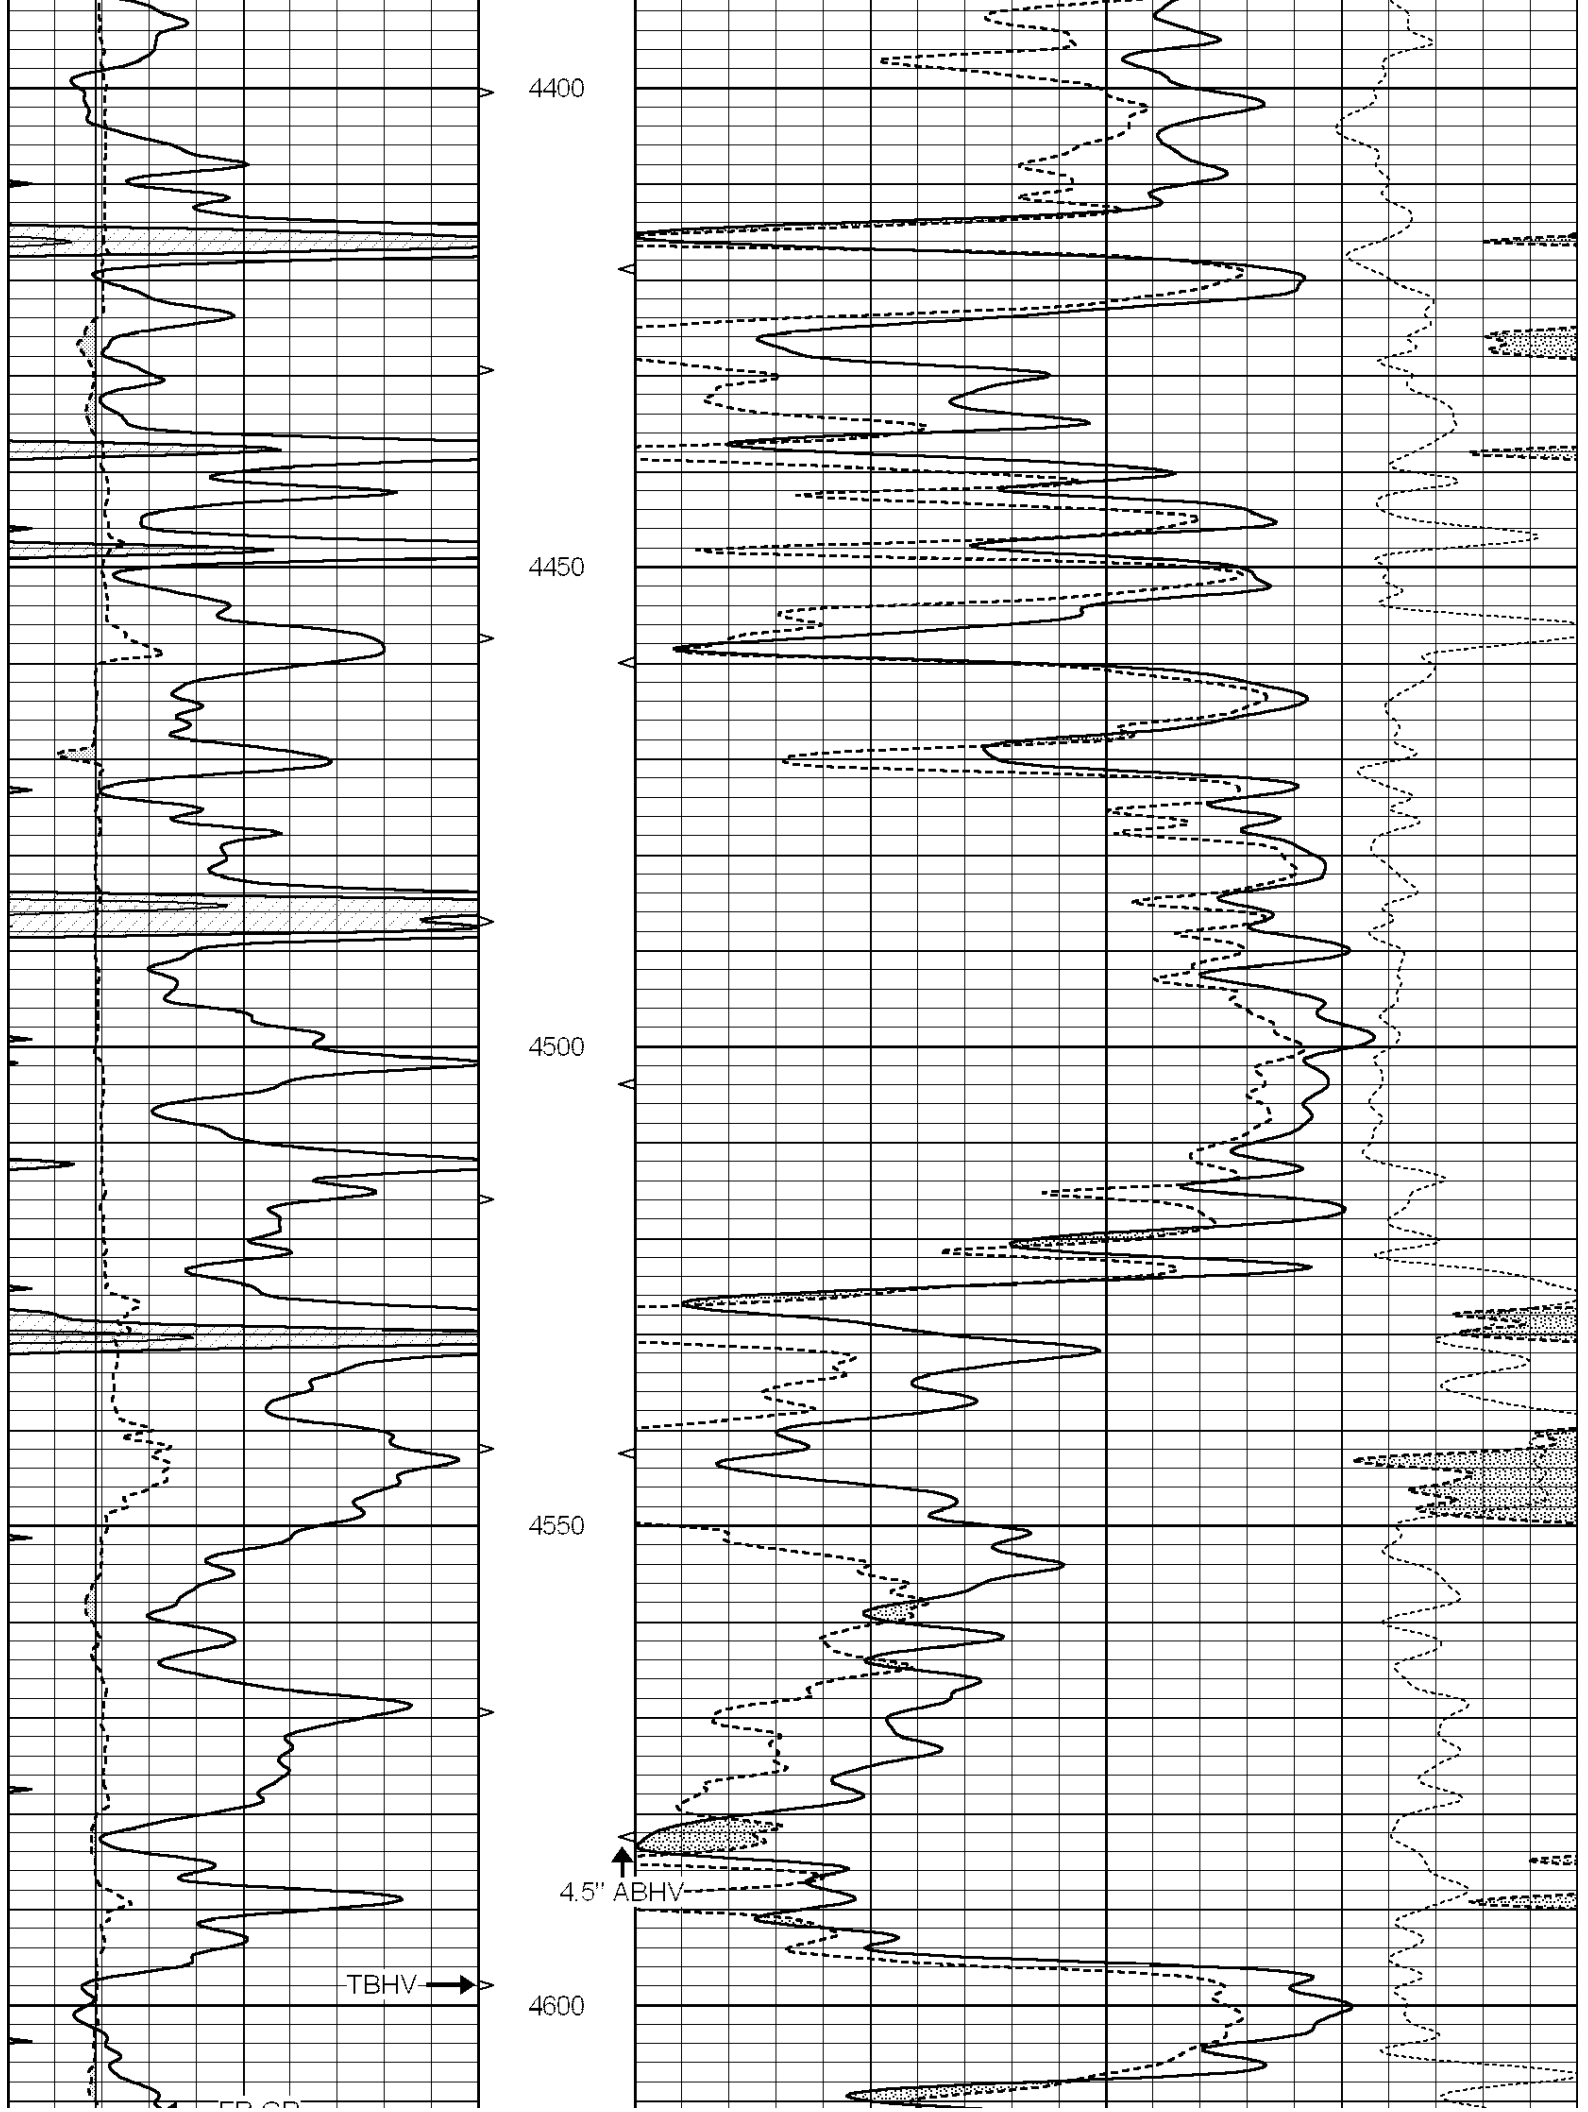


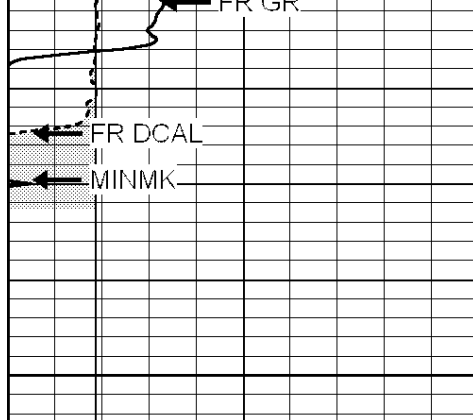

4650

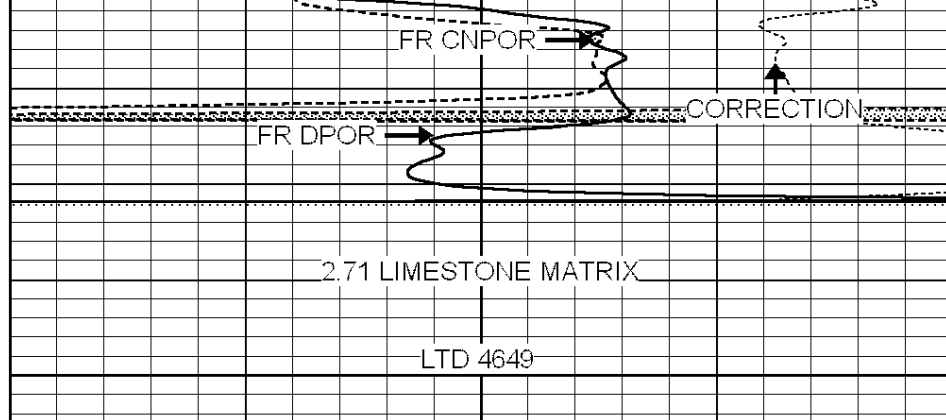


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

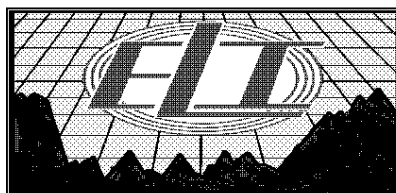

REPEAT SECTION


Database File: 1600ddn.db
 Dataset Pathname: pass2.3
 Presentation Format: den_neu
 Dataset Creation: Fri Sep 01 23:10:08 2017
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

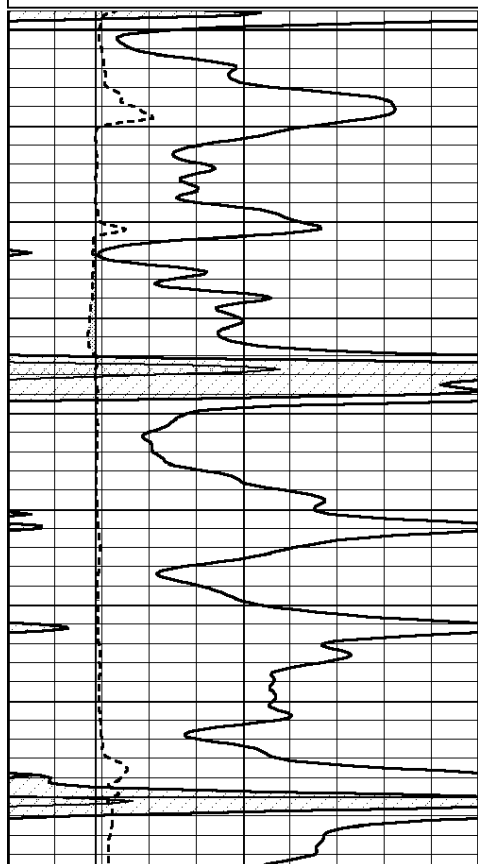

4450

4500

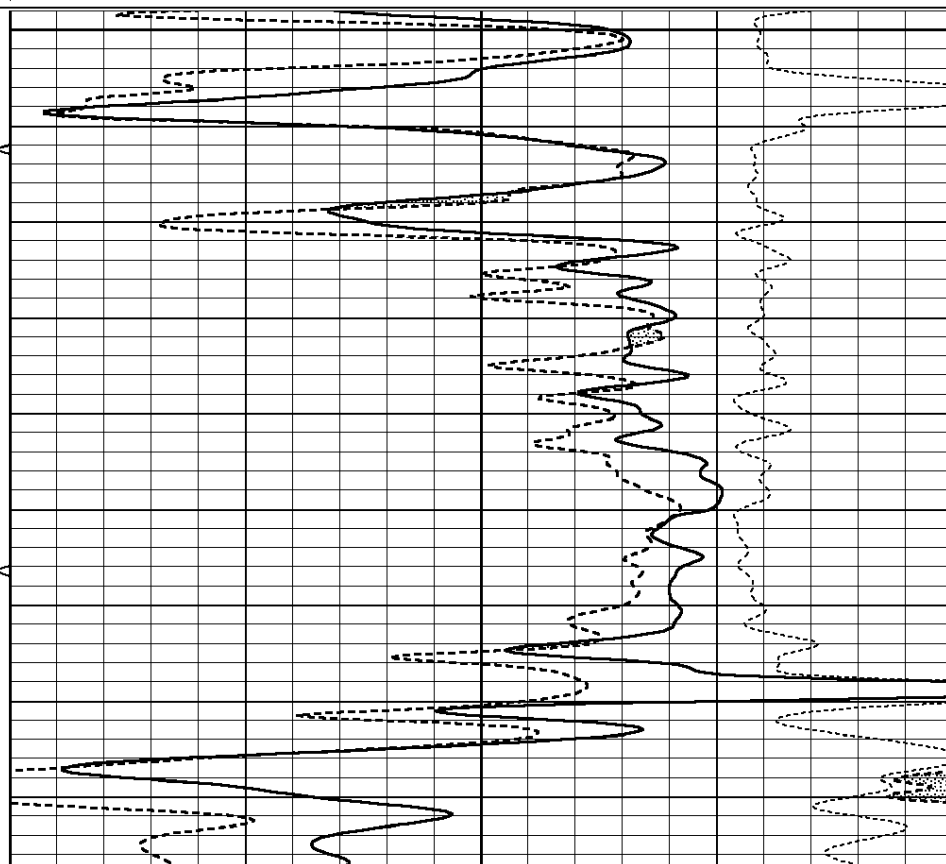

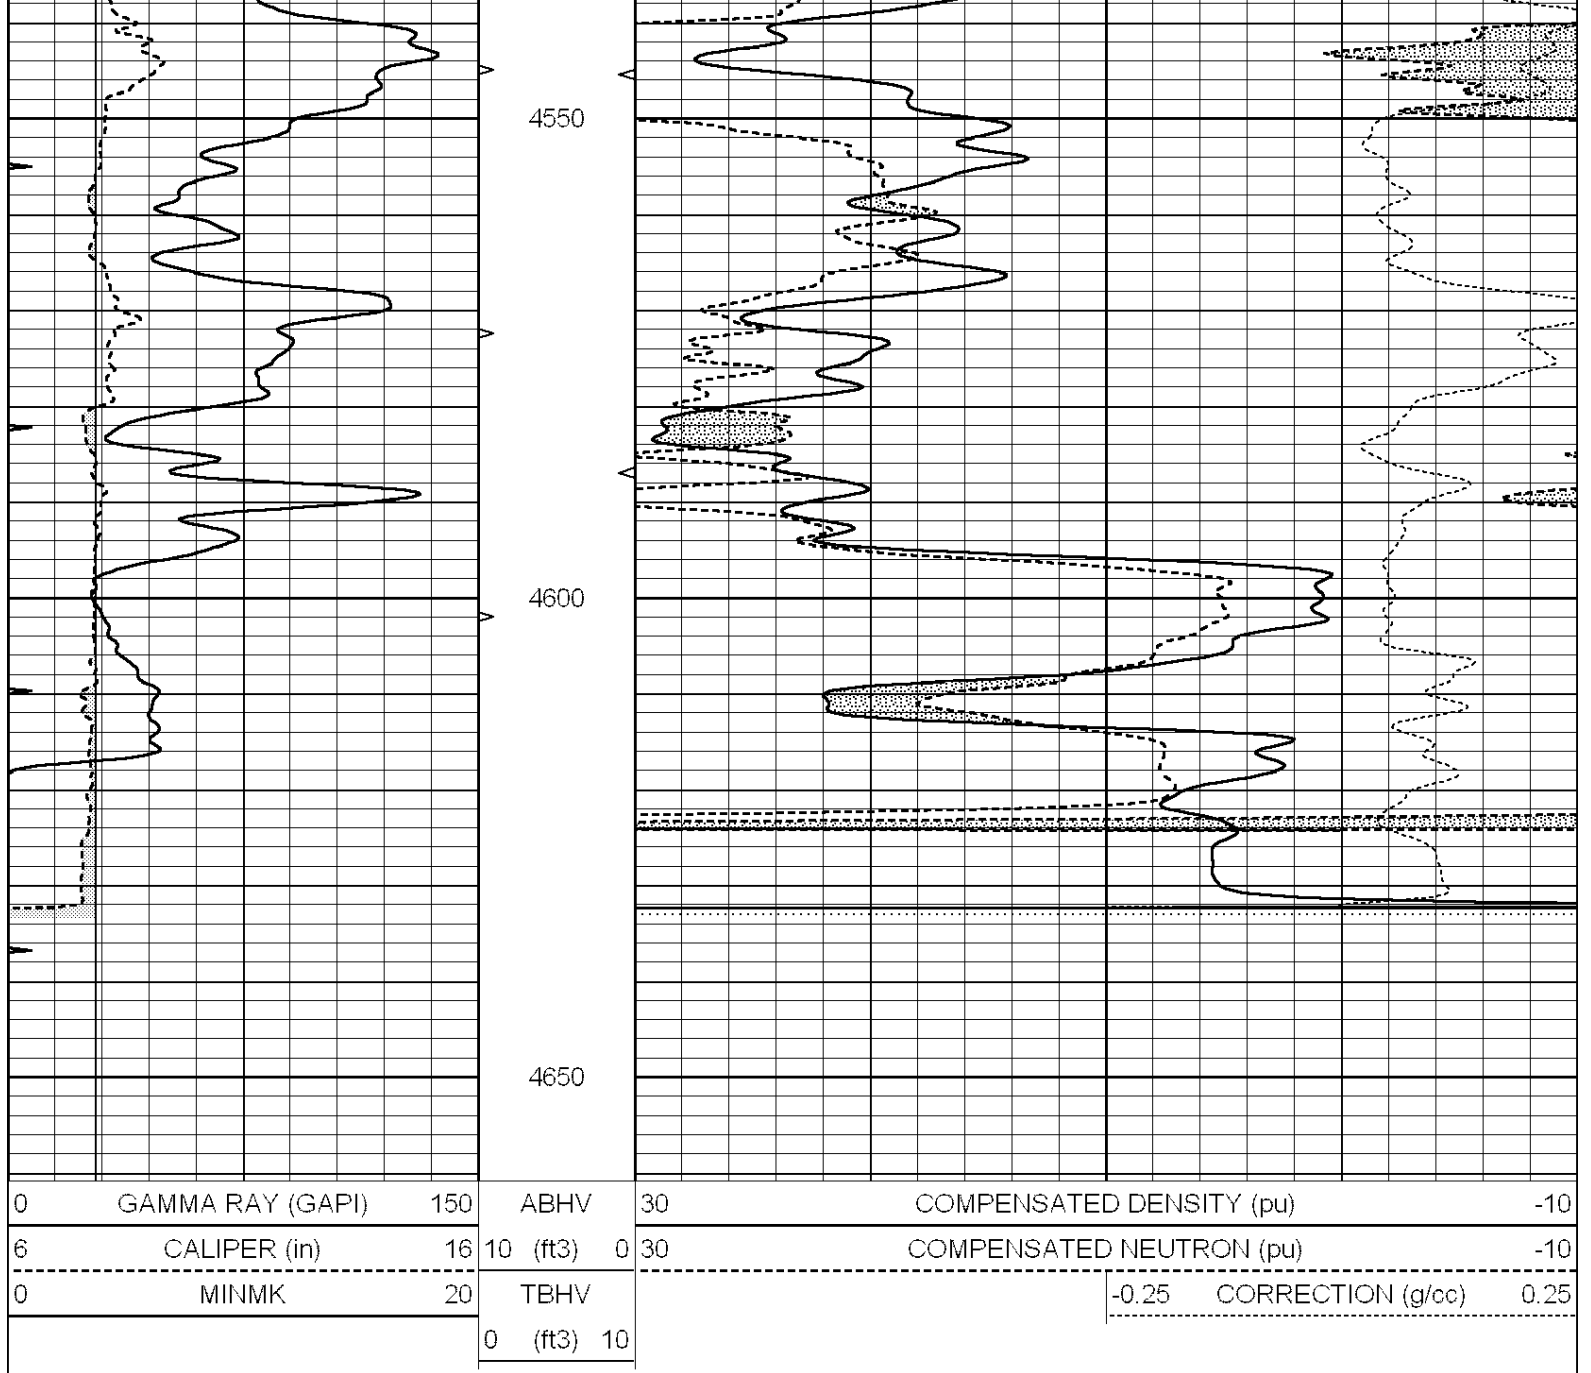

Calibration Report								
Database File:		1598ddn.db						
Dataset Pathname:		pass4						
Dataset Creation:		Wed Aug 30 02:13:00 2017 by Log SOC 120430						
Dual Induction Calibration Report								
Serial-Model:		PROBE7-DILG						
Surface Cal Performed:		Wed Aug 30 00:06:33 2017						
Downhole Cal Performed:		Mon Jul 28 12:02:56 2008						
After Survey Verification Performed:		Mon Jul 28 12:02:56 2008						
Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b

Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings			References			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		
After Survey Verification								
Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Litho Density Calibration Report Serial: 002 Model: PRB								
Master Calibration			Performed Mon Aug 21 11:27:42 2017					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	837.1	10632.5		2945.1		12110.1		cps
Window 2	772.0	9117.4		2570.1		10197.3		cps
Window 3	631.7	4669.0		1481.9		5042.9		cps
Window 4	187.0	187.5		185.9		189.9		cps
Long Space	0.0	8345.4		1798.1		9425.3		cps
Short Space	1.1	1927.9		1285.9		2050.2		cps
Rho		1.7100		2.5960		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio		: 0.558		
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept		: -19.6		
Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		
After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps

Short Space	0.0	0.0	0.0	cps
Measured Rho	0.0000	0.0000	0.0000	g/cc
Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
Compensated Neutron Calibration Report				
Serial Number:		070808		
Tool Model:		Probe		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				
Serial Number:	070558			
Tool Model:	OPEN_GR			
Performed:	Wed May 31 00:09:32 2017			
Calibrator Value:	1.0	GAPI		
Background Reading:	0.0	cps		
Calibrator Reading:	1.0	cps		
Sensitivity:	0.2800	GAPI/cps		