

MICRO LOG


Company		BLUERIDGE PETROLEUM CORP.	
Well		ROMERO #1-4	
Field		GUNSMOKE	
County		FORD	
State		KANSAS	
Company		BLUERIDGE PETROLEUM CORPORATION	
Well		ROMERO #1-4	
Field		GUNSMOKE	
County		FORD	
State		KANSAS	
Location:		API # : 15-057-20994-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		591' FSL & 1872' FWL	
Drilling Measured From		NE - SW - SE - SW	
SEC 4		TWP 27S	
RGE 24W		Elevation	
K.B. 2470		CDL/CNL/PE	
D.F. 2468		DIL/SONIC	
G.L. 2462			
Date	3/7/18		
Run Number	TWO		
Depth Driller	5050		
Depth Logger	5051		
Bottom Logged Interval	5035		
Top Log Interval	4000		
Casing Driller	8 5/8"@432'	13 3/8"@97'	
Casing Logger	432		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,800 PPM	
Density / Viscosity	9.3/54		
pH / Fluid Loss	10.5/7.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.700@75F		
Rmf @ Meas. Temp	.525@75F		
Rmc @ Meas. Temp	.840@75F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.420@125F		
Time Circulation Stopped	5 HOURS		
Time Logger on Bottom	3:30 P.M.		
Maximum Recorded Temperature	125F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	WYATT URBAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
DODGE CITY, KS.(HWY 400 & 56 BYPASS) S. ACROSS RIVER BRIDGE PAST "LOVES TRUCK STOP" TO
" "LARIAT WAY RD.", W. TO "N. MAIN ST.", N. INTO THEN W. THROUGH GATE

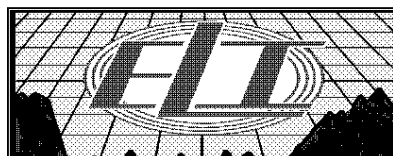


MAIN SECTION

Database File: 2345pe.db
 Dataset Pathname: pass6.2
 Presentation Format: micro
 Dataset Creation: Wed Mar 07 16:16:16 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

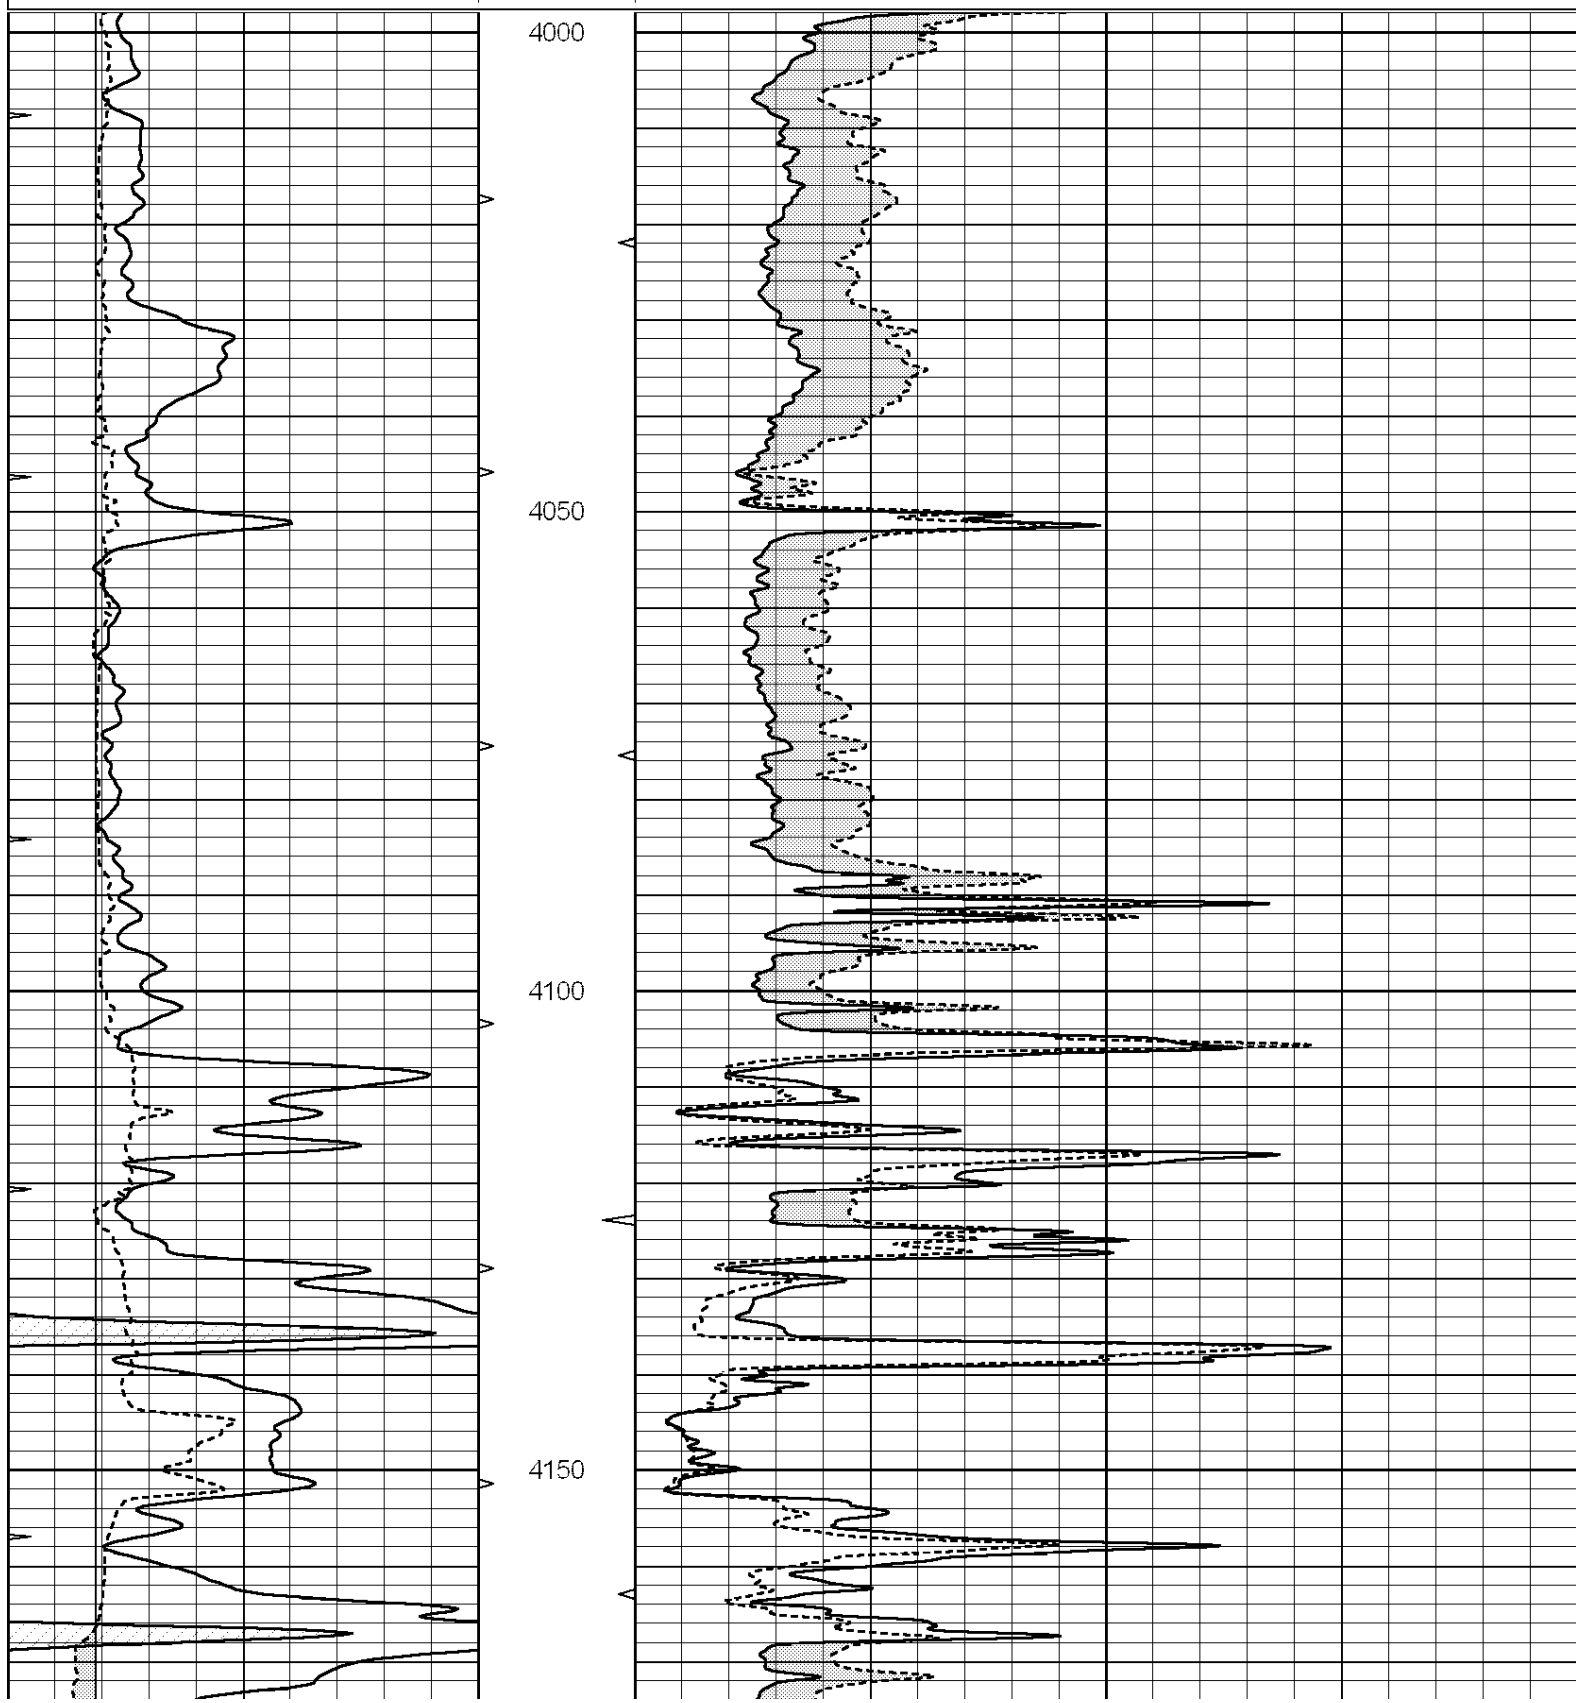

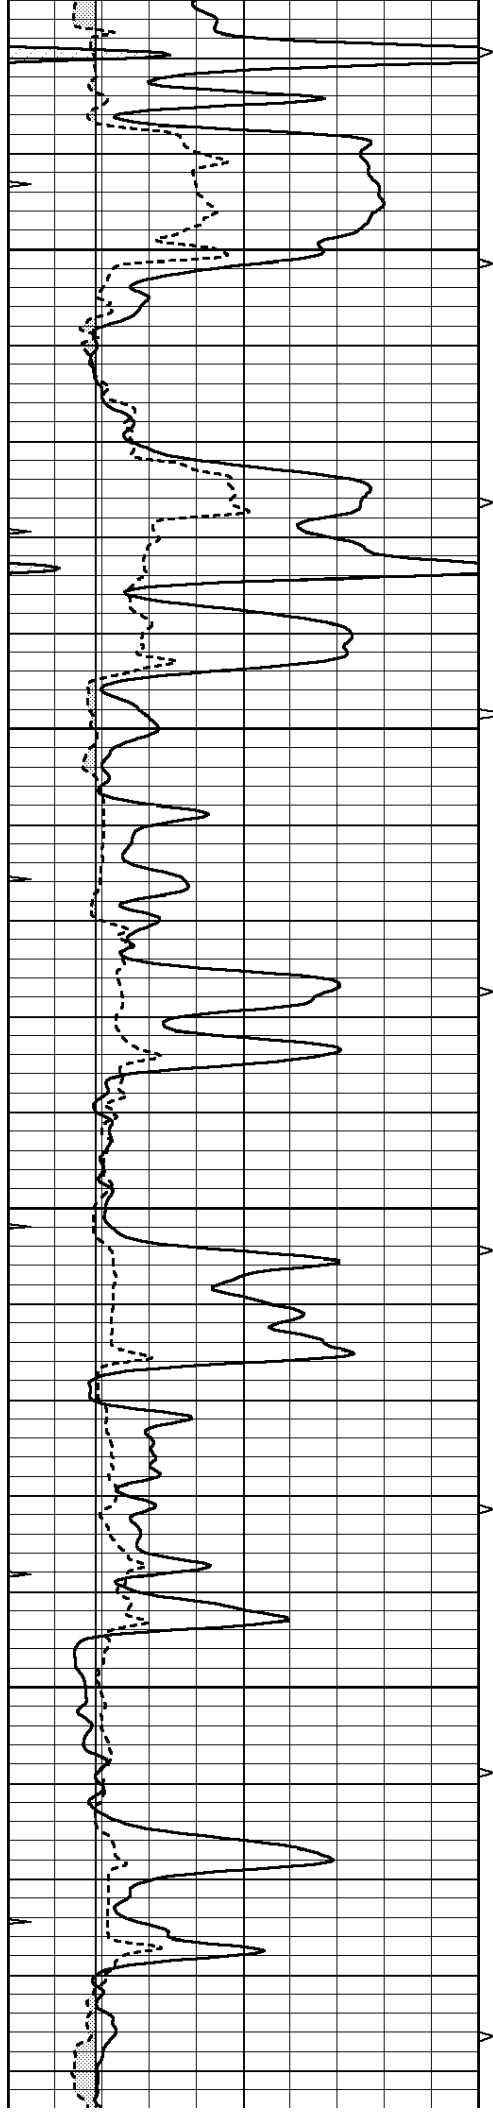



4200


4250

4300

4350

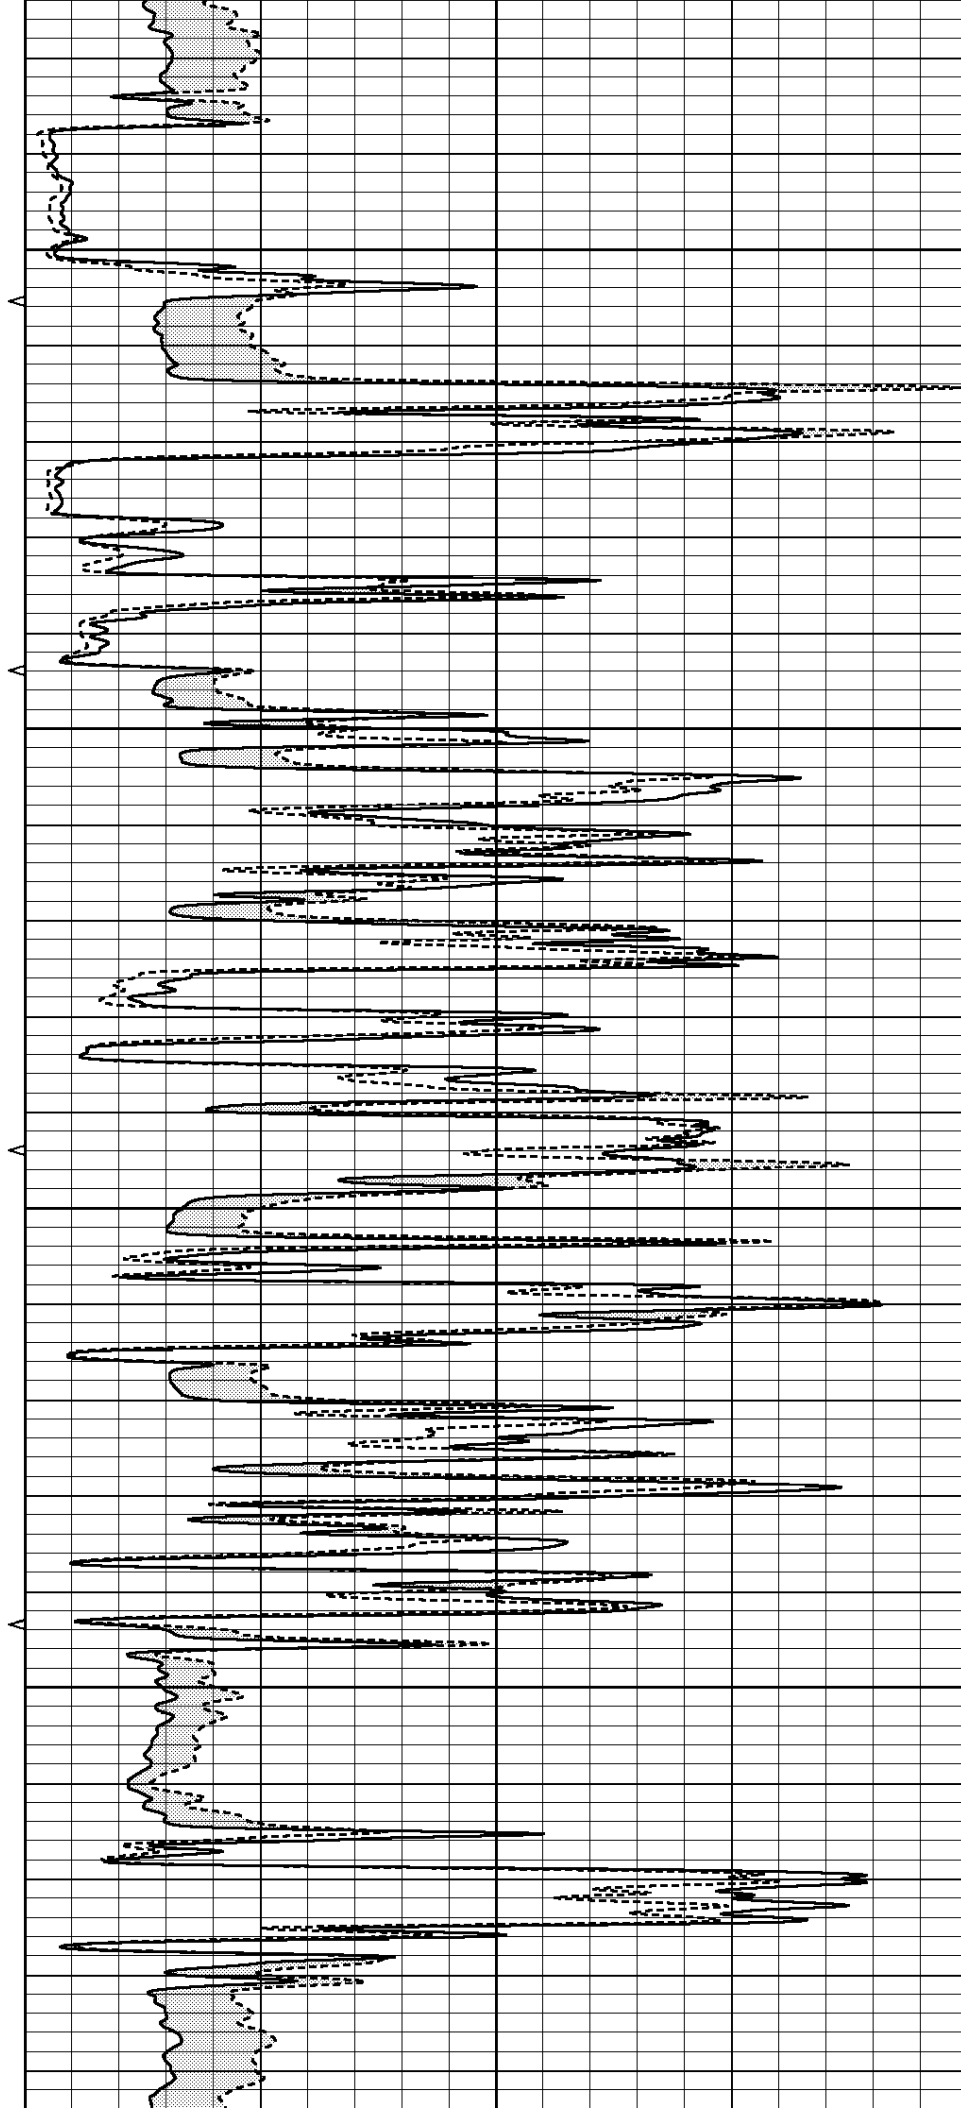

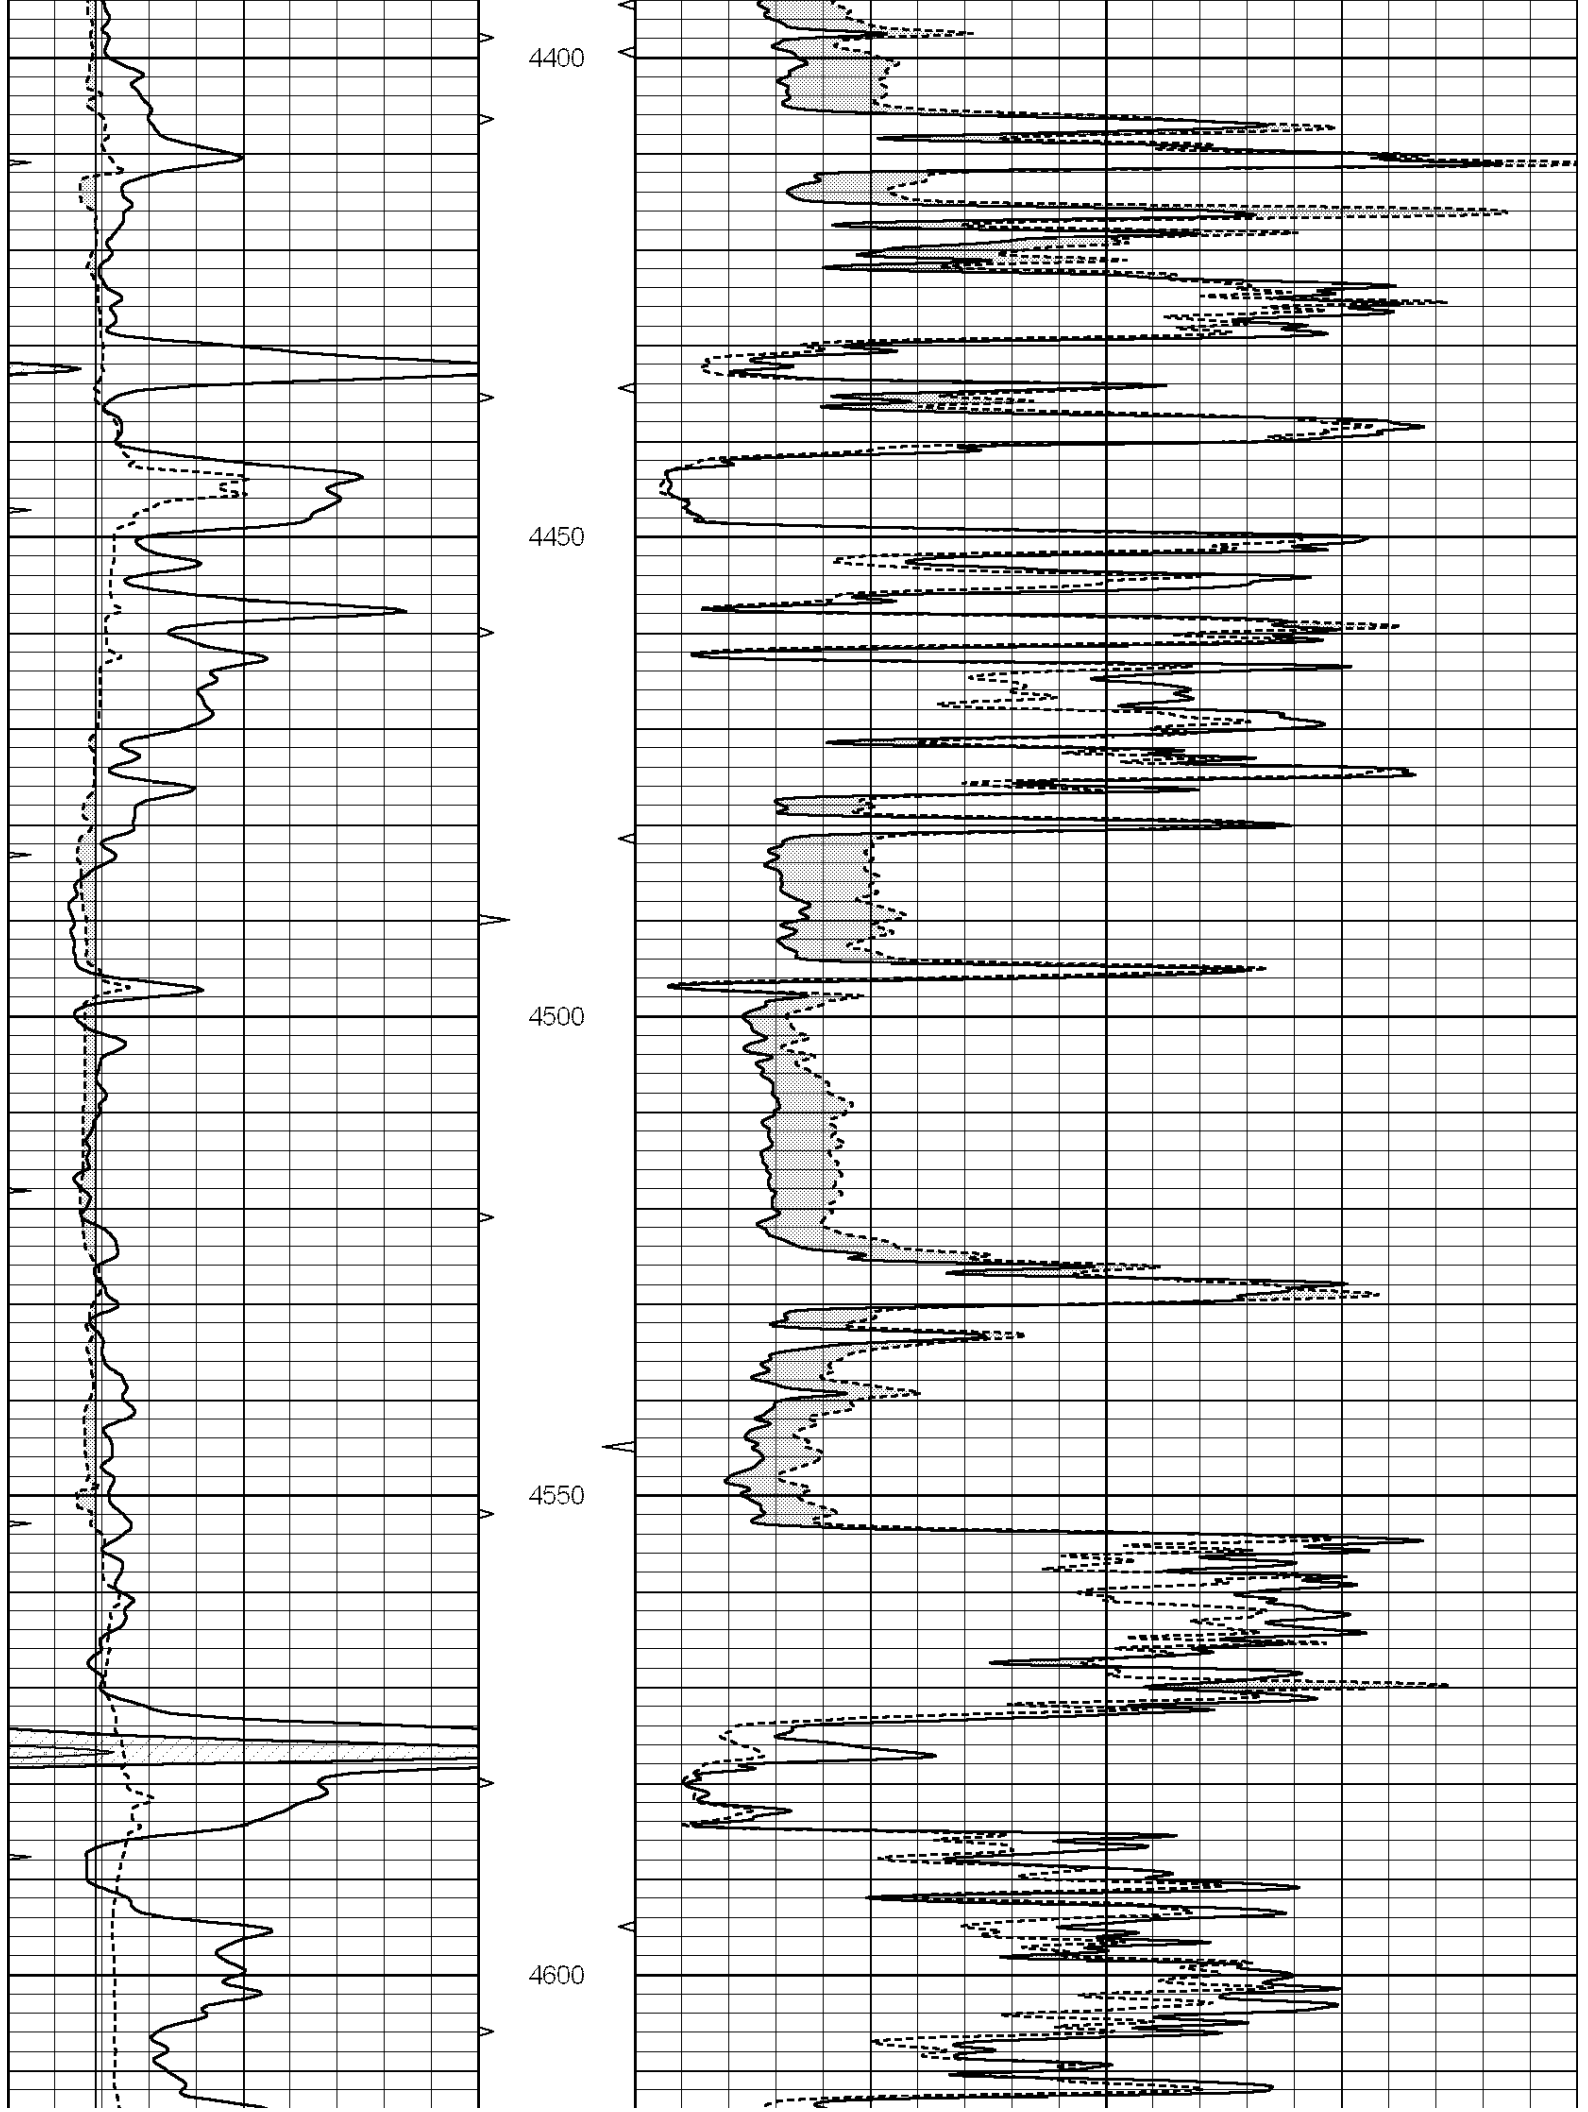

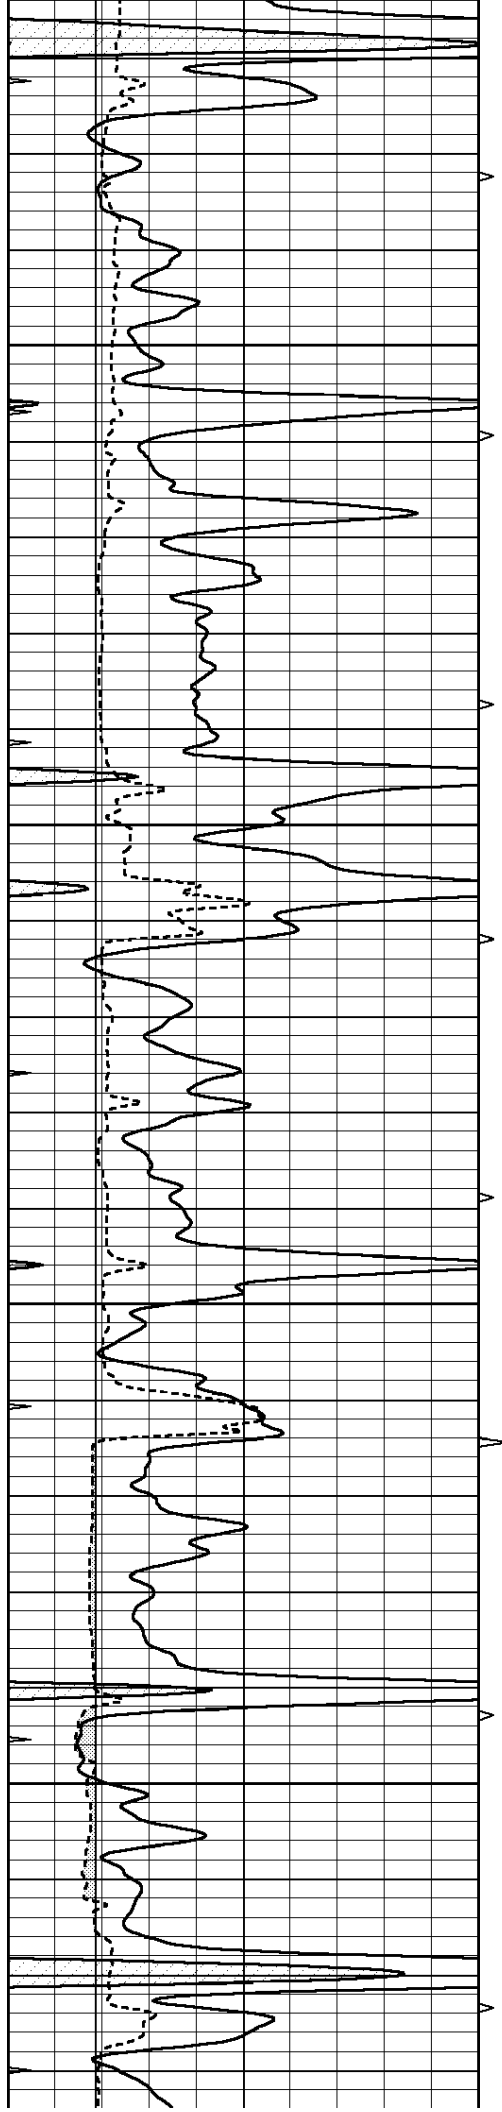



4650

4700

4750

4800

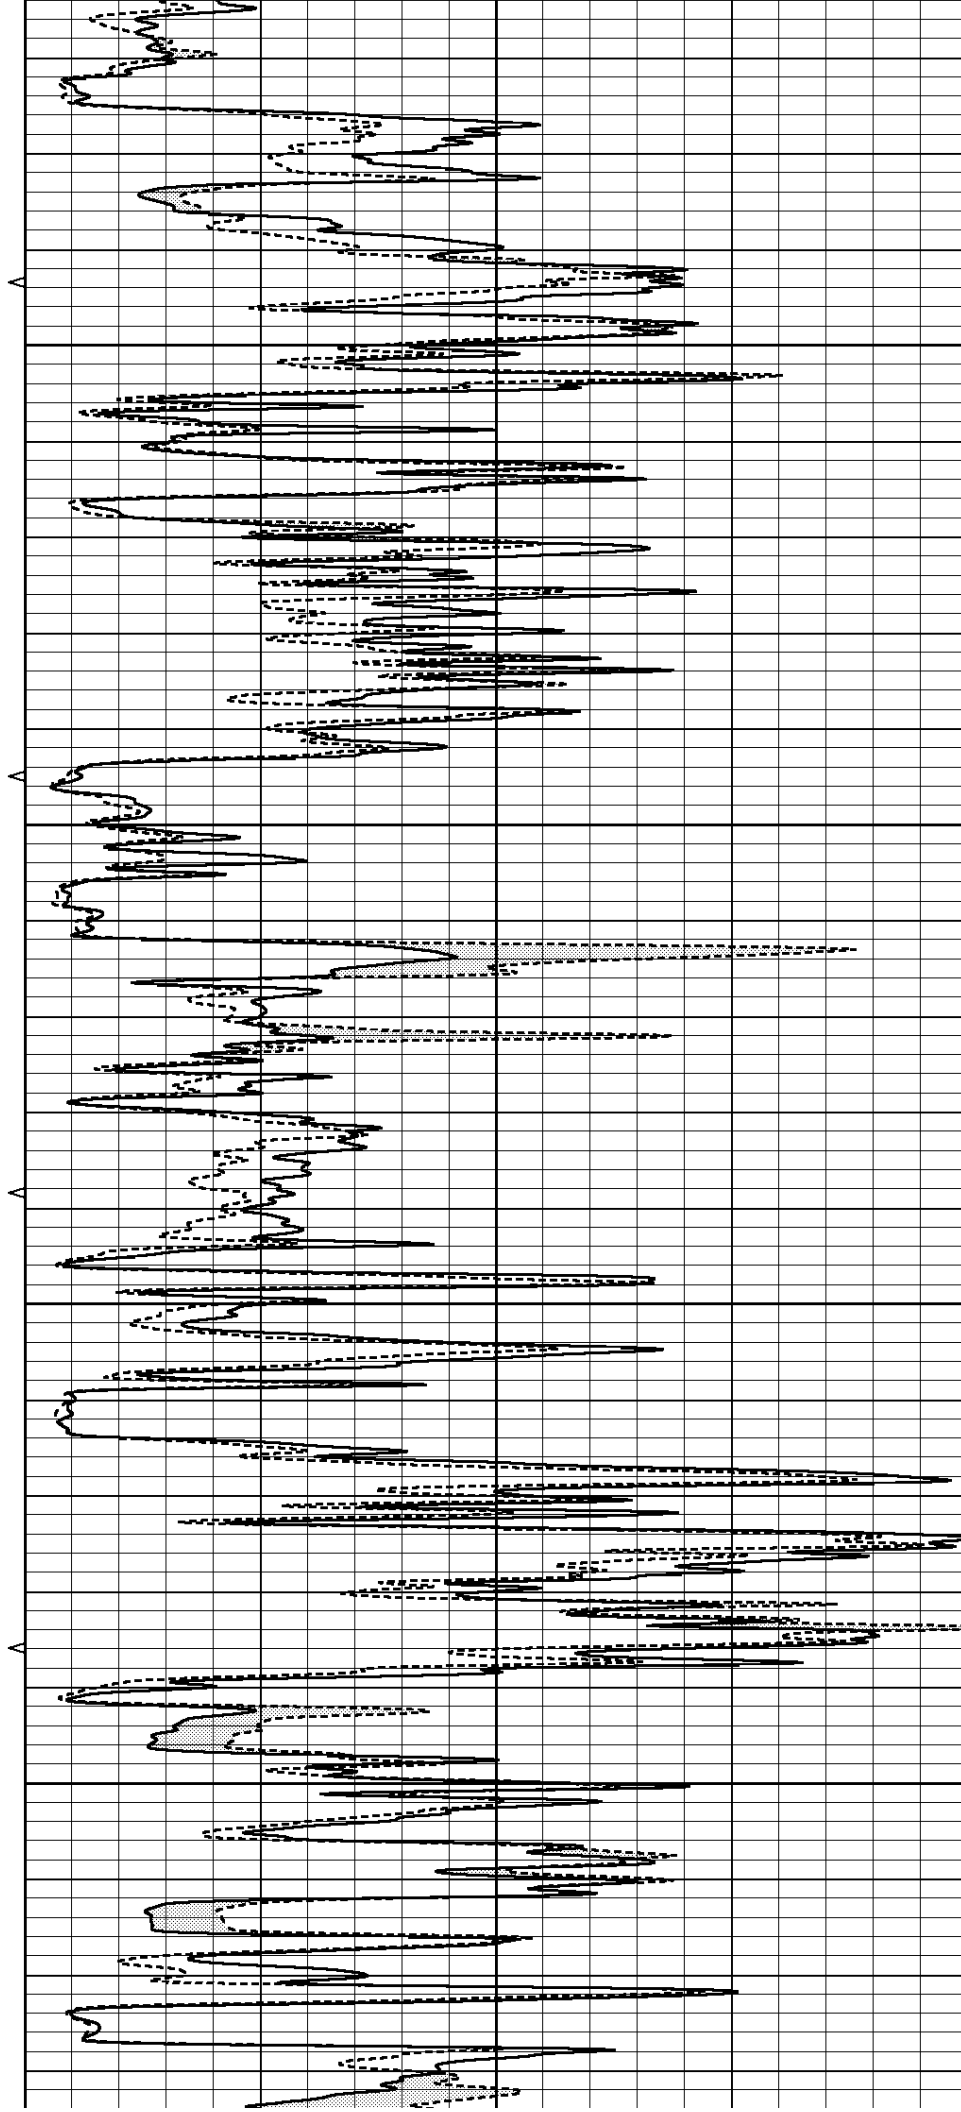

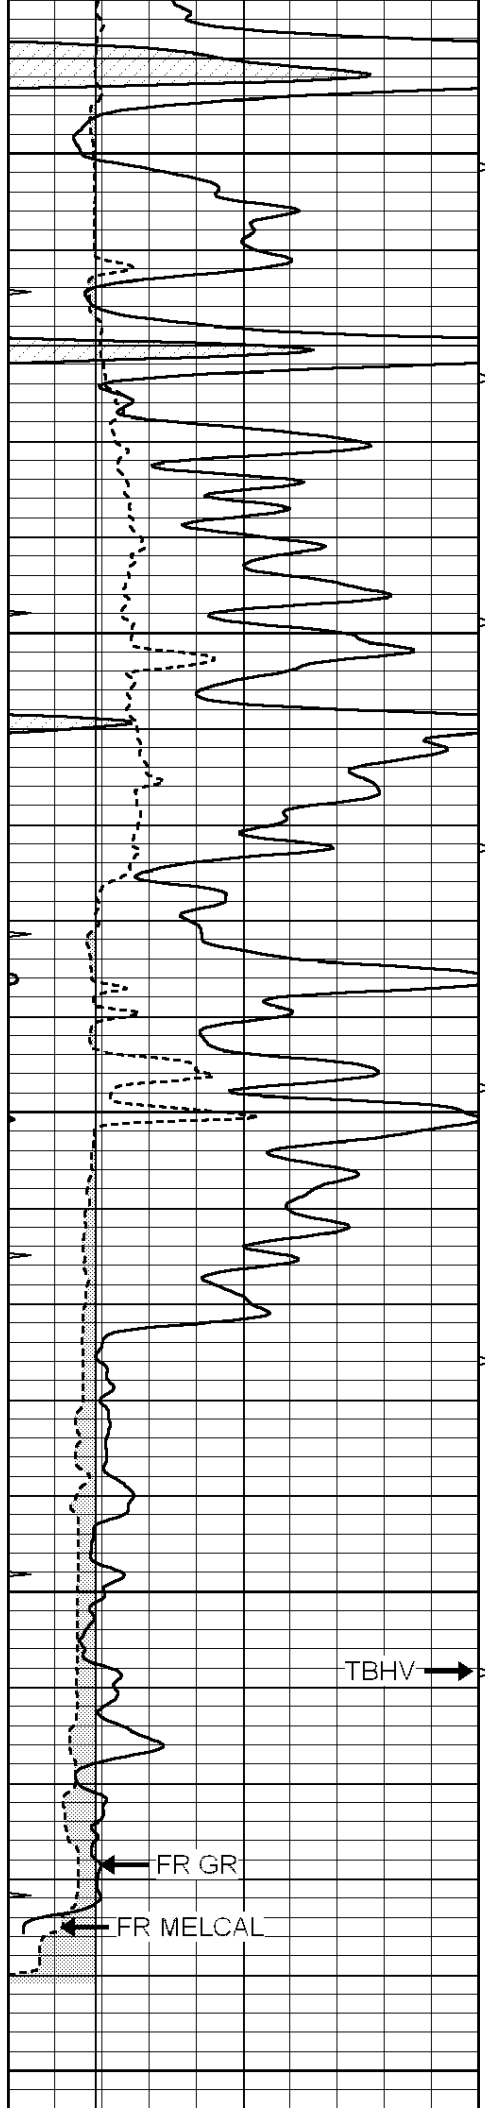

4850

4900

4950

5.5" ABHV

5000

TBHV →

FR GR


FR MELCAL

MEL 20


MEL 1.5

5050

LTD 5051

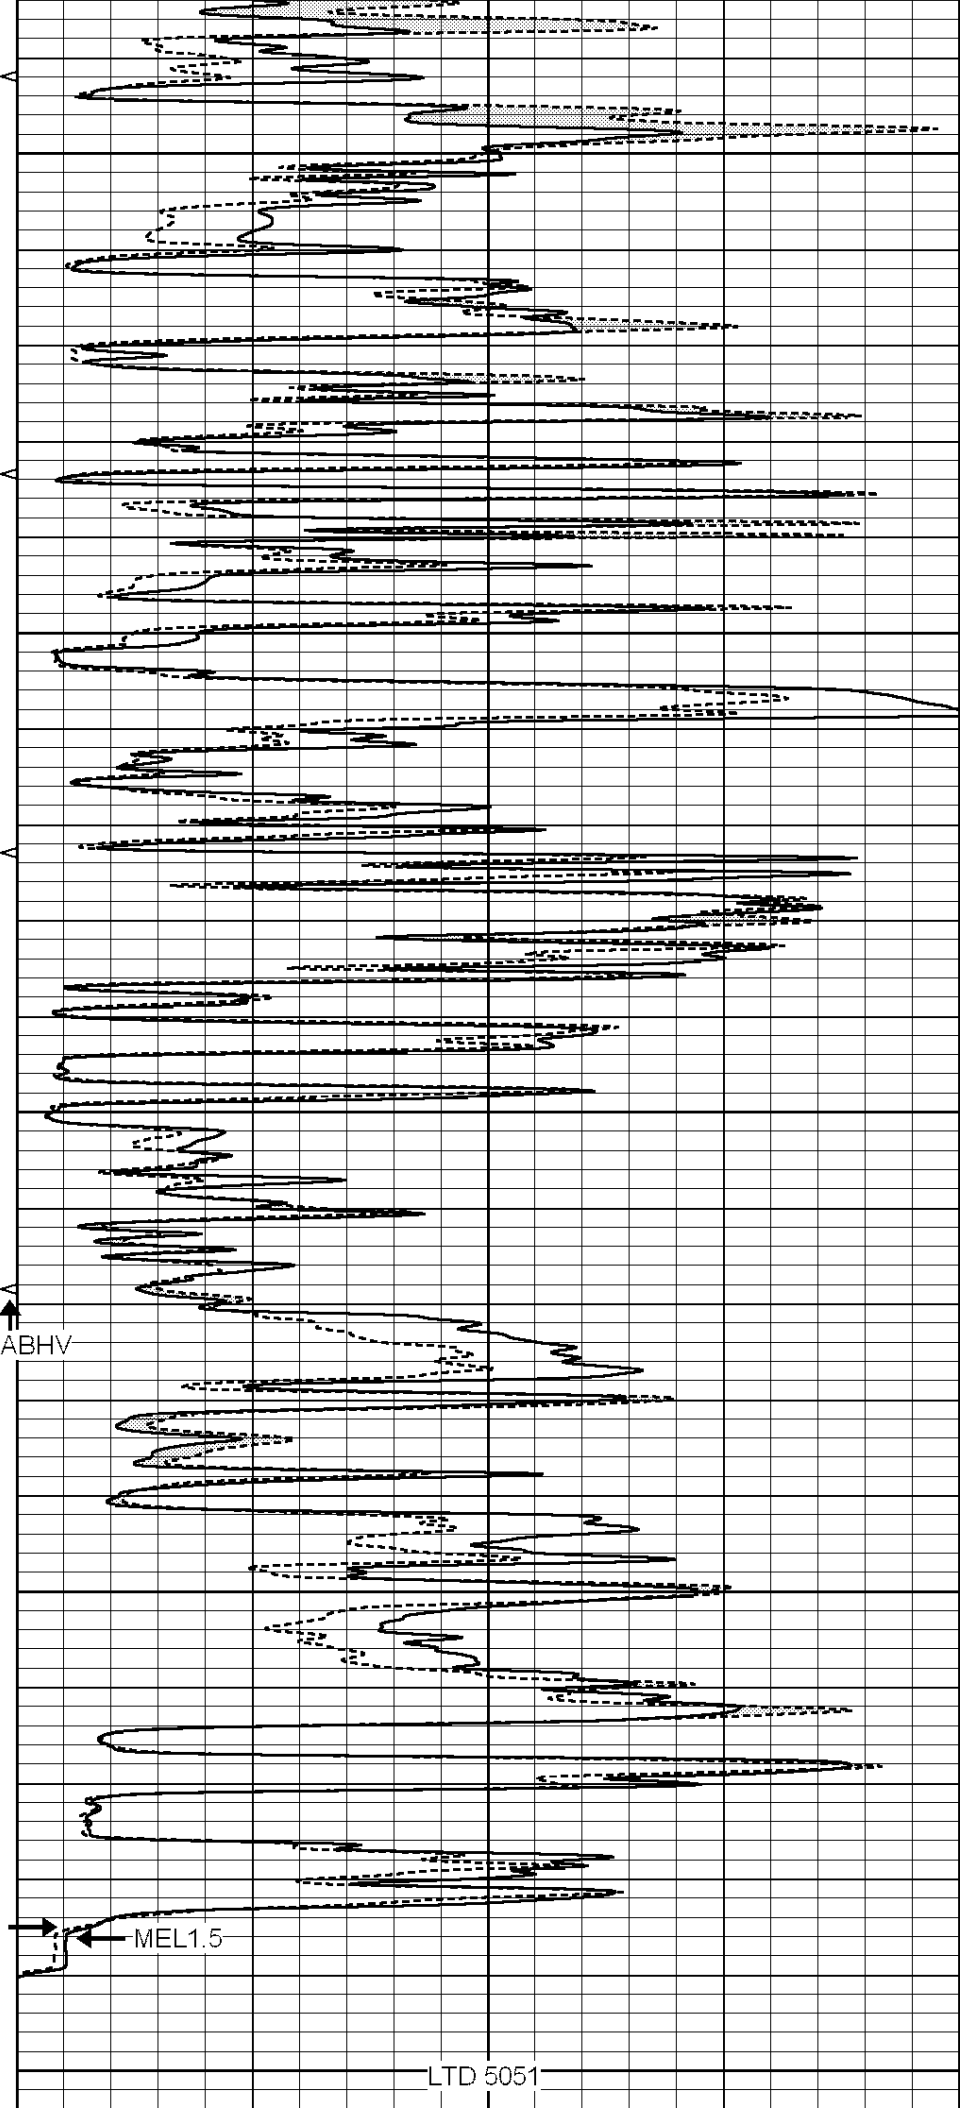


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

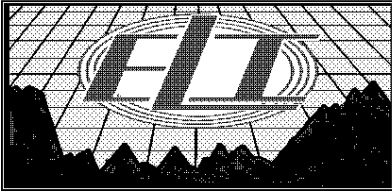


REPEAT SECTION

Database File: 2345pe.db
 Dataset Pathname: pass5.4
 Presentation Format: micro
 Dataset Creation: Wed Mar 07 15:39:38 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

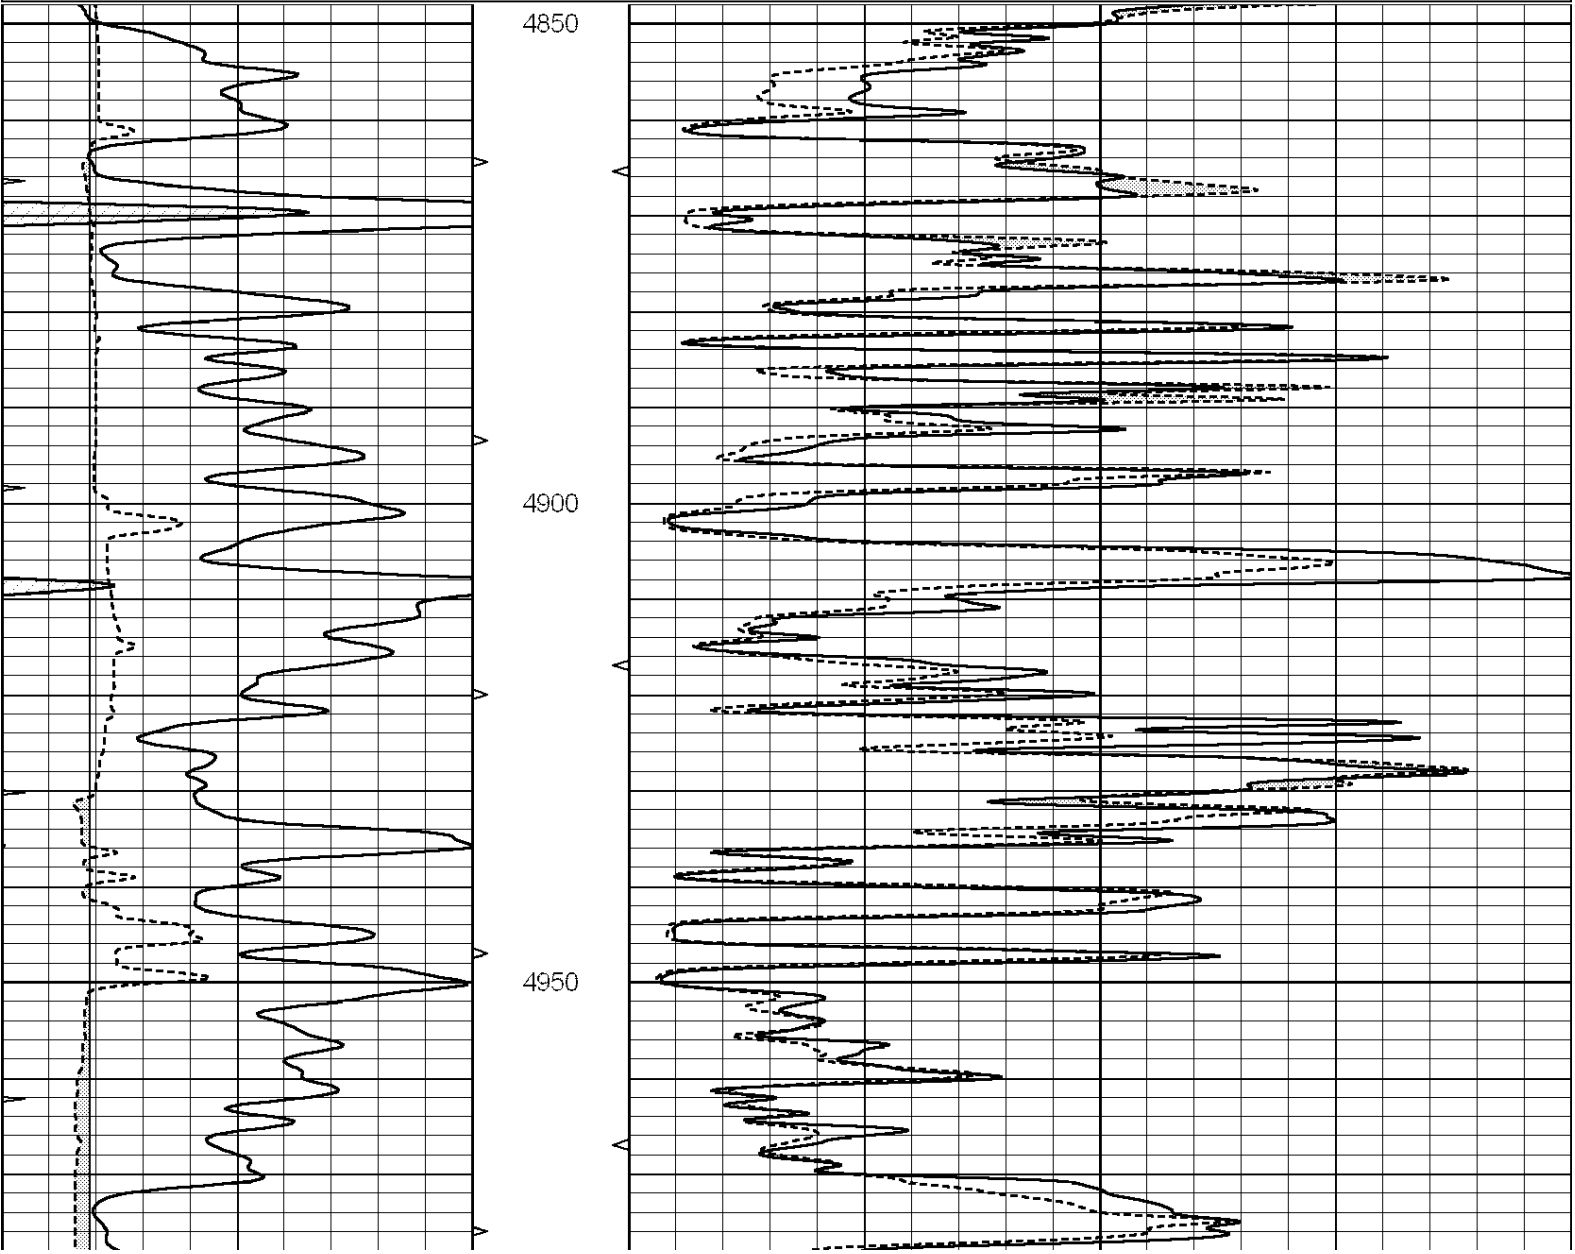

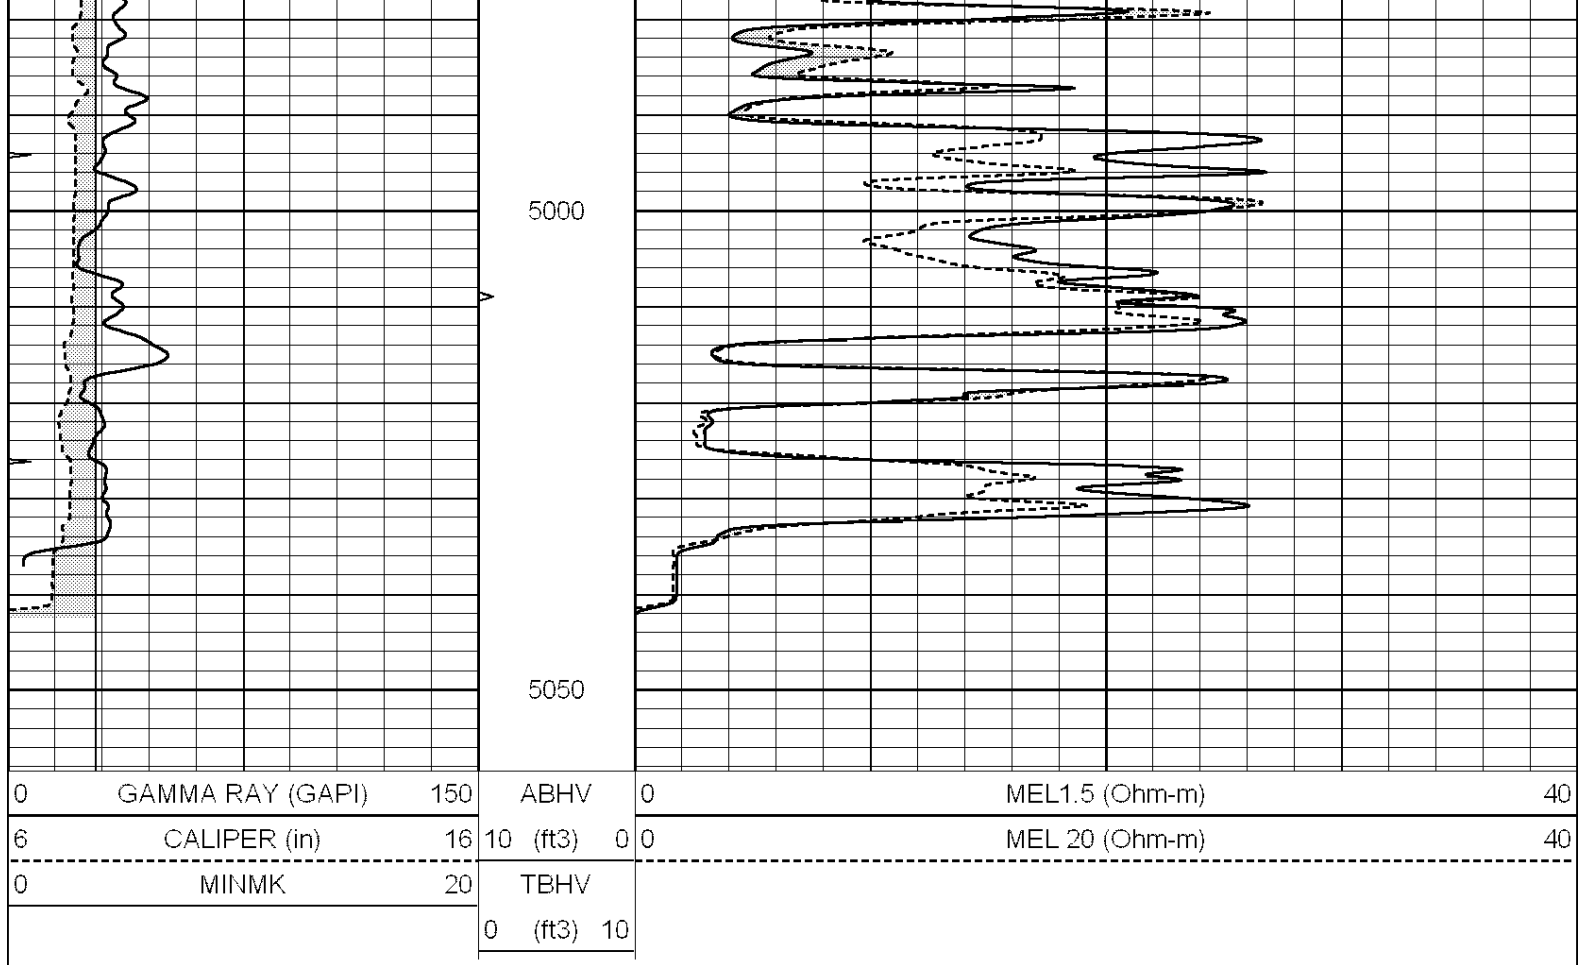

Calibration Report			
Database File:	2345pe.db		
Dataset Pathname:	pass6.2		
Dataset Creation:	Wed Mar 07 16:16:16 2018		
MICRO Calibration Report			
Serial Number:	070912		
Tool Model:	ProbeN		
Performed:	Wed Mar 07 15:30:41 2018		
Caliper Calibration:	Gain=2.784	Offset=5.530	
	Low Cal	High Cal	
References	7.200	18.000	
Readings	0.600	4.480	
1.5" Calibration:	Gain=25.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.239	
2" Calibration:	Gain=42.000	Offset=-0.800	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.075	
Gamma Ray Calibration Report			
Serial Number:	110959		
Tool Model:	OPEN_GR		
Performed:	Wed Mar 07 15:30:36 2018		
Caliper Calibration:	Gain=2.784	Offset=5.530	

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2500	GAPI/cps