

COMPENSATED DENSITY / NEUTRON PE LOG

Company	BLUERIDGE PETROLEUM CORP.		
Well	ROMERO #1-4		
Field	GUNSMOKE		
County	FORD		
State	KANSAS		
Company	BLUERIDGE PETROLEUM CORPORATION		
Well	ROMERO #1-4		
Field	GUNSMOKE		
County	FORD		
State	KANSAS		
Location:	API # : 15-057-20994-0000 591' FSL & 1872' FWL NE - SW - SE - SW		
Permanent Datum	GROUND LEVEL	Elevation	2462
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 4	TWP 27S	RGE 24W	
Date	3/7/18		
Run Number	ONE		
Depth Driller	5050		
Depth Logger	5051		
Bottom Logged Interval	5027		
Top Log Interval	4000		
Casing Driller	8 5/8"@432'	13 3/8"@97'	
Casing Logger	432		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,800 PPM	
Density / Viscosity	9.3/54		
pH / Fluid Loss	10.5/7.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.700@75F		
Rmf @ Meas. Temp	.525@75F		
Rmc @ Meas. Temp	.840@75F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.420@125F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	1:00 P.M.		
Maximum Recorded Temperature	125F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	WYATT URBAN		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS


DODGE CITY, KS.(HWY 400 & 56 BYPASS) S. ACROSS RIVER BRIDGE PAST "LOVES TRUCK STOP" TO
" "LARIAT WAY RD.", W. TO "N. MAIN ST.", N. INTO THEN W. THROUGH GATE

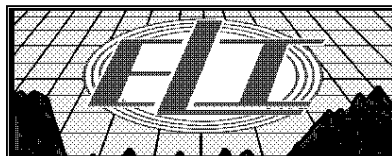


MAIN SECTION

Database File: 2345pe.db
Dataset Pathname: pass3.7
Presentation Format: ldt_neu
Dataset Creation: Wed Mar 07 14:29:11 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3)	10		

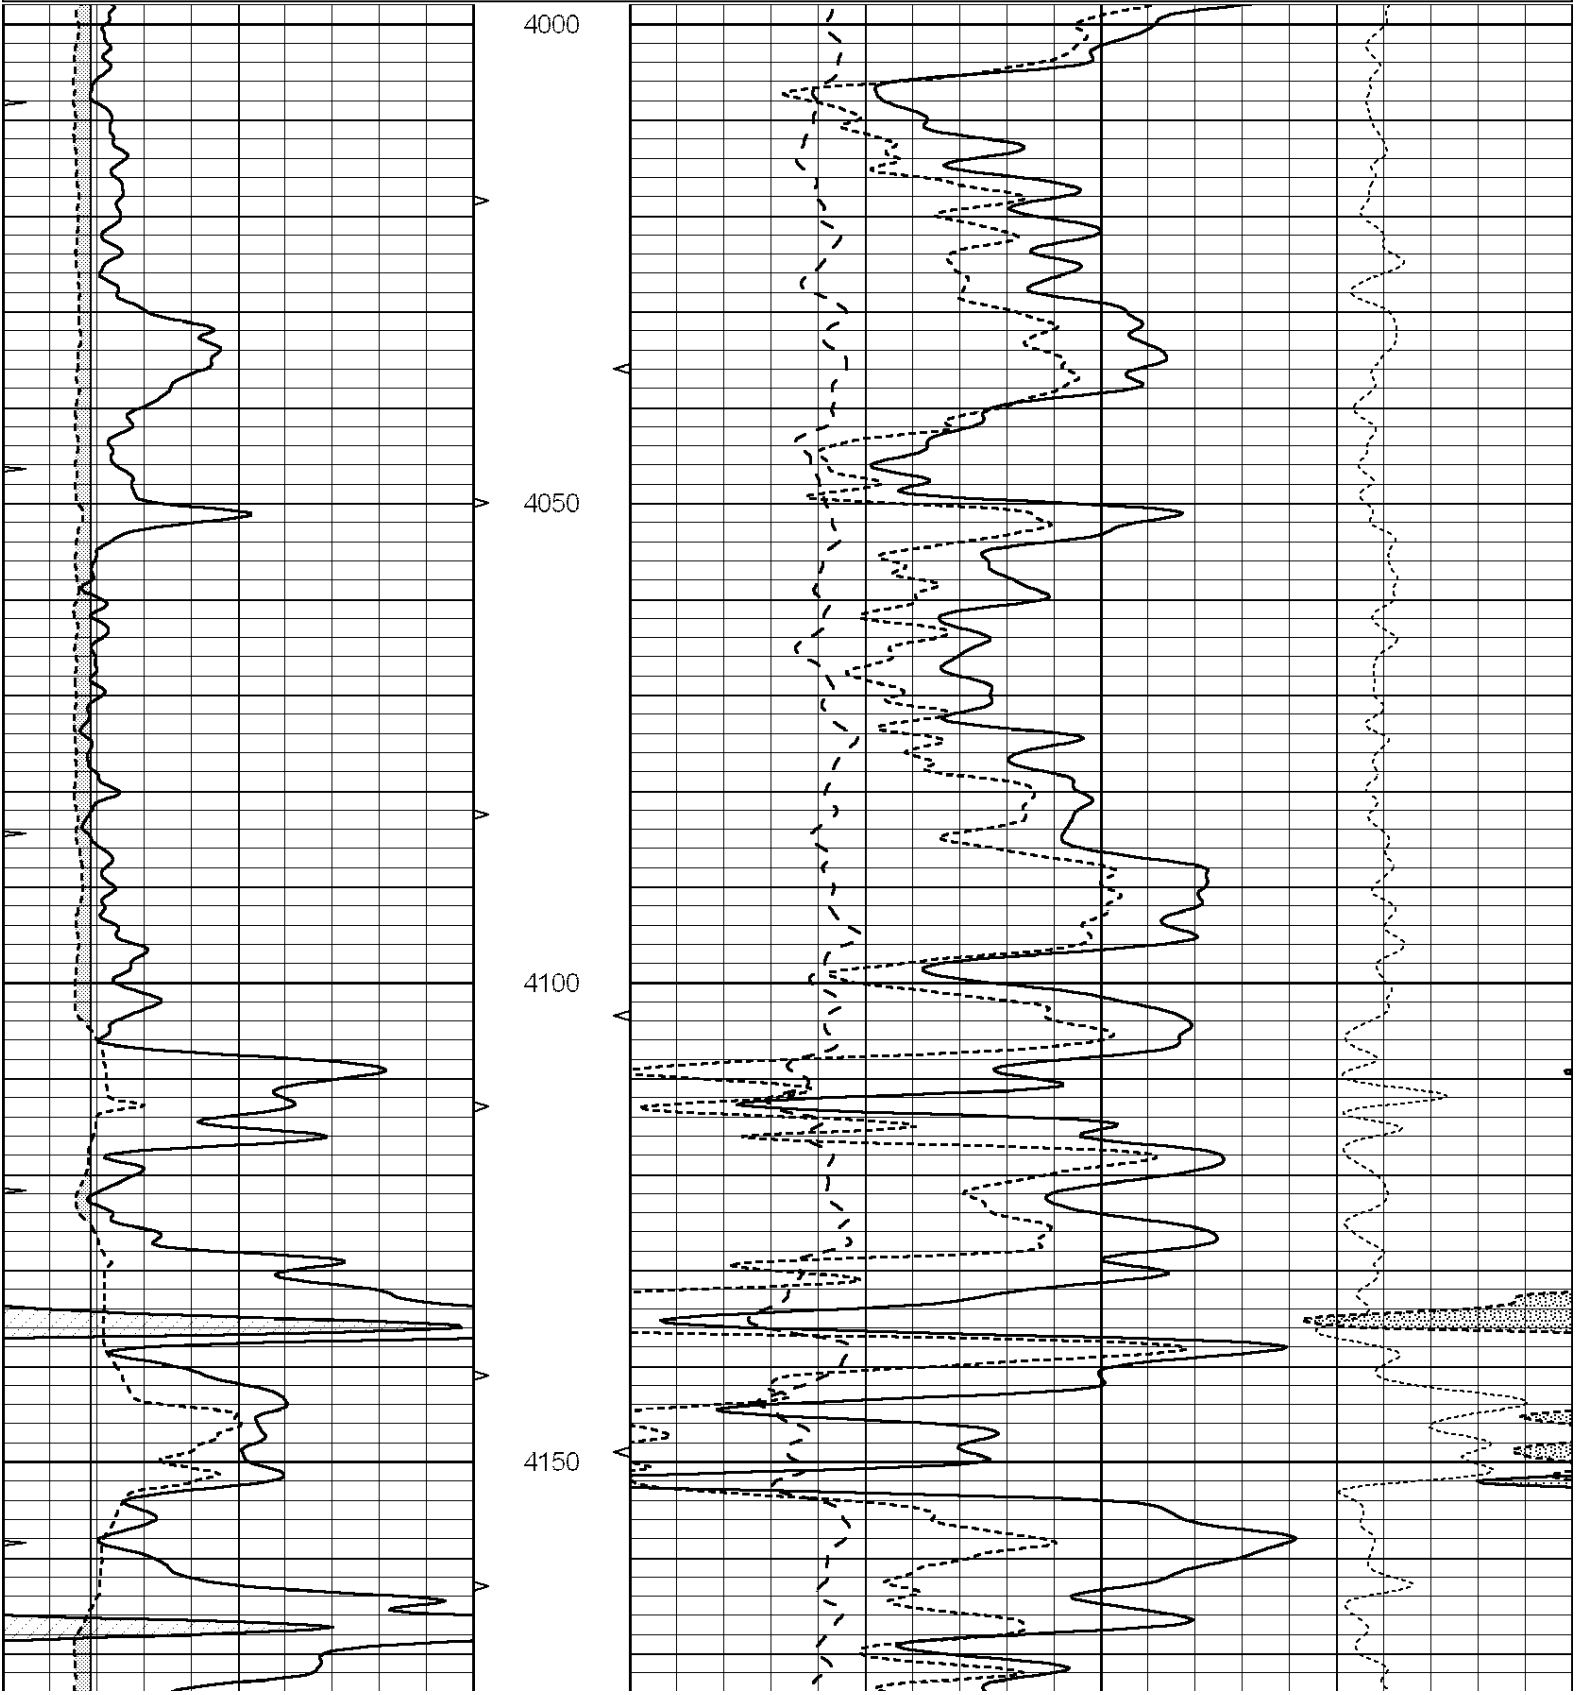

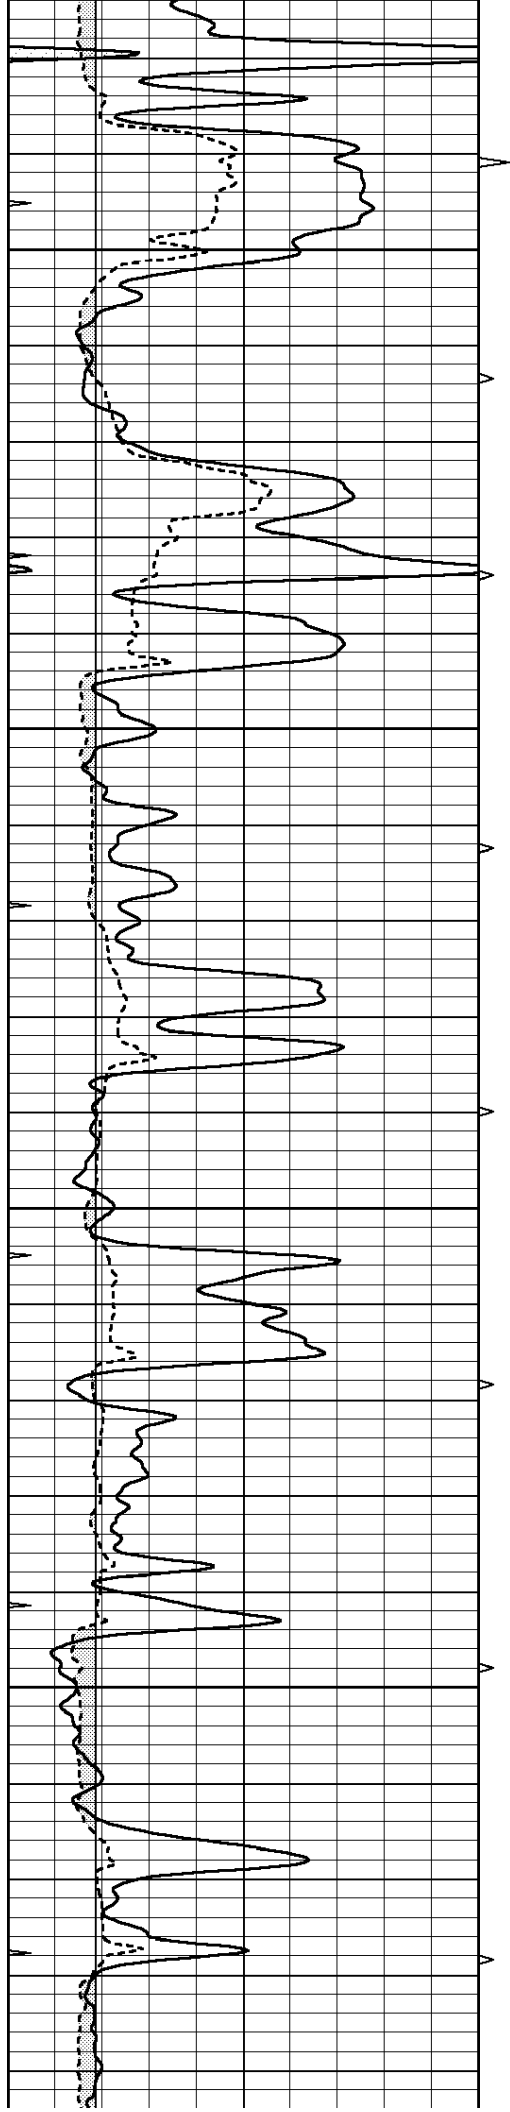



4200


4250

4300

4350

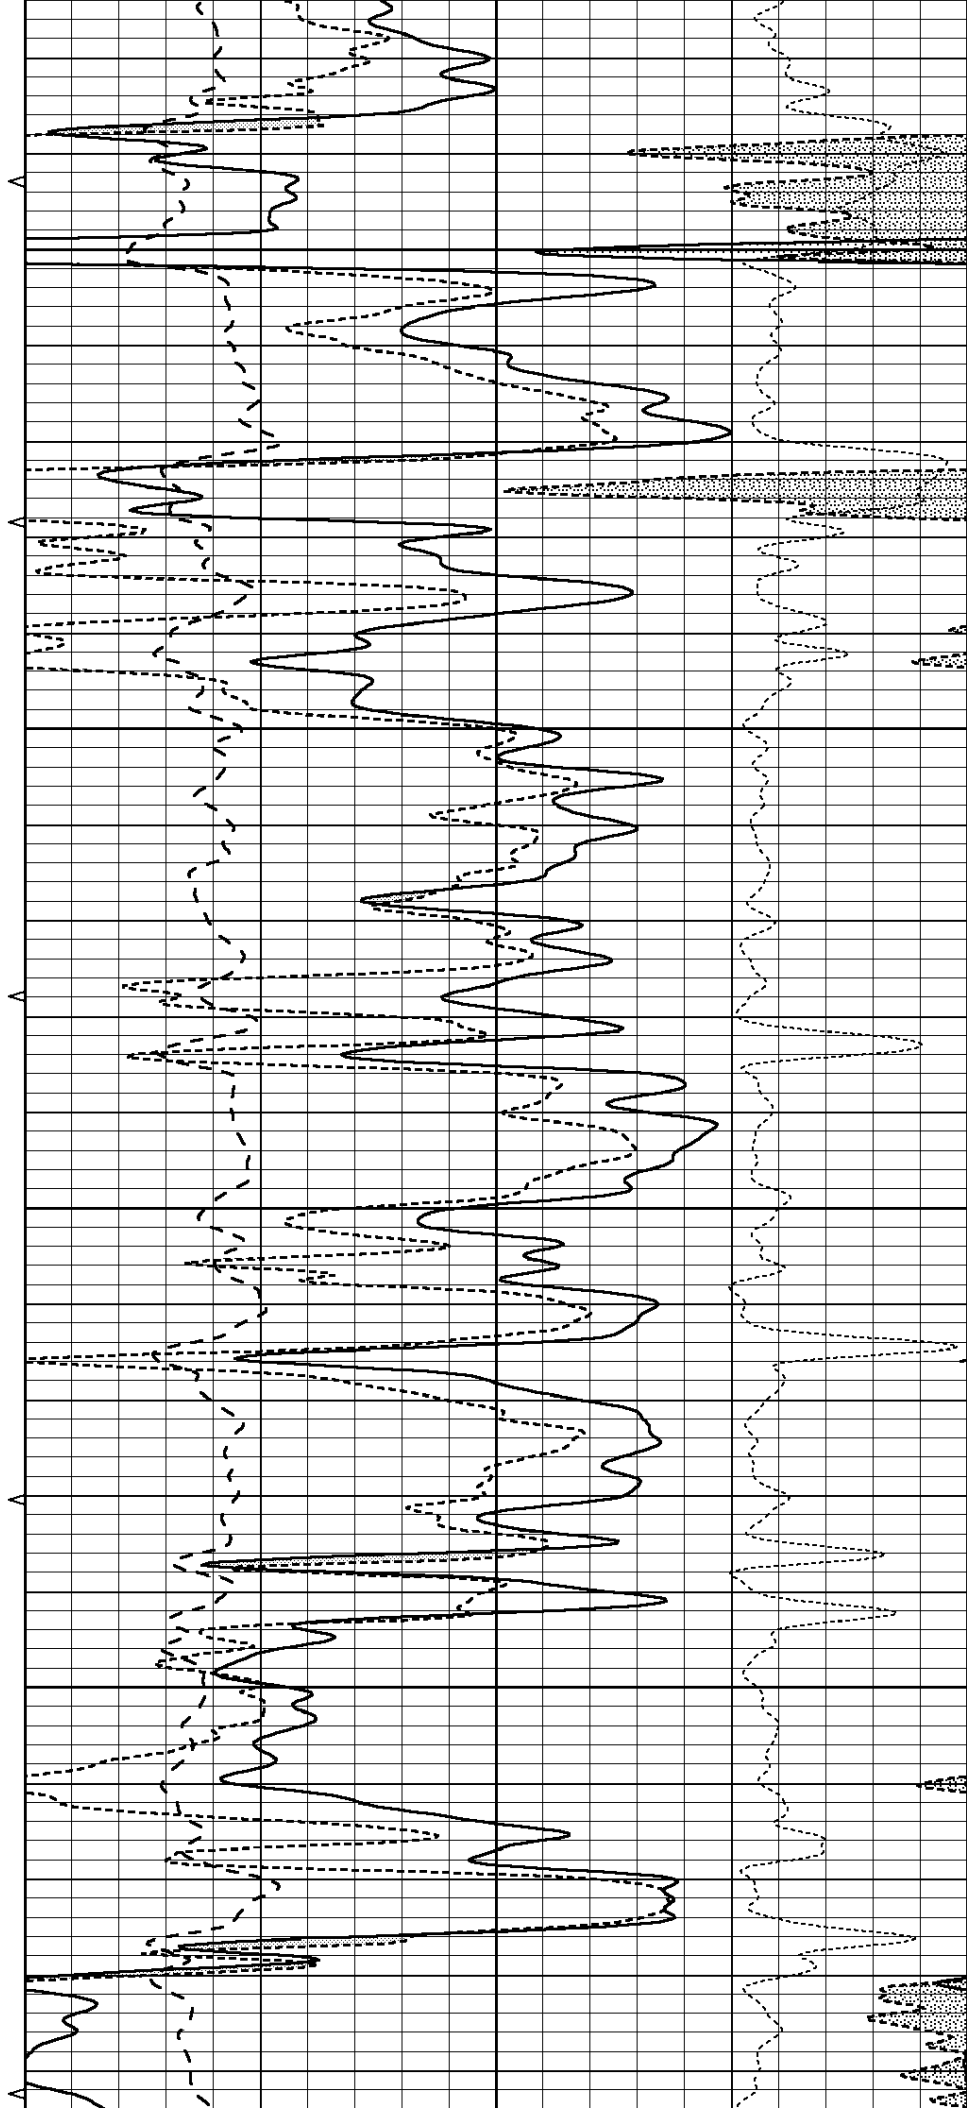

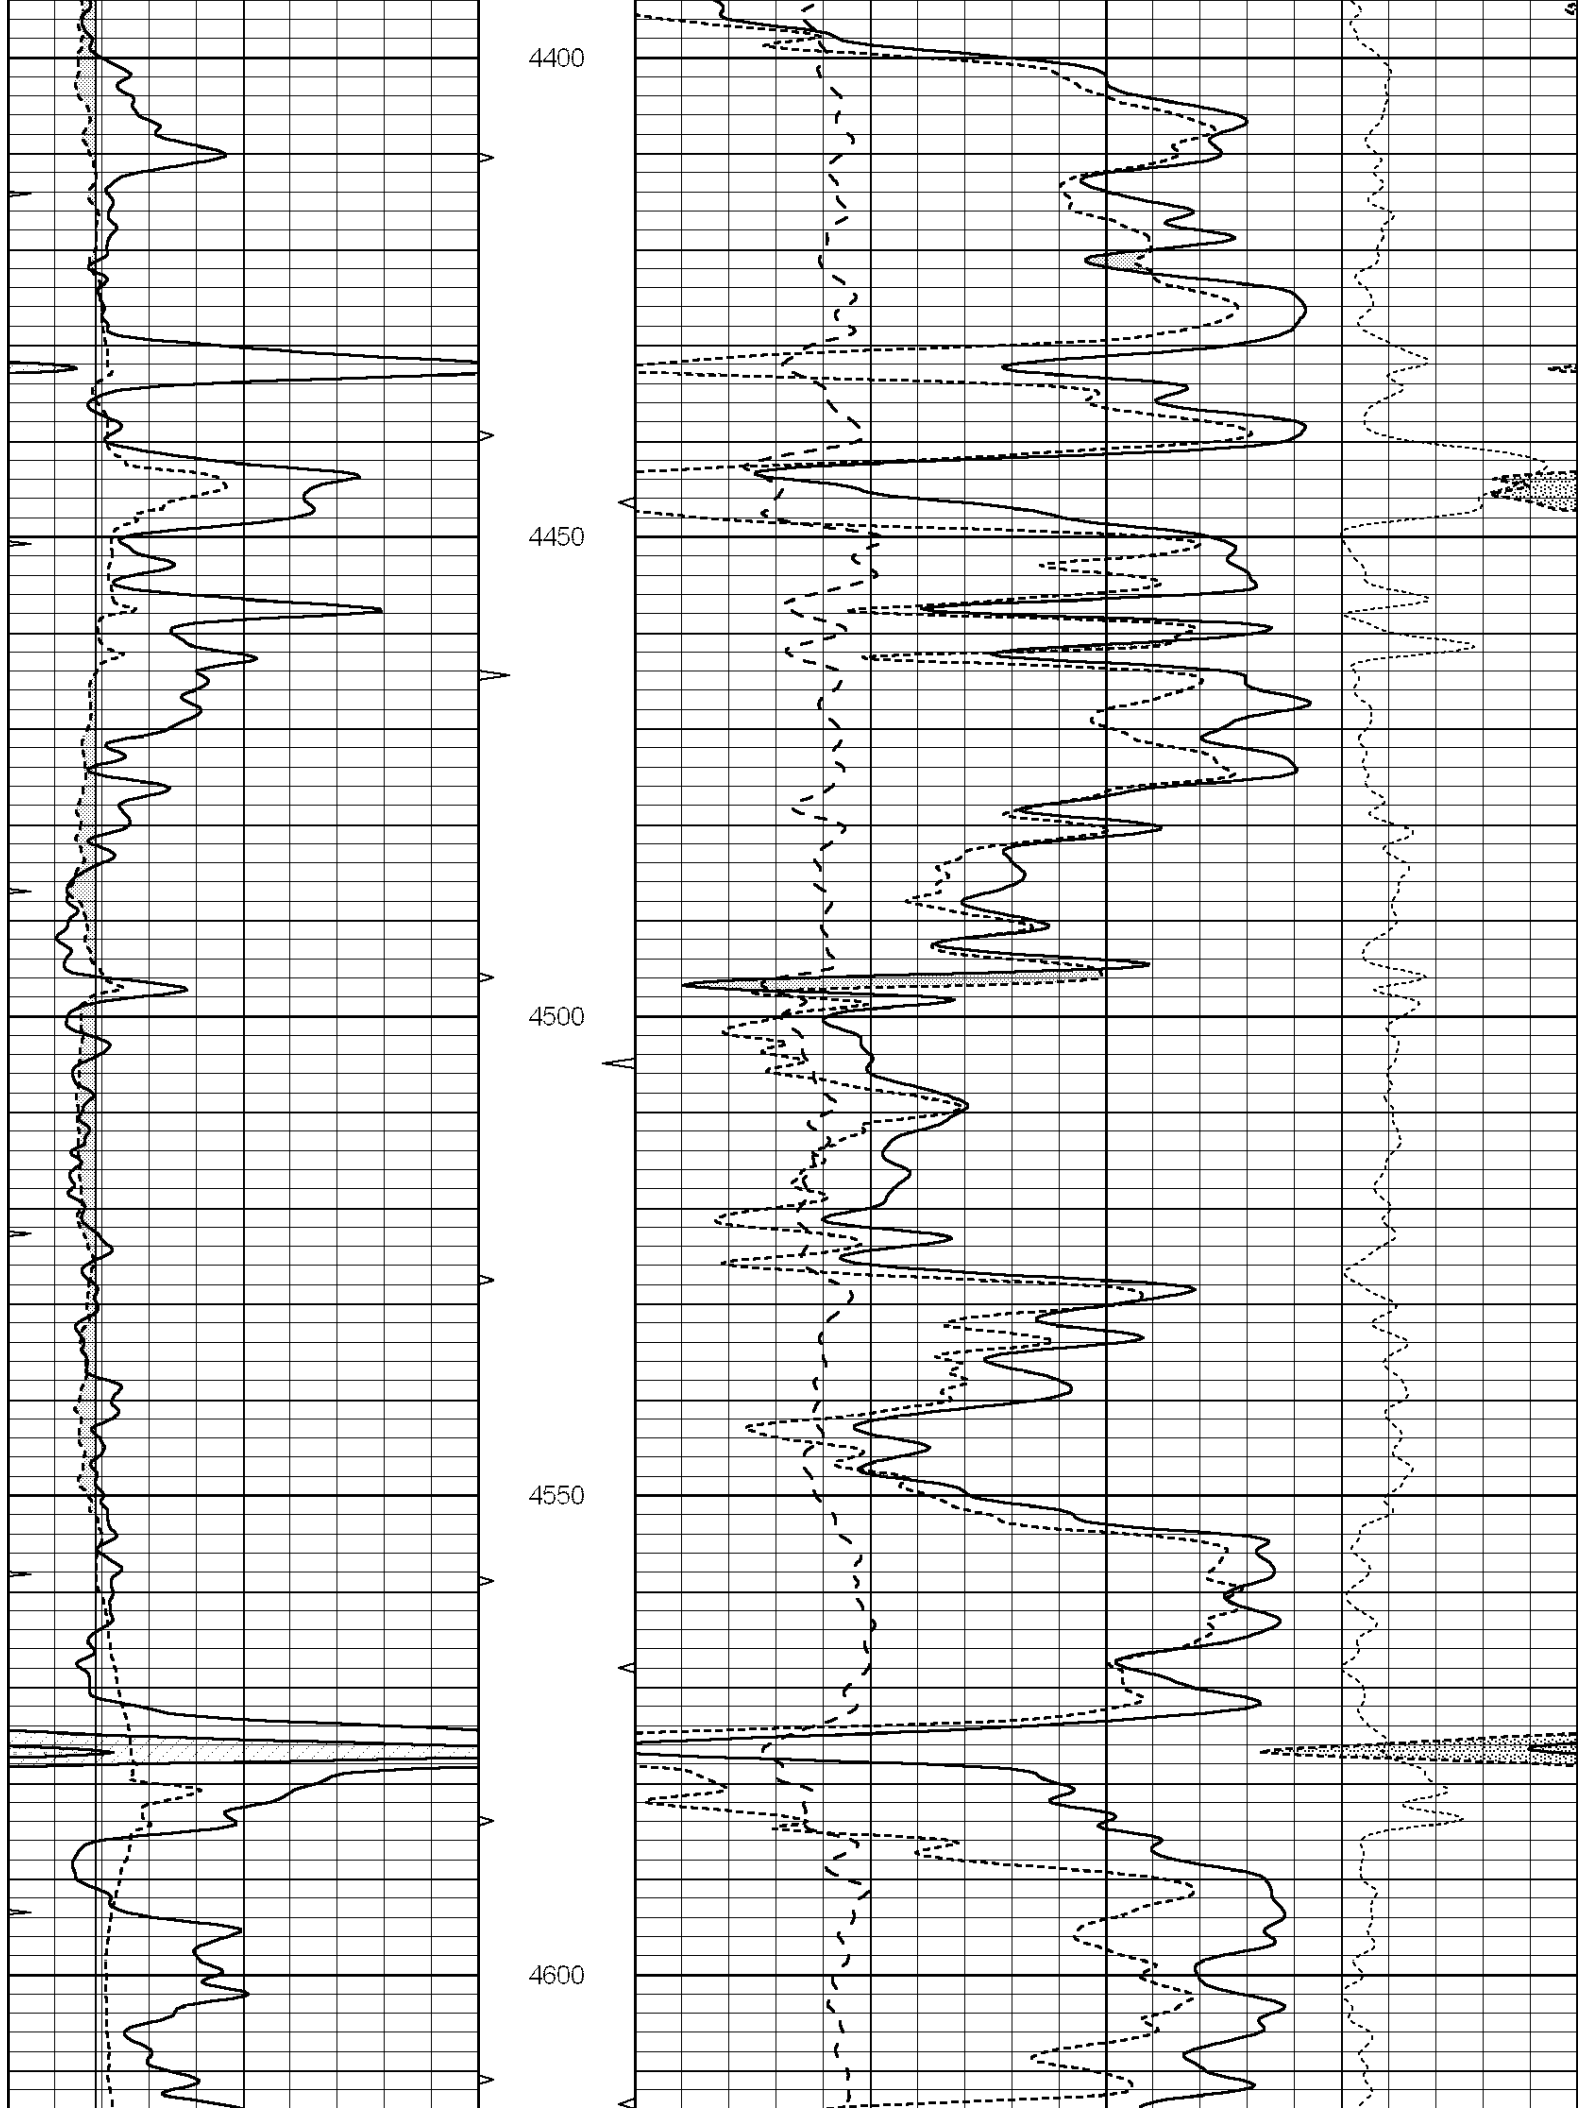

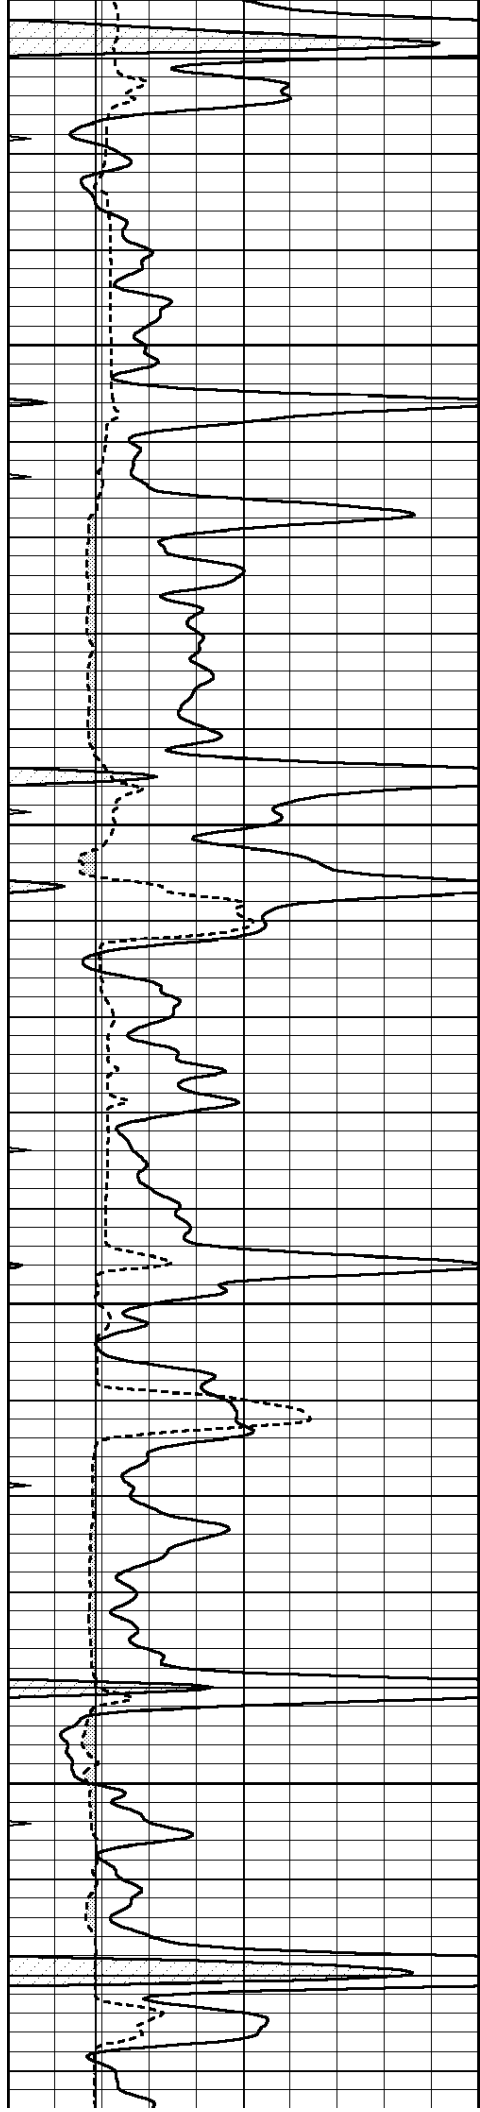



4650

4700

4750

4800

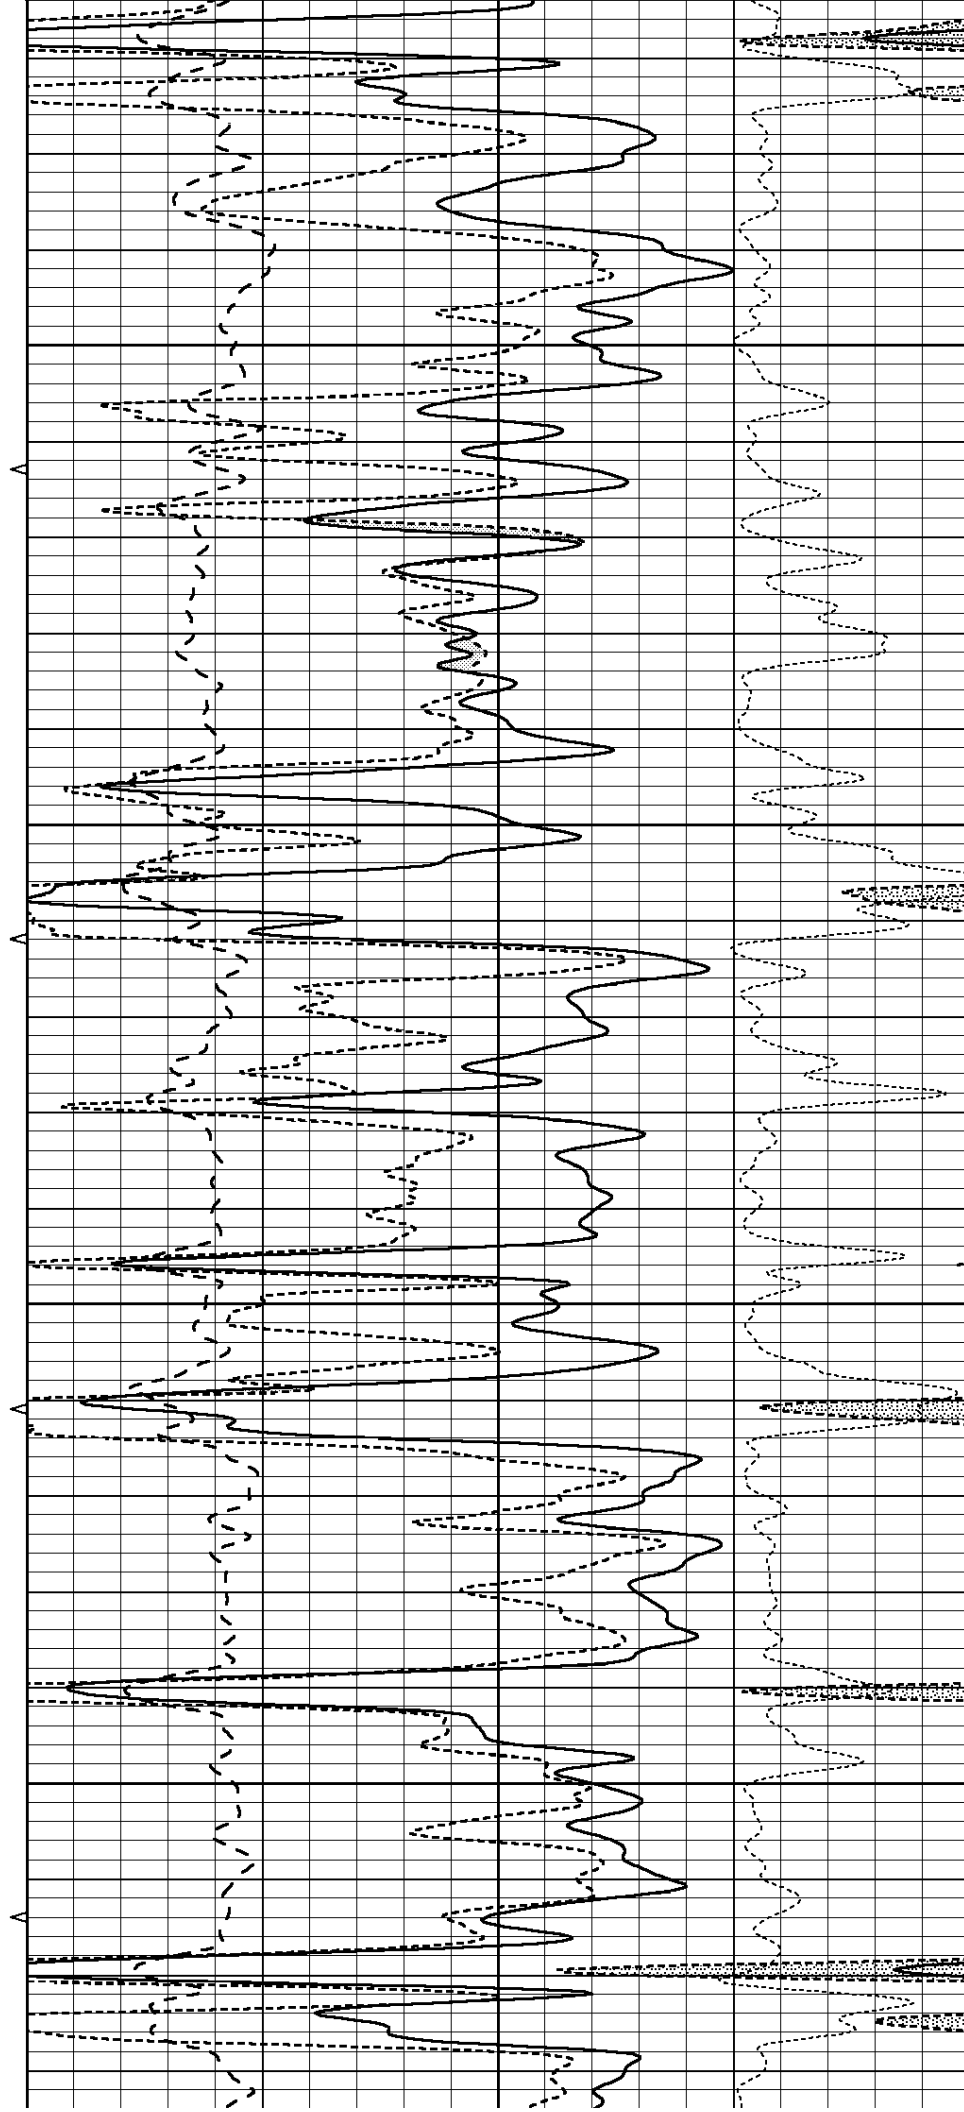

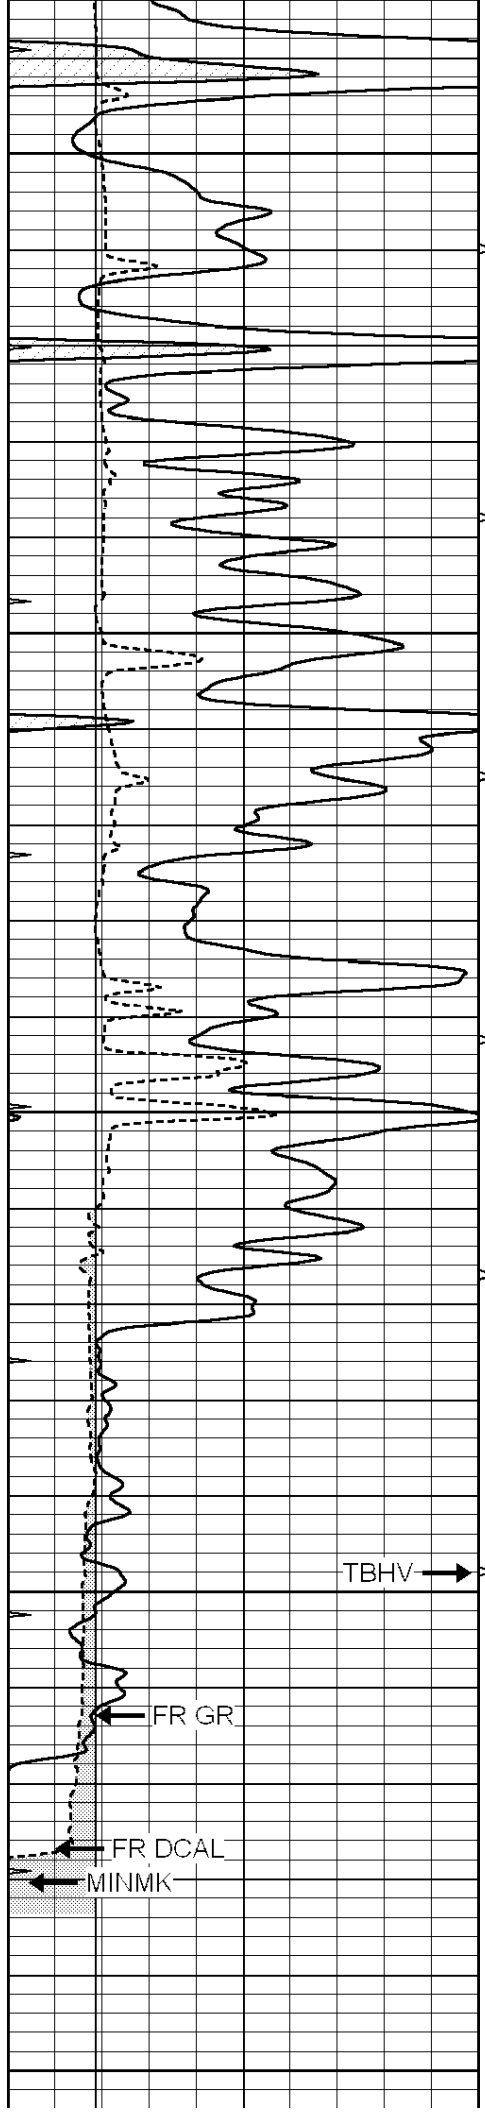

4850

4900

4950

5.5" ABHV


TBHV →

5000

FR GR

FR DCAL


MINMK

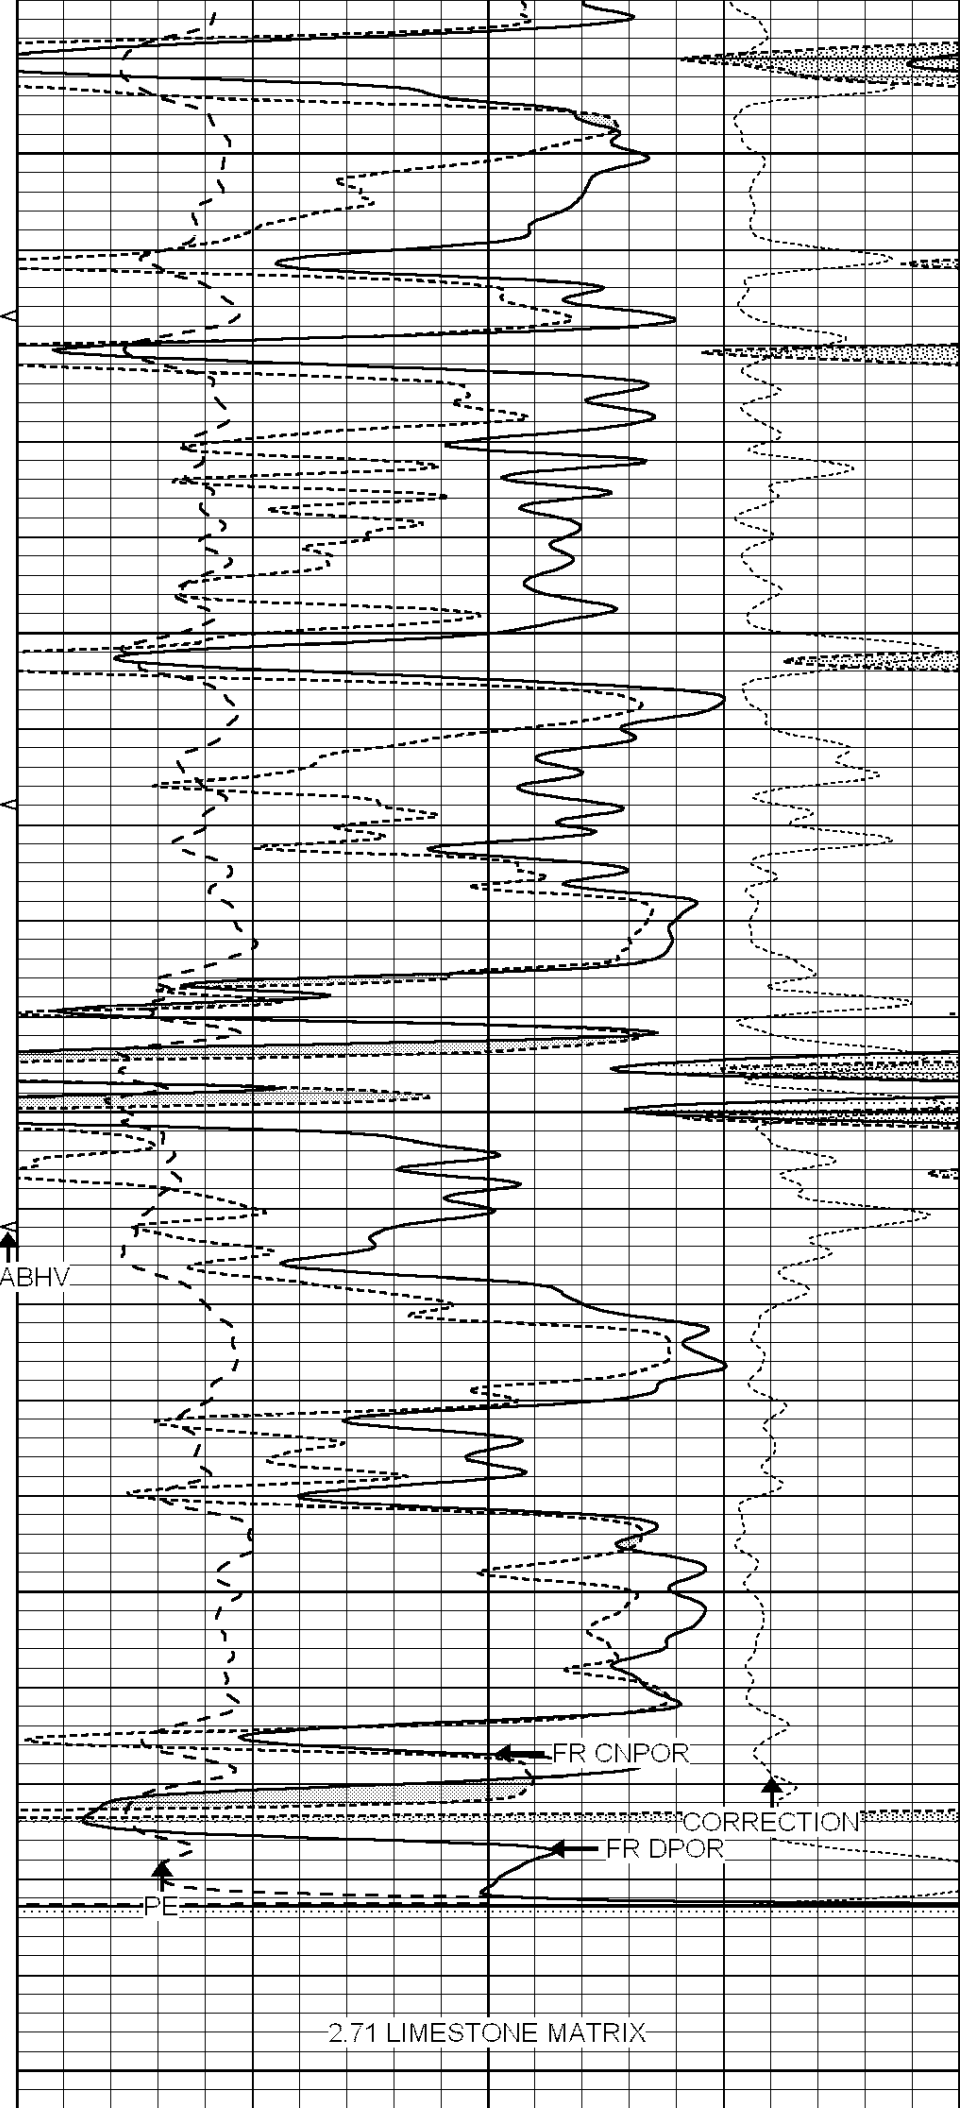

2.71 LIMESTONE MATRIX

5050


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3) 10			

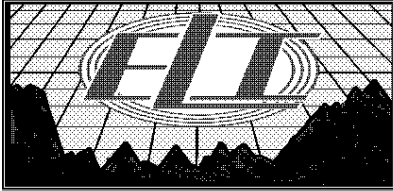


REPEAT SECTION

Database File: 2345pe.db
 Dataset Pathname: pass2.6
 Presentation Format: ldt_neu
 Dataset Creation: Wed Mar 07 13:33:23 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3) 10			

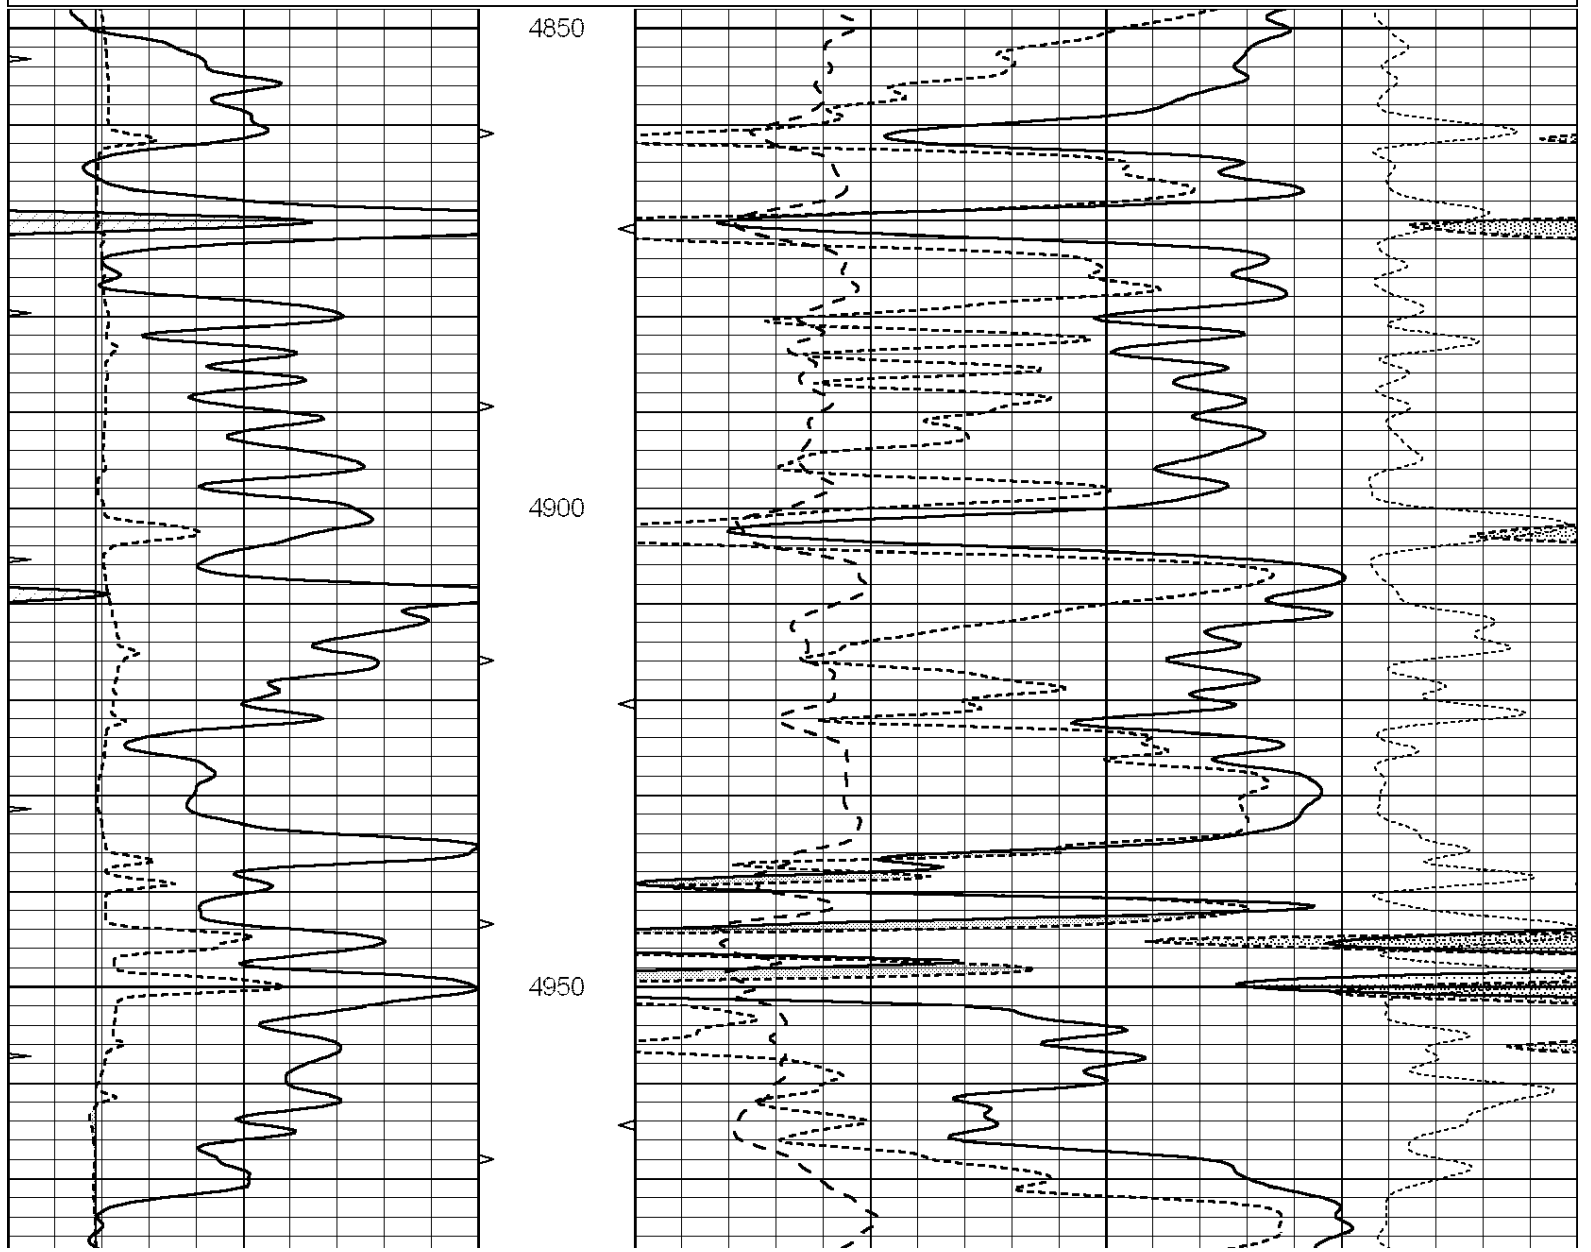

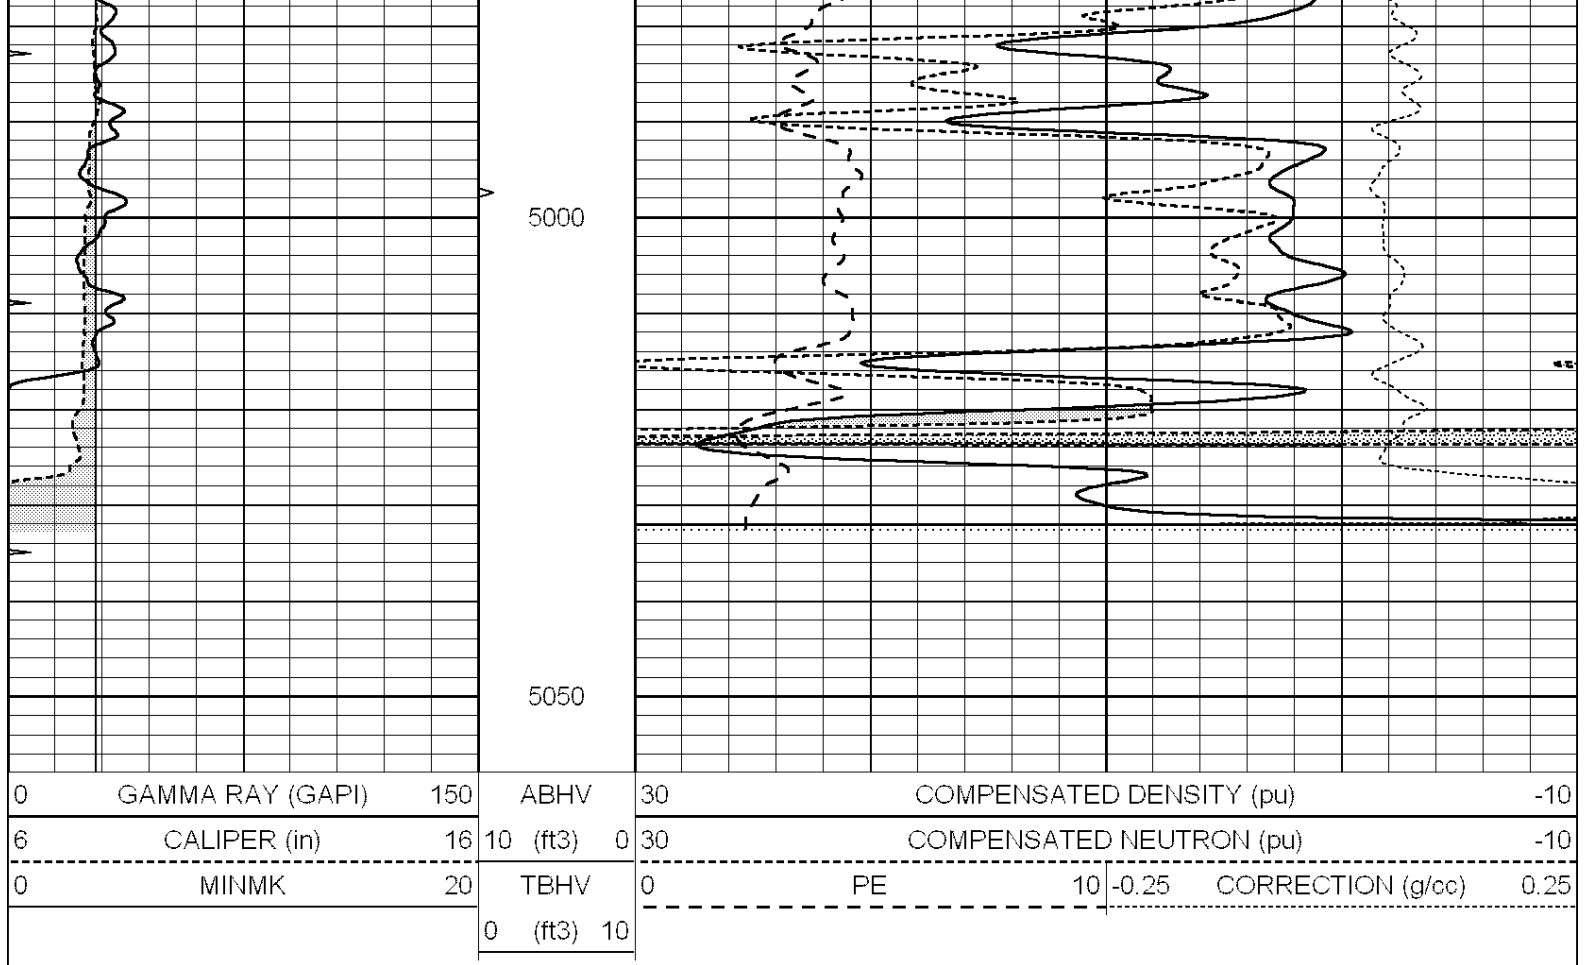

Calibration Report

Database File: 1598ddn.db
Dataset Pathname: pass4
Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
Surface Cal Performed: Wed Aug 30 00:06:33 2017
Downhole Cal Performed: Mon Jul 28 12:02:56 2008
After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification			Readings		Targets		Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 002 Model: PRB

Master Calibration			Performed Mon Aug 21 11:27:42 2017		
	Background	Magnesium	Aluminum	Sandstone	
Window 1	837.1	10632.5	2945.1	12110.1	cps
Window 2	772.0	9117.4	2570.1	10197.3	cps
Window 3	631.7	4669.0	1481.9	5042.9	cps
Window 4	187.0	187.5	185.9	189.9	cps
Long Space	0.0	8345.4	1798.1	9425.3	cps
Short Space	1.1	1927.9	1285.9	2050.2	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio	: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept	: -19.6

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Wed May 31 00:09:32 2017		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	