



MICRO LOG

Company	EAGLE CREEK CORP.	Location:	API # : 15-135-26092-0000	Other Services CDL/CNL DIL
Well	HOSS UNIT #1-2	SEC 02 TWP 20S RGE 25W		
Field	WESLEY SOUTHWEST	1672' FSL & 150' FEL		
County	NESS			
State	KANSAS			
Permanent Datum	GROUND LEVEL	Elevation	2361	K.B. 2366 D.F. 2364 G.L. 2361
Log Measured From	KELLY BUSHING 5' A.G.L.			
Drilling Measured From	KELLY BUSHING			
Date	03/15/20			
Run Number	TWO			
Depth Driller	4428			
Depth Logger	4425			
Bottom Logged Interval	4423			
Top Log Interval	3600			
Casing Driller	8 5/8" @ 601			
Casing Logger	601			
Bit Size	7 7/8"			
Type Fluid in Hole	CHEMICAL MUD			
Density / Viscosity	9.2/44			
pH / Fluid Loss	9.5/9.2			
Source of Sample	FLOWLINE			
Rm @ Meas. Temp	.65 @ 62F			
Rmf @ Meas. Temp	.49 @ 62F			
Rmc @ Meas. Temp	.78 @ 62F			
Source of Rmf / Rmc	MEASURED			
Rm @ BHT	.33 @ 120F			
Time Circulation Stopped	2 HOURS			
Time Logger on Bottom	////			
Maximum Recorded Temperature	120F			
Equipment Number	1523			
Location	HAYS, KANSAS			
Recorded By	GUS PFANENSTIEL			
Witnessed By	BOB O'DELL			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: NESS FOUR WAY STOP SOUTH 7 MILES TO 60 RD.
7W,1S,1W,N INTO.




MAIN PASS

Database File	4684pe.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Sun Mar 15 19:45:45 2020
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

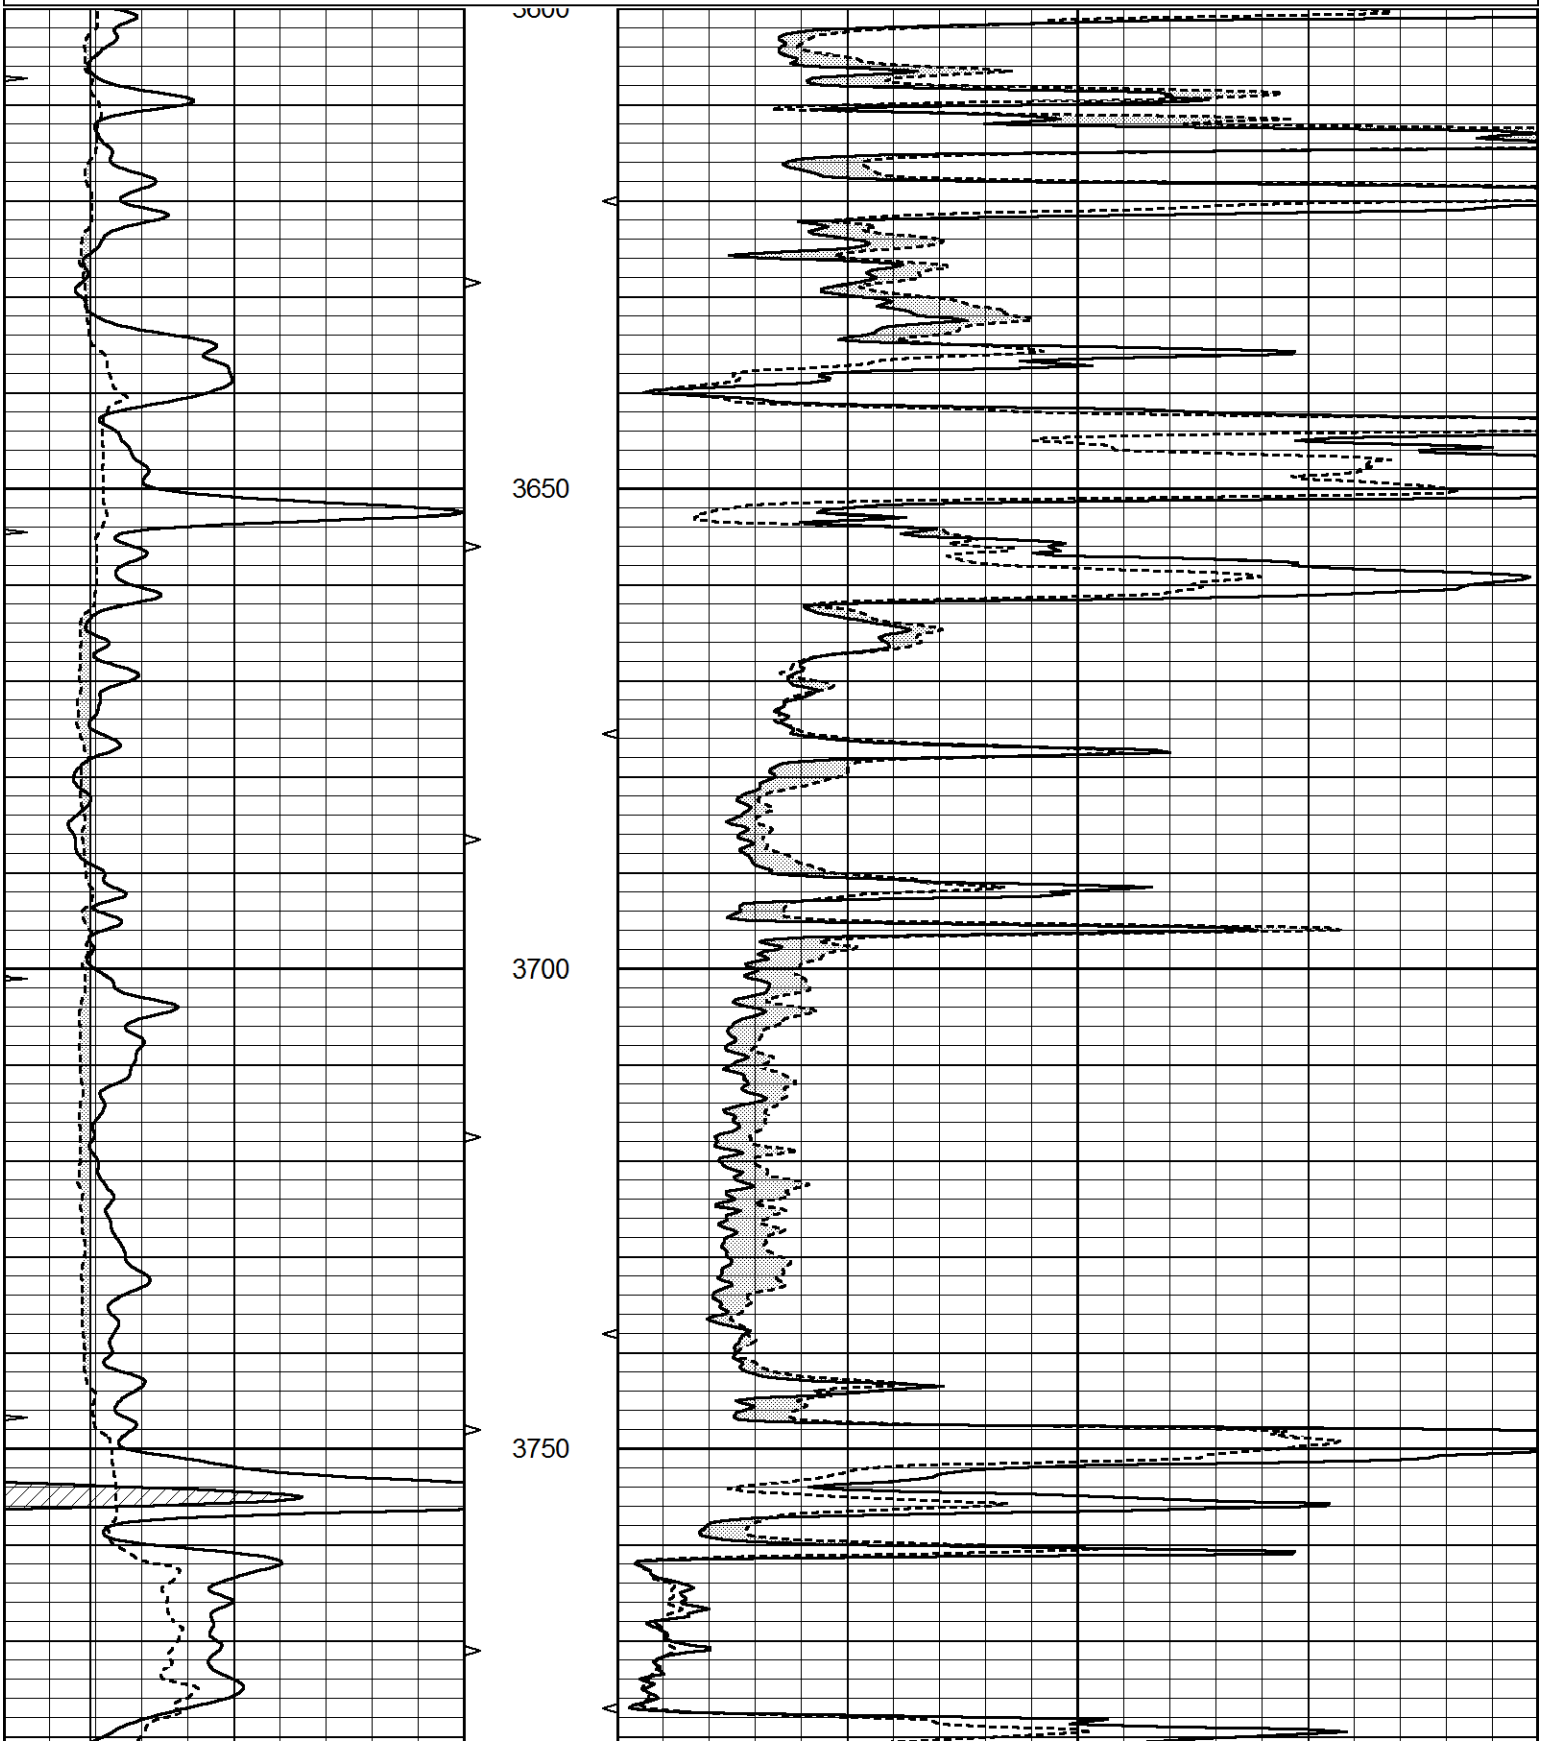

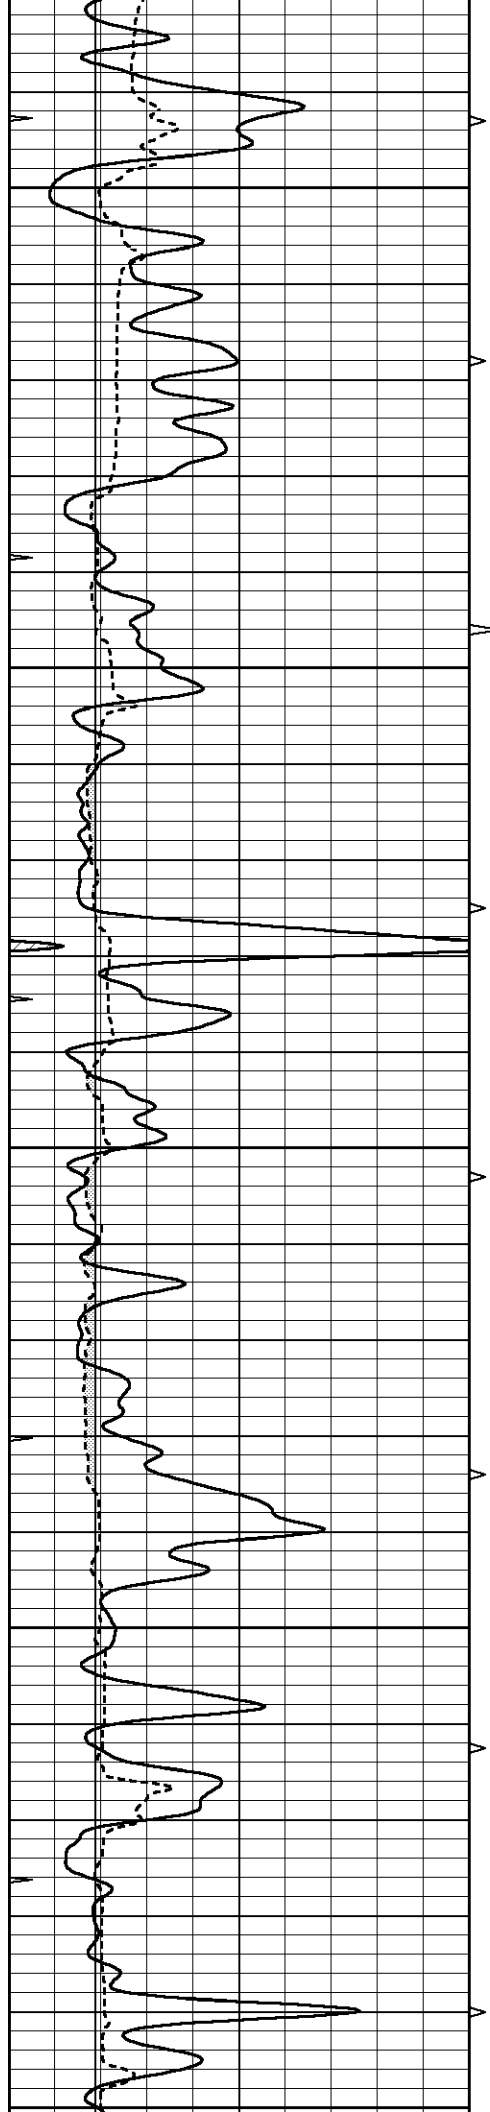


3800


3850

3900

3950

4000

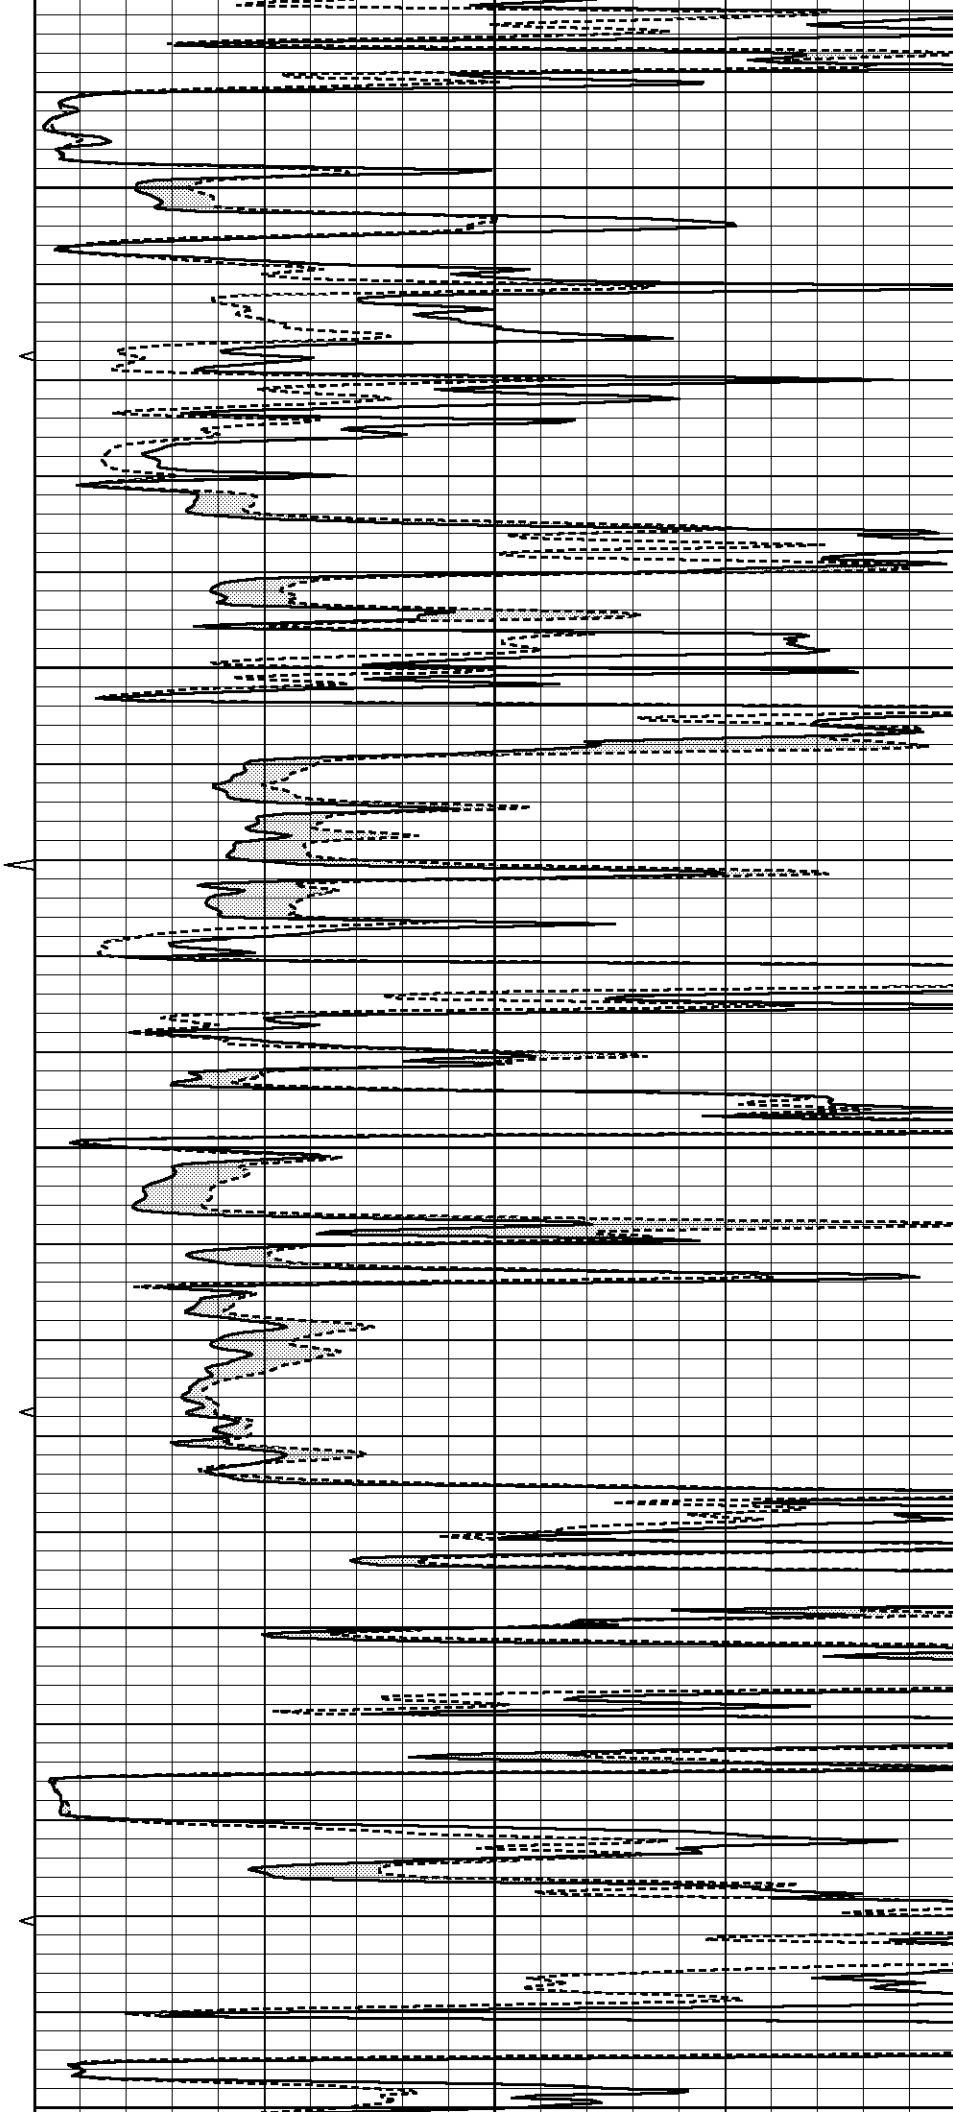

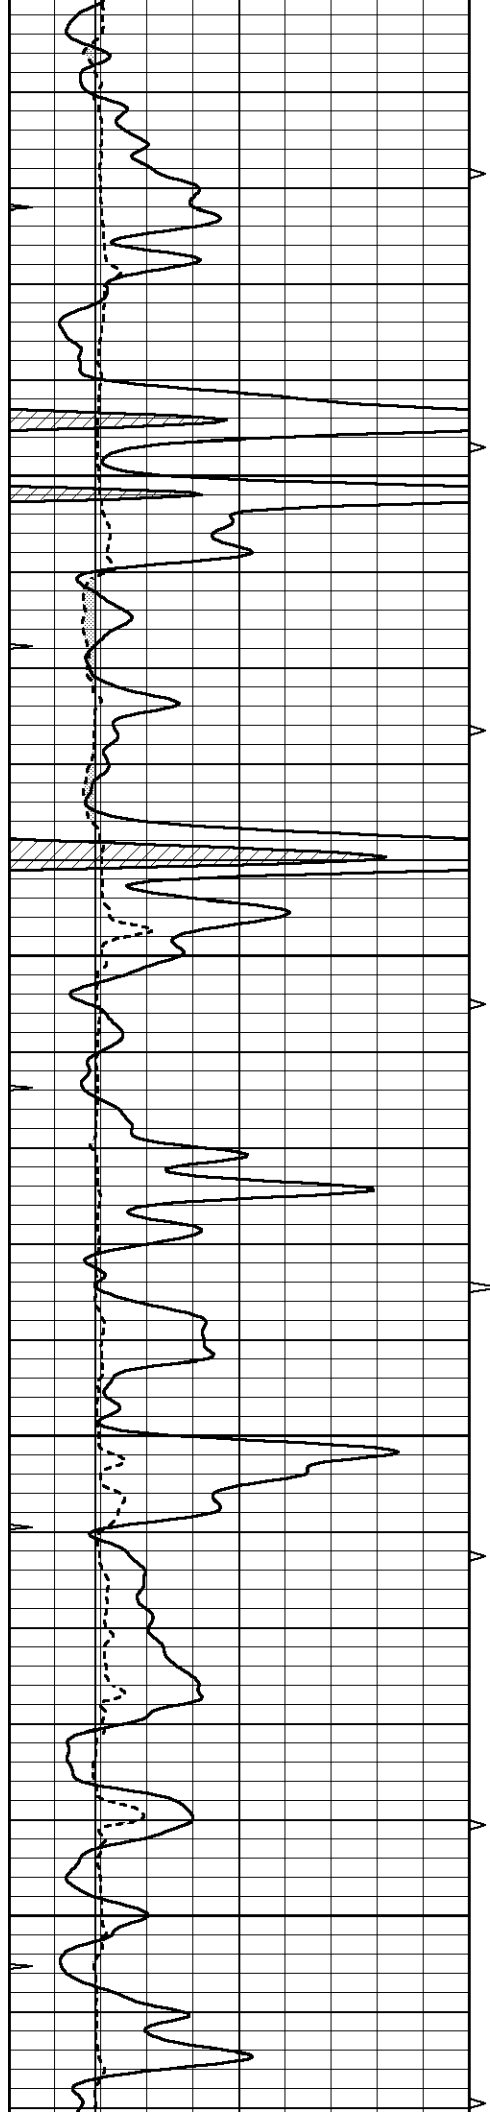



4050

4100

4150

4200

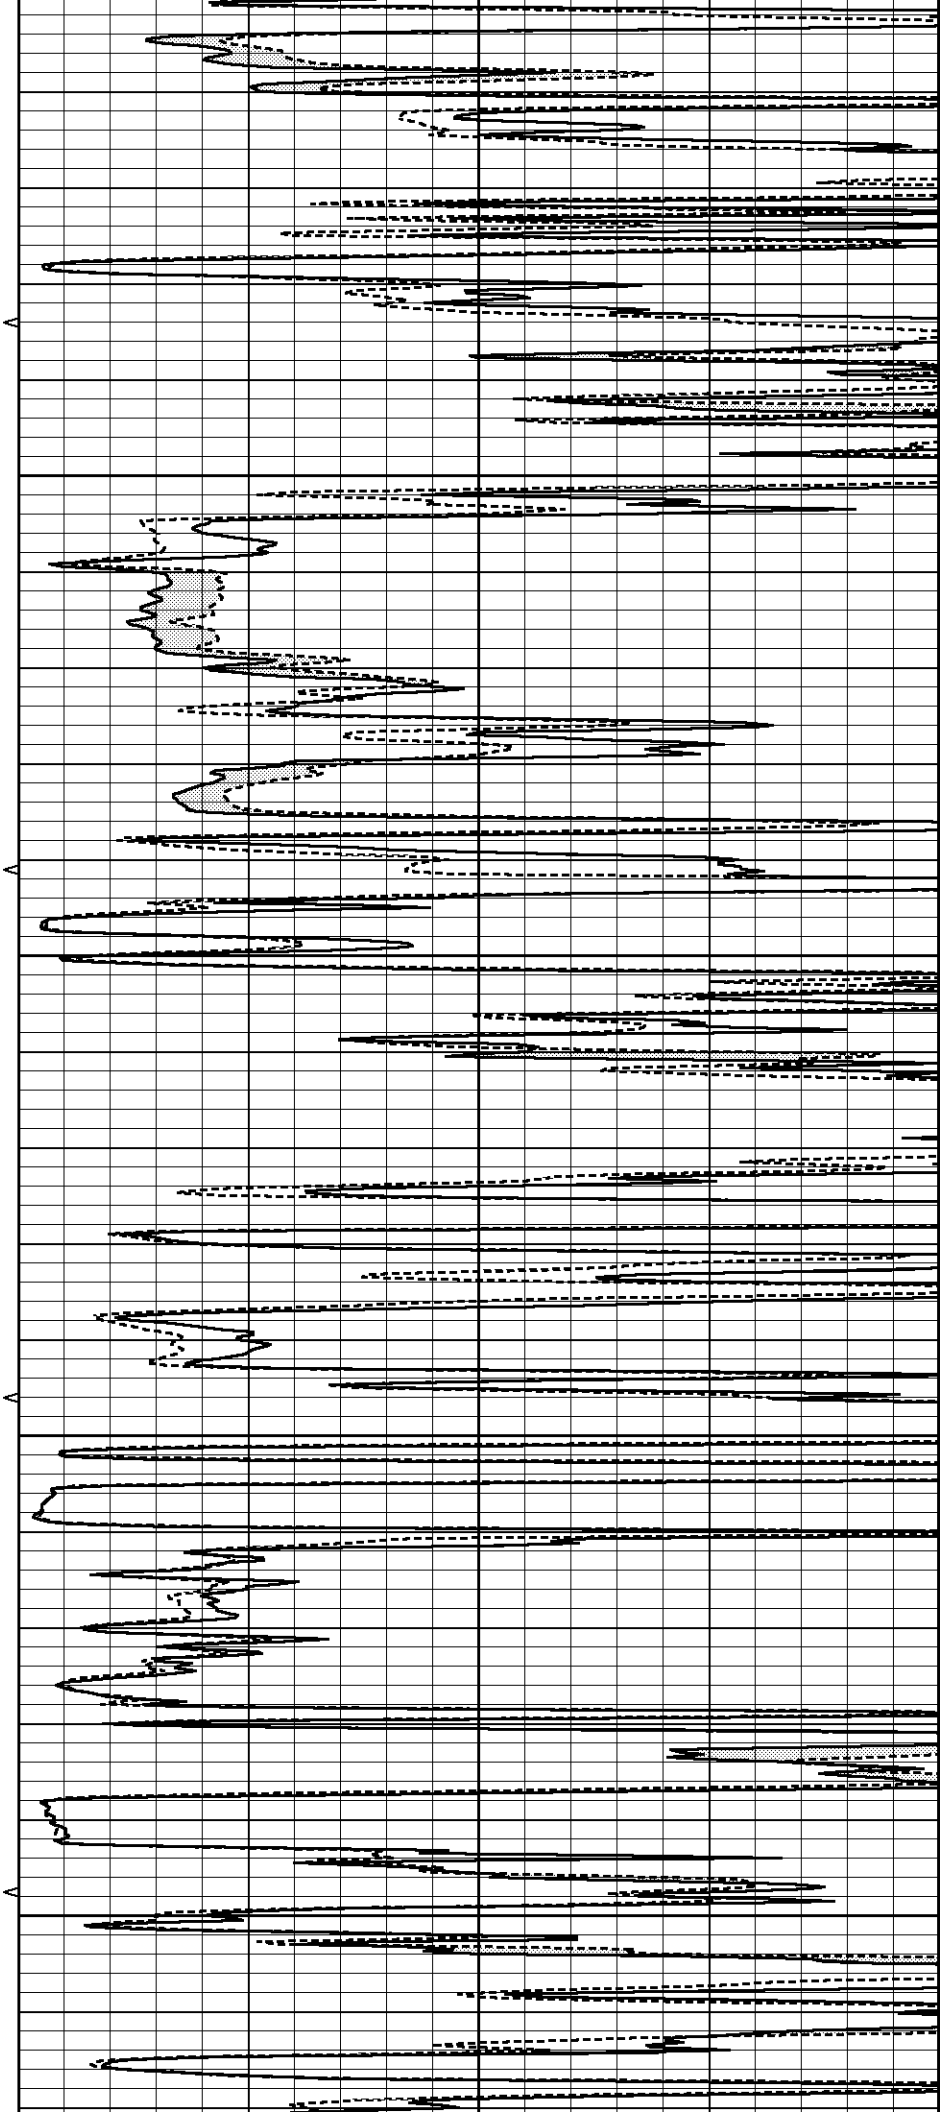

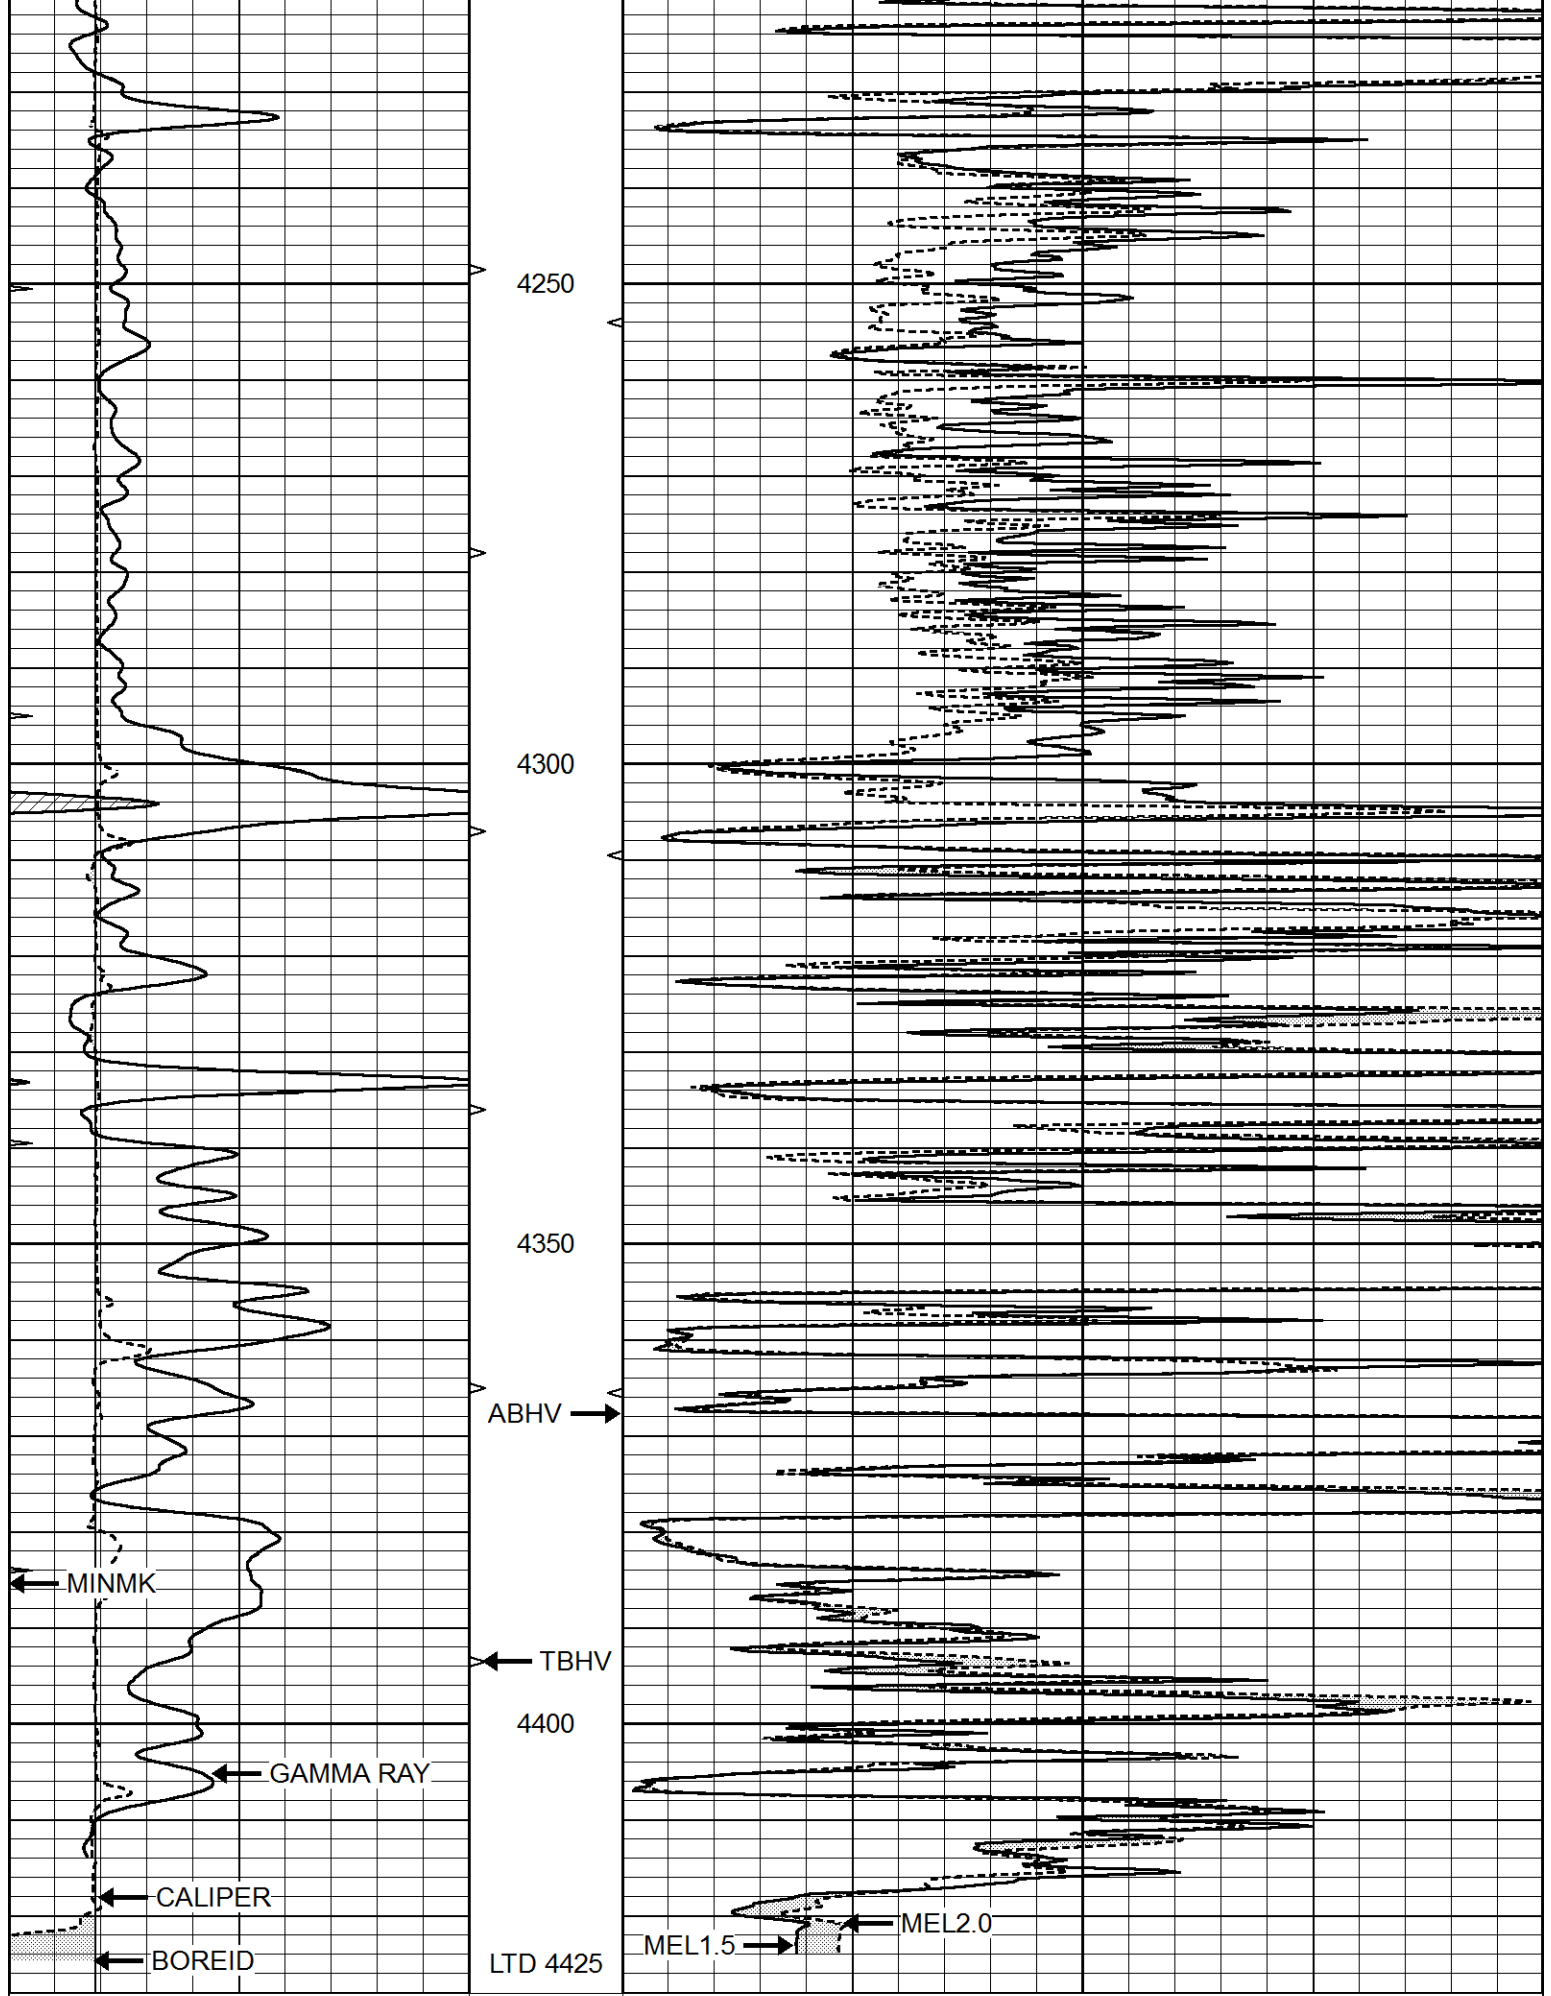

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			


0	MINMK	20	TBHV	0	(ft3)	10
---	-------	----	------	---	-------	----




REPEAT SECTION

Database File	4684pe.db
Dataset Pathname	pass4.1
Presentation Format	_micro
Dataset Creation	Sun Mar 15 19:39:59 2020
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

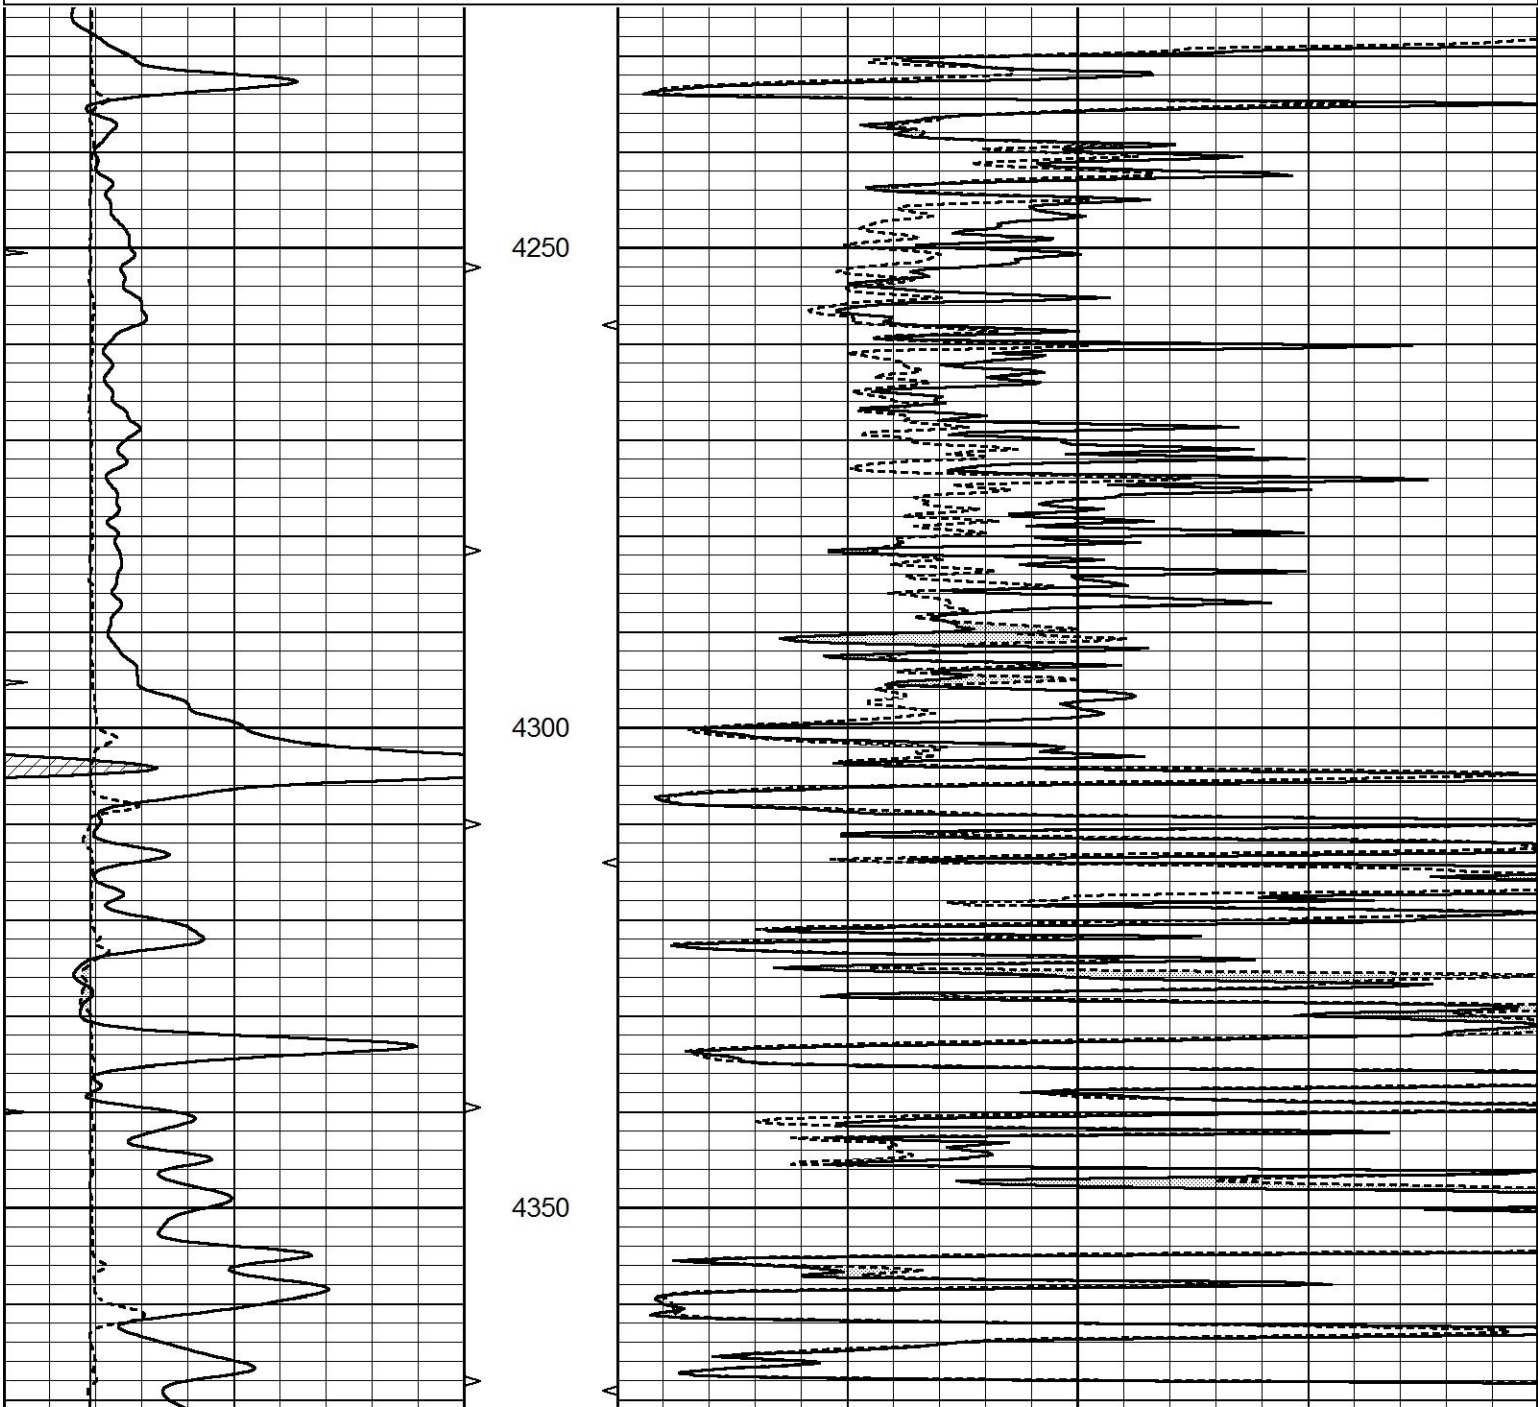

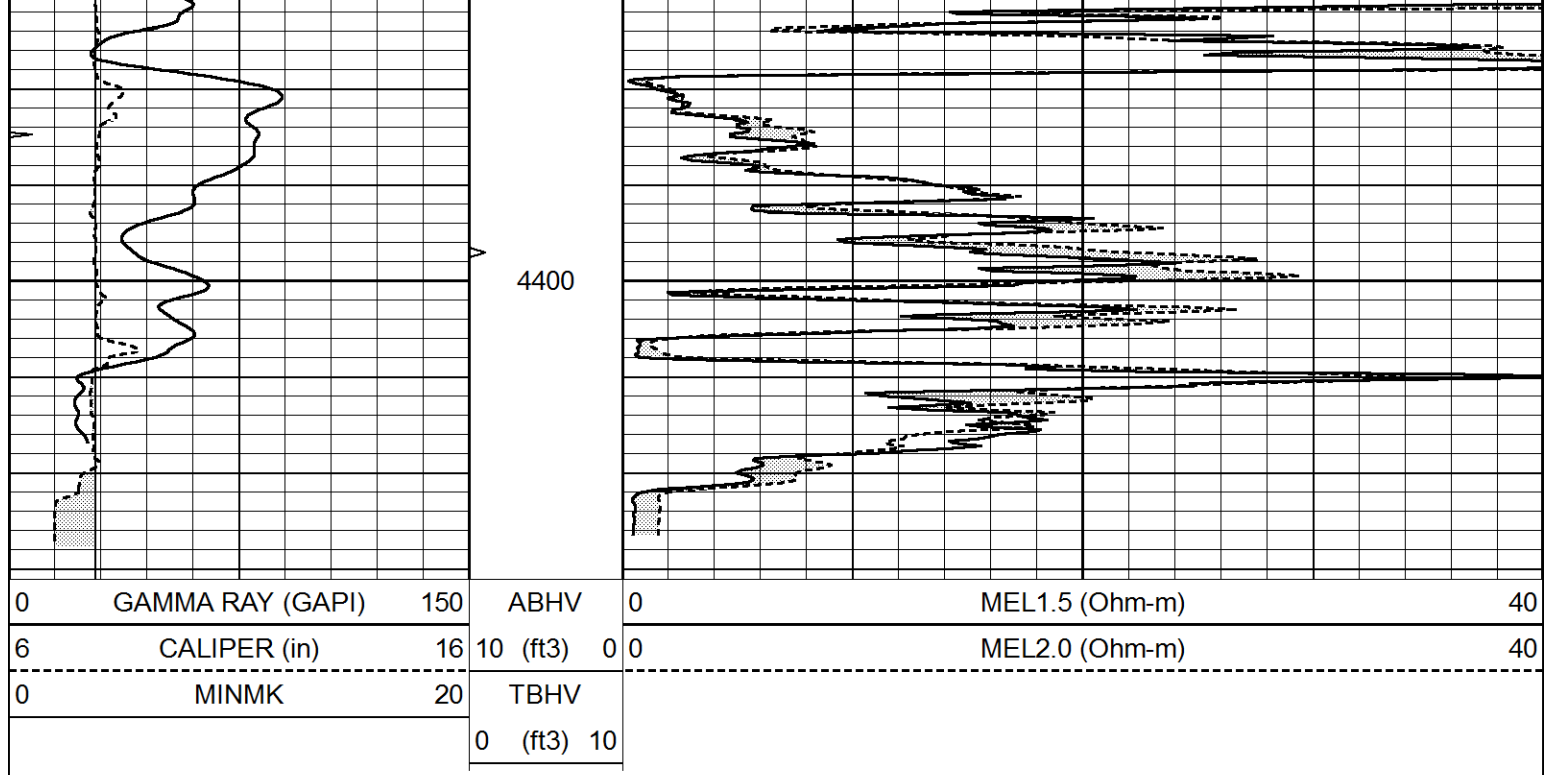

Calibration Report			
Database File	4684pe.db		
Dataset Pathname	pass4.1		
Dataset Creation	Sun Mar 15 19:39:59 2020		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Mon Feb 17 12:46:42 2020		
Caliper Calibration:	Gain=3.980	Offset=4.951	
References	Low Cal	High Cal	
Readings	9.500	13.000	
	0.308	2.032	
1.5" Calibration:	Gain=36.134	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.832	
2" Calibration:	Gain=38.000	Offset=-0.800	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.022	0.793	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Sun Jan 05 05:38:27 2020		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5400	GAPI/cps	

