

COMPENSATED DENSITY/NEUTRON LOG

Company	MAI OIL OPERATIONS		
Well	KULTGEN #17		
Field	CHEYENNE VIEW		
County	BARTON	State	KANSAS
Location:	AP1 # : 15-009-26218-00-00		Other Services DIL/MEL
2024 FNL & 672 FWL			
SEC 12 TWP 19S RGE 12W			
Permanent Datum	GROUND LEVEL	Elevation	1809'
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	06/07/18		
Run Number	ONE		
Depth Driller	3465		
Depth Logger	3469		
Bottom Logged Interval	3445		
Top Log Interval	2650		
Casing Driller	8 5/8@ 366		
Casing Logger	366		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8000 PPM	
Density / Viscosity	9.0/51		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.50@80		
Rmt @ Meas. Temp	.36@80		
Rmc @ Meas. Temp	.60@80		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.36@111		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	111F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	WYATT URBAN		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
GREAT BEND EAST TO SOUTH WINDS YARD
4 NORTH, EAST INTO

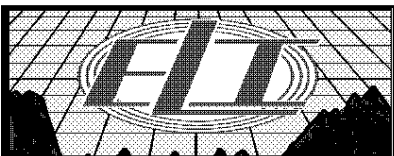



MAIN PASS


Database File: 2682ddn.db
Dataset Pathname: pass3.1
Presentation Format: den_neu
Dataset Creation: Thu Jun 07 01:35:35 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

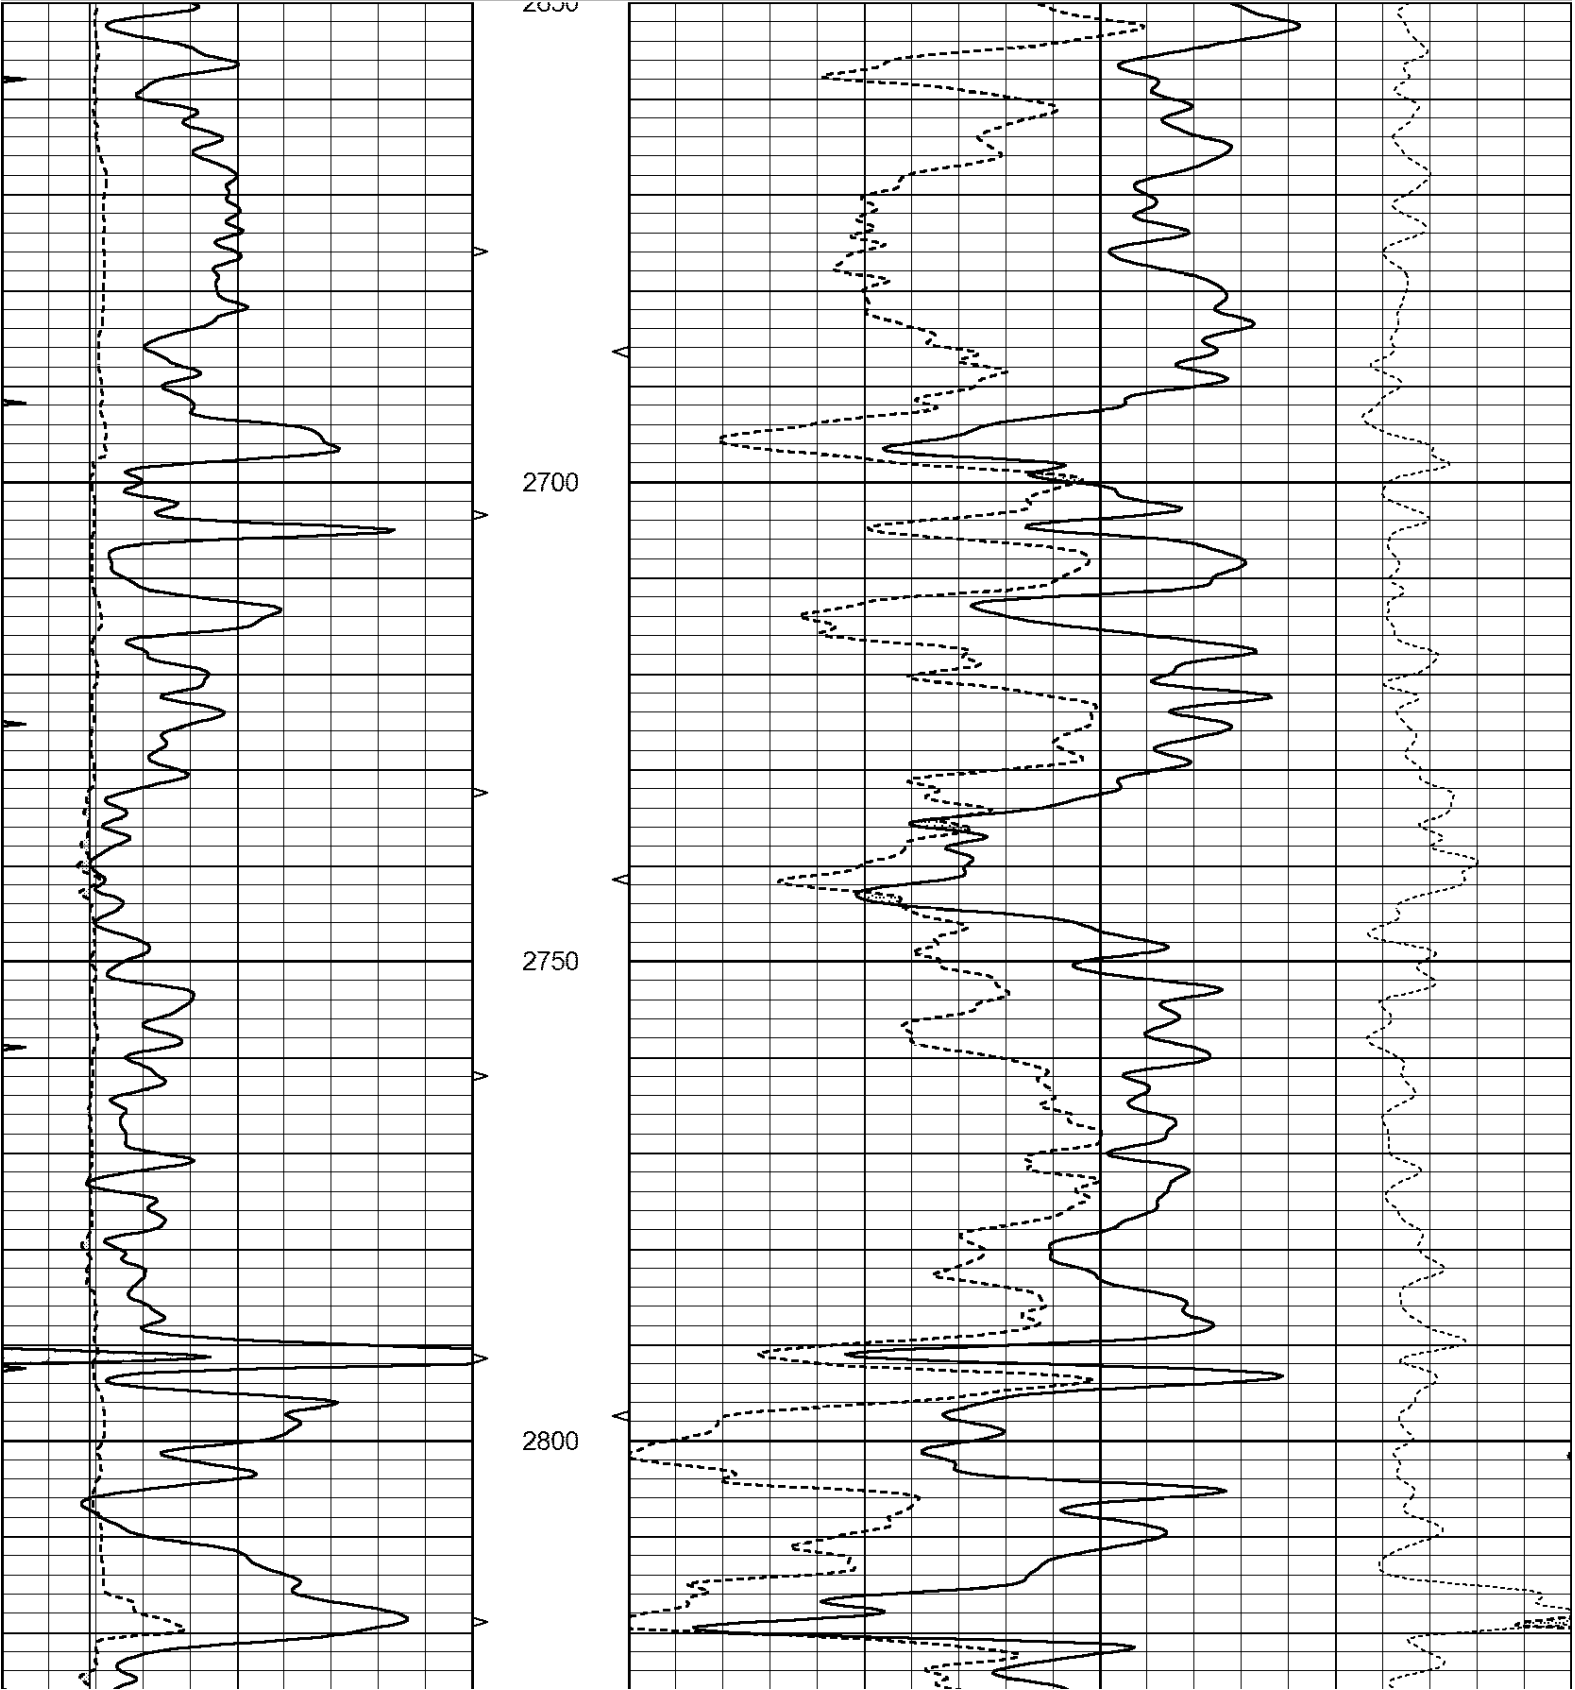

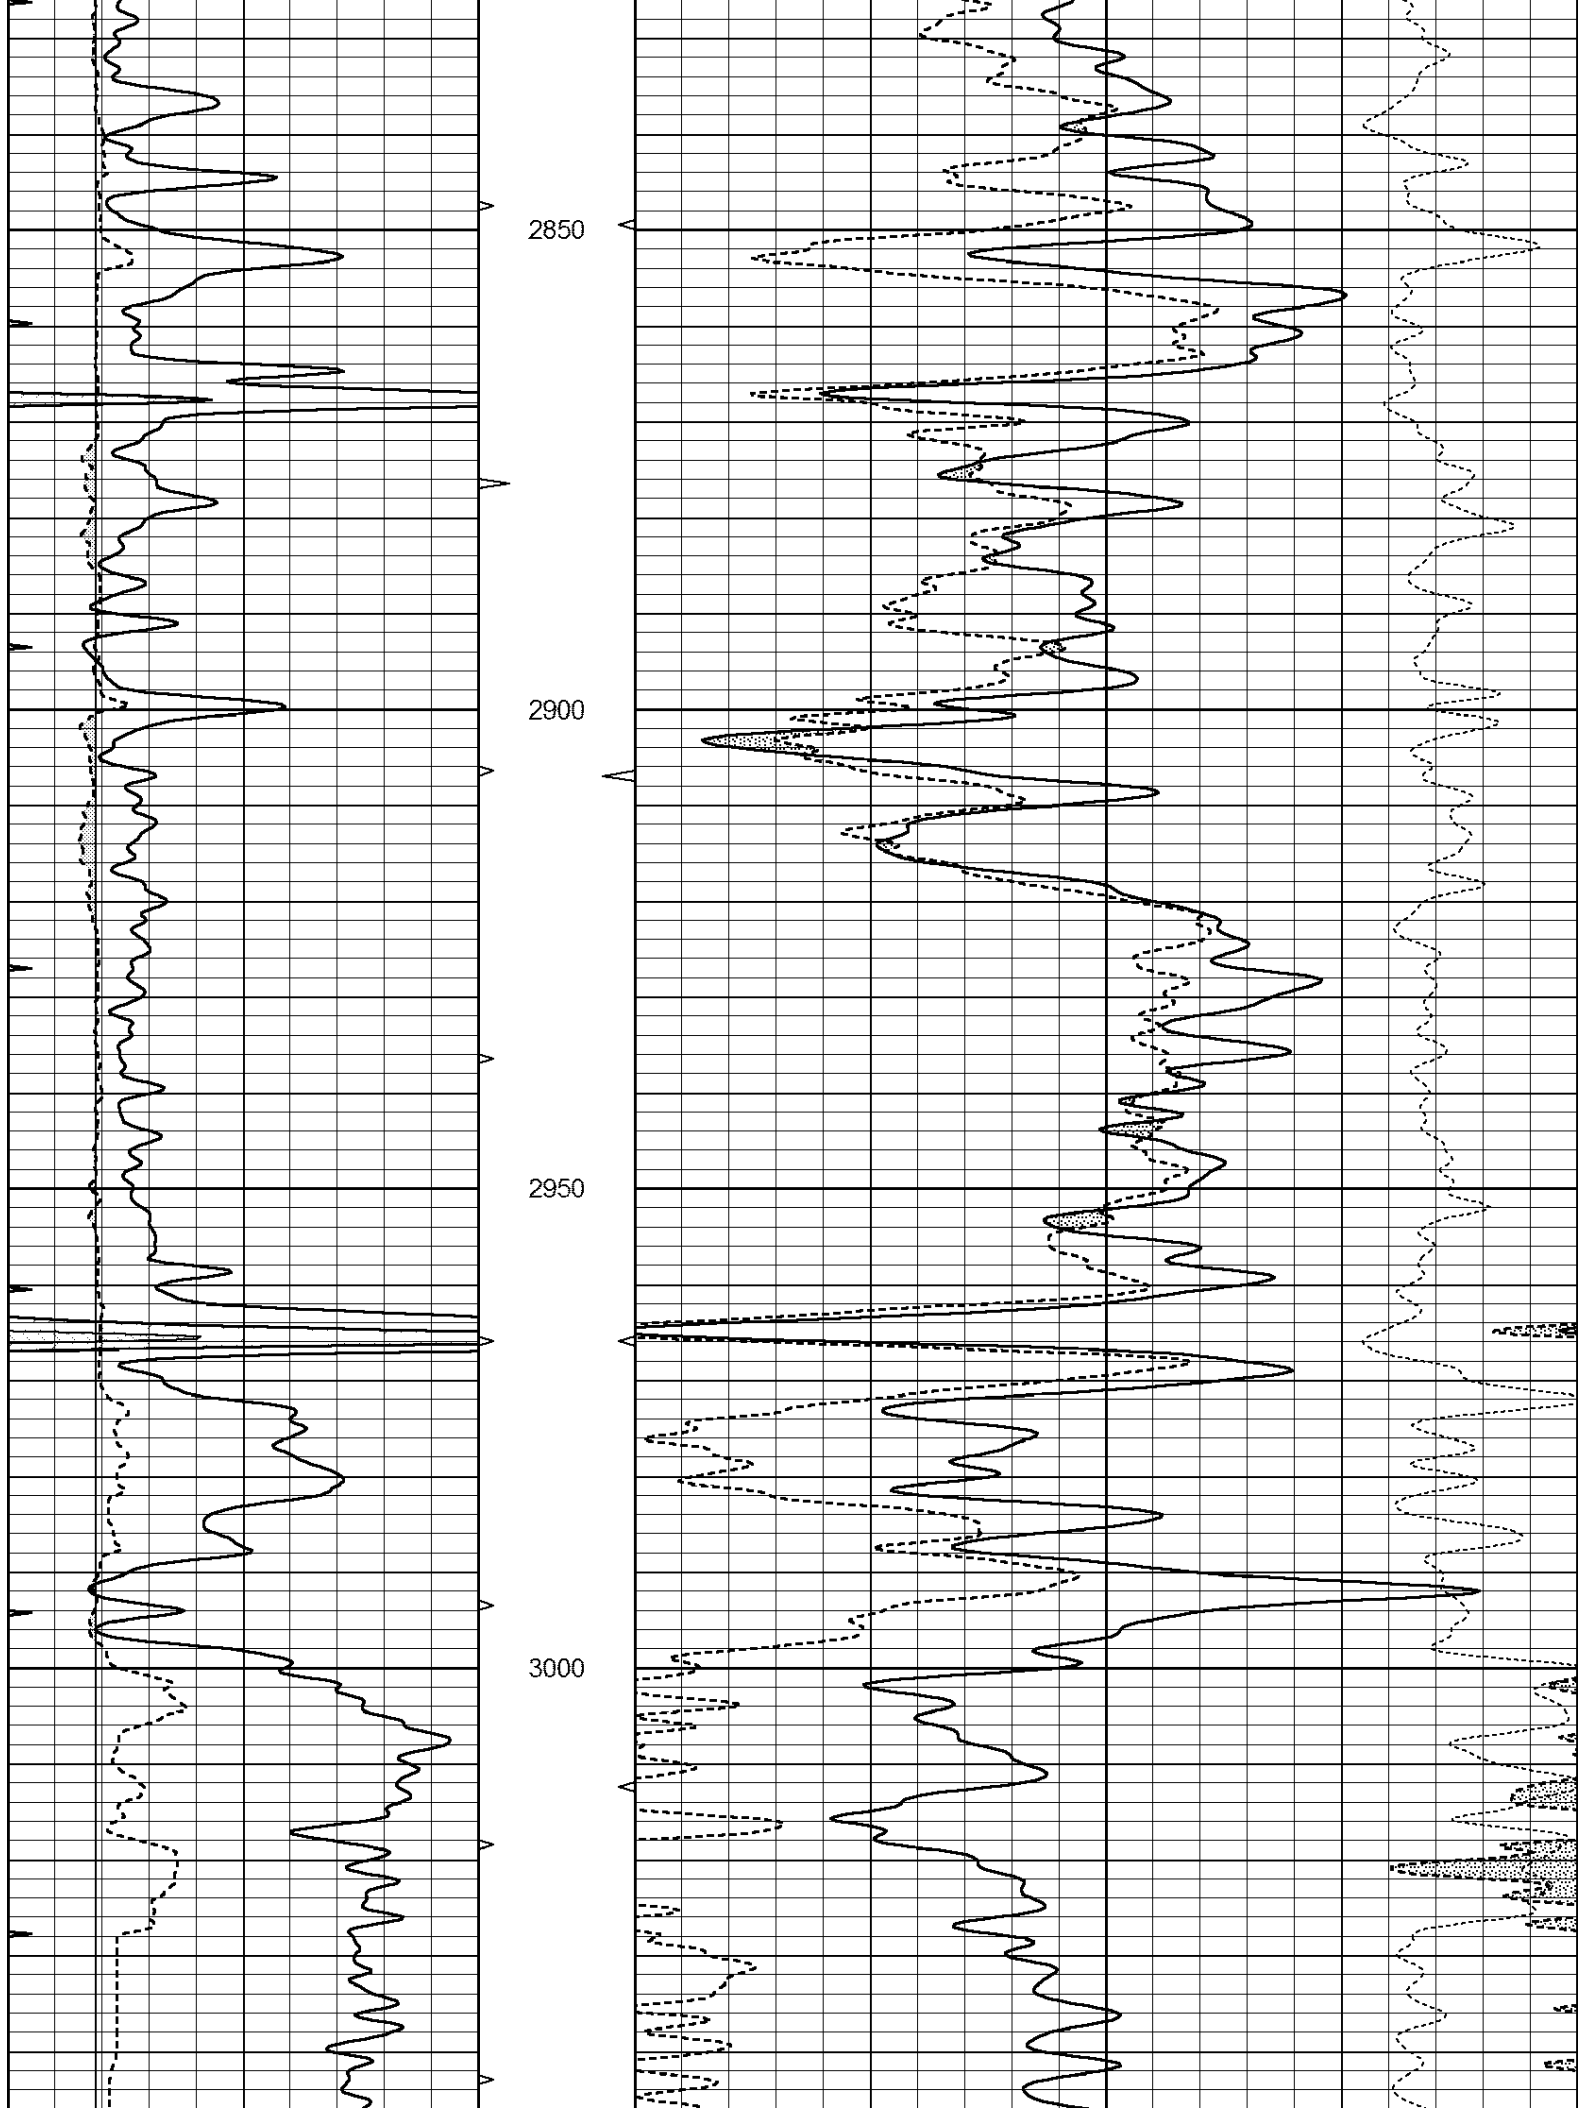

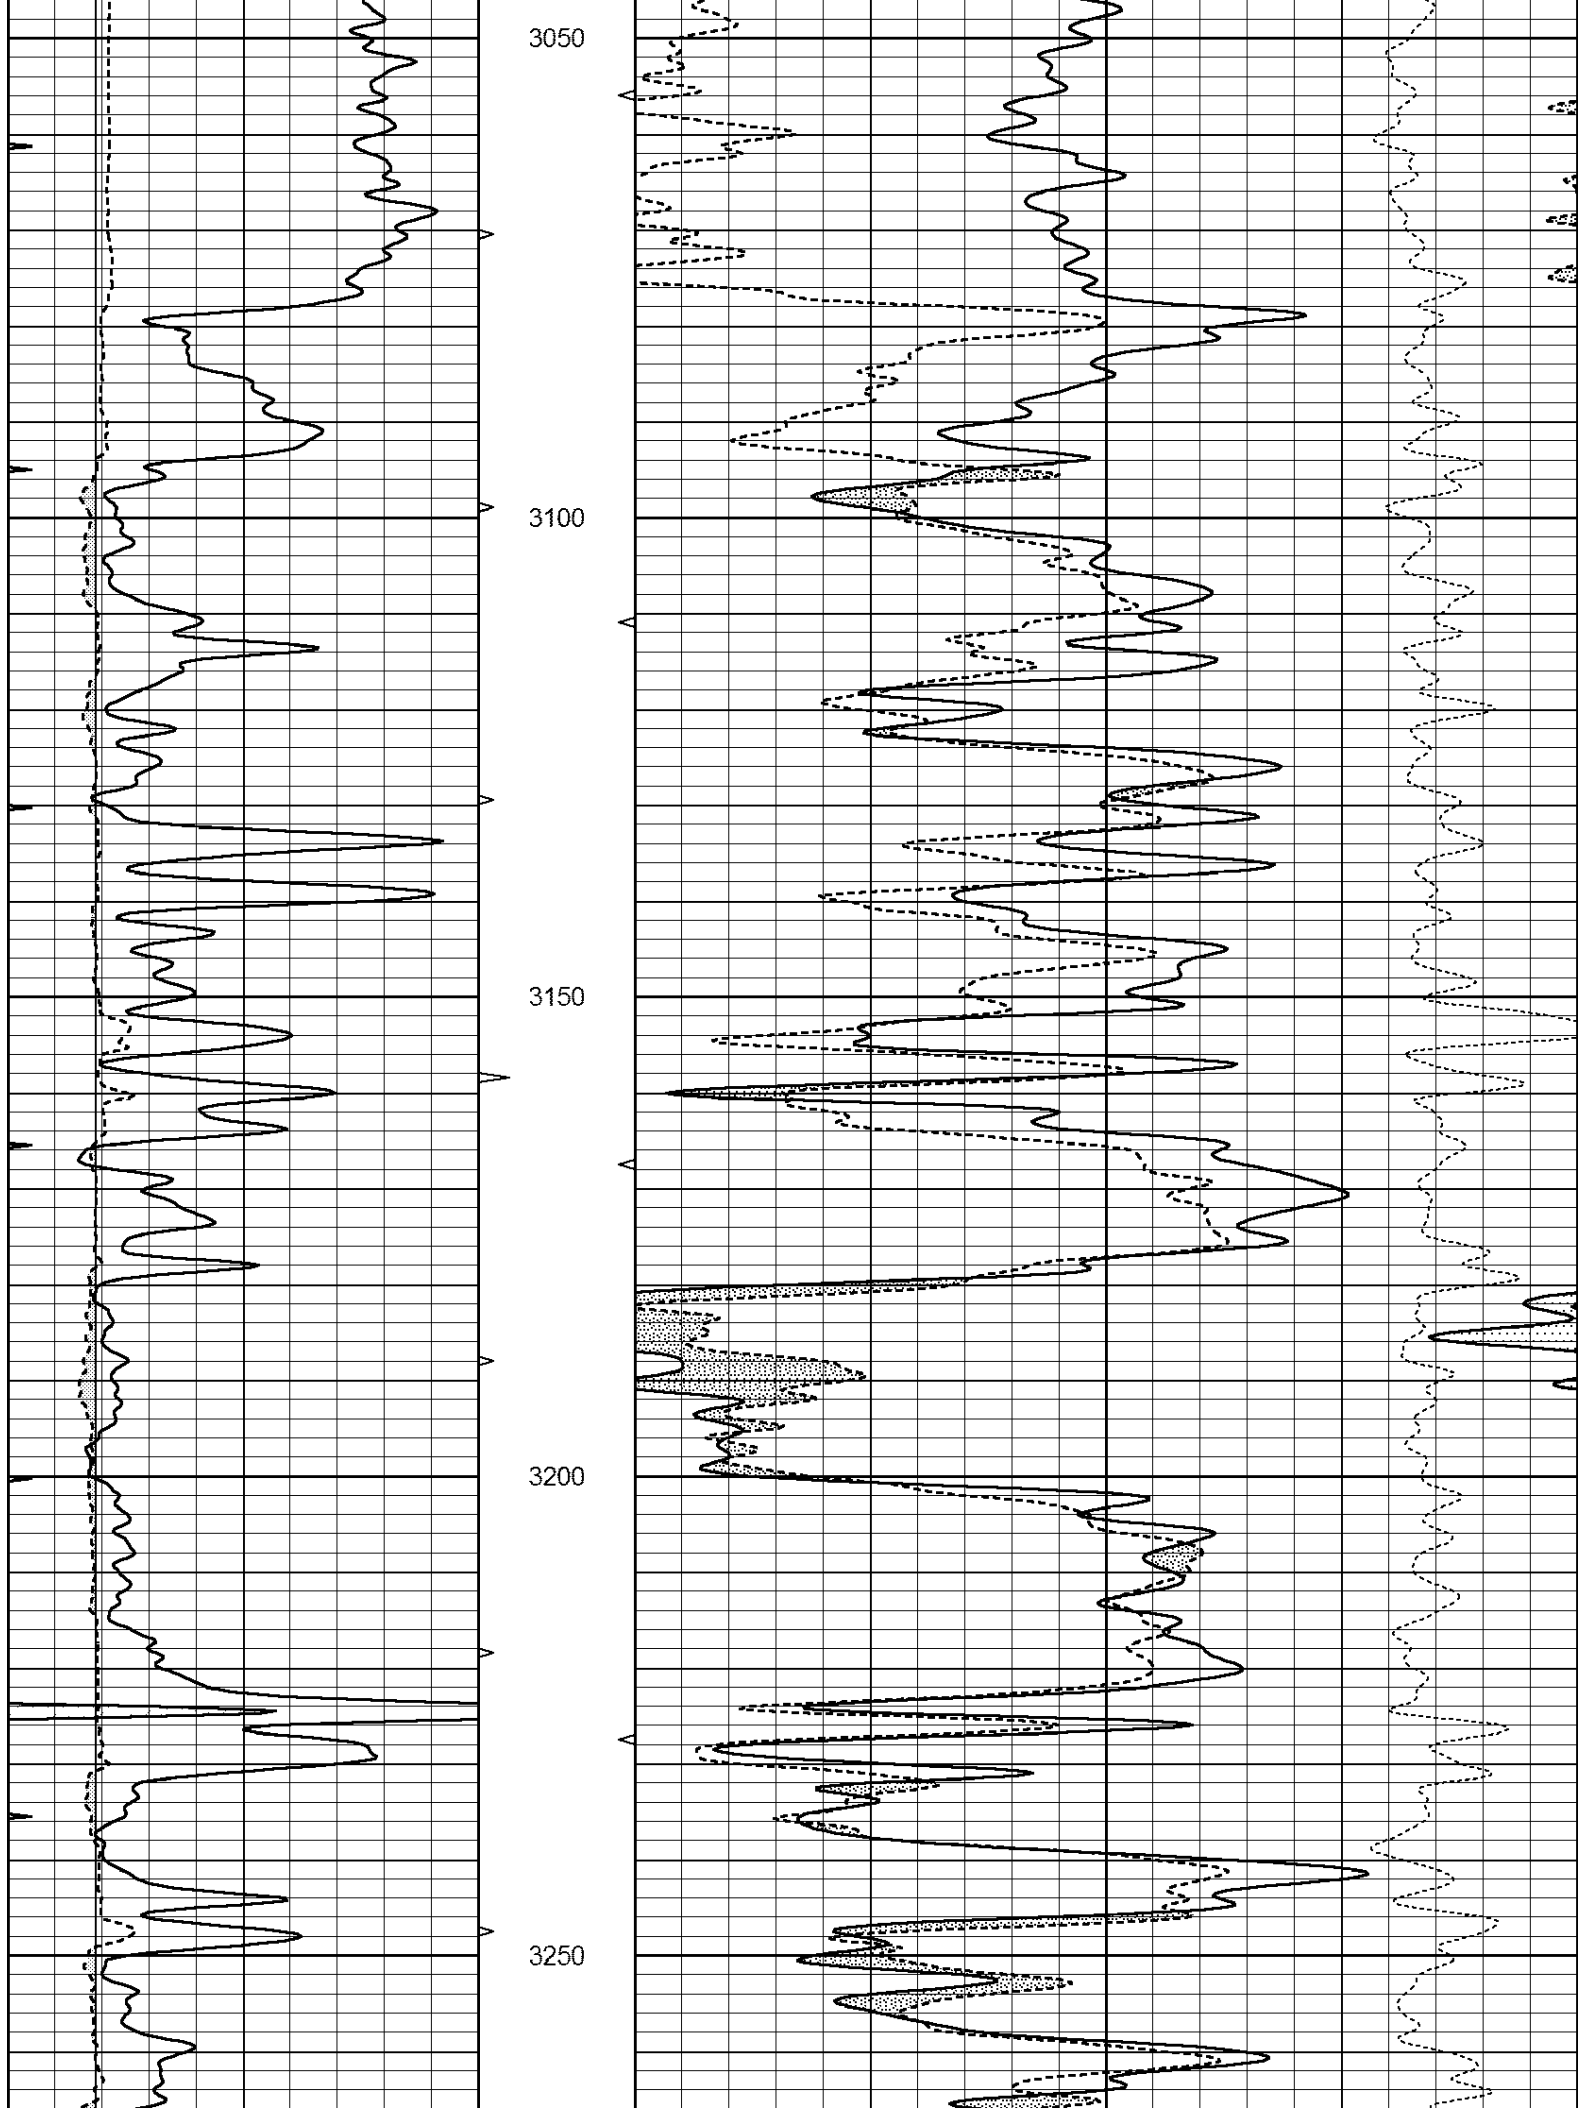

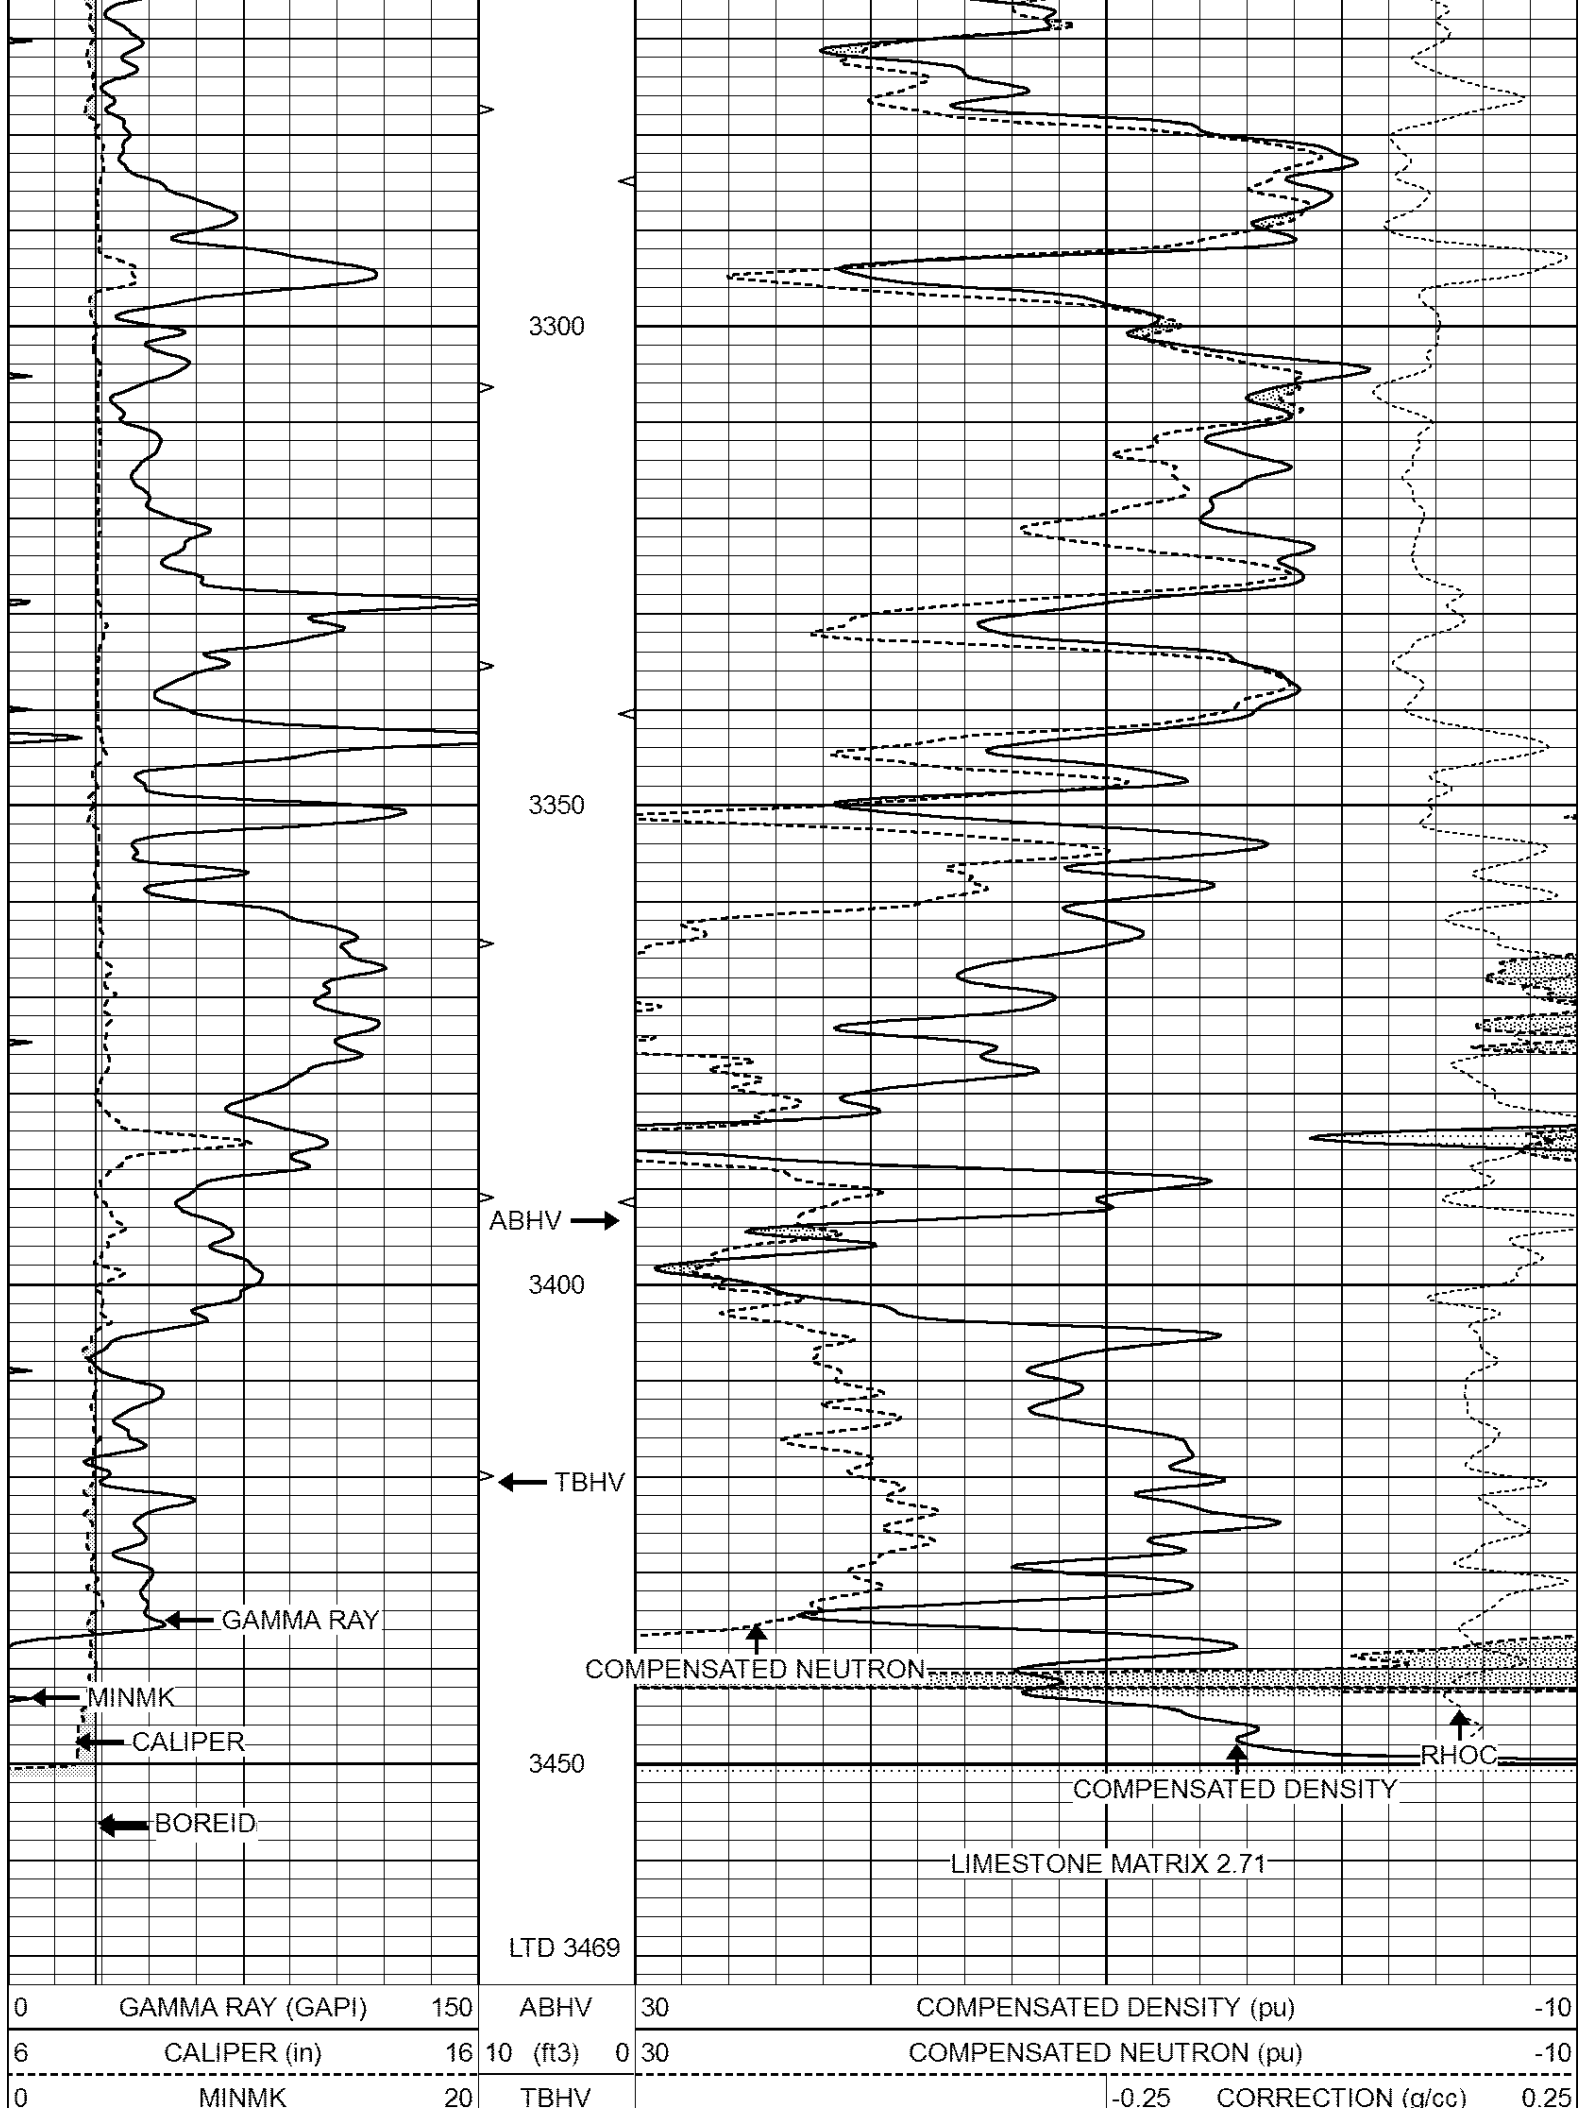


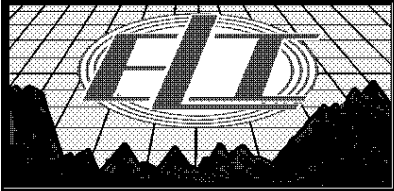


REPEAT SECTION

Database File: 2682ddn.db
Dataset Pathname: pass2.2RP
Presentation Format: den_neu
Dataset Creation: Thu Jun 07 01:06:08 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

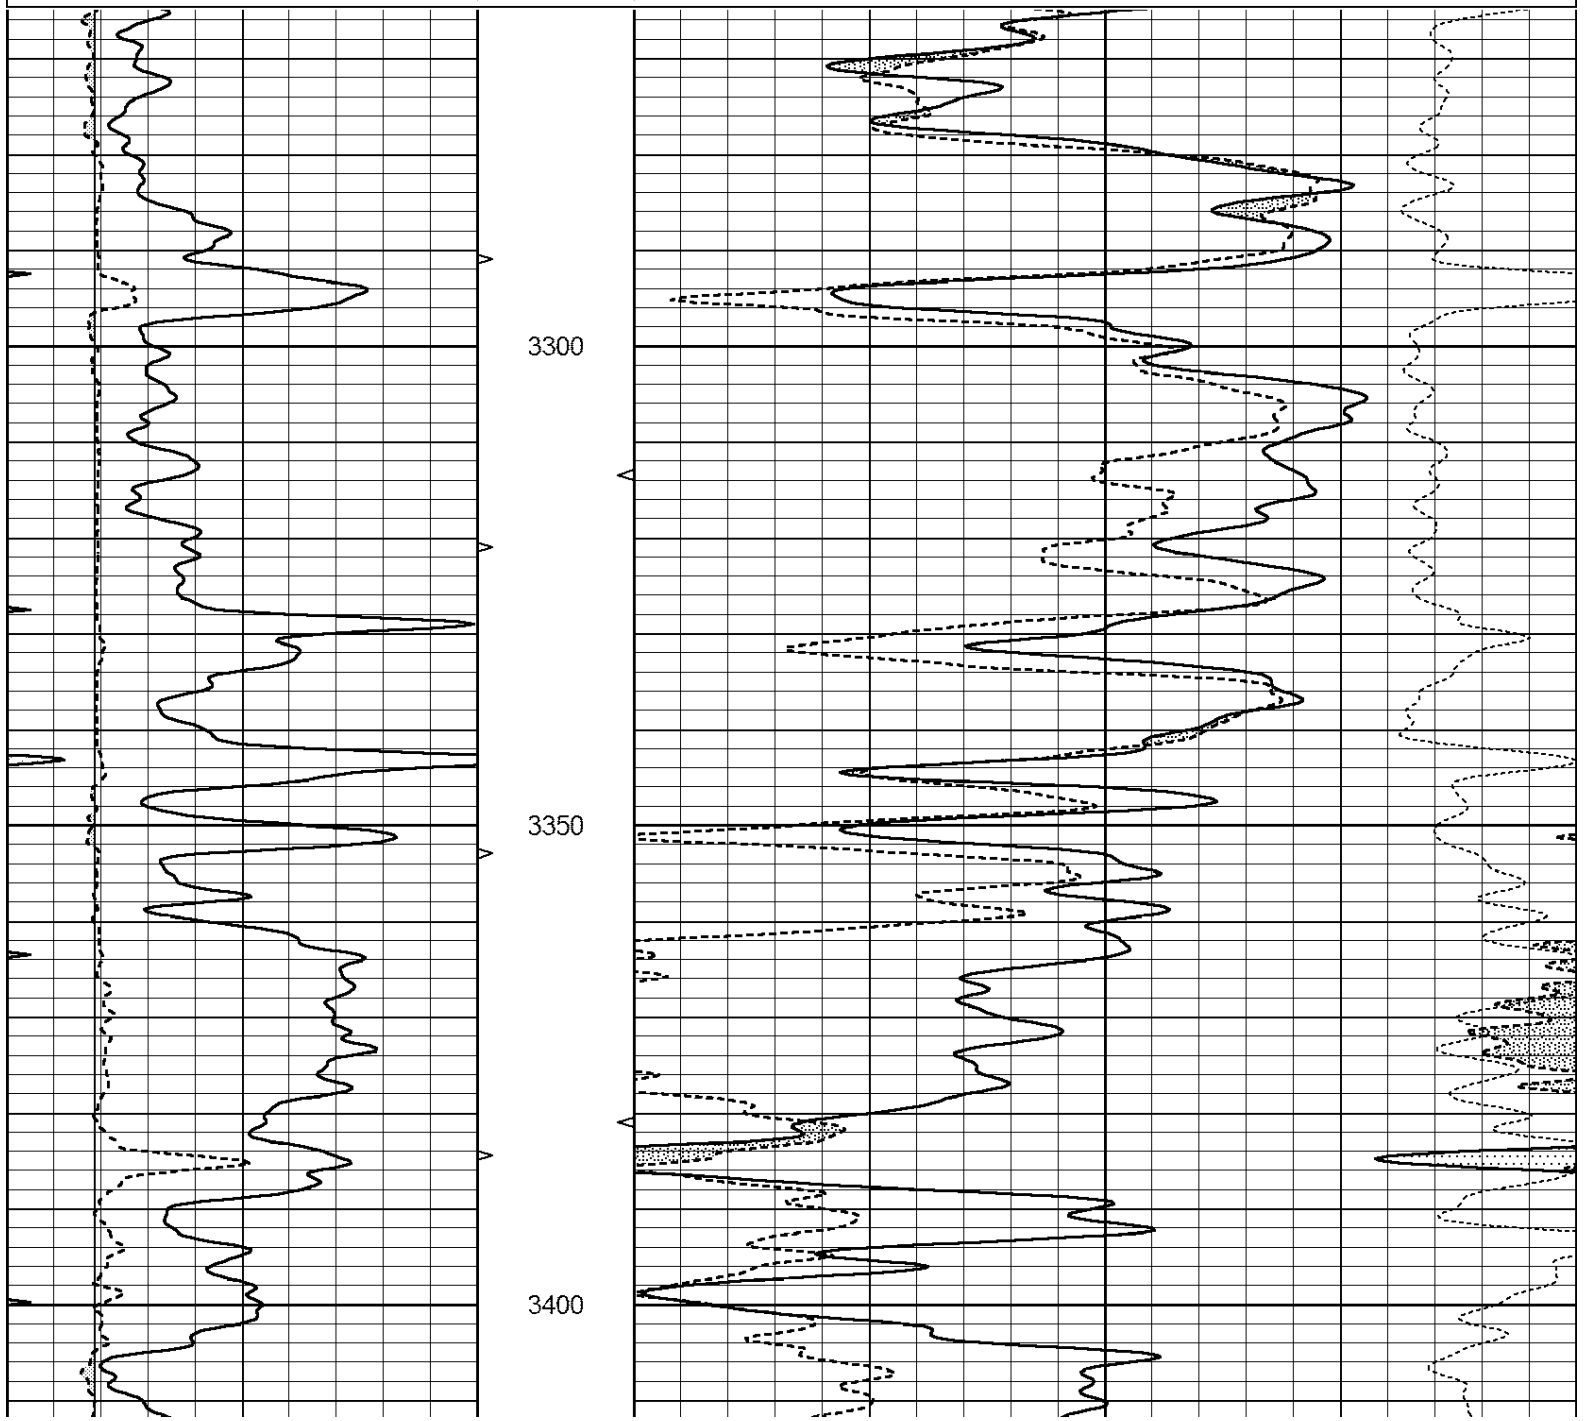

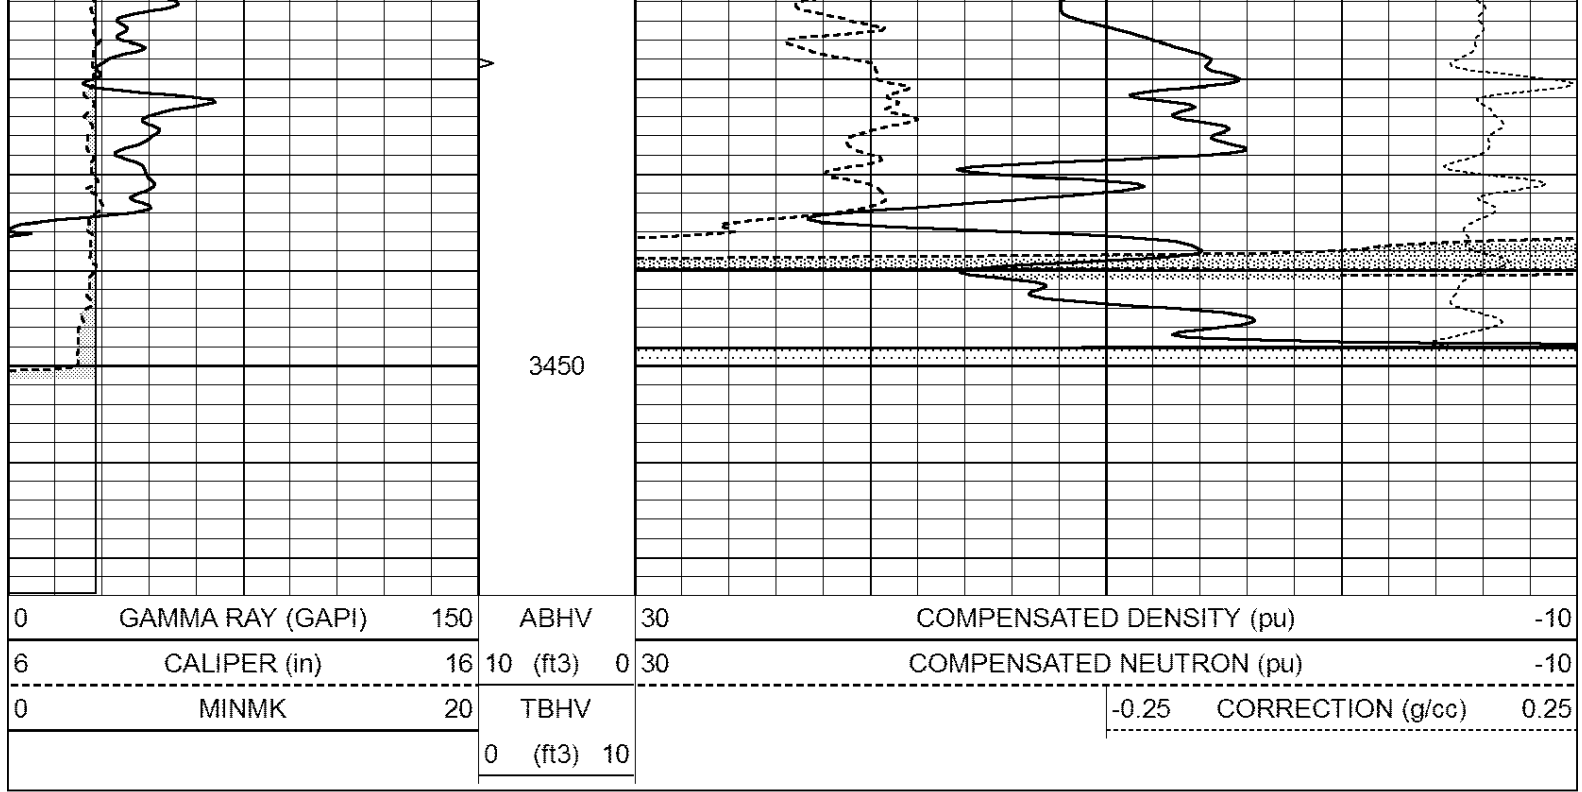

Calibration Report

Database File: pe2.db
 Dataset Pathname: pass2
 Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Mon Aug 21 11:58:18 2017
 Downhole Cal Performed: Mon Aug 21 11:58:21 2017
 After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 002 Model: PRB

Master Calibration			Performed Mon Aug 21 11:56:41 2017					
	Background		Magnesium		Aluminum		Sandstone	
Window 1	833.6		7394.2		2287.3		8111.8	cps
Window 2	768.9		6322.3		1995.6		6800.0	cps
Window 3	621.5		3261.9		1186.4		3380.9	cps
Window 4	184.2		185.7		184.9		184.8	cps
Long Space	0.0		5553.4		1226.6		6031.1	cps
Short Space	1.2		1307.5		903.9		1387.7	cps
Rho			1.7100		2.5900		1.3800	g/cc
Pe			0.0000		2.5700		1.5500	
Rib Angle	: 46.3		Rib Slope	: 1.045	Density/Spine Ratio		: 0.566	
Spine Angle	: 76.3		Spine Slope	: 4.090	Spine Intercept		: -20.7	

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0		0.0		0.0		0.0	cps
Window 2	0.0		0.0		0.0		0.0	cps
Window 3	0.0		0.0		0.0		0.0	cps
Window 4	0.0		0.0		0.0		0.0	cps
Long Space	0.0		0.0		0.0		0.0	cps
Short Space	0.0		0.0		0.0		0.0	cps
Measured Rho			0.0000		0.0000		0.0000	g/cc
Measured Correction			0.0000		0.0000		0.0000	g/cc
Measured Pe					0.0000		0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0		0.0		0.0		0.0	cps
Window 2	0.0		0.0		0.0		0.0	cps
Window 3	0.0		0.0		0.0		0.0	cps
Window 4	0.0		0.0		0.0		0.0	cps
Long Space	0.0		0.0		0.0		0.0	cps
Short Space	0.0		0.0		0.0		0.0	cps
Measured Rho			0.0000		0.0000		0.0000	g/cc
Measured Correction			0.0000		0.0000		0.0000	g/cc
Measured Pe					0.0000		0.0000	

--

Compensated Neutron Calibration Report

Serial Number:	6I
Tool Model:	G

CALIBRATION						
Detector	Readings		Target		Normalization	
Short Space	1.00	cps	1.00	cps	1.0000	
Long Space	1.00	cps	1.00	cps	1.0000	

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space Long Space	cps cps	pu	pu
2)	Short Space Long Space	cps cps	pu	
3)	Short Space Long Space	cps cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space Long Space	cps cps	pu	pu
2)	Short Space Long Space	cps cps	pu	pu
3)	Short Space Long Space	cps cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Aug 21 11:59:01 2017	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5500	GAPI/cps