

MICRO LOG

Company	TRANS PACIFIC OIL CORP.		
Well	J. WILLIAM UNIT #1-29		
Field	WILDCAT		
County	LOGAN	State	KANSAS
Location:	AP1 # : 15-109-21547-00-00		Other Services CDL/CNL/DIL
SEC 29 TWP 14S RGE 32W		Elevation	
Permanent Datum	GROUND LEVEL	Elevation	2758
Log Measured From	KELLY BUSHING 12' A.G.L.	K.B. 2770	D.F. 2768
Drilling Measured From	KELLY BUSHING	G.L. 2758	
Date	05/18/18		
Run Number	TWO		
Depth Driller	4490		
Depth Logger	4491		
Bottom Logged Interval	4490		
Top Log Interval	3250		
Casing Driller	8 5/8" @ 272		
Casing Logger	272		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.661		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.50@76		
Rmt @ Meas. Temp	.37@76		
Rmc @ Meas. Temp	.60@76		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.32@120		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	120F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	NICK HIXON		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


SOUTH OF OAKLEY TO GOLD RD. WEST 2 MILES TO BIG TANKS
GO NORTH ON EAST SIDE OF TANKS

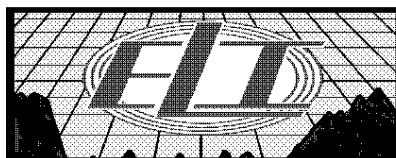


MAIN PASS

Database File: 2678pe.db
Dataset Pathname: pass5.1
Presentation Format: _micro
Dataset Creation: Fri May 18 06:48:24 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

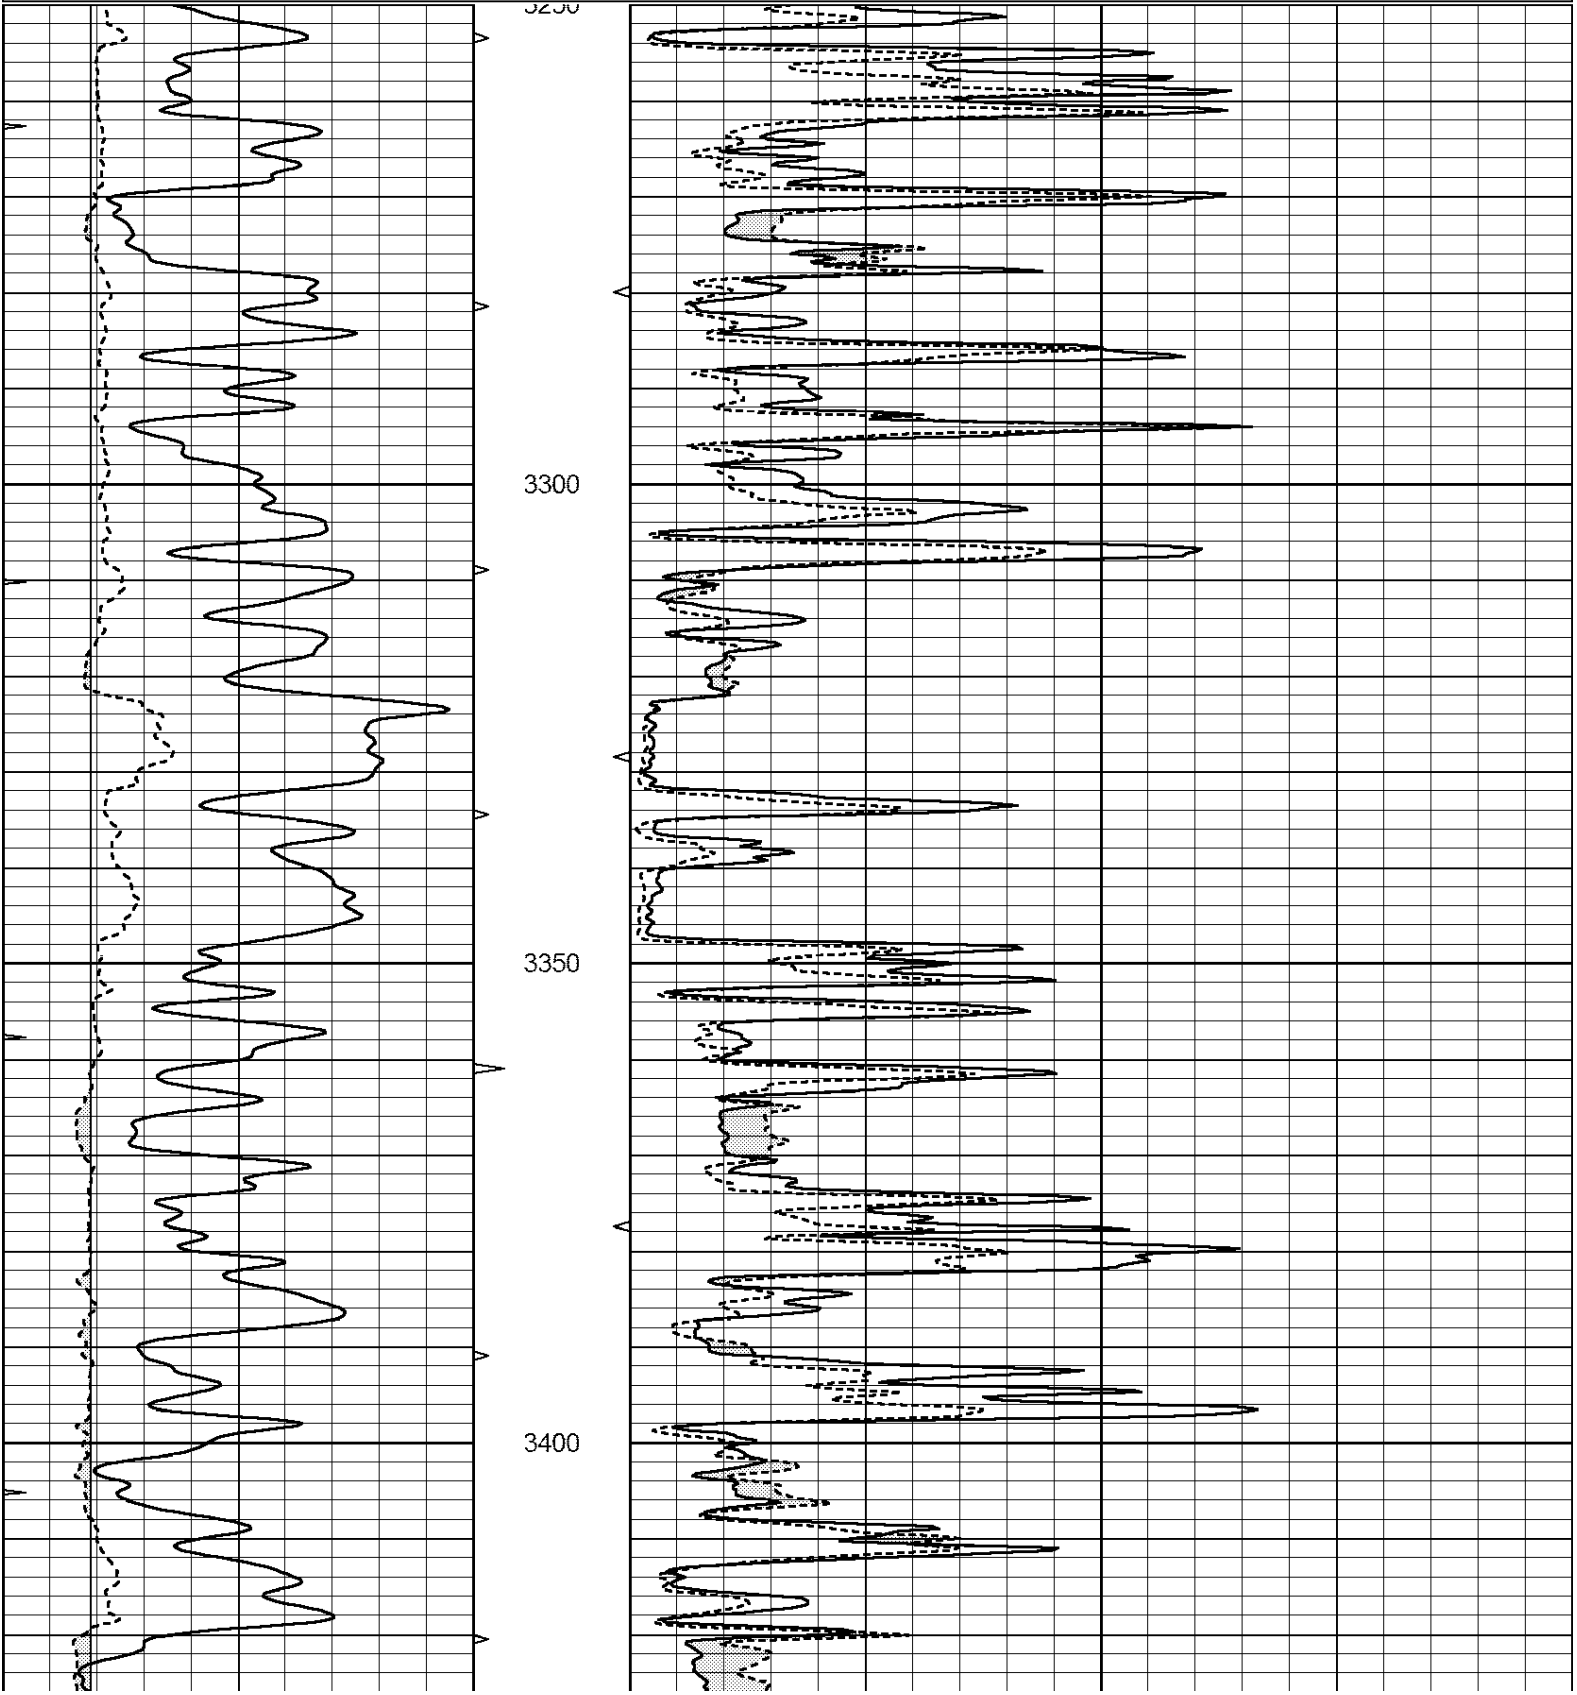

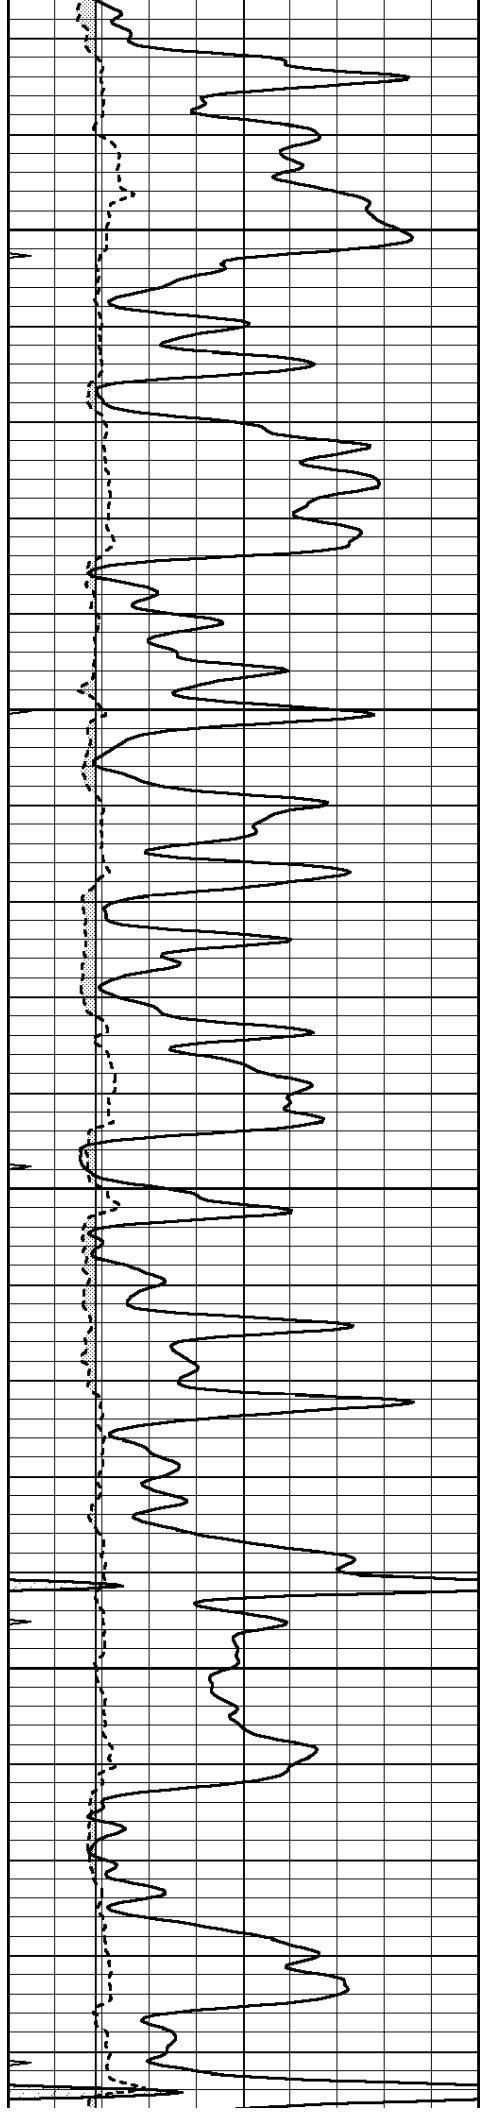




3450


3500

3550

3600

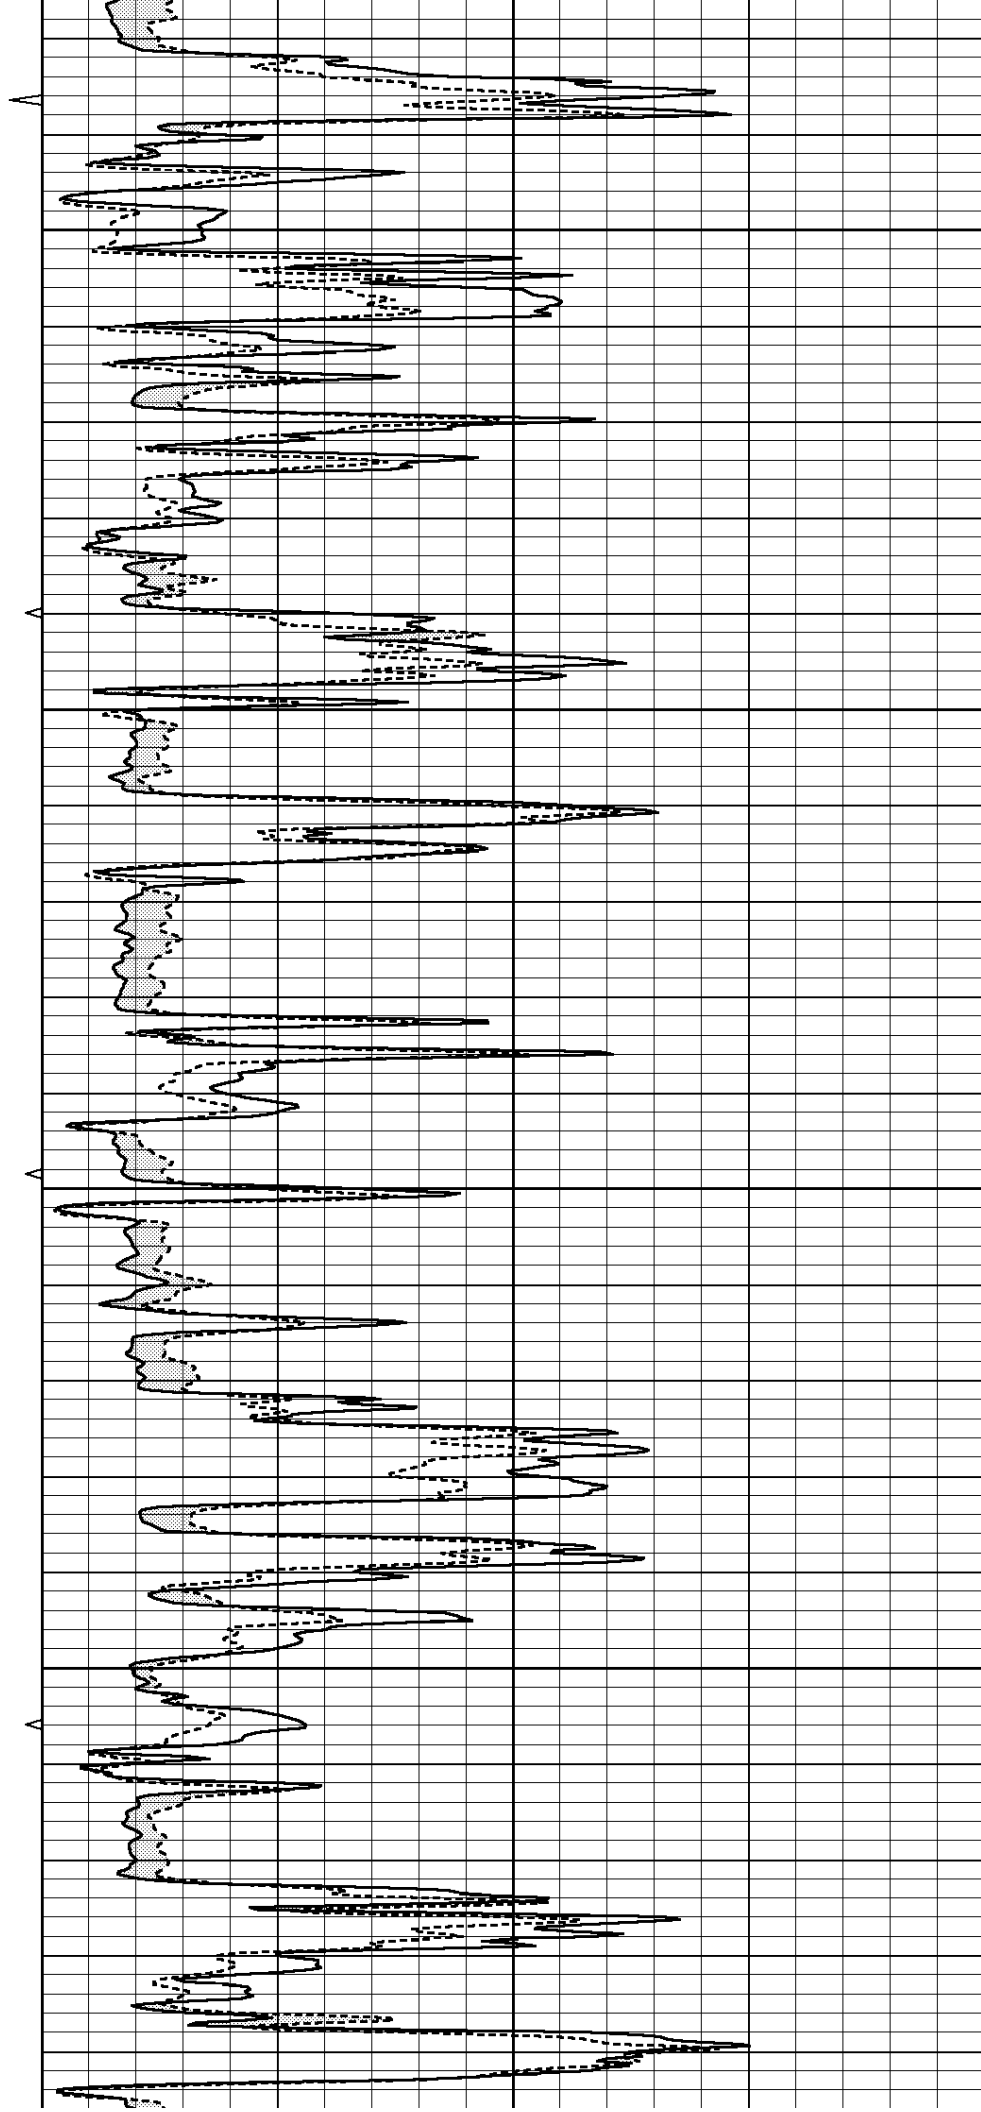

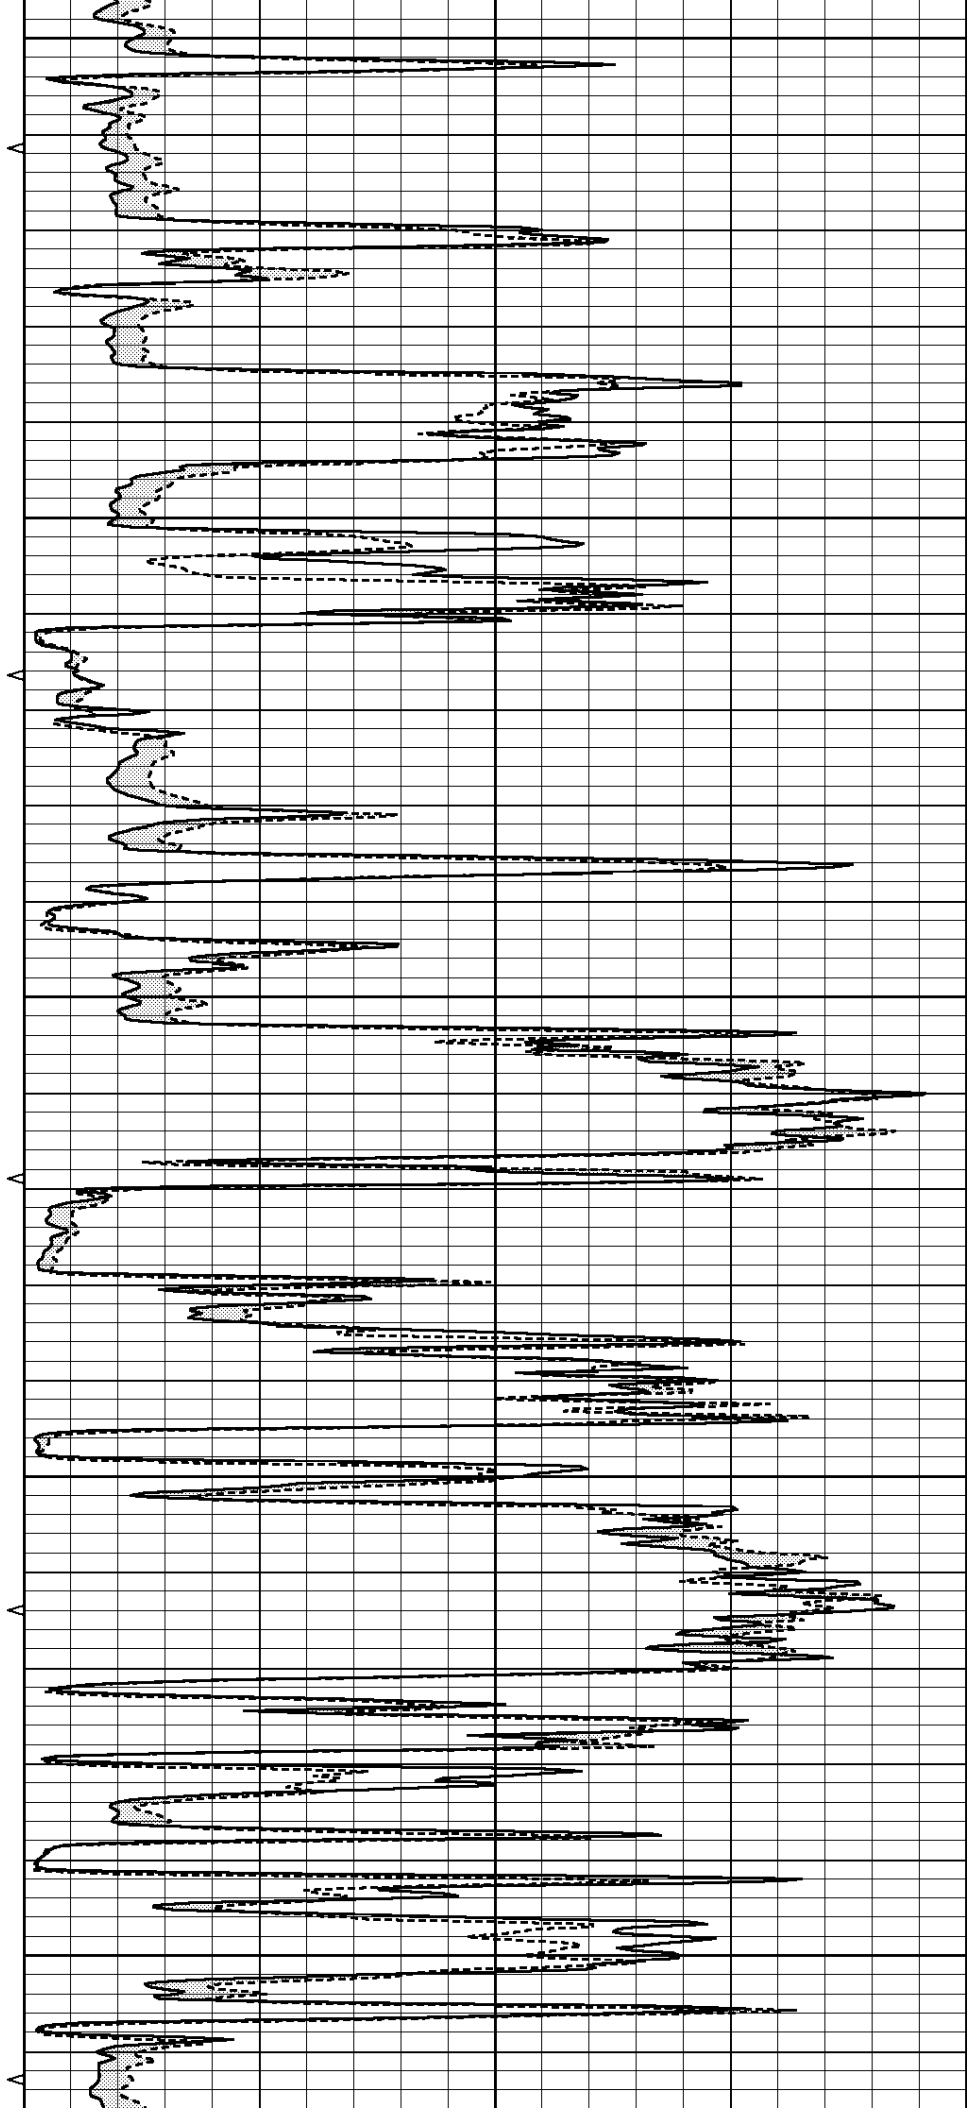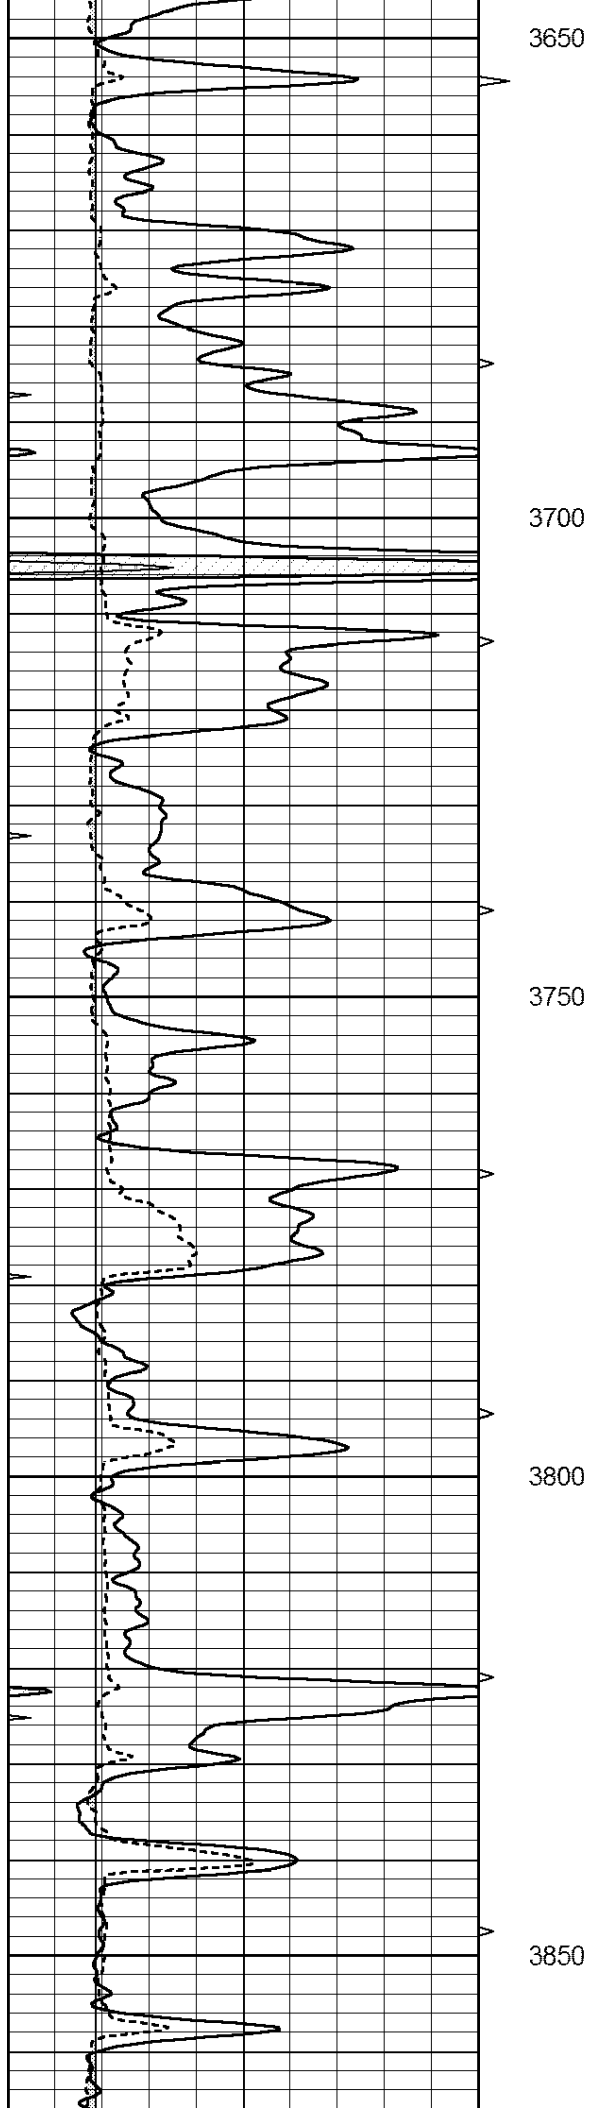

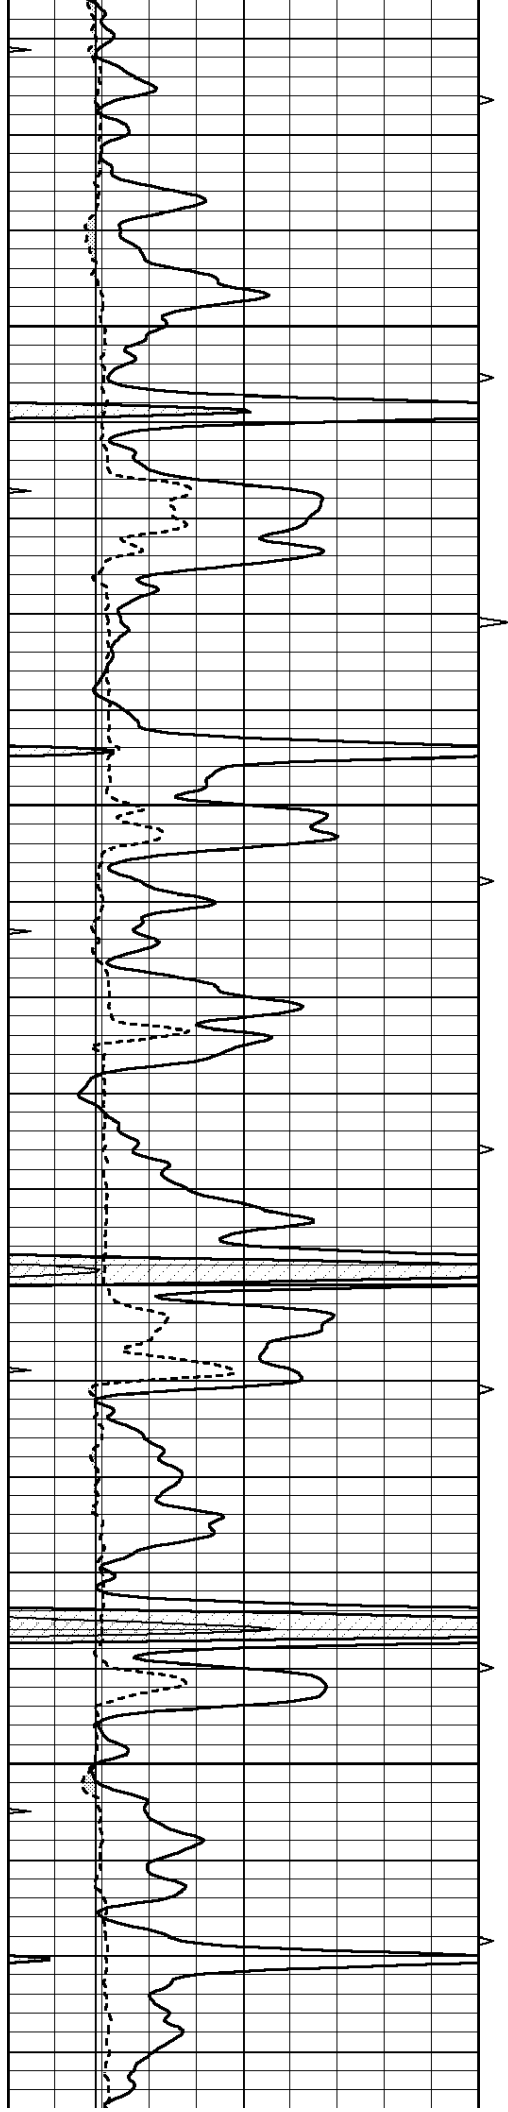



3900

3950

4000

4050

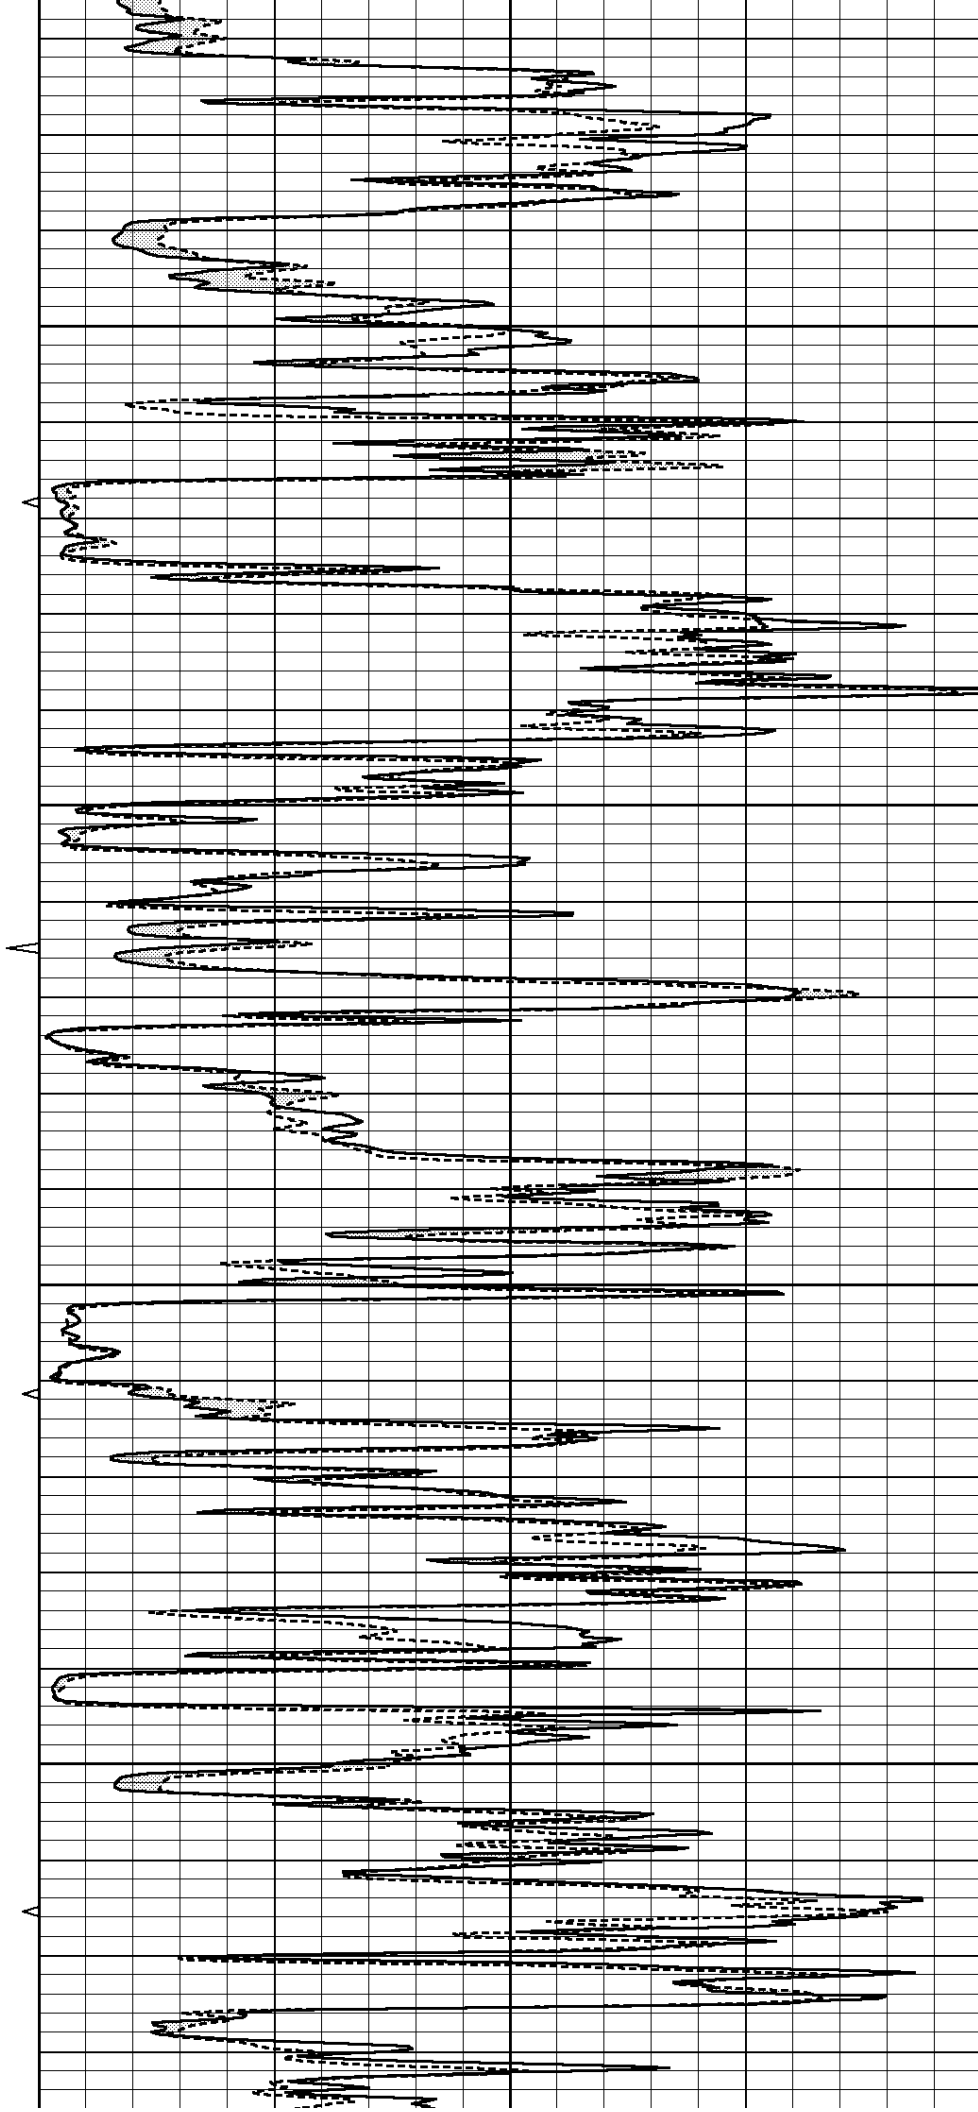

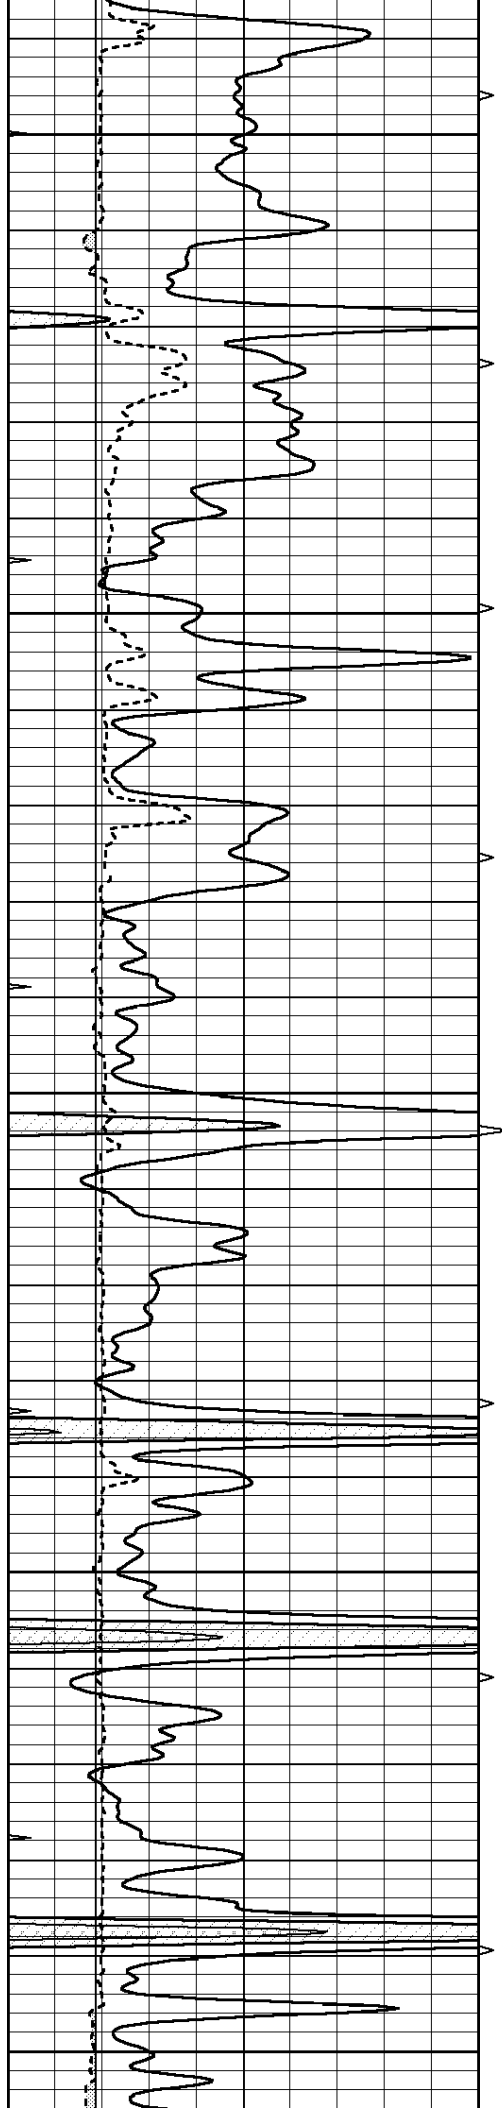


4100


4150


4200

4250

4300

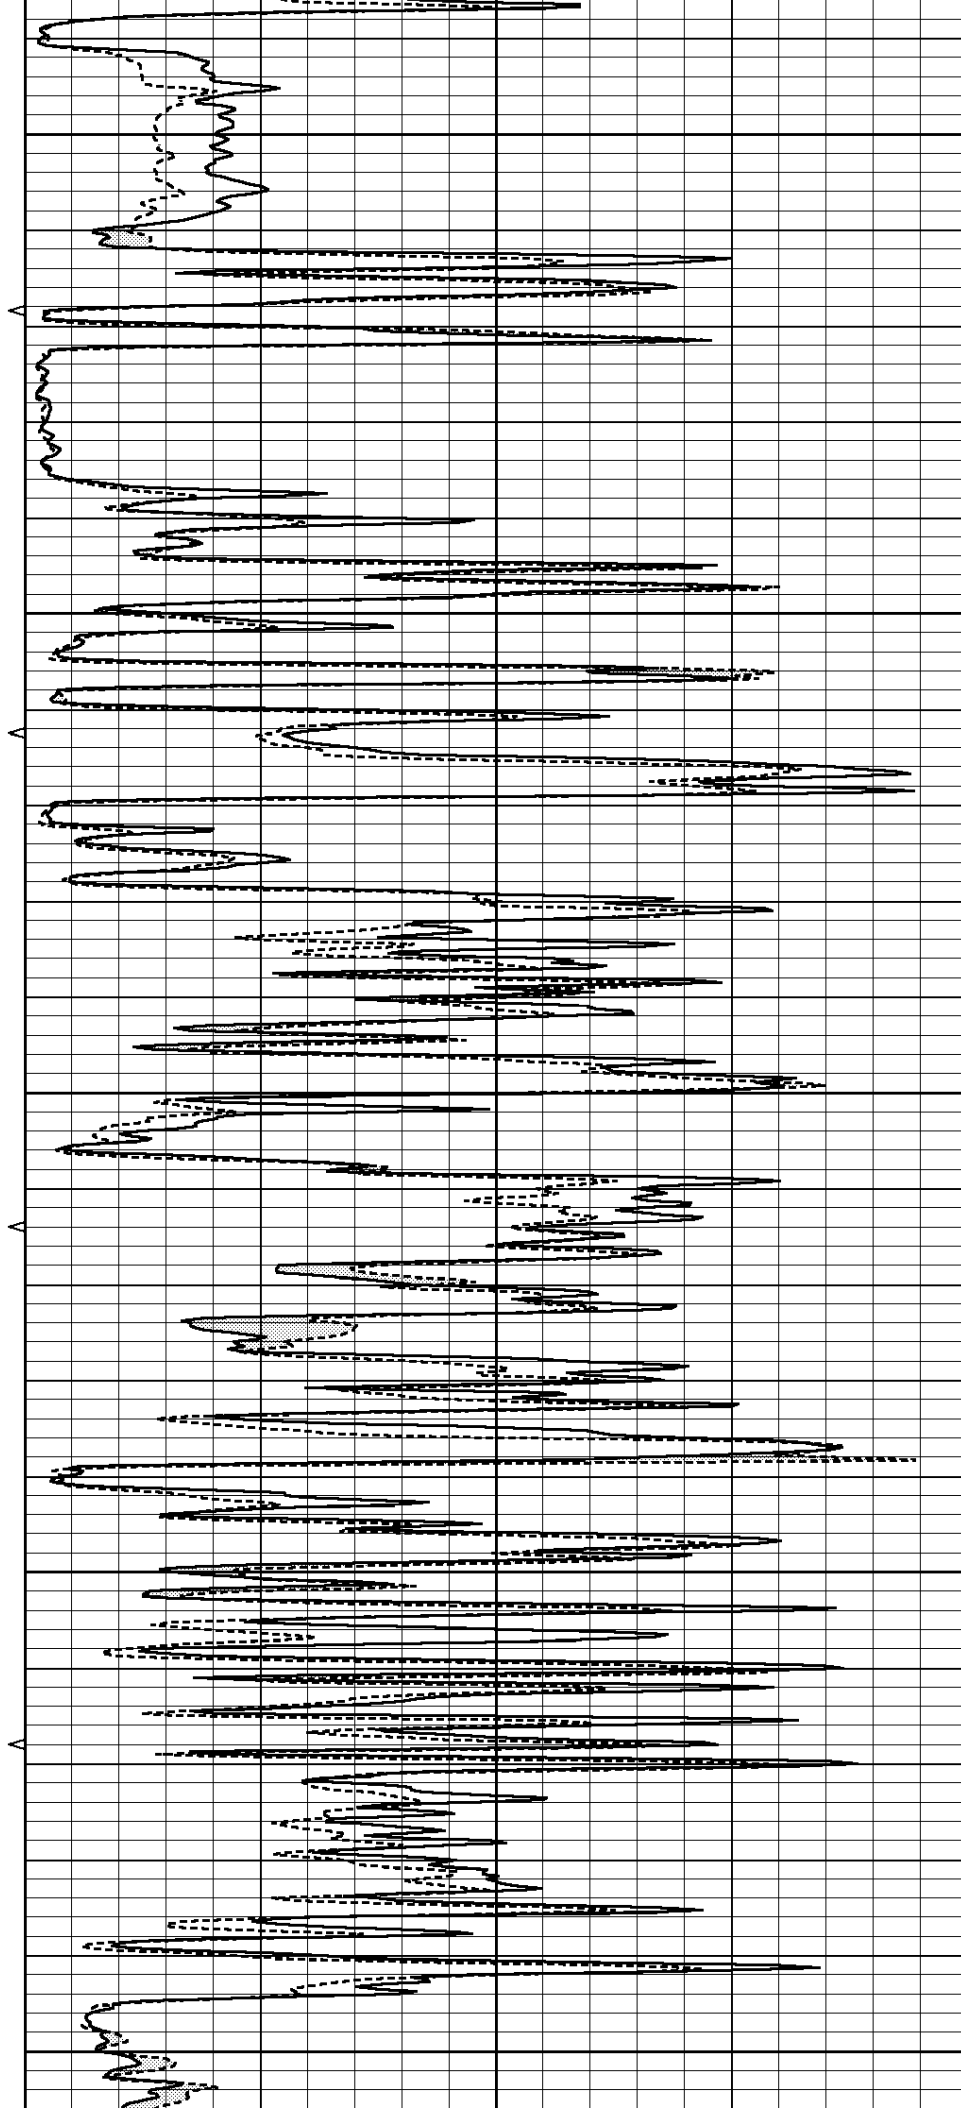

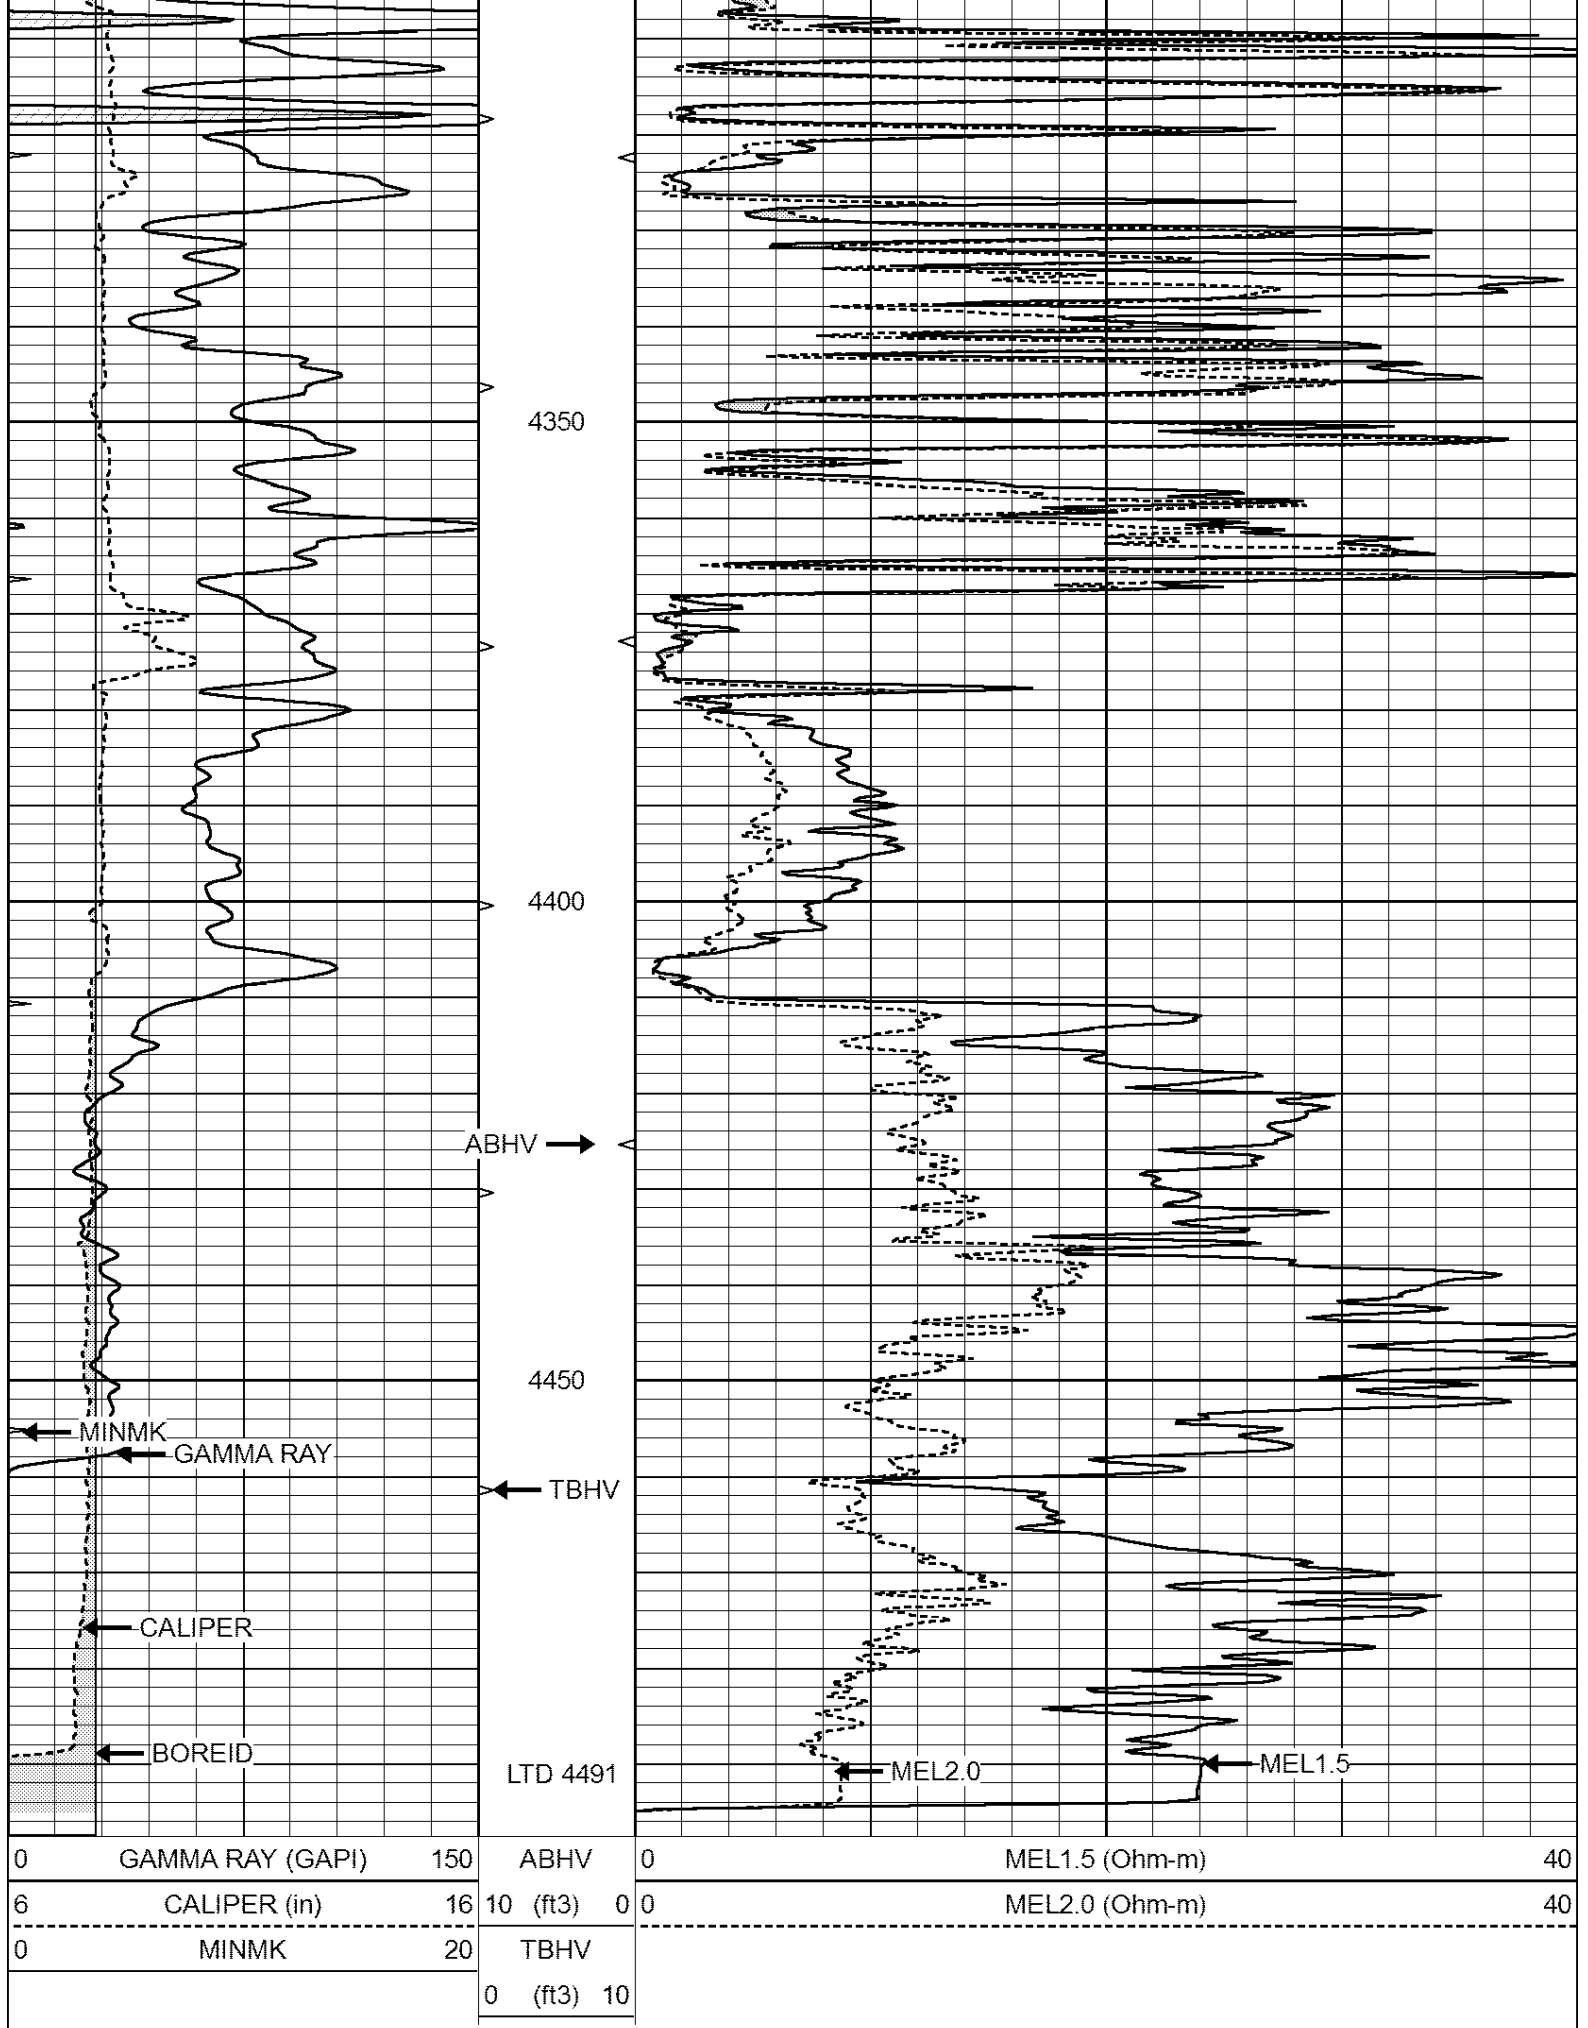


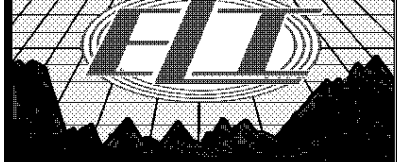


REPEAT SECTION

Database File: 2678pe.db
Dataset Pathname: pass4.1
Presentation Format: _micro
Dataset Creation: Fri May 18 06:36:44 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

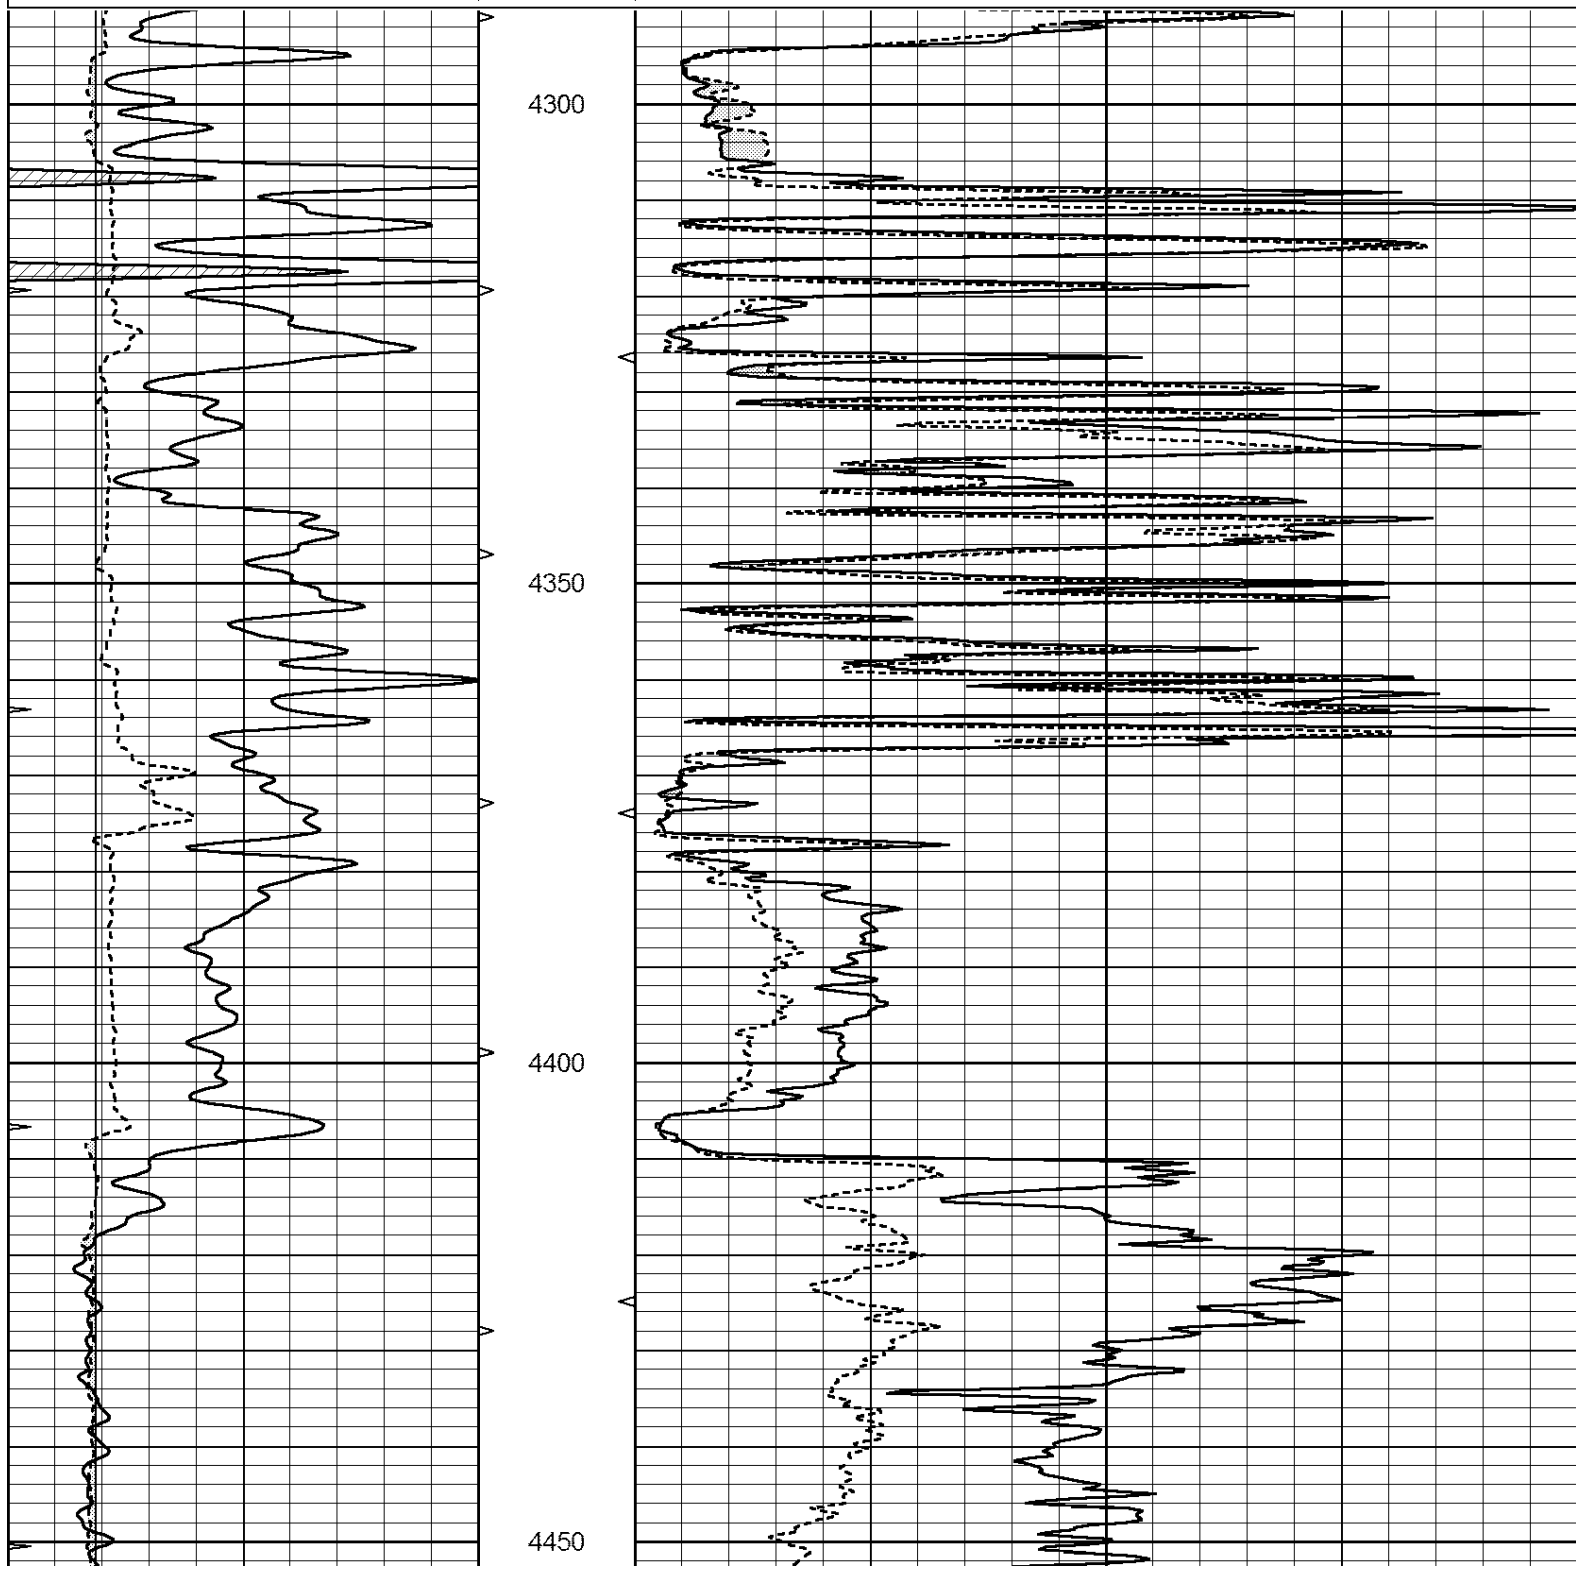

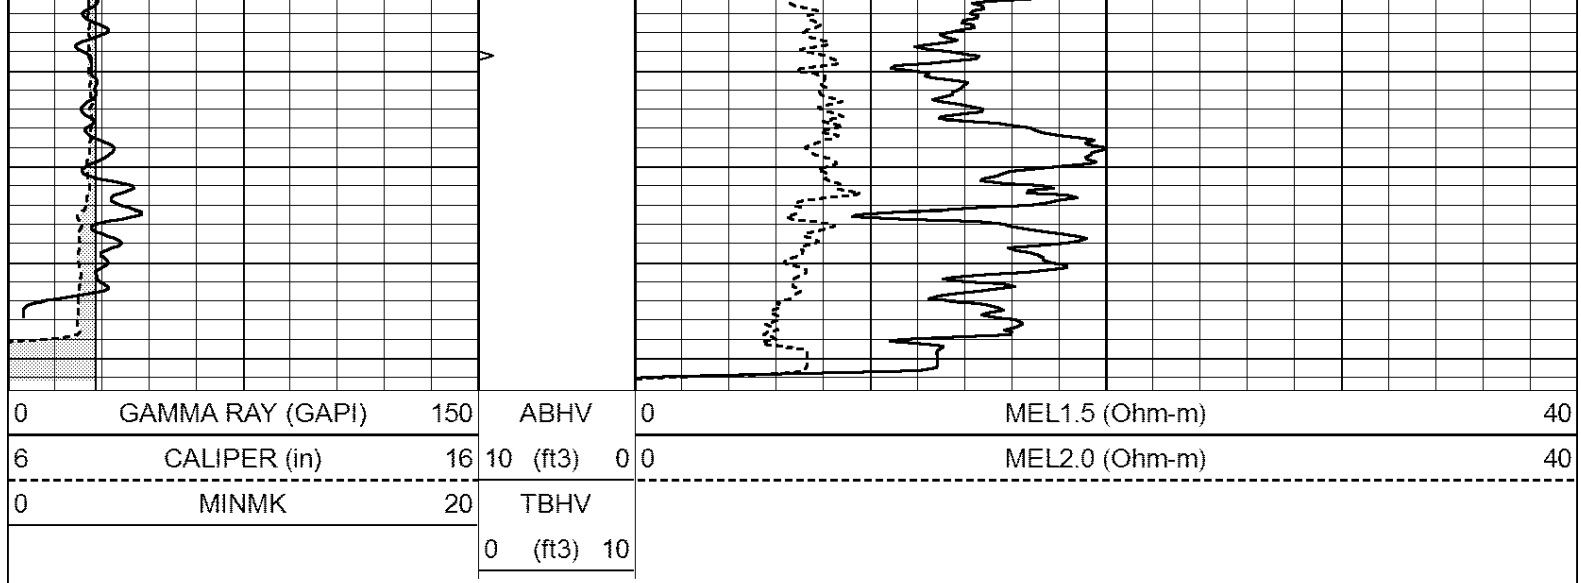

Calibration Report

Database File: 2678pe.db
 Dataset Pathname: pass4.1
 Dataset Creation: Fri May 18 06:36:44 2018 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Wed May 09 00:54:36 2018

Caliper Calibration: Gain=26.621 Offset=0.453
 References Low Cal High Cal
 7.000 14.000
 Readings 0.217 0.478

1.5" Calibration: Gain=31.075 Offset=-0.400
 References Low Cal High Cal
 0.000 20.000
 Readings 0.004 1.196

2" Calibration: Gain=43.000 Offset=-1.000
 References Low Cal High Cal
 0.000 20.000
 Readings 0.006 0.913

Gamma Ray Calibration Report

Serial Number: #8
 Tool Model: OPEN
 Performed: Tue May 15 00:49:07 2018
 Calibrator Value: 150.0 GAPI
 Background Reading: 0.0 cps
 Calibrator Reading: 175.0 cps
 Sensitivity: 0.9000 GAPI/cps