



COMPENSATED DENSITY/NEUTRON PE/LOG

Company	CMX INC.	Company	CMX INC.
Well	BLACK KETTLE #1-18	Well	BLACK KETTLE #1-18
Field	WILDCAT	Field	WILDCAT
County	SCOTT	County	SCOTT
State	KANSAS	State	KANSAS
Location:	API # : 15-171-21228-00-00	Other Services	DIL/MEL SONIC
Permanent Datum	SEC 18 TWP 16S RGE 31W	Elevation	
Log Measured From	1840' FNL & 1436' FEL		
Drilling Measured From	GROUND LEVEL Elevation 2929 KELLY BUSHING 8' A.G.L. KELLY BUSHING		
Date	07/24/18		
Run Number	ONE		
Depth Driller	4675		
Depth Logger	4668		
Bottom Logged Interval	4644		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 309		
Casing Logger	309		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2/5.1		
pH / Fluid Loss	8.0/11.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.0@77		
Rmt @ Meas. Temp	.75@77		
Rmc @ Meas. Temp	1.2@77		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.63@122		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	122F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	MIKE ENGELBRECHT		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


8 N OF SCOTT CITY ON HWY 83, 6 E ON HWY 4,
4 N ON RODEO RD., 1/2 E,
1/2 N, E INTO.


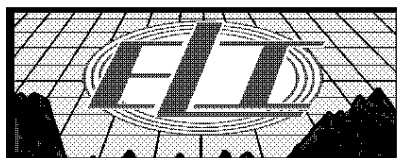



MAIN PASS


Database File: 2696pe.db
Dataset Pathname: pass5.1
Presentation Format: _ldt_neu
Dataset Creation: Tue Jul 24 09:43:23 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3)	10		

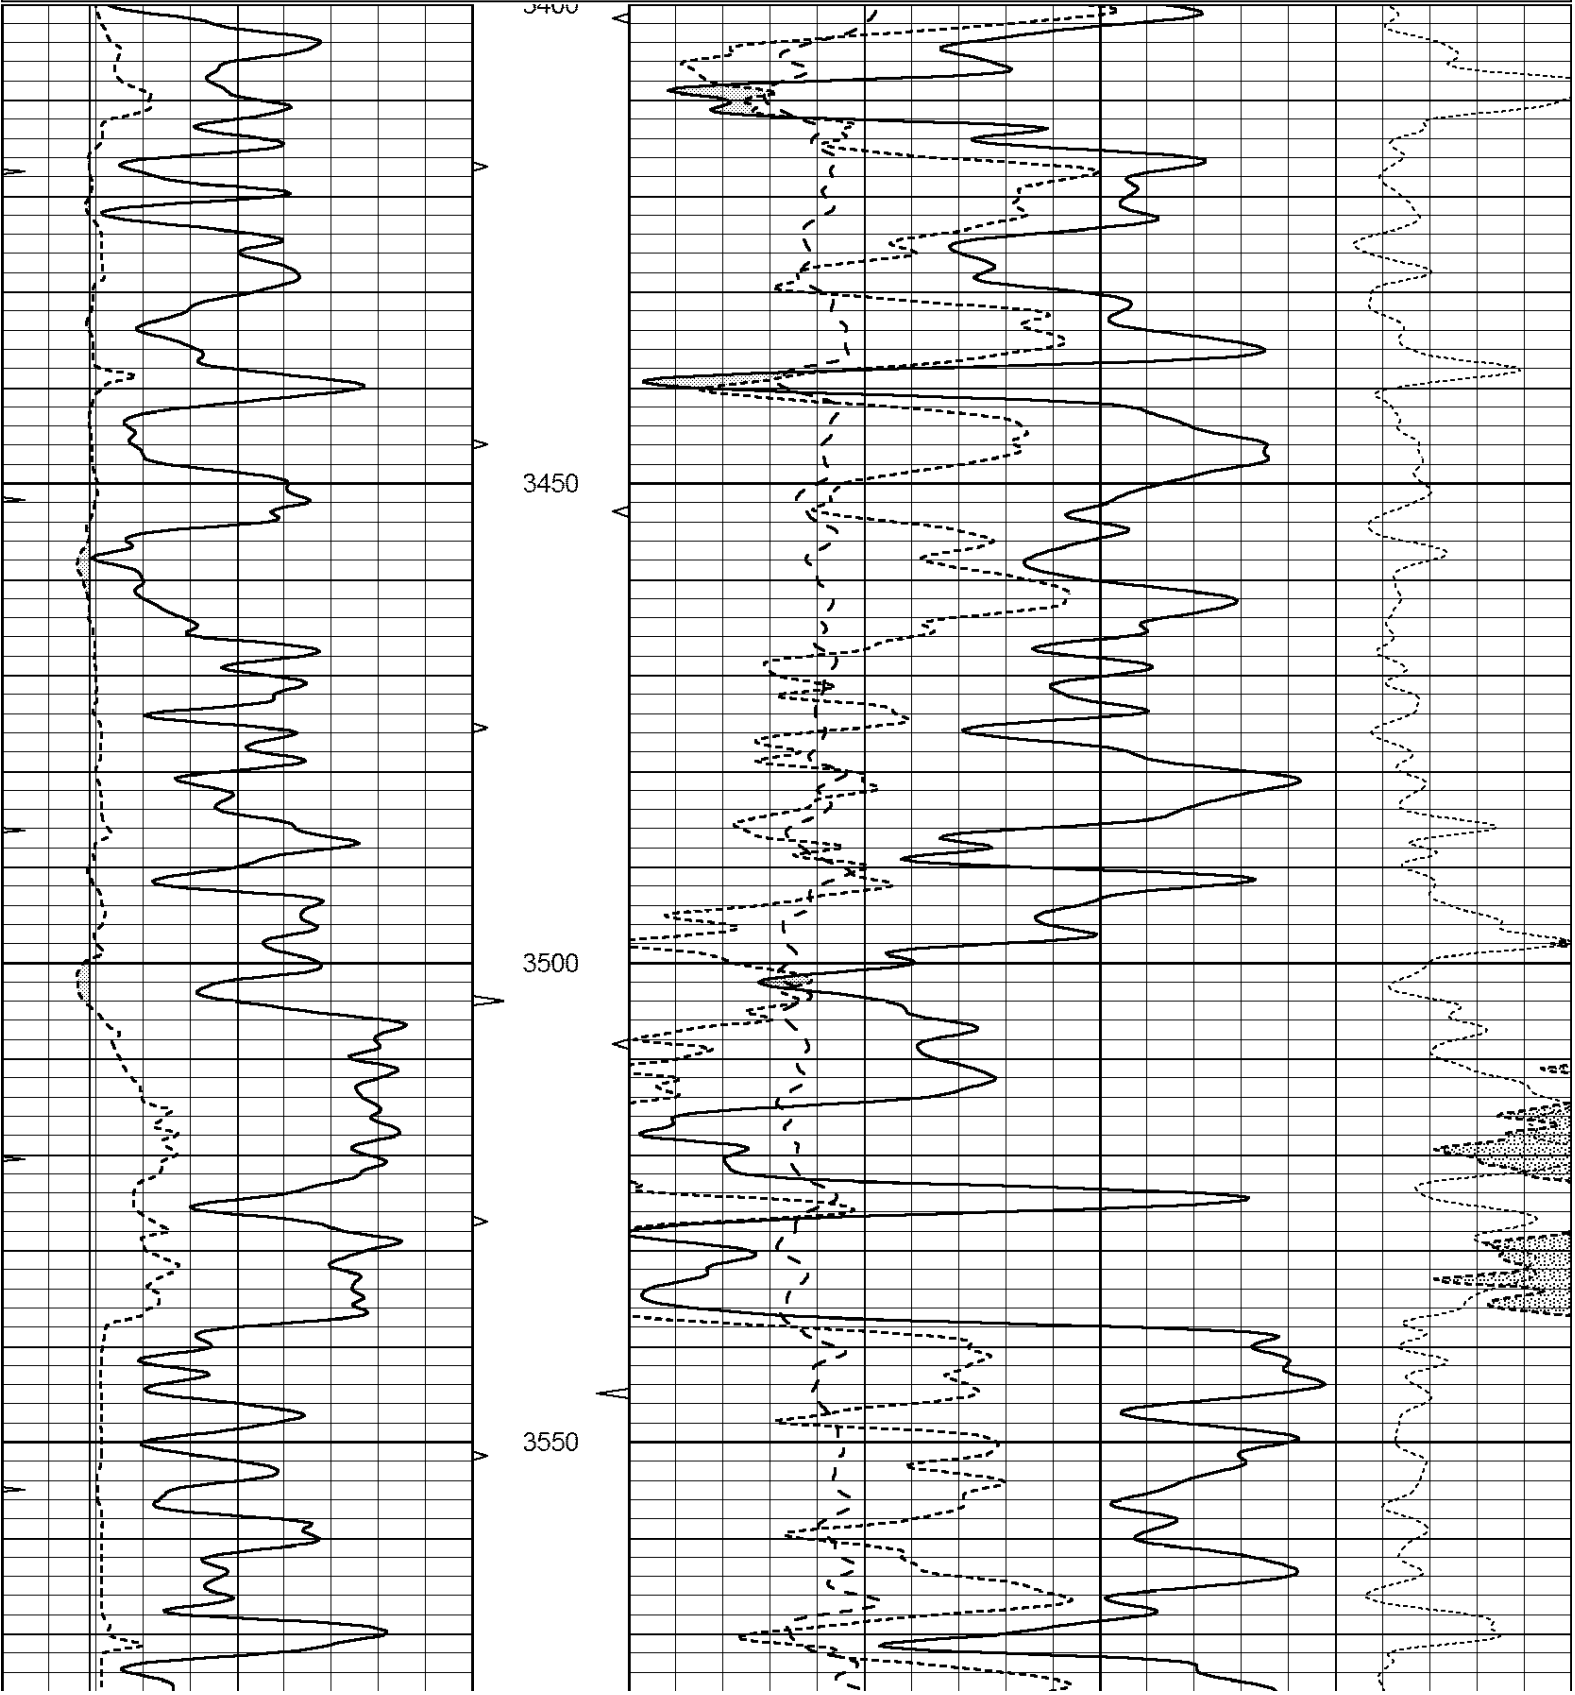

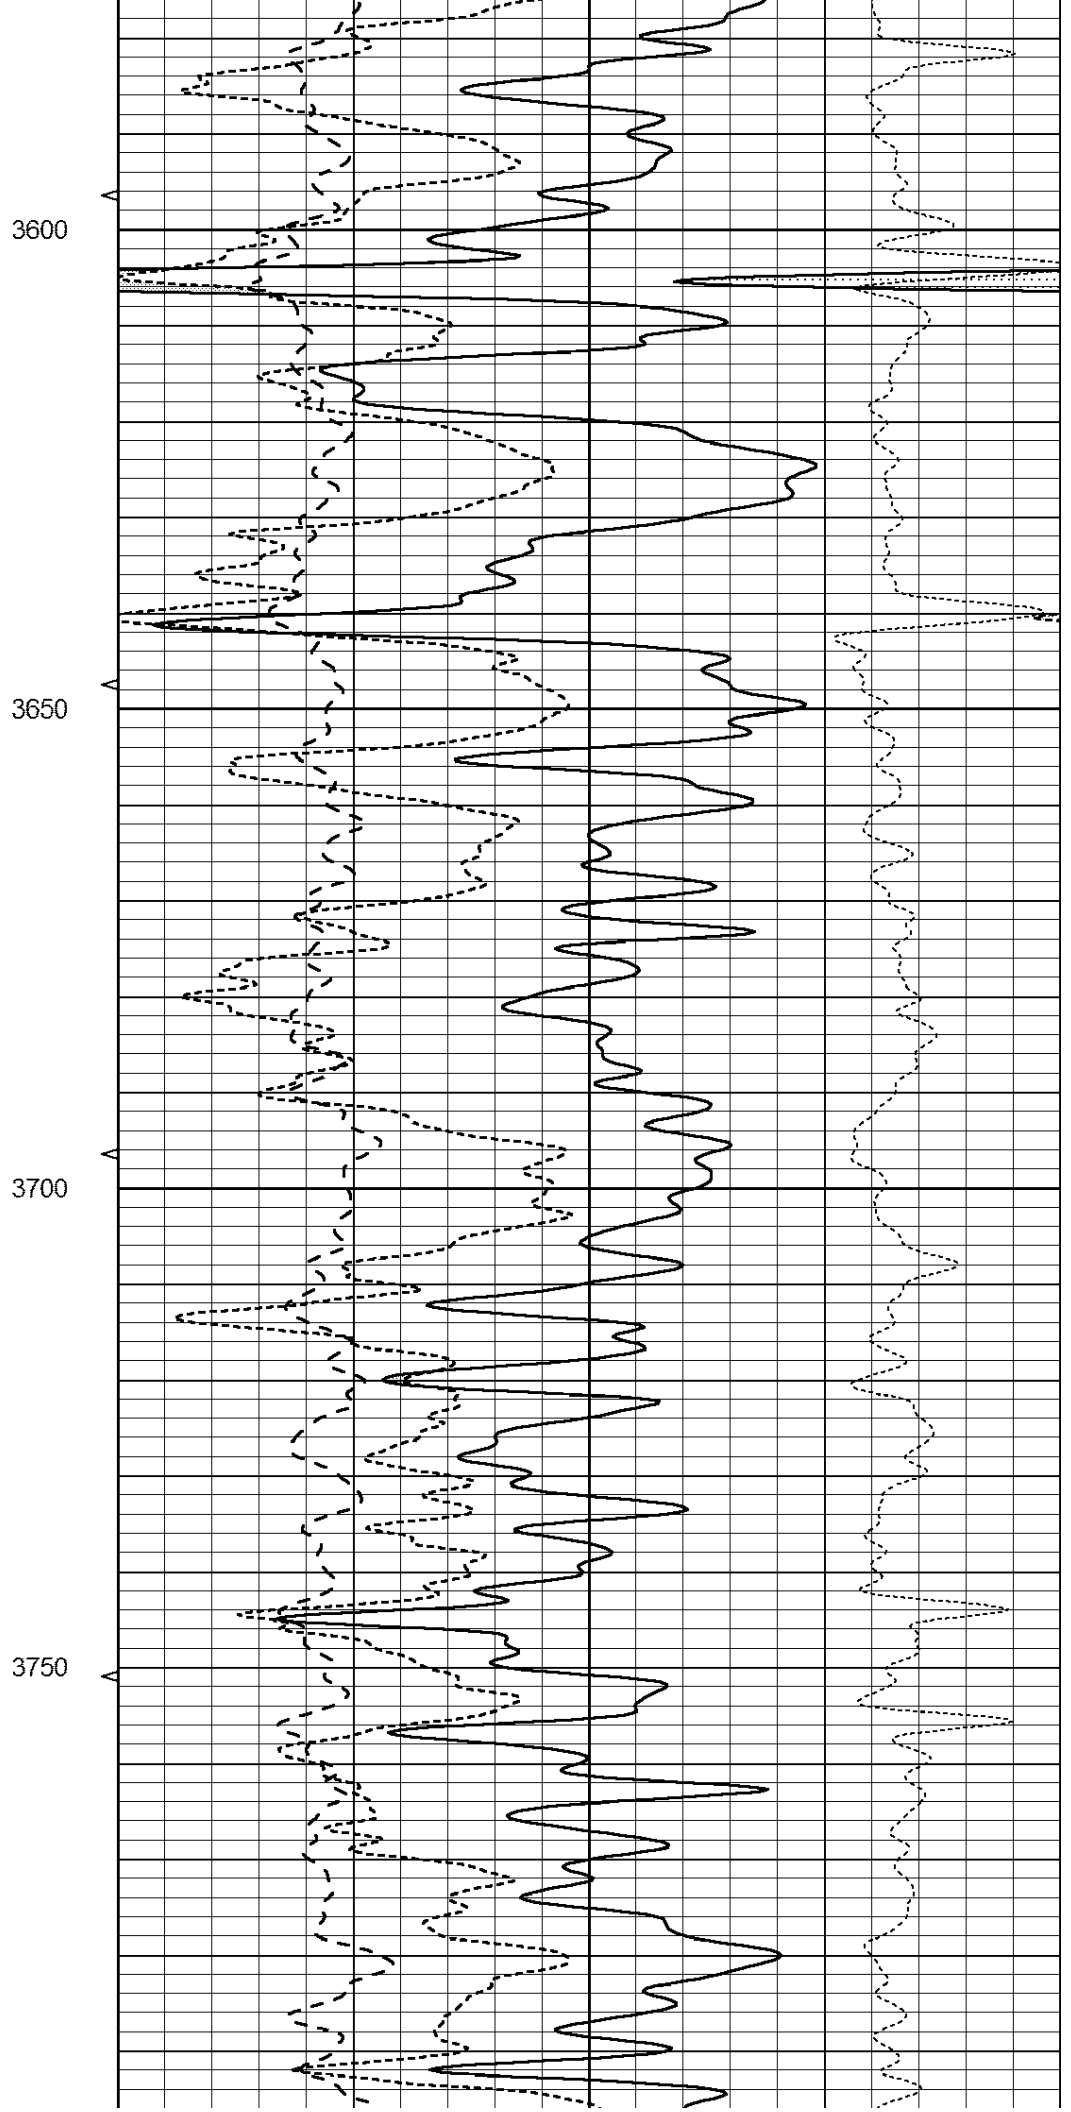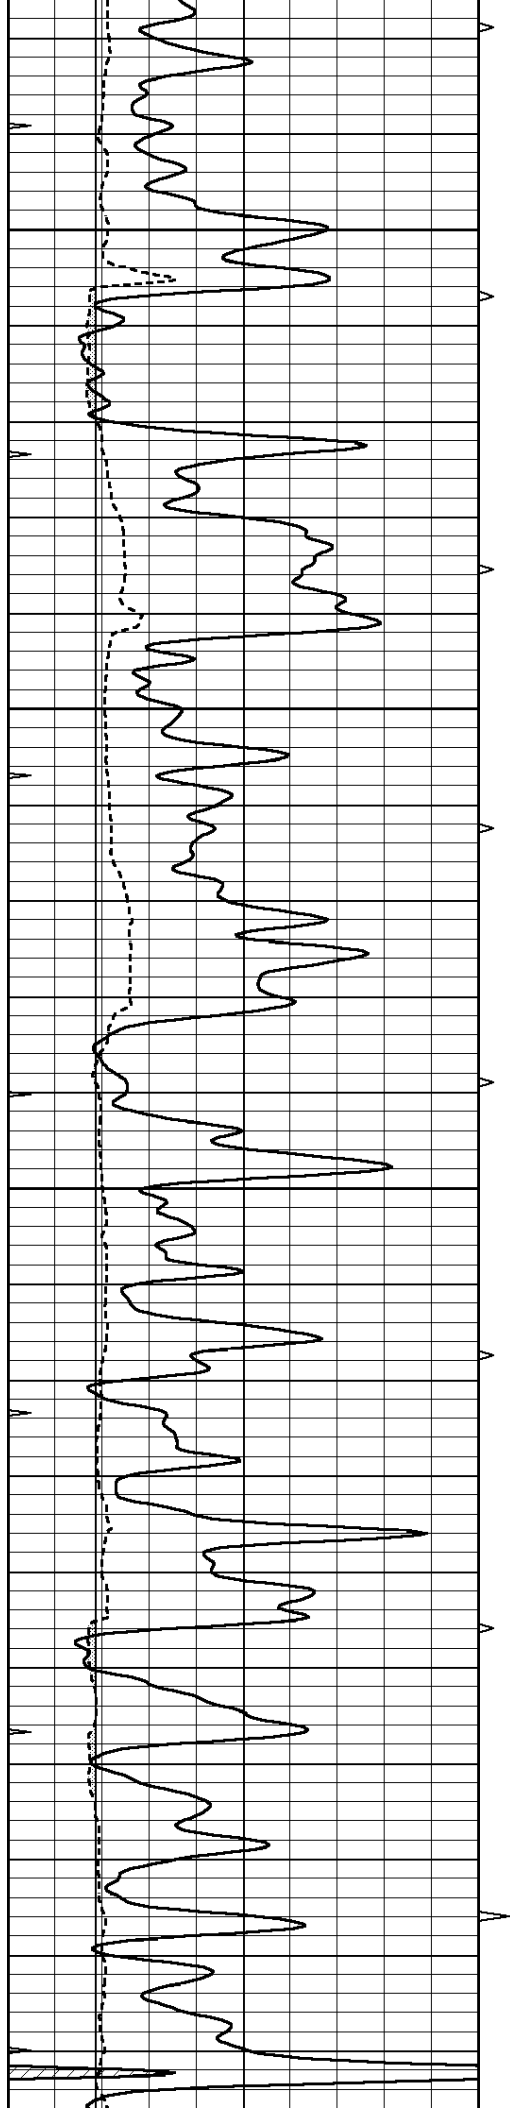

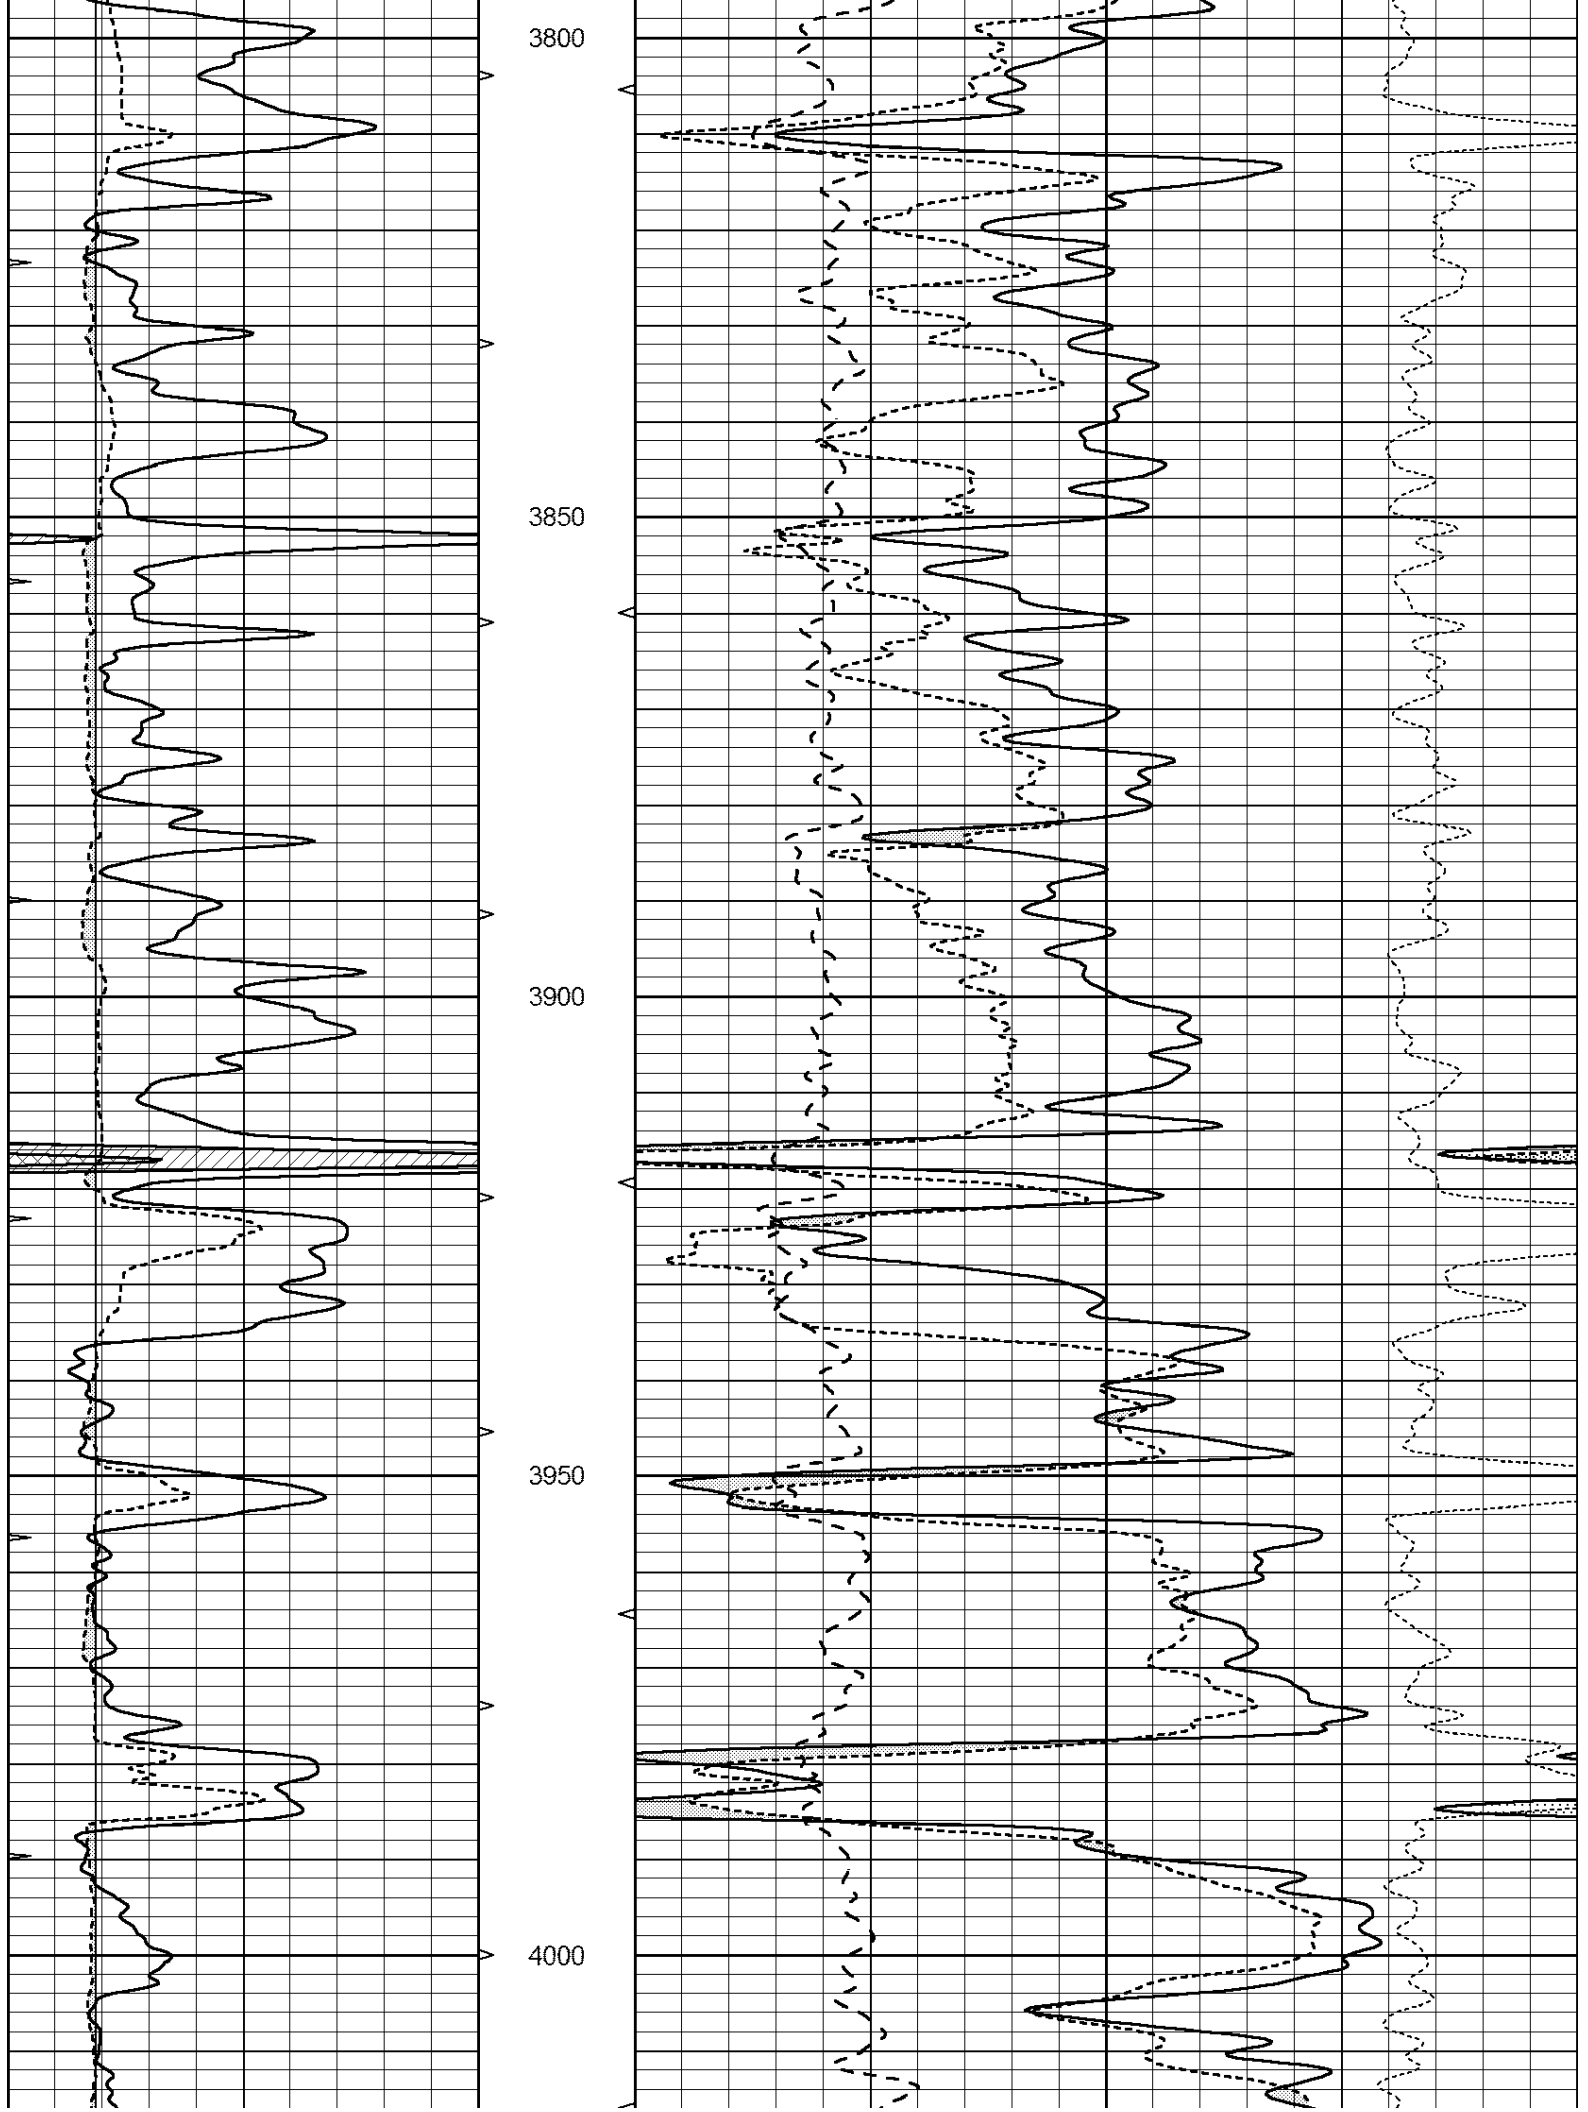

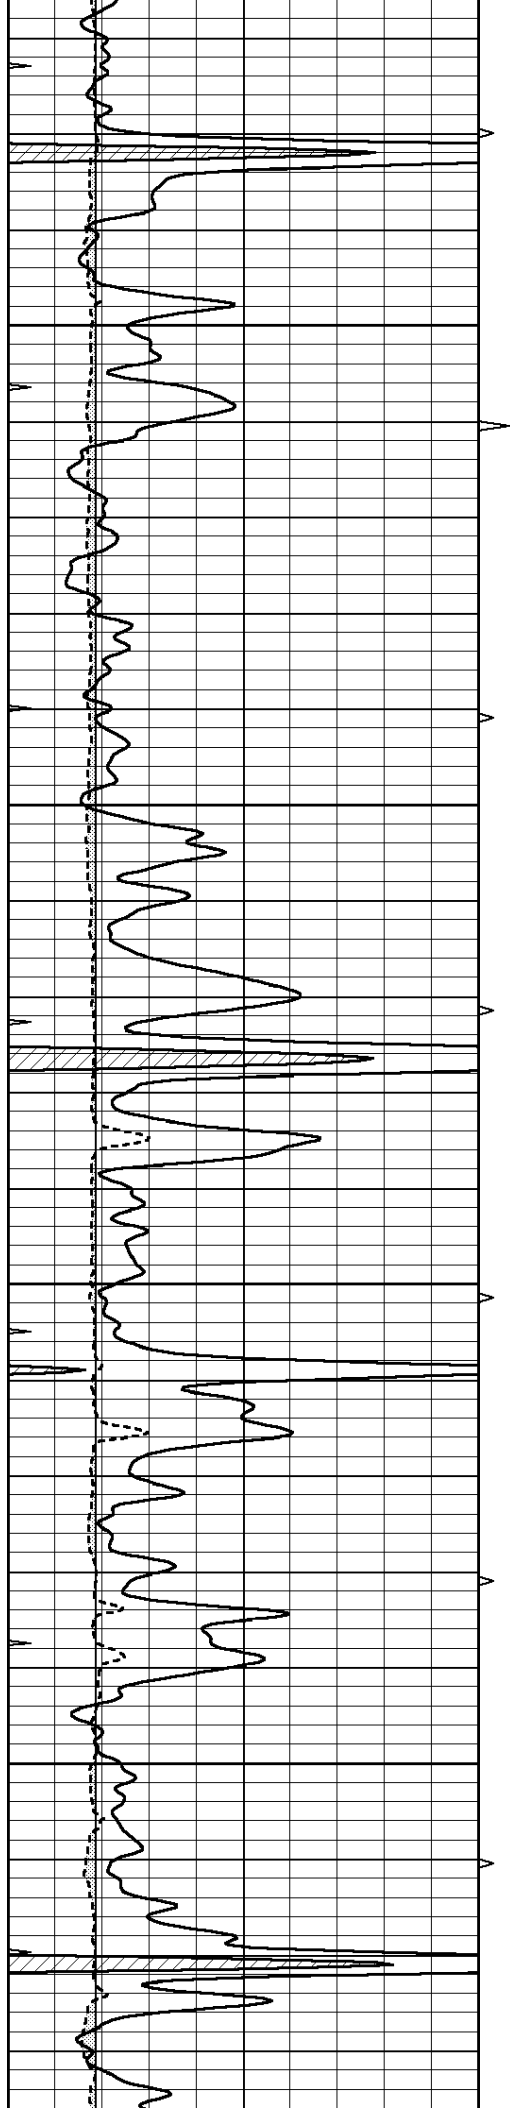




4050


4100

4150


4200

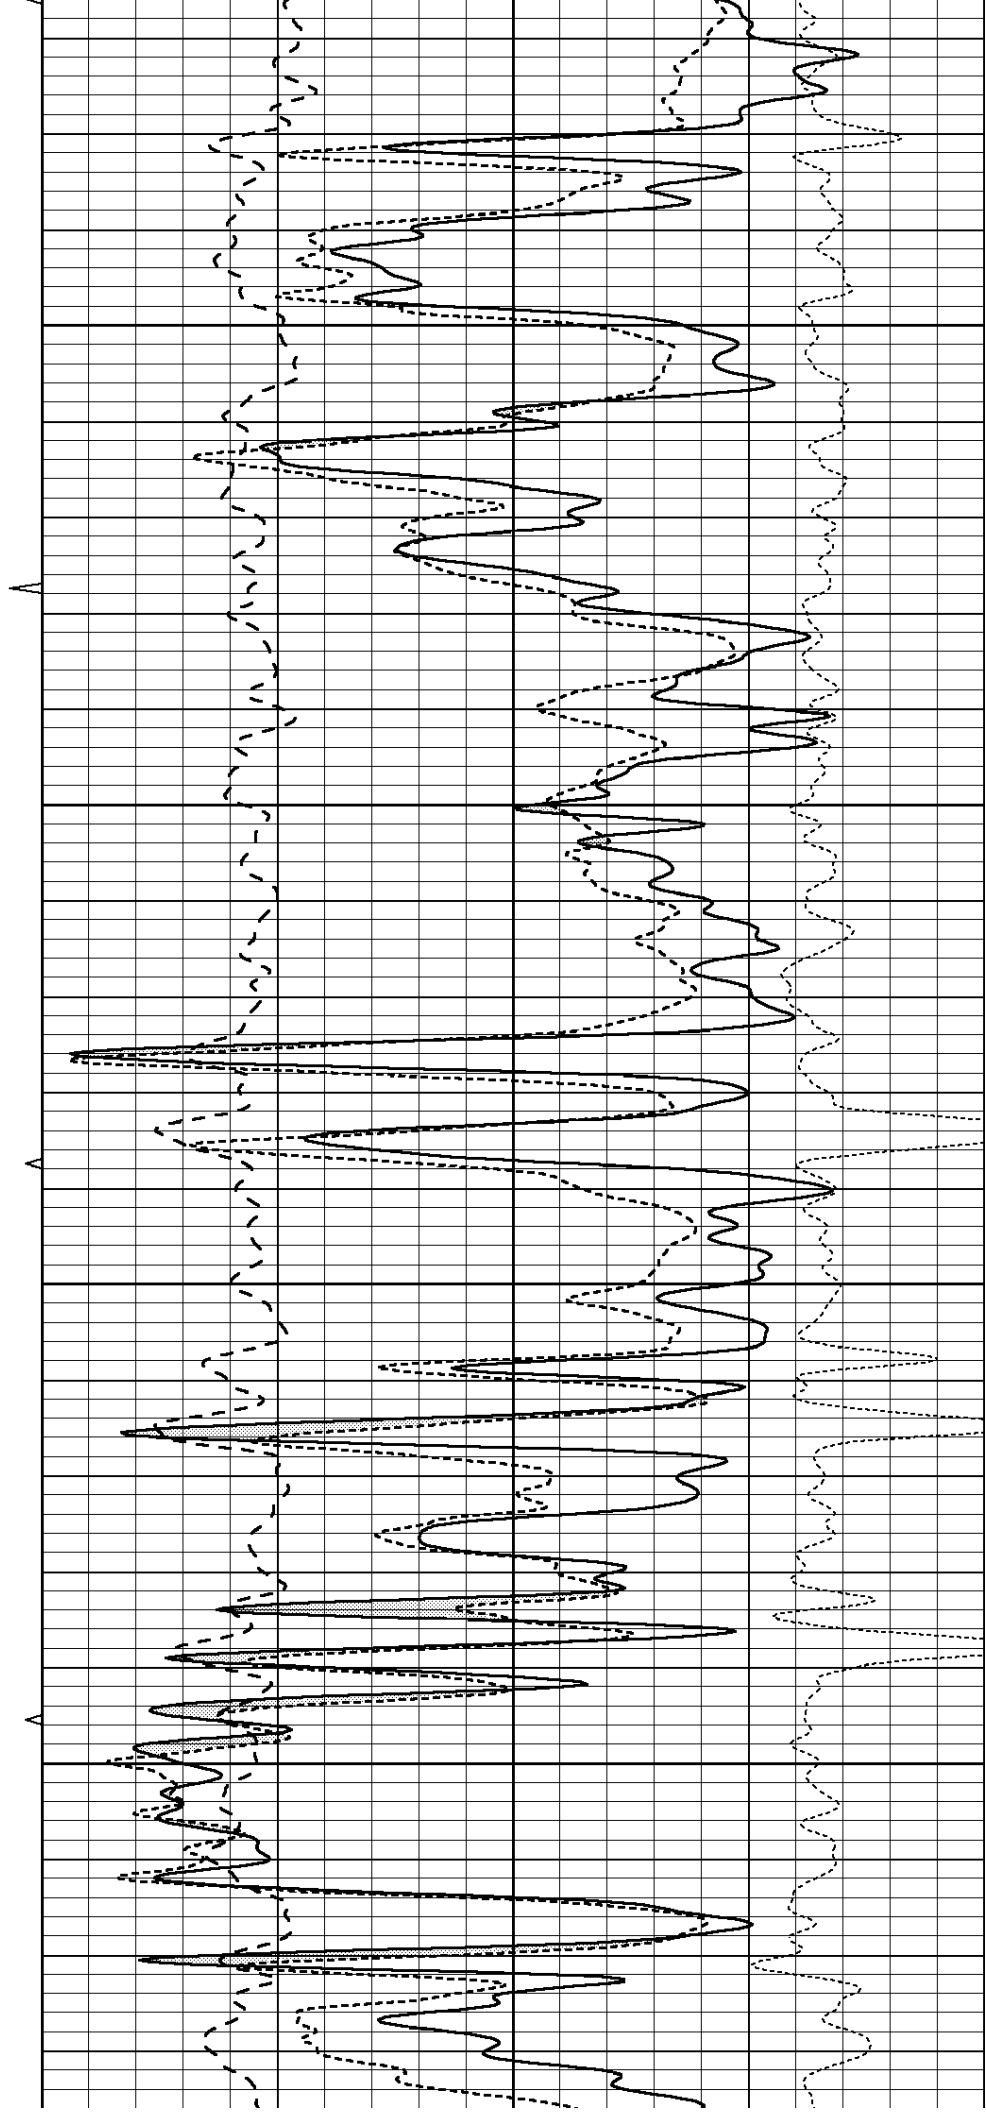

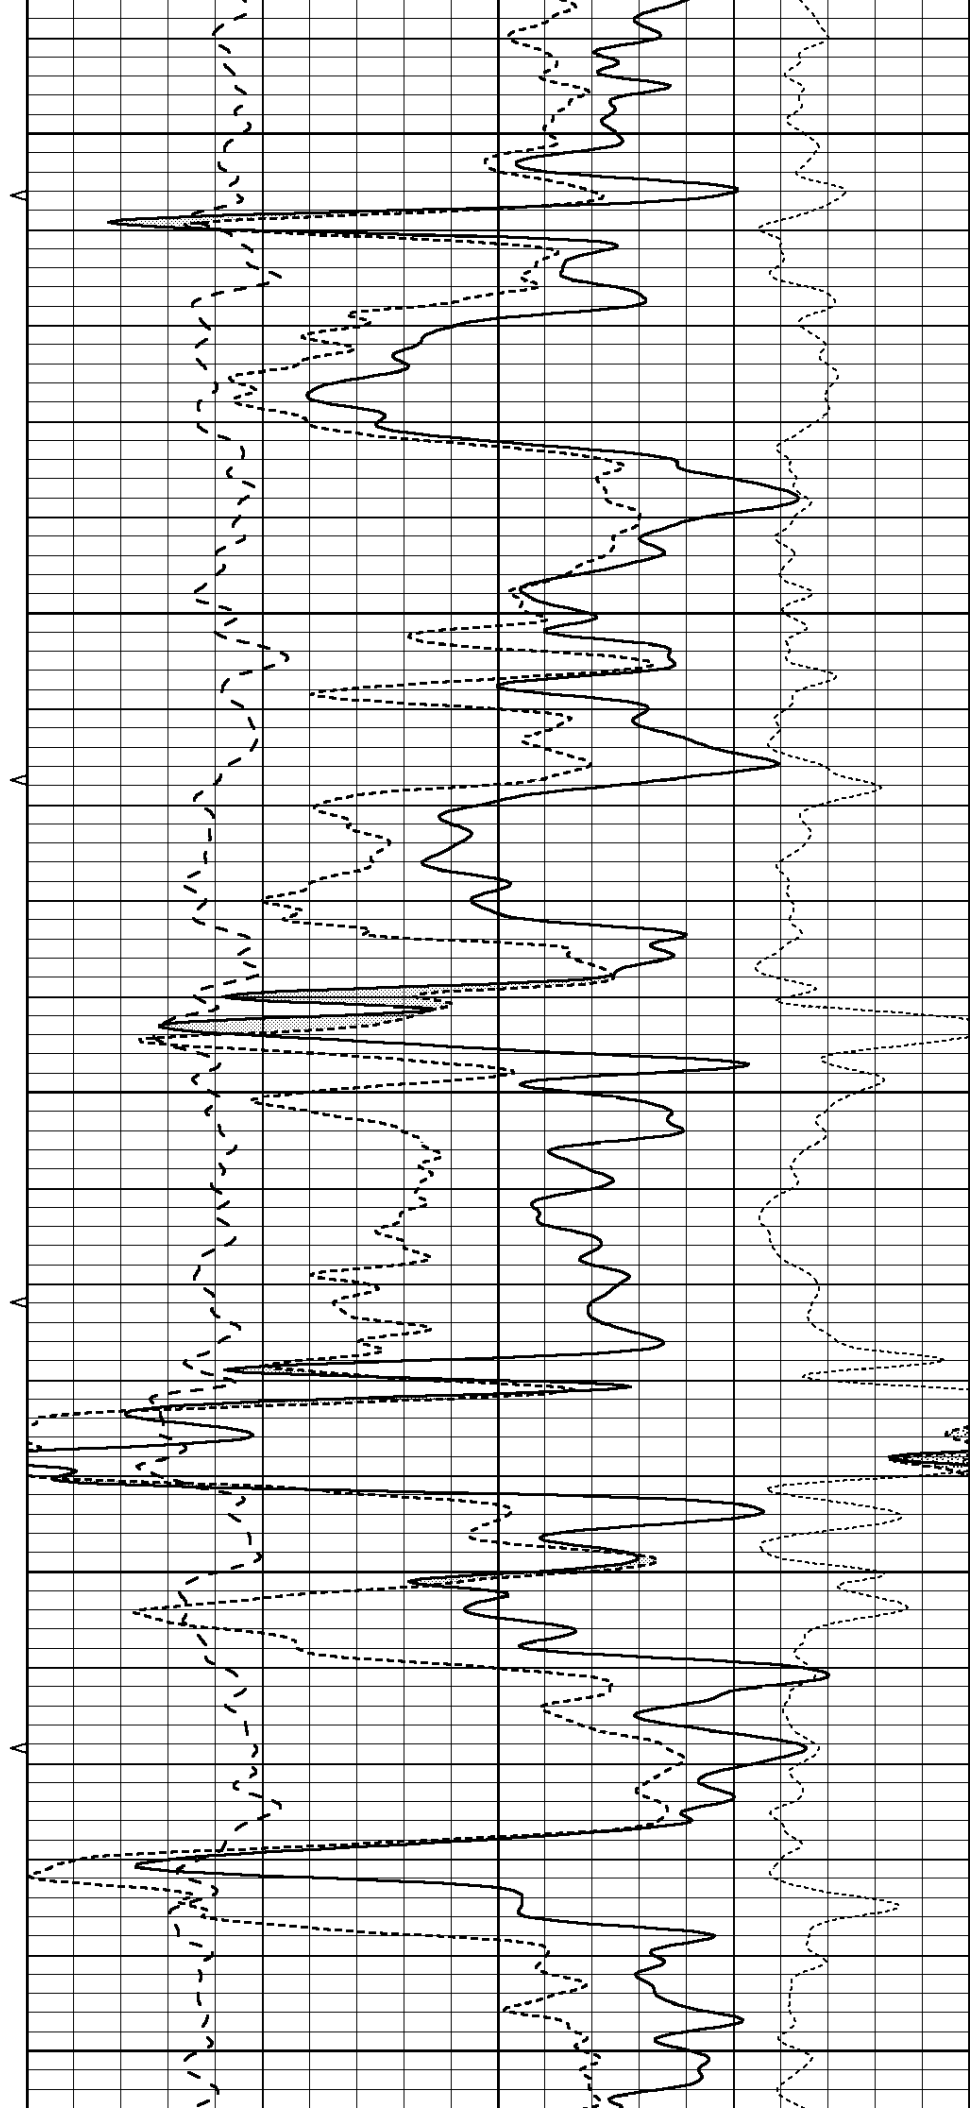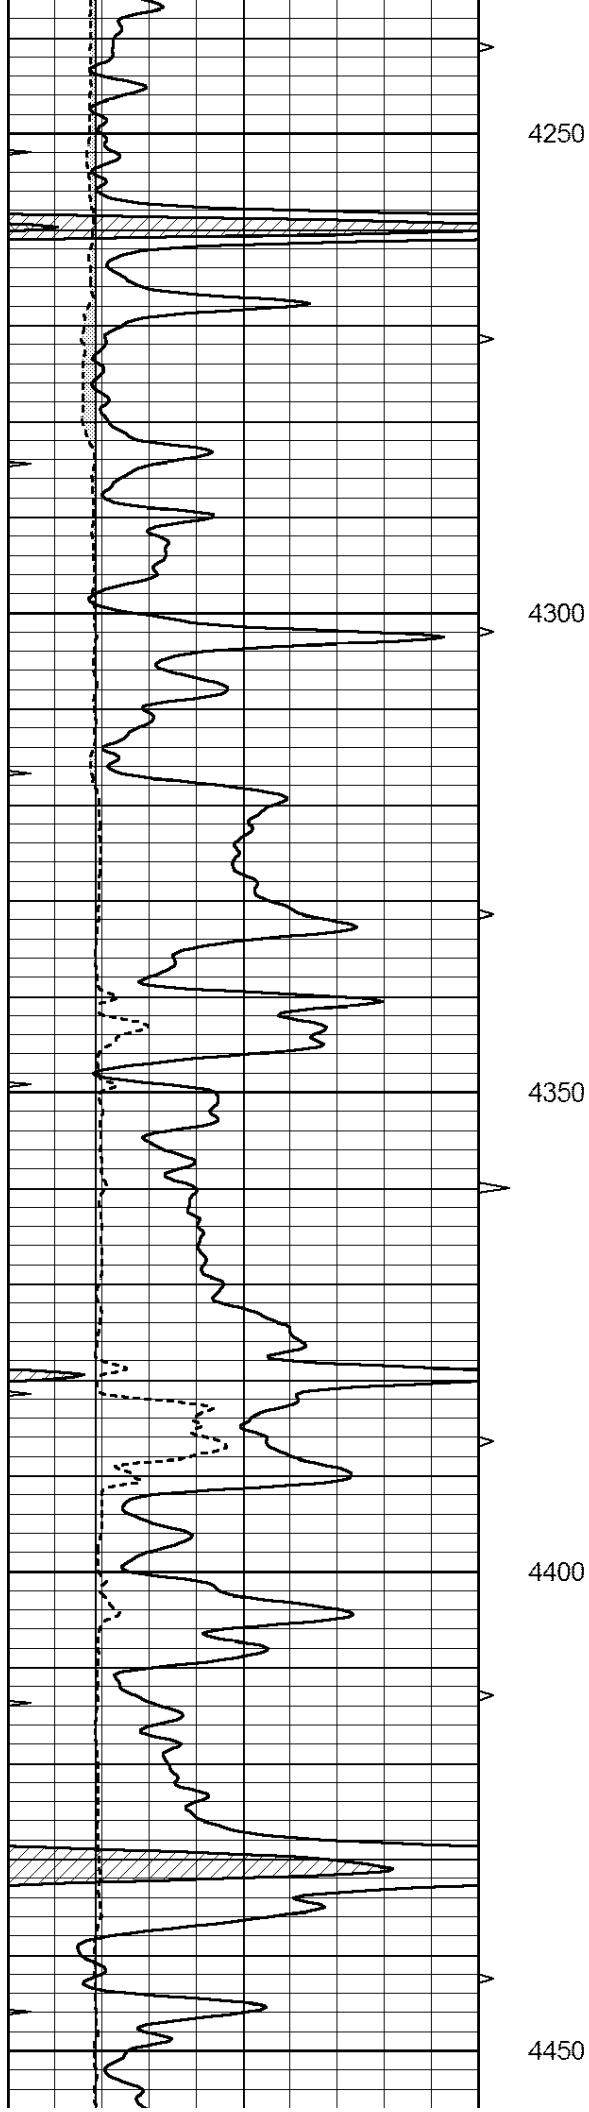

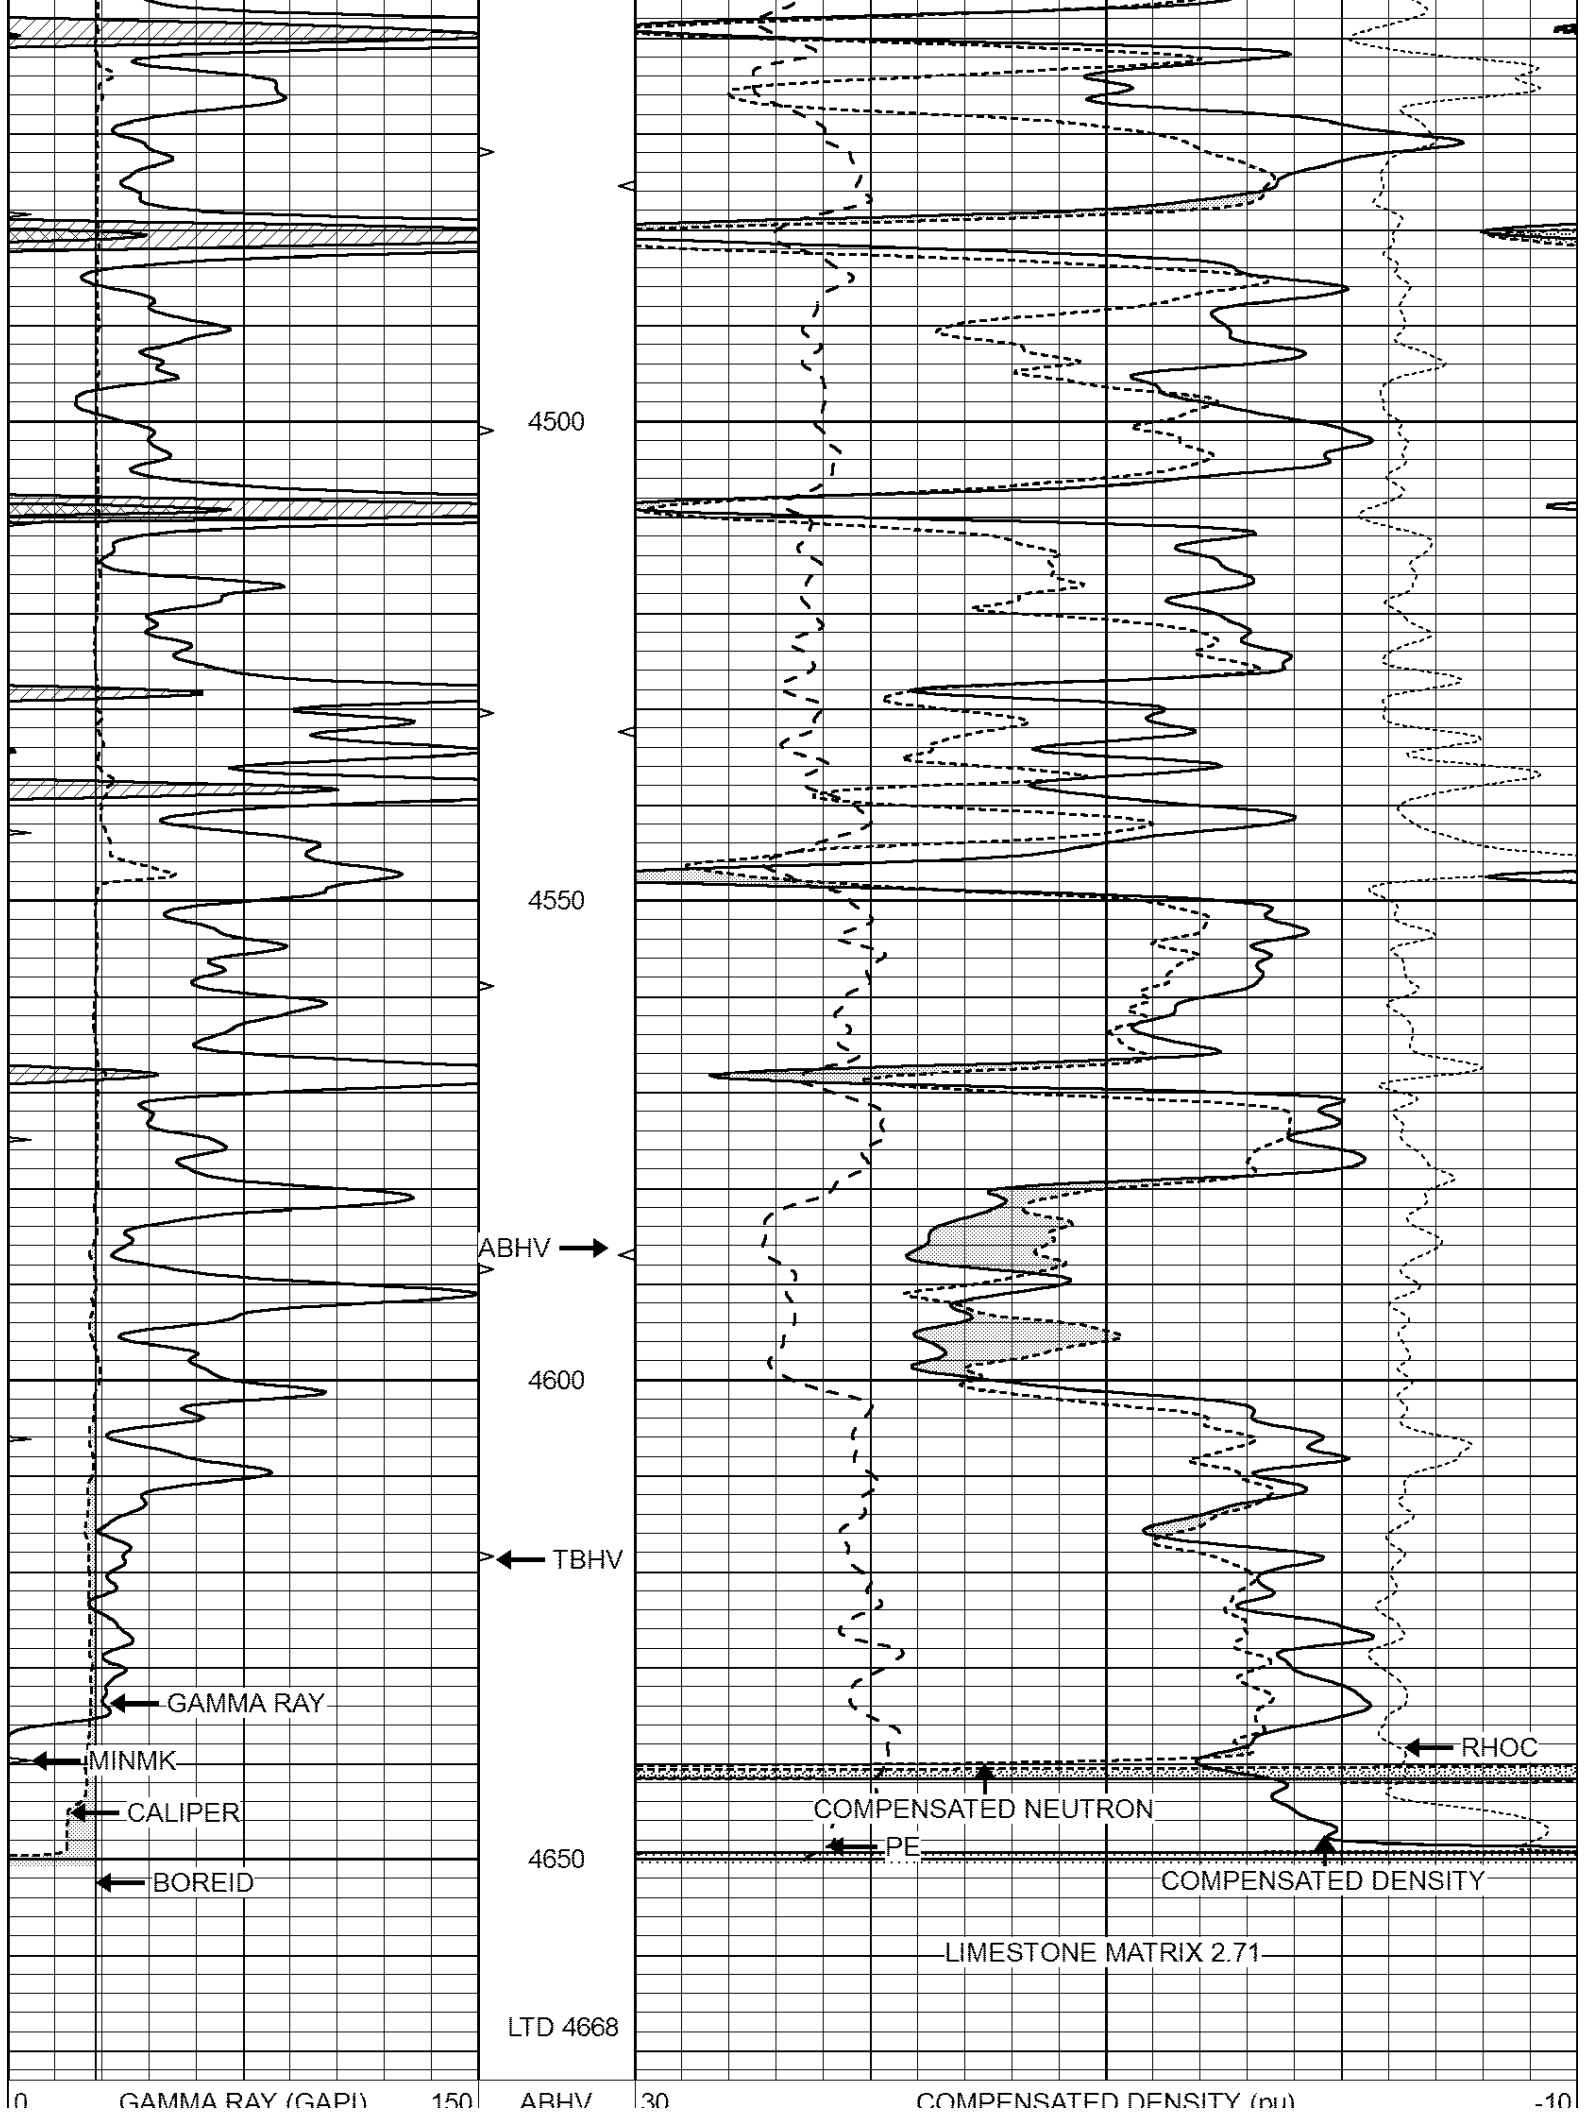


CALIPER (in)			16	10 (ft3)	0	COMPENSATED DENSITY (pu)			-10	
MINMK			20	TBHV	0	PE	10	-0.25	CORRECTION (g/cc)	0.25
				0 (ft3)	10					

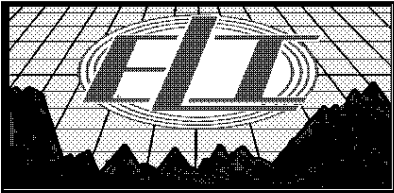


REPEAT SECTION

Database File: 2696pe.db
 Dataset Pathname: pass4.1
 Presentation Format: _ldt_neu
 Dataset Creation: Tue Jul 24 08:55:41 2018
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)				-10	
6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)				-10
0	MINMK	20	TBHV	0	PE	10	-0.25	CORRECTION (g/cc)	0.25	
			0 (ft3)	10						

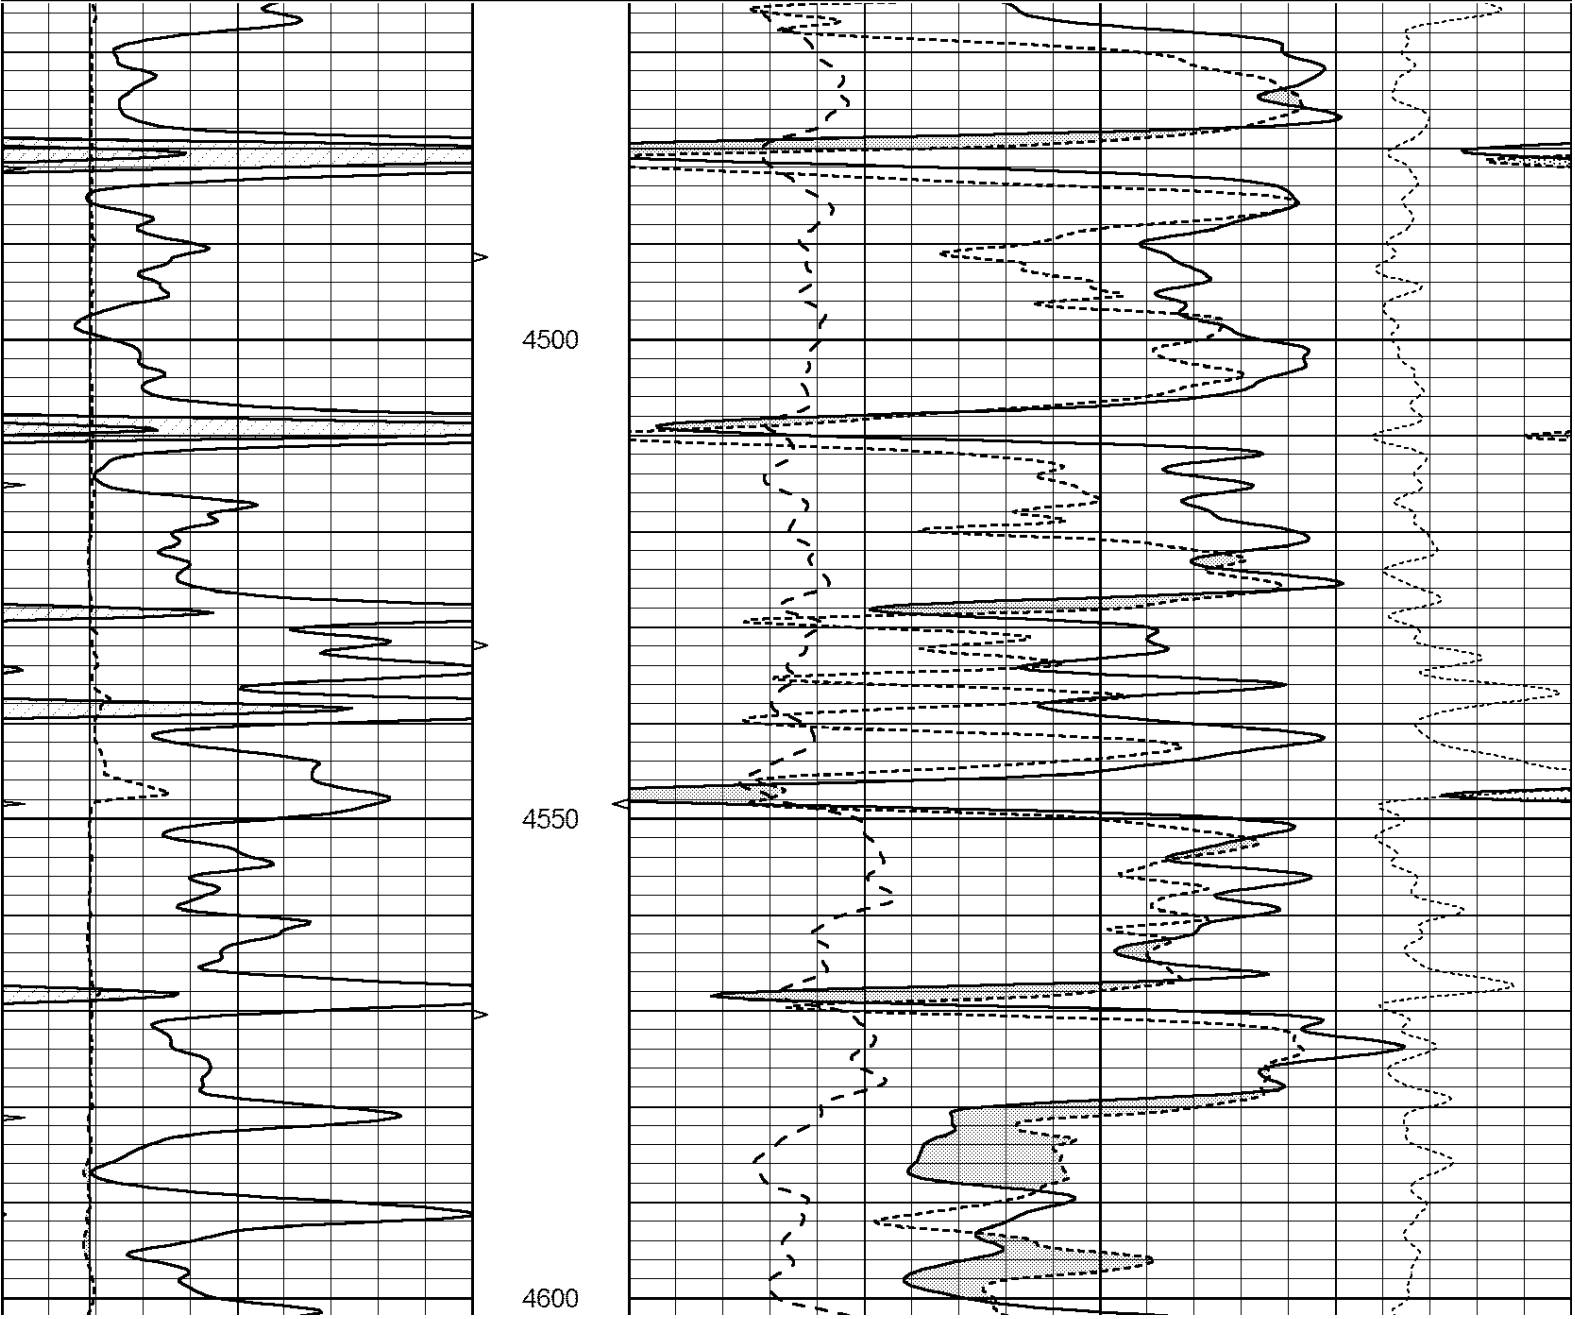

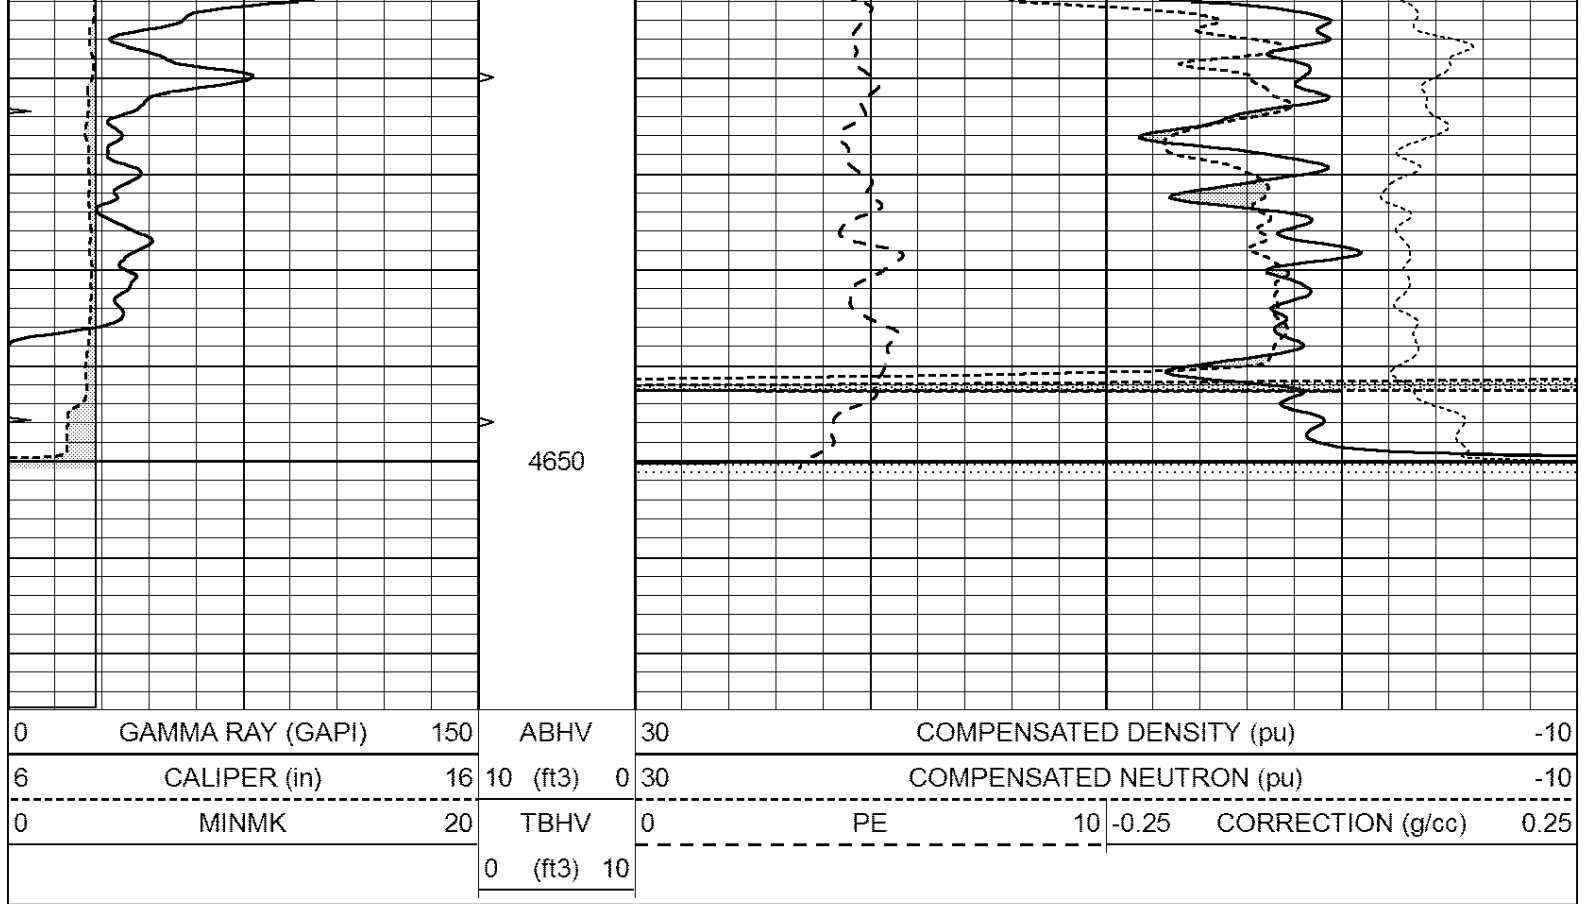

Calibration Report

Database File: pe2.db
Dataset Pathname: pass2
Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Mon Aug 21 11:58:18 2017
Downhole Cal Performed: Mon Aug 21 11:58:21 2017
After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

Readings

Targets

Results

Readings			Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 002 Model: PRB

Master Calibration

Performed Mon Aug 21 11:56:41 2017

	Background	Magnesium	Aluminum	Sandstone	
Window 1	833.6	7394.2	2287.3	8111.8	cps
Window 2	768.9	6322.3	1995.6	6800.0	cps
Window 3	621.5	3261.9	1186.4	3380.9	cps
Window 4	184.2	185.7	184.9	184.8	cps
Long Space	0.0	5553.4	1226.6	6031.1	cps
Short Space	1.2	1307.5	903.9	1387.7	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio	: 0.566
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept	: -20.7

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector Readings Target Normalization

	Short Space	1.00	cps	1.00	cps	1.0000
	Long Space	1.00	cps	1.00	cps	1.0000
PRE-SURVEY VERIFICATION						
	Detector	Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		
3)	Short Space		cps			
	Long Space		cps	pu		
POST-SURVEY VERIFICATION						
	Detector	Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		pu
3)	Short Space		cps			
	Long Space		cps	pu		pu
Gamma Ray Calibration Report						
Serial Number:		GR6				
Tool Model:		OPEN				
Performed:		Mon Aug 21 11:59:01 2017				
Calibrator Value:		150.0		GAPI		
Background Reading:		0.0		cps		
Calibrator Reading:		276.0		cps		
Sensitivity:		0.5500		GAPI/cps		