



MICRO LOG

Company	RJM COMPANY	Company	RJM COMPANY
Well	K & C MILLER #1	Well	K & C MILLER #1
Field	UNKNOWN	Field	UNKNOWN
County	BARTON	County	BARTON
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-009-26225-00-00 NE/SE/NW/NE 980 FNL & 1560 FEL		Other Services CDL/CNL/SON DIL
Permanent Datum	SEC 10 TWP 19S RGE 12W	Elevation	
Log Measured From	GROUND LEVEL	Elevation	1823
Drilling Measured From	KELLY BUSHING 8' A.G.L. KELLY BUSHING	K.B. 1831 D.F. 1829 G.L. 1823	
Date	08/08/18		
Run Number	TWO		
Depth Driller	3488		
Depth Logger	3488		
Bottom Logged Interval	3468		
Top Log Interval	2600		
Casing Driller	8 5/8@ 292		
Casing Logger	292		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6000 PPM	
Density / Viscosity	9.1/48		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80@70		
Rmt @ Meas. Temp	.60@70		
Rmc @ Meas. Temp	.96@70		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.50@111		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	111F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	WYATT URBAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
BARTON COLLEGE BLACKTOP AND 156 NORTH TO 40 RD.
1.5 EAST, SOUTH INTO.




MAIN PASS

Database File: 2700pe.db
Dataset Pathname: pass5
Presentation Format: _micro
Dataset Creation: Wed Aug 08 09:44:21 2018 by Log Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

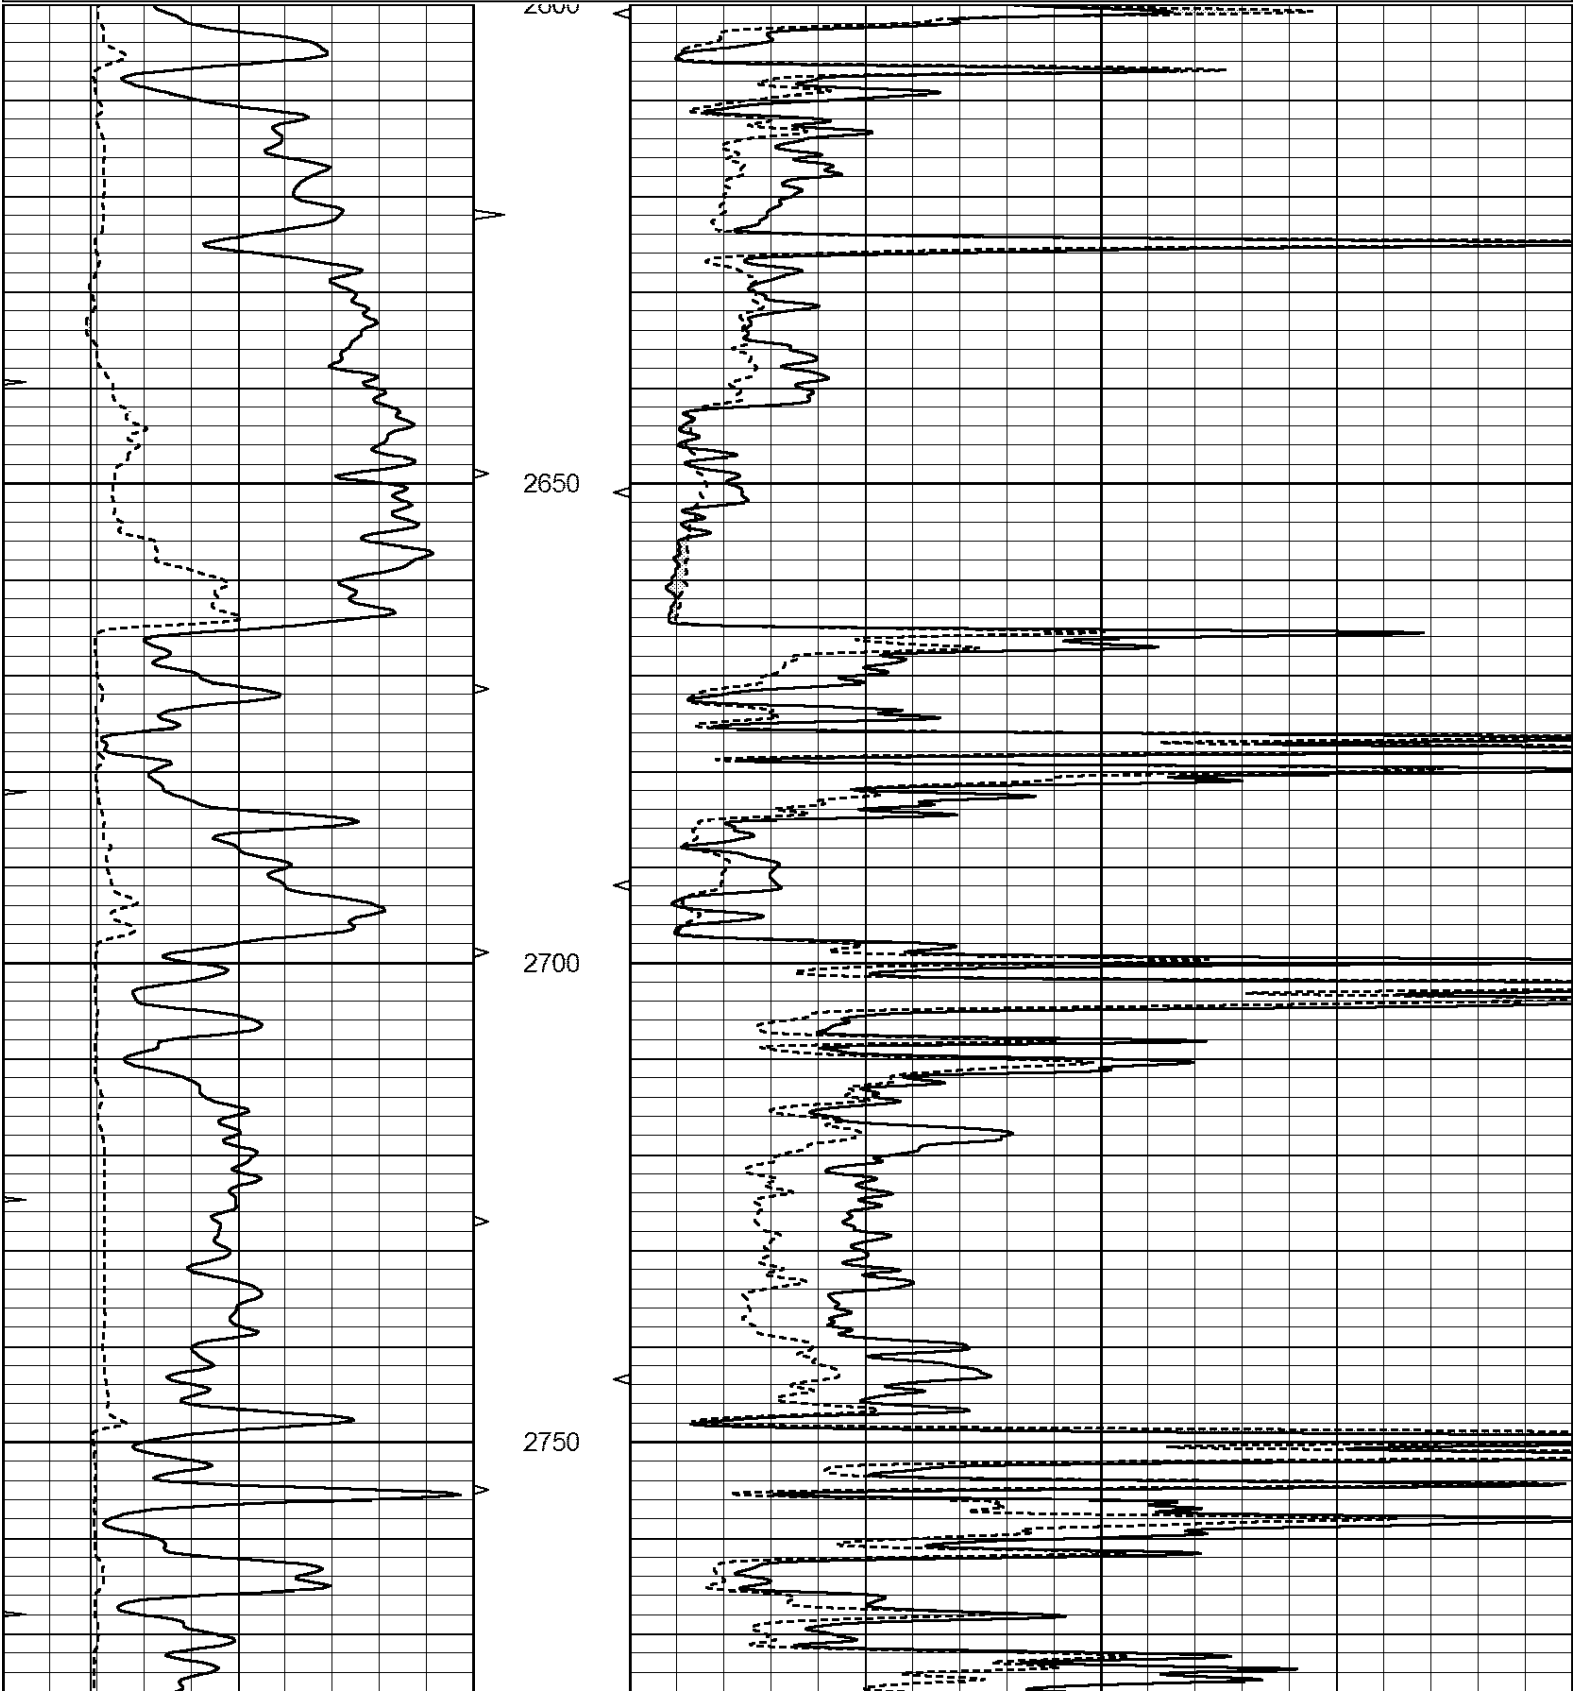

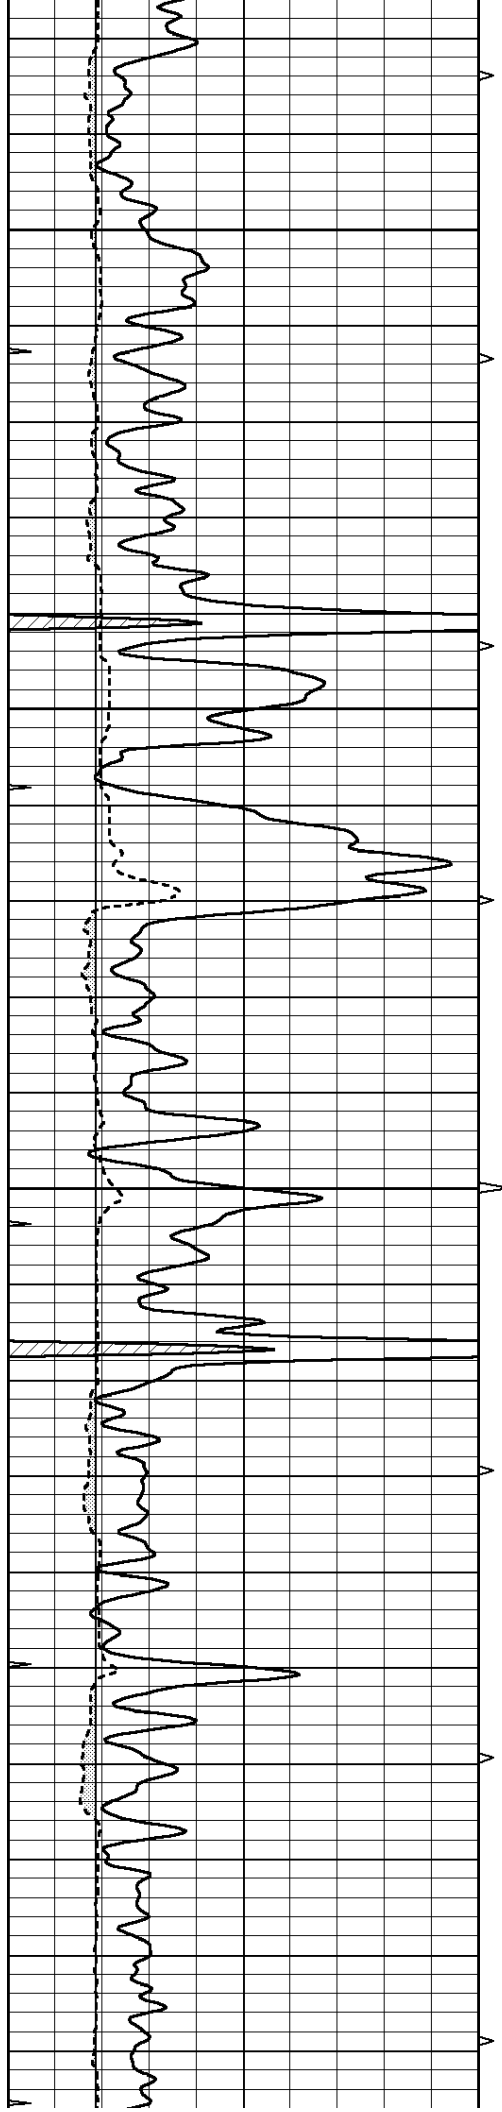




2800


2850



2900

2950

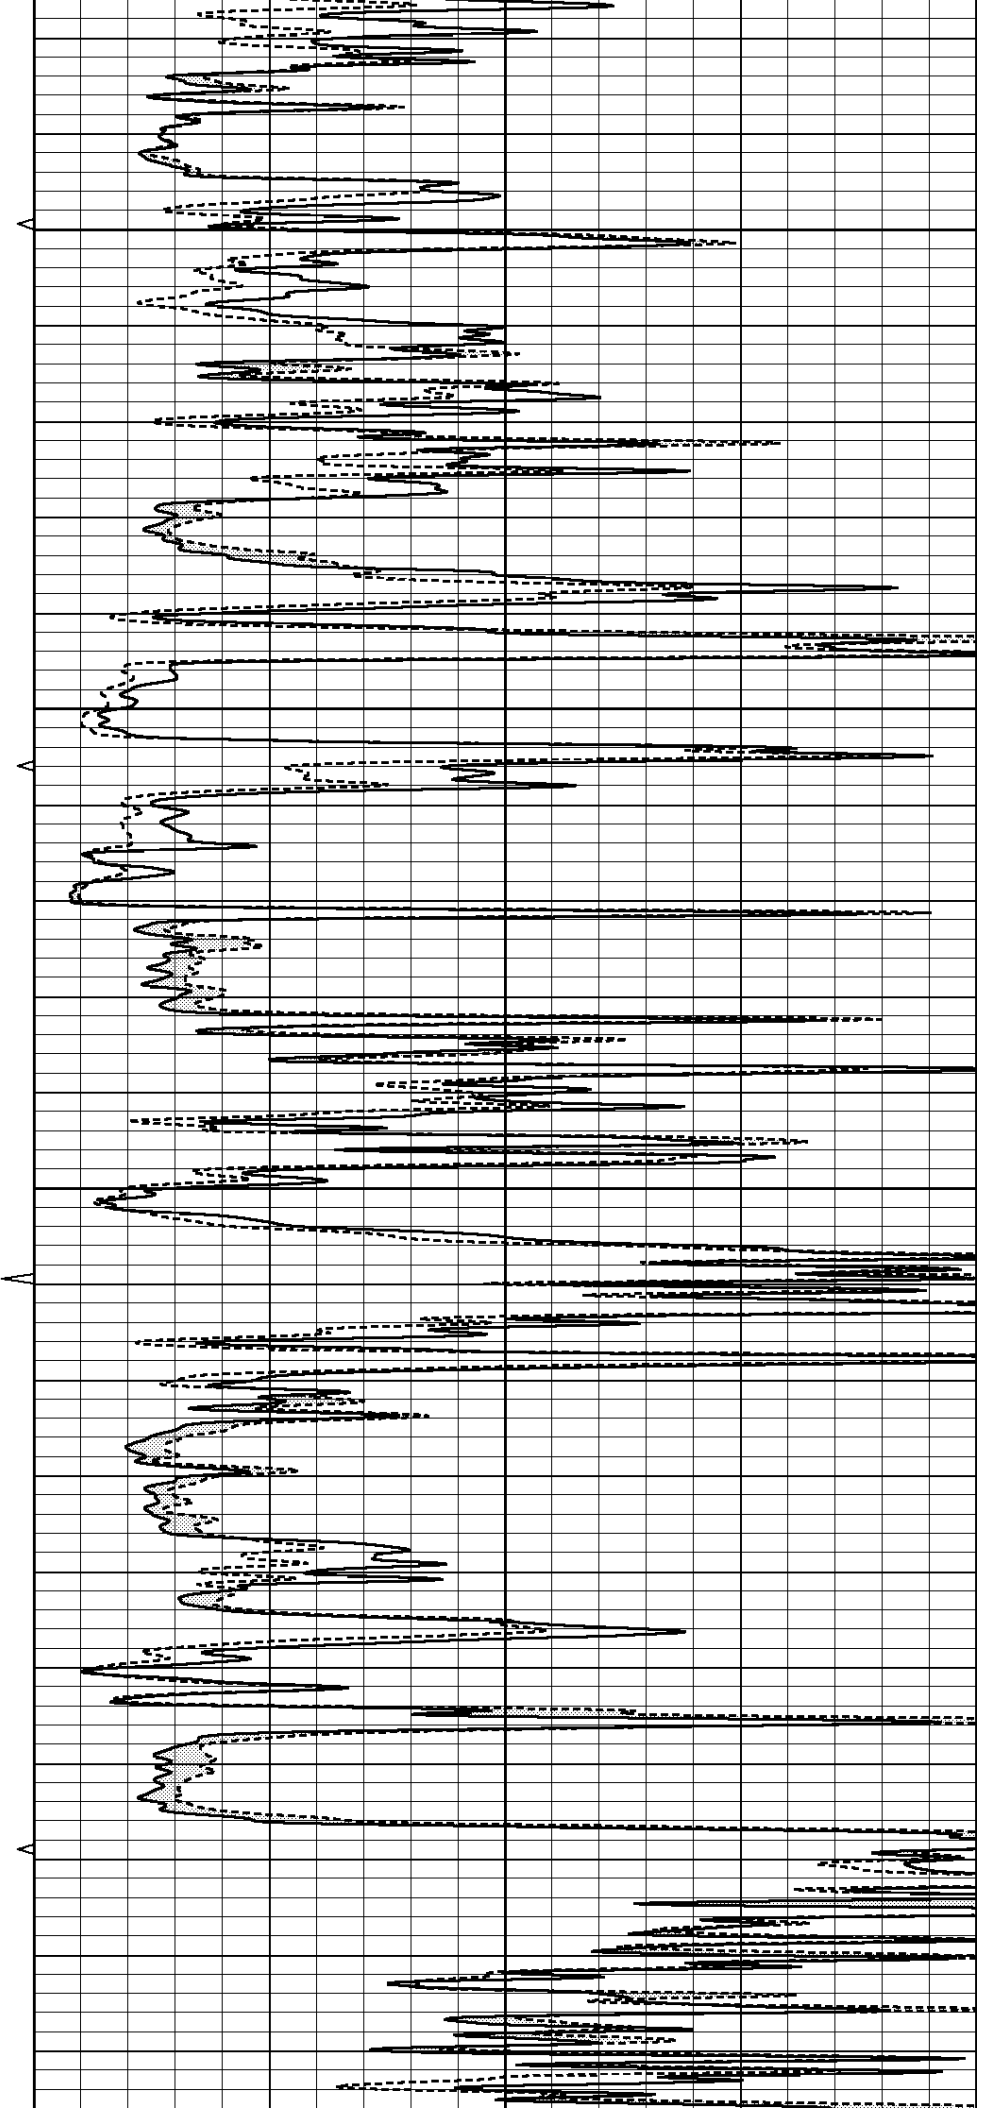

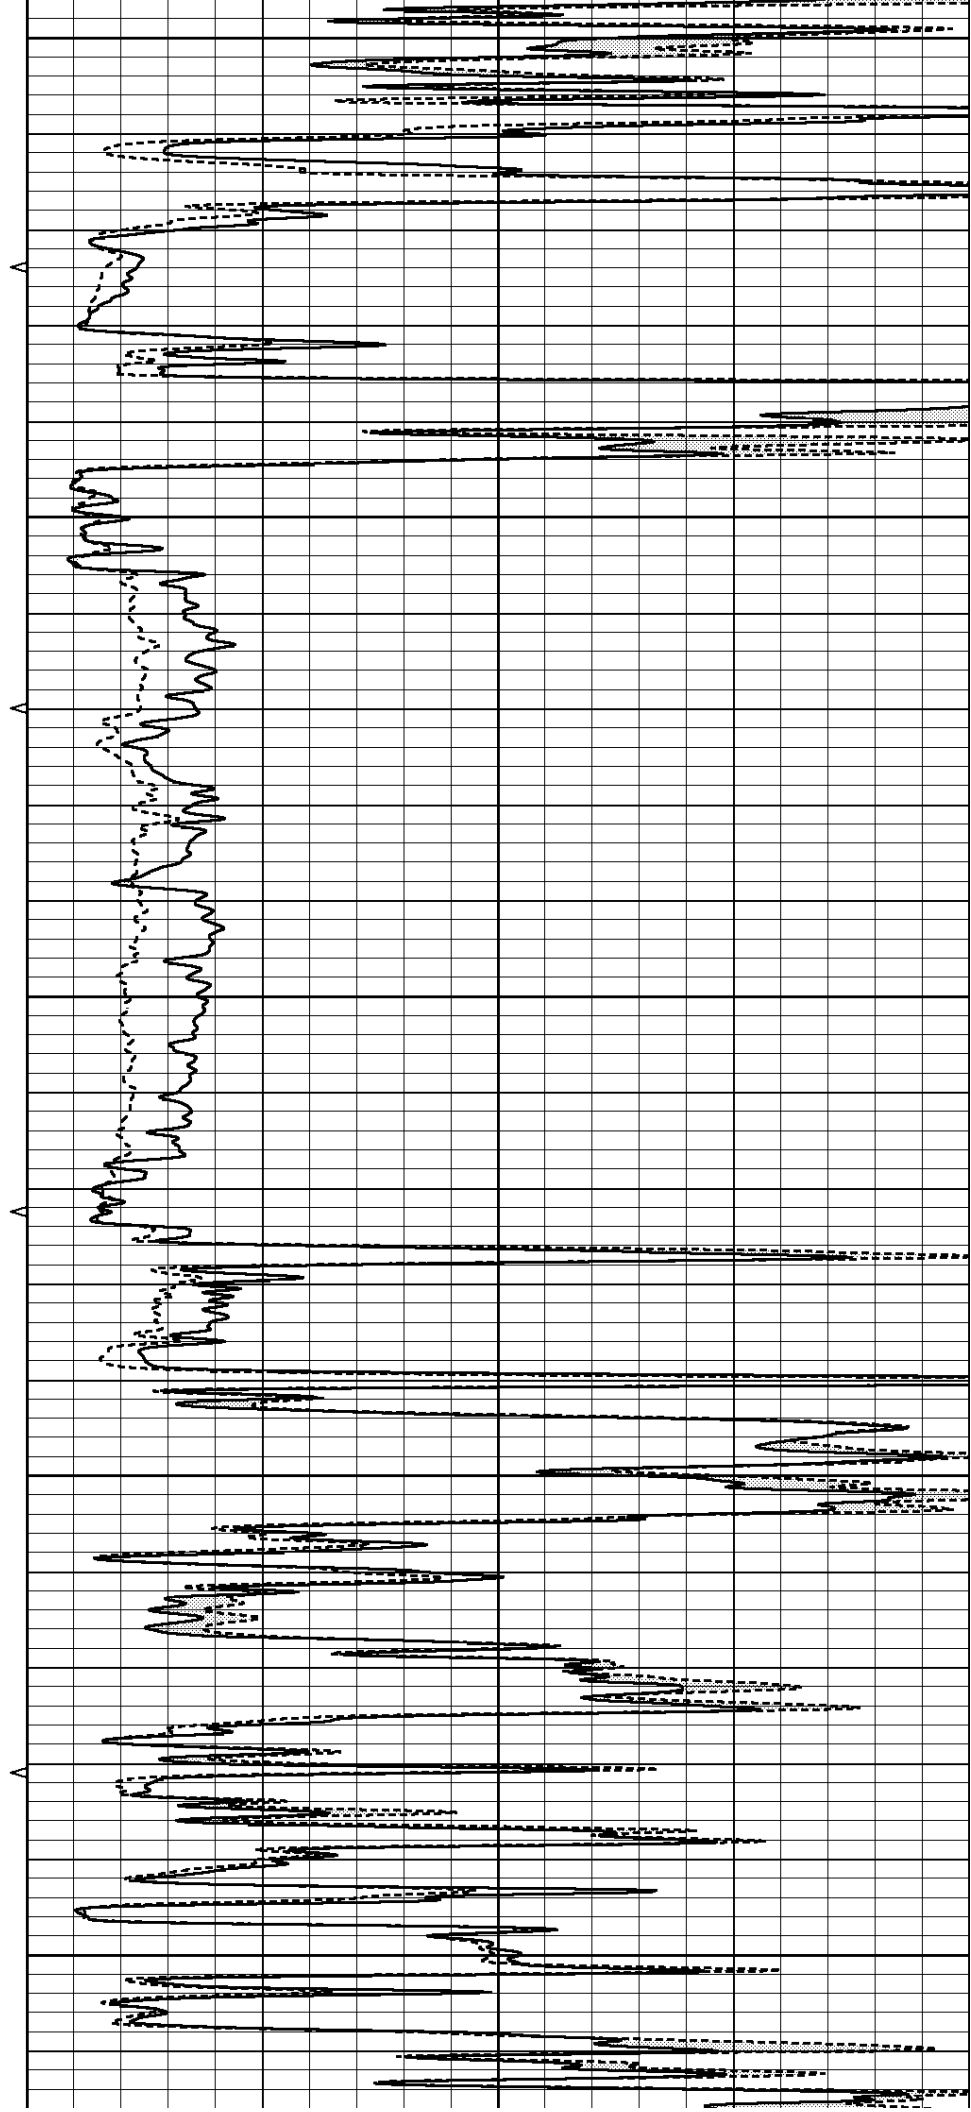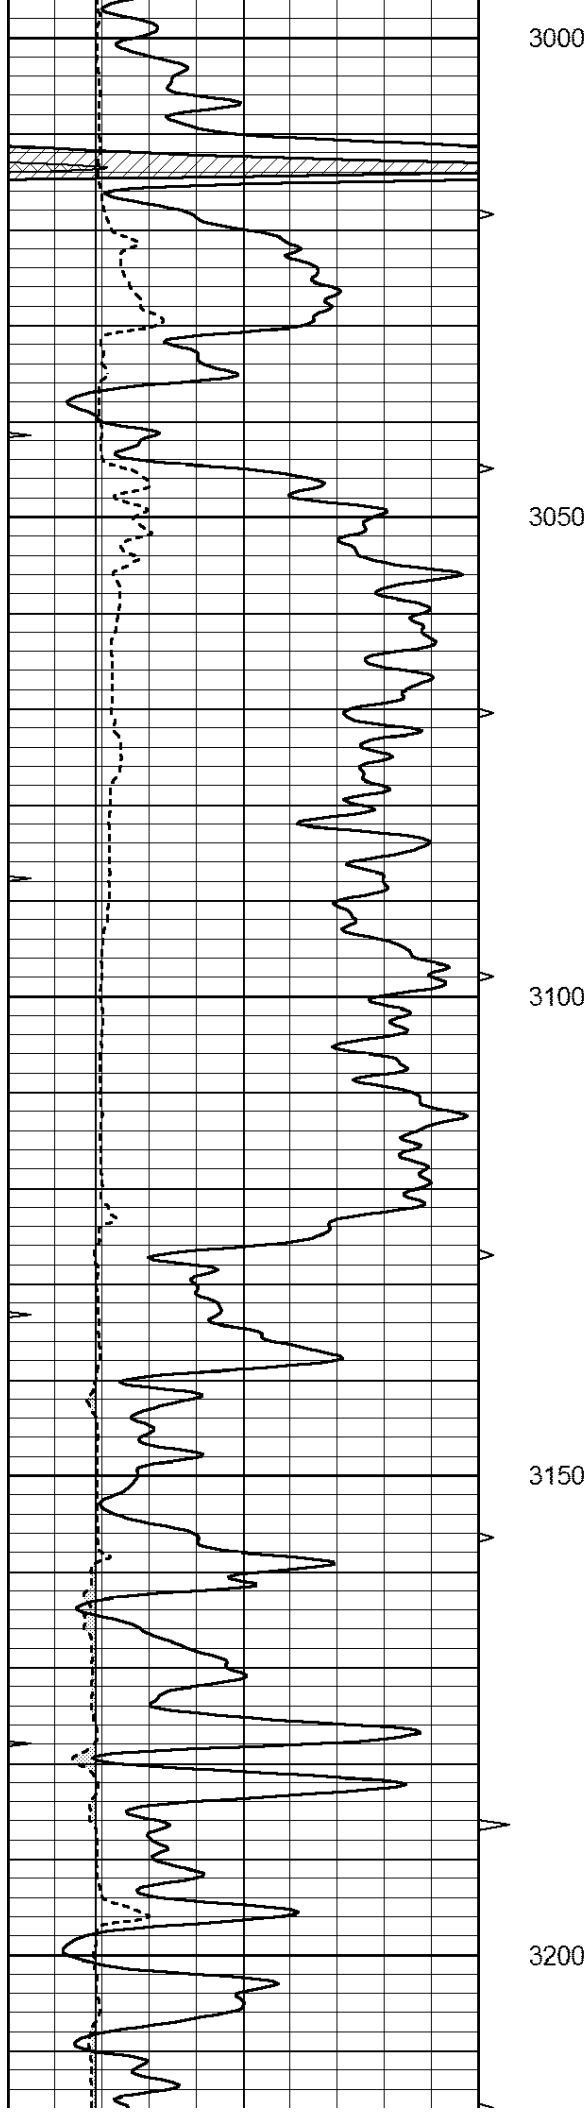

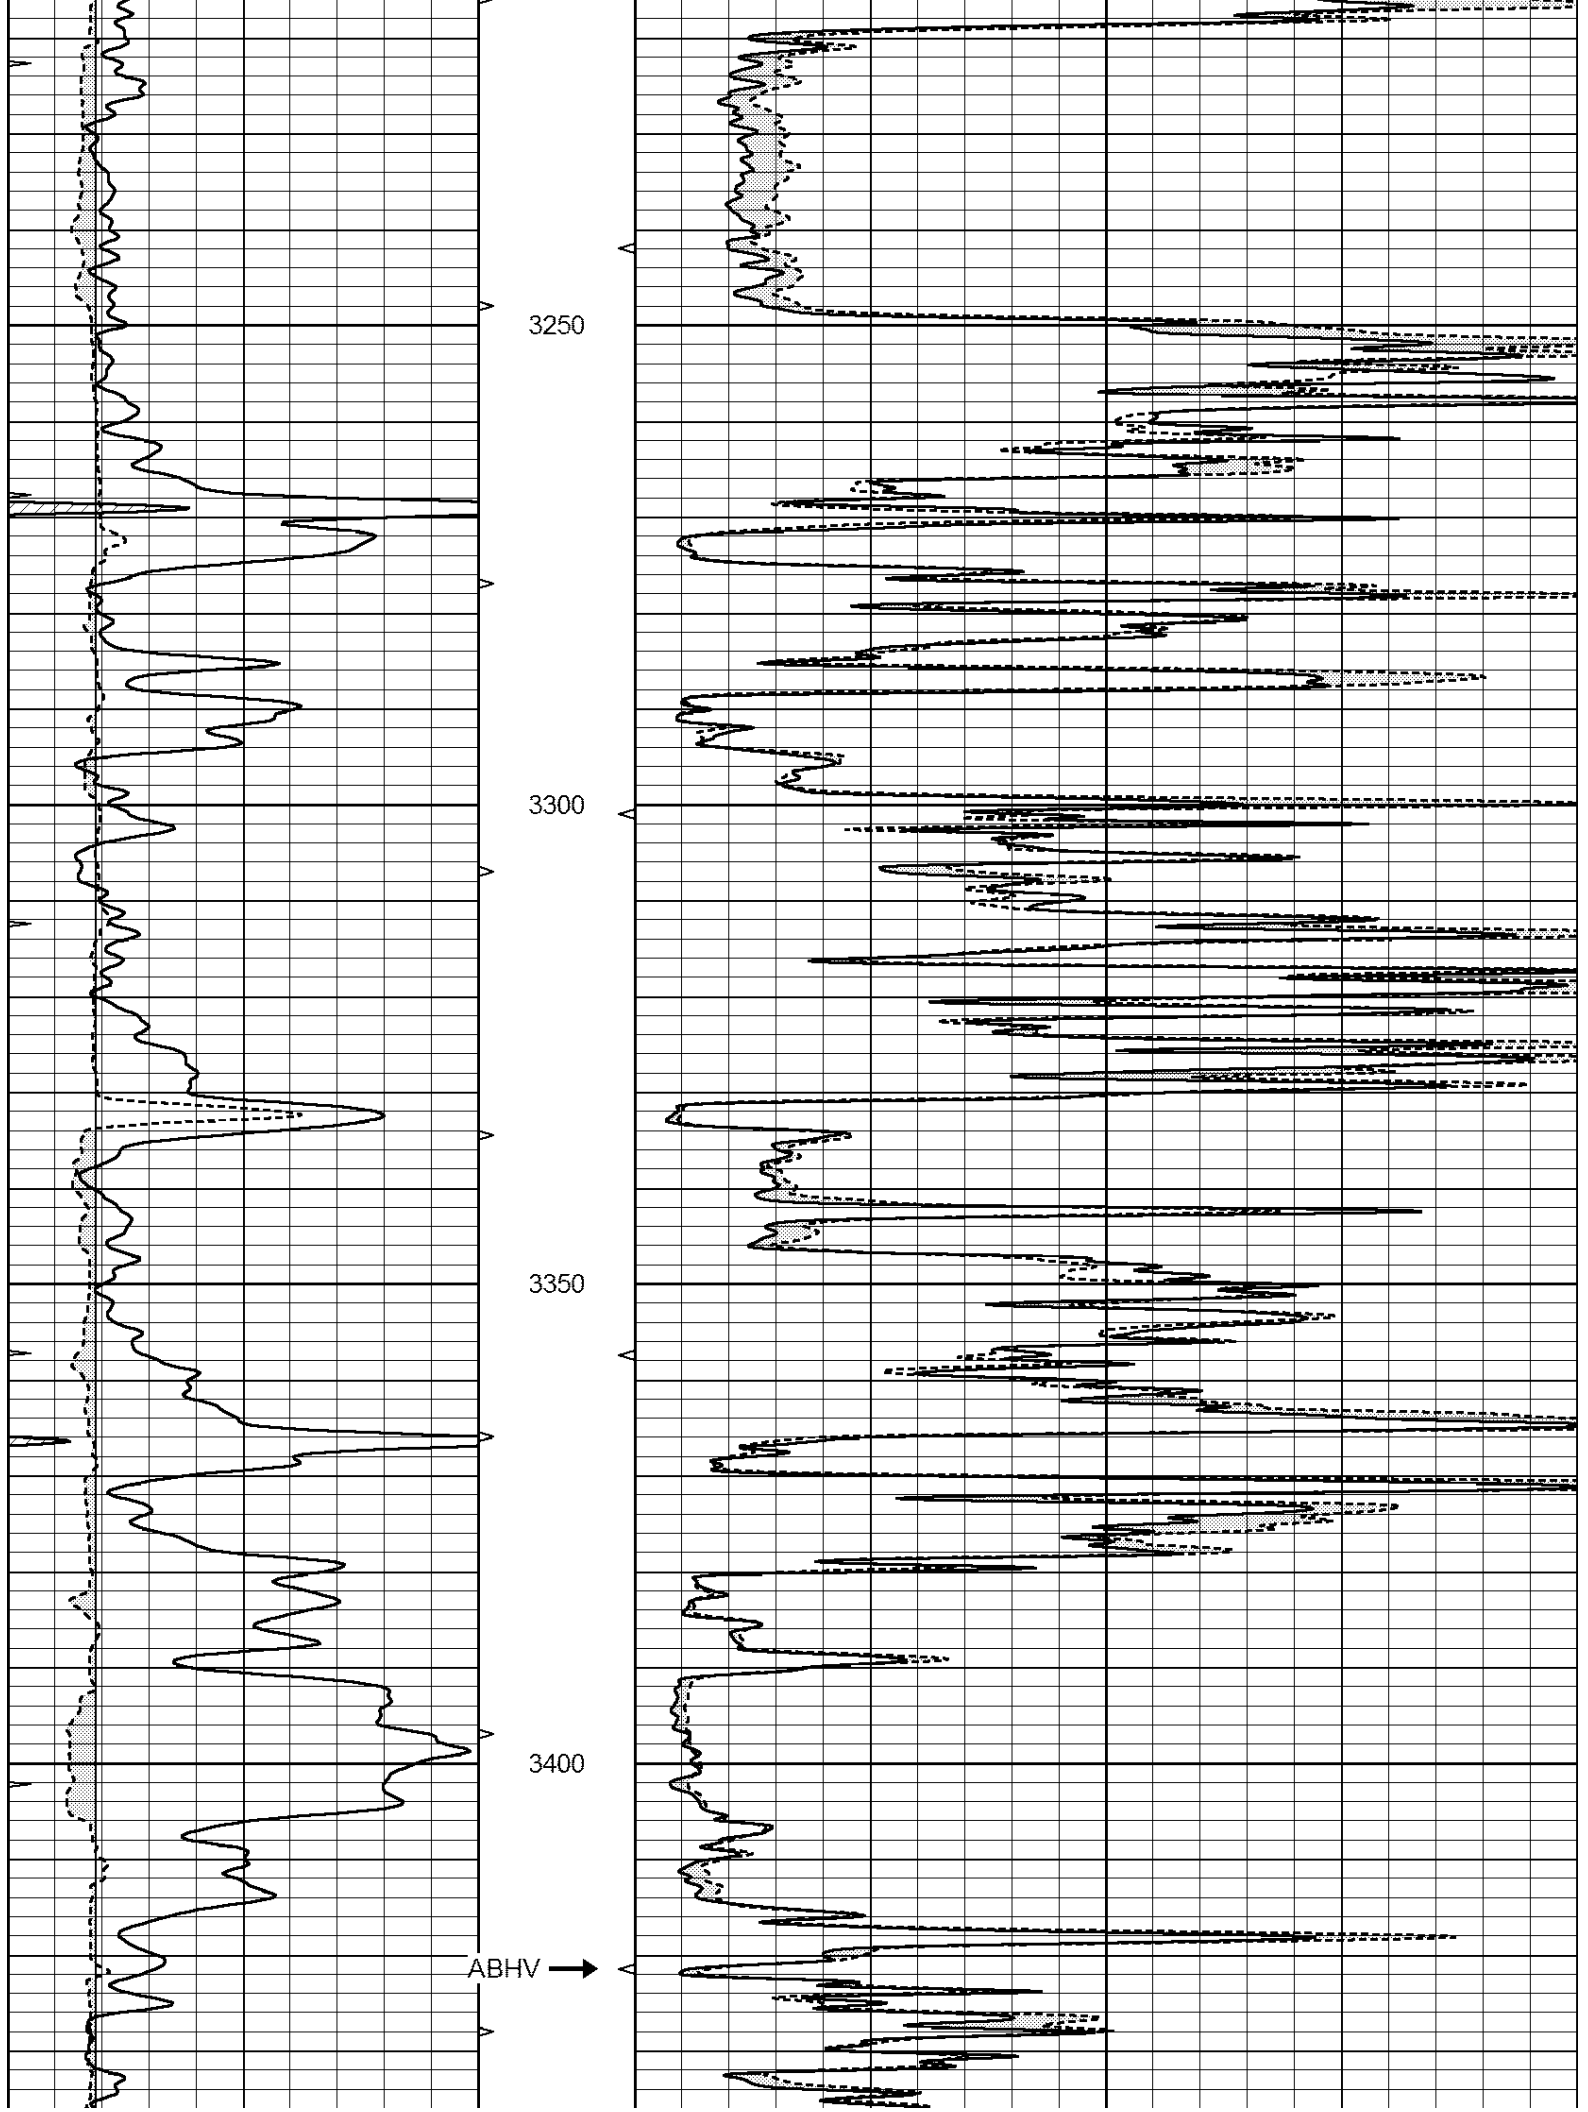


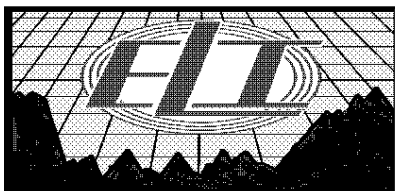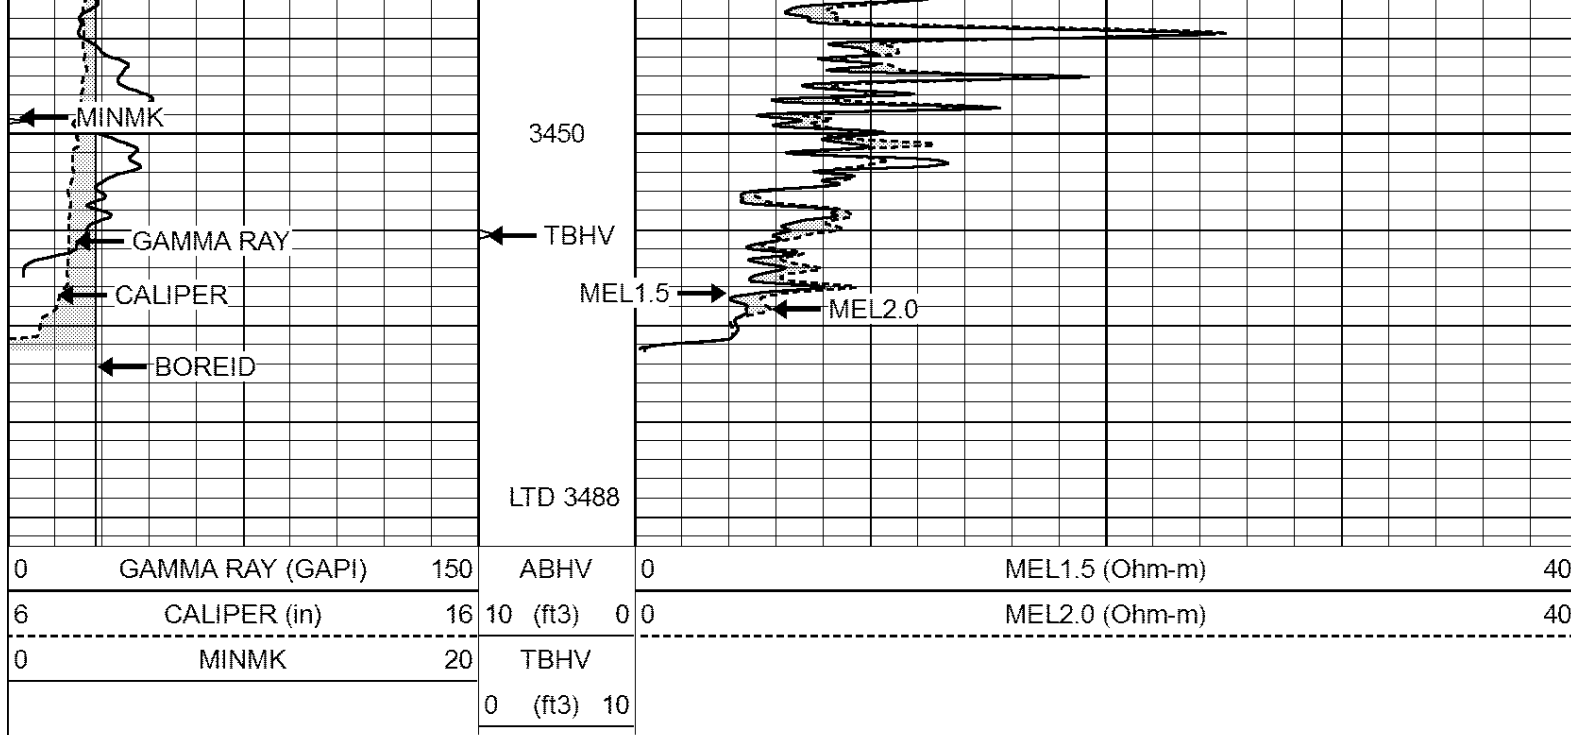


REPEAT SECTION

Database File: 2700pe.db
 Dataset Pathname: pass4
 Presentation Format: _micro
 Dataset Creation: Wed Aug 08 09:35:38 2018 by Log Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

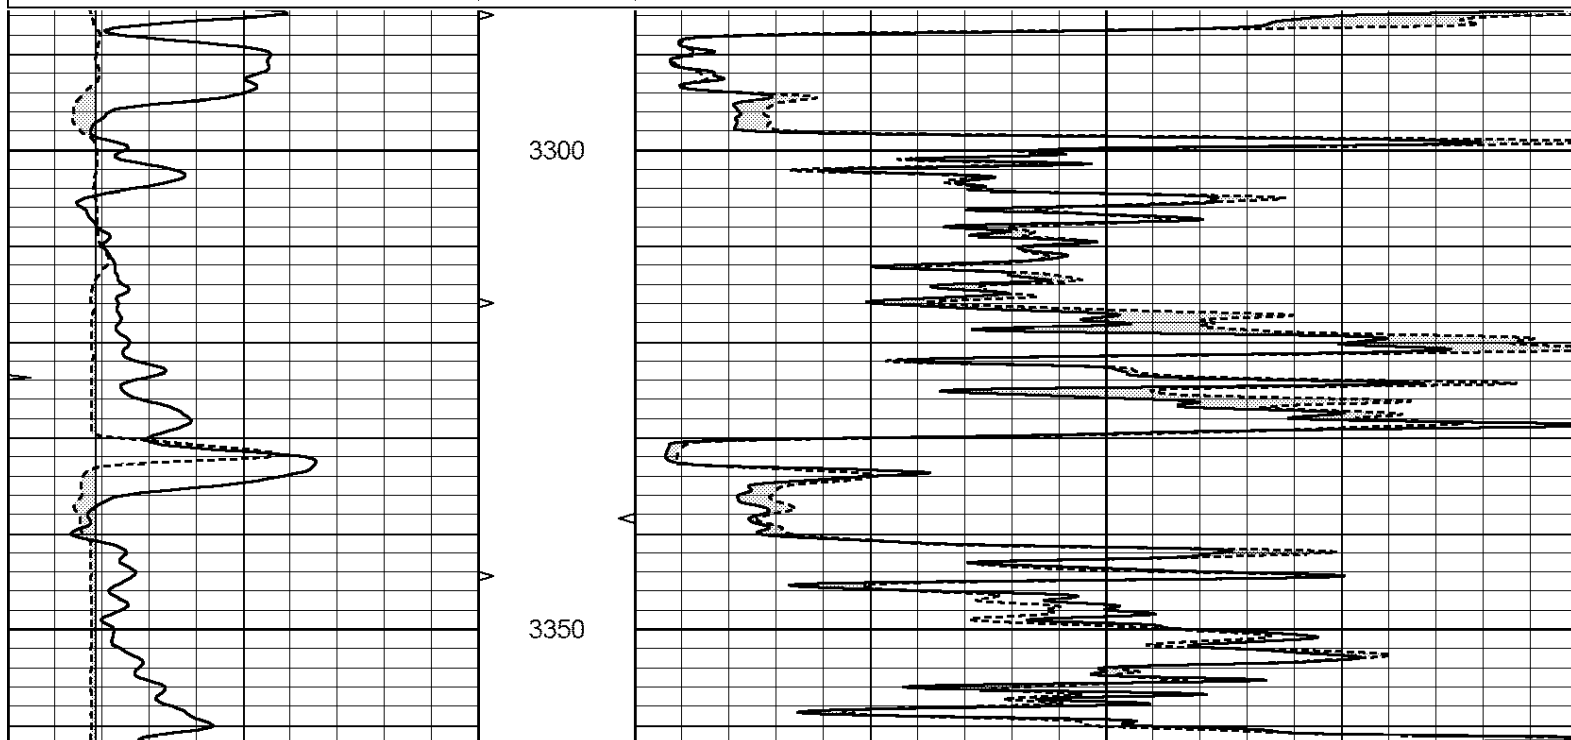

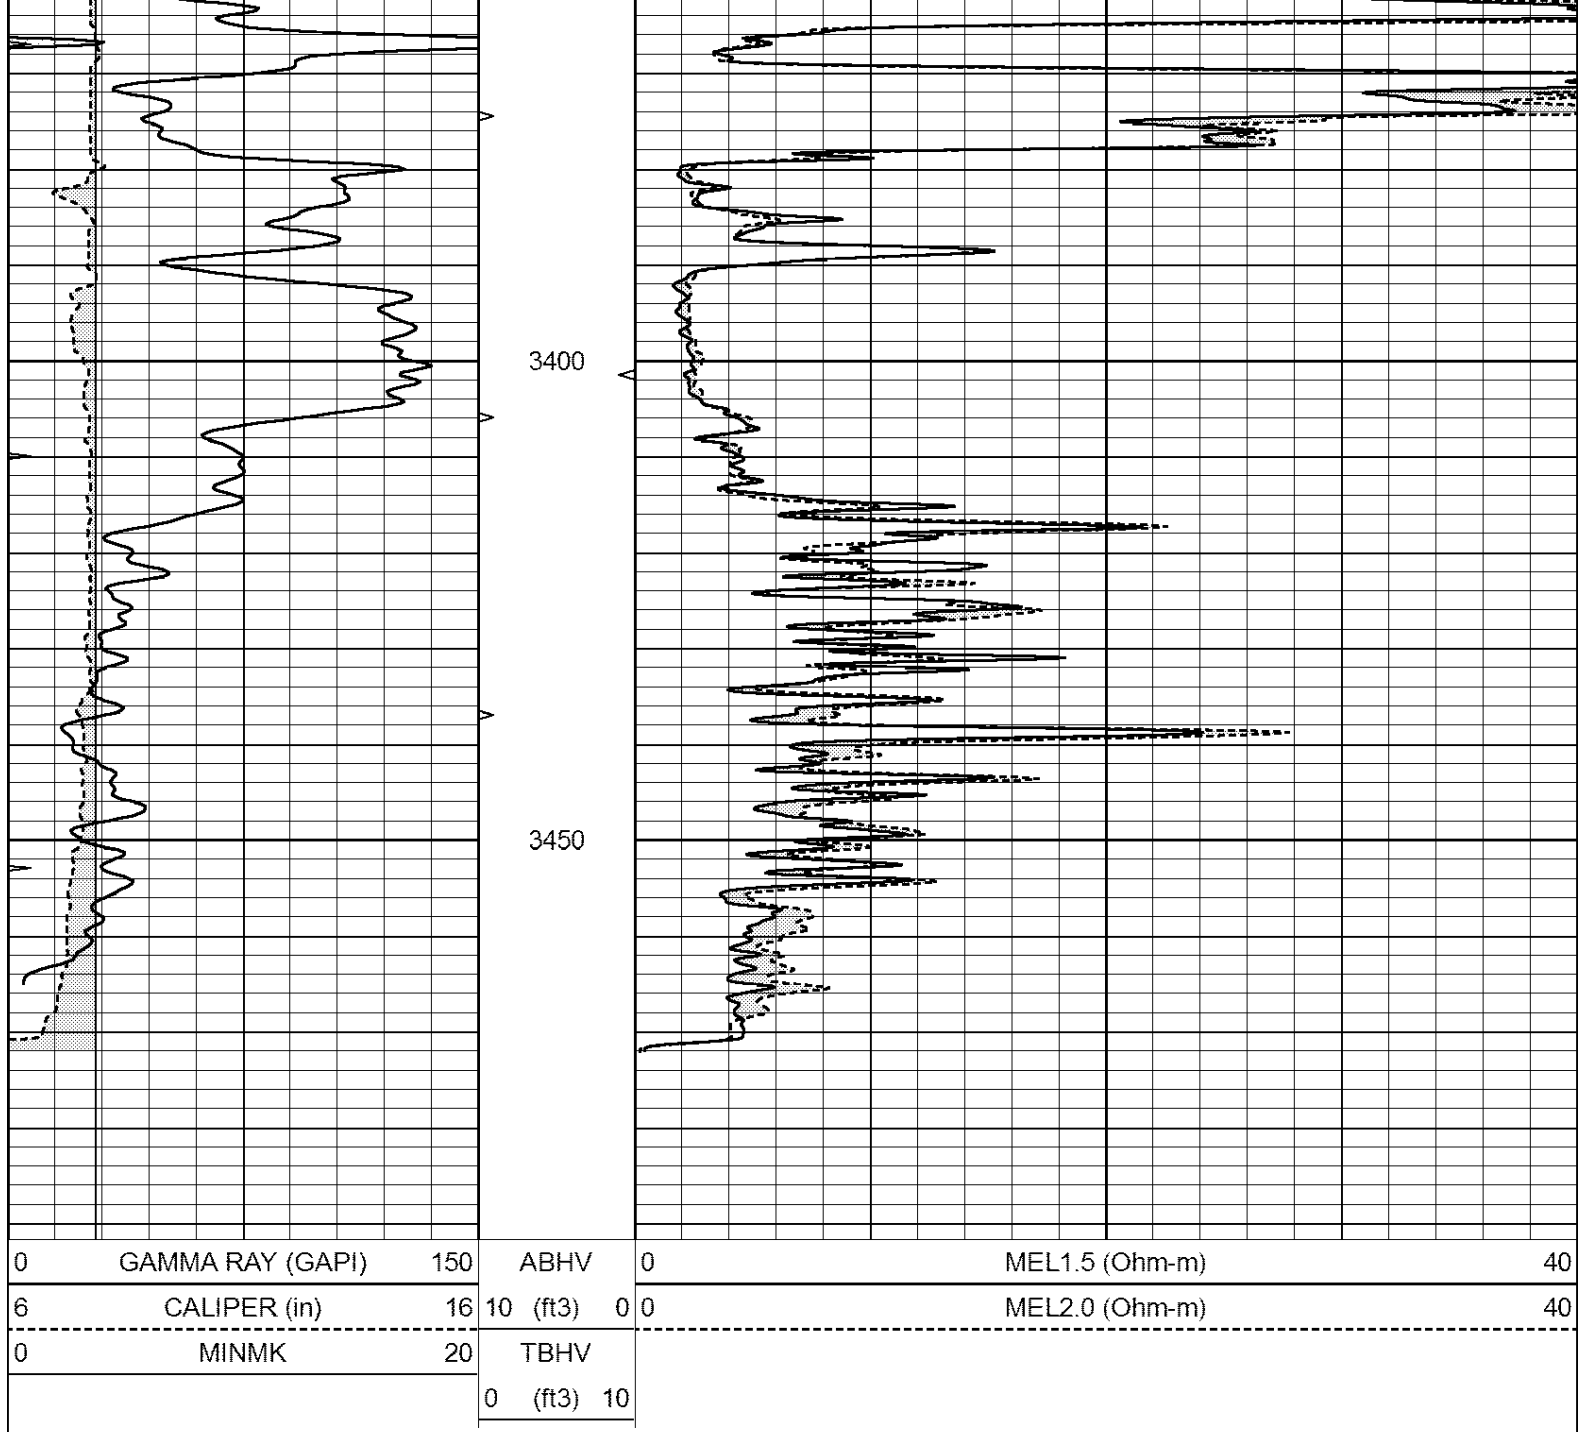

Calibration Report			
Database File:	2700pe.db		
Dataset Pathname:	pass4		
Dataset Creation:	Wed Aug 08 09:35:38 2018 by Log Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	MICRO3		
Tool Model:	PROBE		
Performed:	Wed Aug 08 09:13:43 2018		
Caliper Calibration:	Gain=3.840	Offset=-7.902	
References	Low Cal	High Cal	
Readings	7.000	14.000	
	3.622	5.514	
1.5" Calibration:	Gain=120.000	Offset=0.400	
	Low Cal	High Cal	

References	0.000	20.000
Readings	0.004	0.228
2" Calibration:	Gain=110.553	Offset=0.220
	Low Cal	High Cal
References	0.000	20.000
Readings	0.005	0.175
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Mon Jul 02 20:05:37 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.9600	GAPI/cps