PIONEER
Pioneer Energy Services

DUAL COMP POROSITY LOG

Company AMERICAN WARRIOR, INC.
Well SUNRAY #1-12
Field UNKNOWN
County GREELEY State KANSAS
Location: API #: 15-071-20881-00-00
2324' FNL & 1117' FWL
SEC 12 TWP 16S RGE 42W

Other Services: DIL/MEL, BHCS

Elevation: K.B. 3791', D.F. N/A, G.L. 3780'

Company	AMERICAN WARRIOR, INC.
Well	SUNRAY #1-12
Field	UNKNOWN
County	GREELEY
State	KANSAS
Location:	API #: 15-071-20881-00-00
	2324' FNL & 1117' FWL
	SEC 12 TWP 16S RGE 42W
Other Services	DIL/MEL, BHCS
Elevation	K.B. 3791', D.F. N/A, G.L. 3780'
Permanent Datum	GROUND LEVEL Elevation 3780'
Log Measured From	KELLY BUSHING
Drilling Measured From	KELLY BUSHING

Date	4/16/2018
Run Number	ONE
Type Log	CNL/CDL
Depth Driller	5240'
Depth Logger	5243'
Bottom Logged Interval	4214'
Top Logged Interval	3600'
Type Fluid In Hole	CHEMICAL
Salinity, PPM CL	4000
Density	9.5
Level	FULL
Max. Rec. Temp. F	128
Operating Rig Time	5 HOURS
Equipment -- Location	91 HAYS
Recorded By	D. SCHMIDT
Witnessed By	KEVIN TIMSON

Borehole Record

Run No.	Bit	From	To
ONE	12.25"	0'	441'
TWO	7.875"	441'	TD

Casing Record

Size	Wgt.	From	To
8.625"	23#	0'	441'

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and Pioneer Wireline Services, LLC cannot and does not guarantee the accuracy or correctness of any interpretation, and Pioneer Wireline Services, LLC will not be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees.

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.

TRIBUNE,
NORTH TO D RD, 8 WEST, 1 NORTH, 1 WEST, 1/4 NORTH,
EAST INTO

Log Measured From: KELLY BUSHING 11 Ft. Above Permanent Datum

THANK YOU FOR USING PIONEER ENERGY SERVICES
www.pioneeres.com 785-625-3858

Your Pioneer Energy Services Crew	This Log Record Was Witnessed By
Engineer: D. SCHMIDT	Primary Witness: KEVIN TIMSON
Operator:	Secondary Witness:
Operator:	Secondary Witness:
Operator:	Secondary Witness:

Log Variables

Database C:\ProgramData\Warrior\Data\american warrior_sunray 1-12.db
Dataset field/well/STKML/pass3.8/_vars_

Top - Bottom

M	A	SZCOR	NPORSEL	FLUIDDEN g/cc	MATRXDEN g/cc	SPSHIFT mV	SNDERRM mmho/m
2	1	Off	Limestone	1	2.71	-105	0

SNDERR mmho/m	SRFTEMP degF	CASETHCK in	CASEOD in	PERFS	TDEPTH ft	BOTTEMP degF	BOREID in
0	50	0	5.5	0	5242	128	7.875

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb
			GR-M&W (89)	3.00	3.50	50.00
GR	40.58					
CNLSC	37.48		CNT-M&W (207-MW)	5.50	3.50	100.00
CNSSC	36.73					
			CDL-M&W (182-152)	8.50	4.00	250.00
LSD	28.43					
DCAL	28.42					
SSD	27.93					
			ML-PSIML (PSI-01) GO Micro log tools converted to Simplec electronics	7.58	4.00	65.00
MCAL	19.83					
MI	19.83					
MN	19.83					
RLL3F	15.80					
RLL3	15.80					

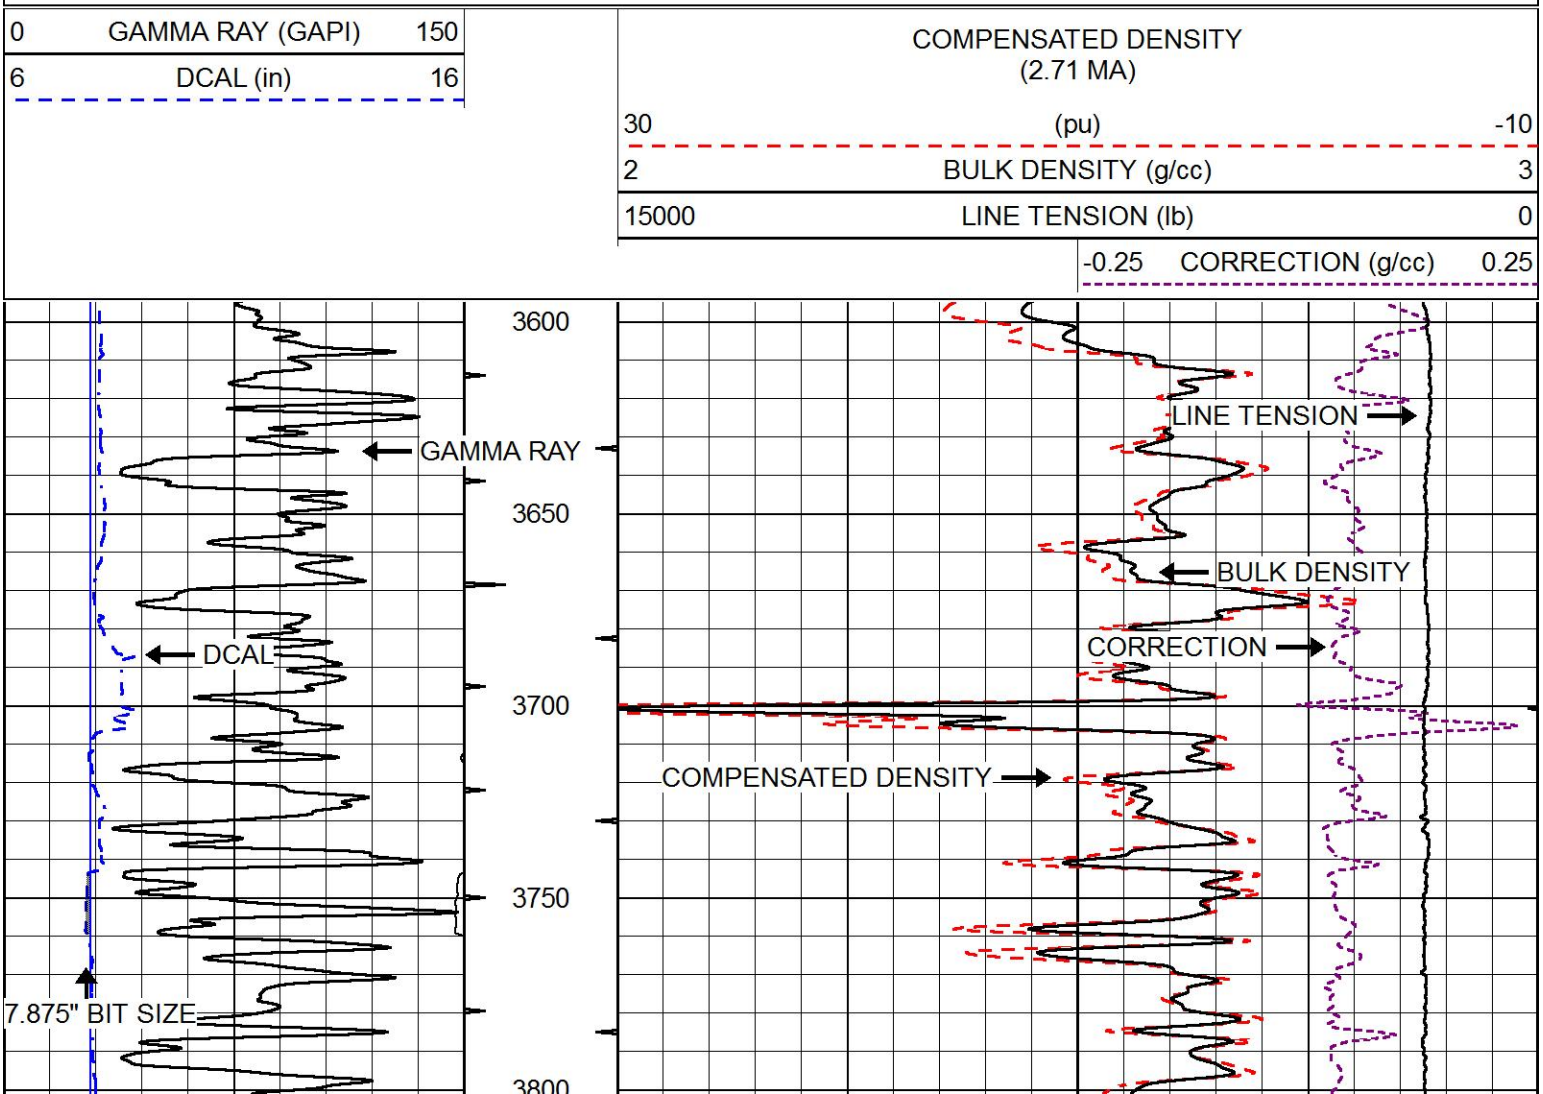
			DIL-PSI HIGH TEMP (933 (HT))	18.50	3.50	220.00
CILD	8.00					
CILM	4.70					
SP	0.20					

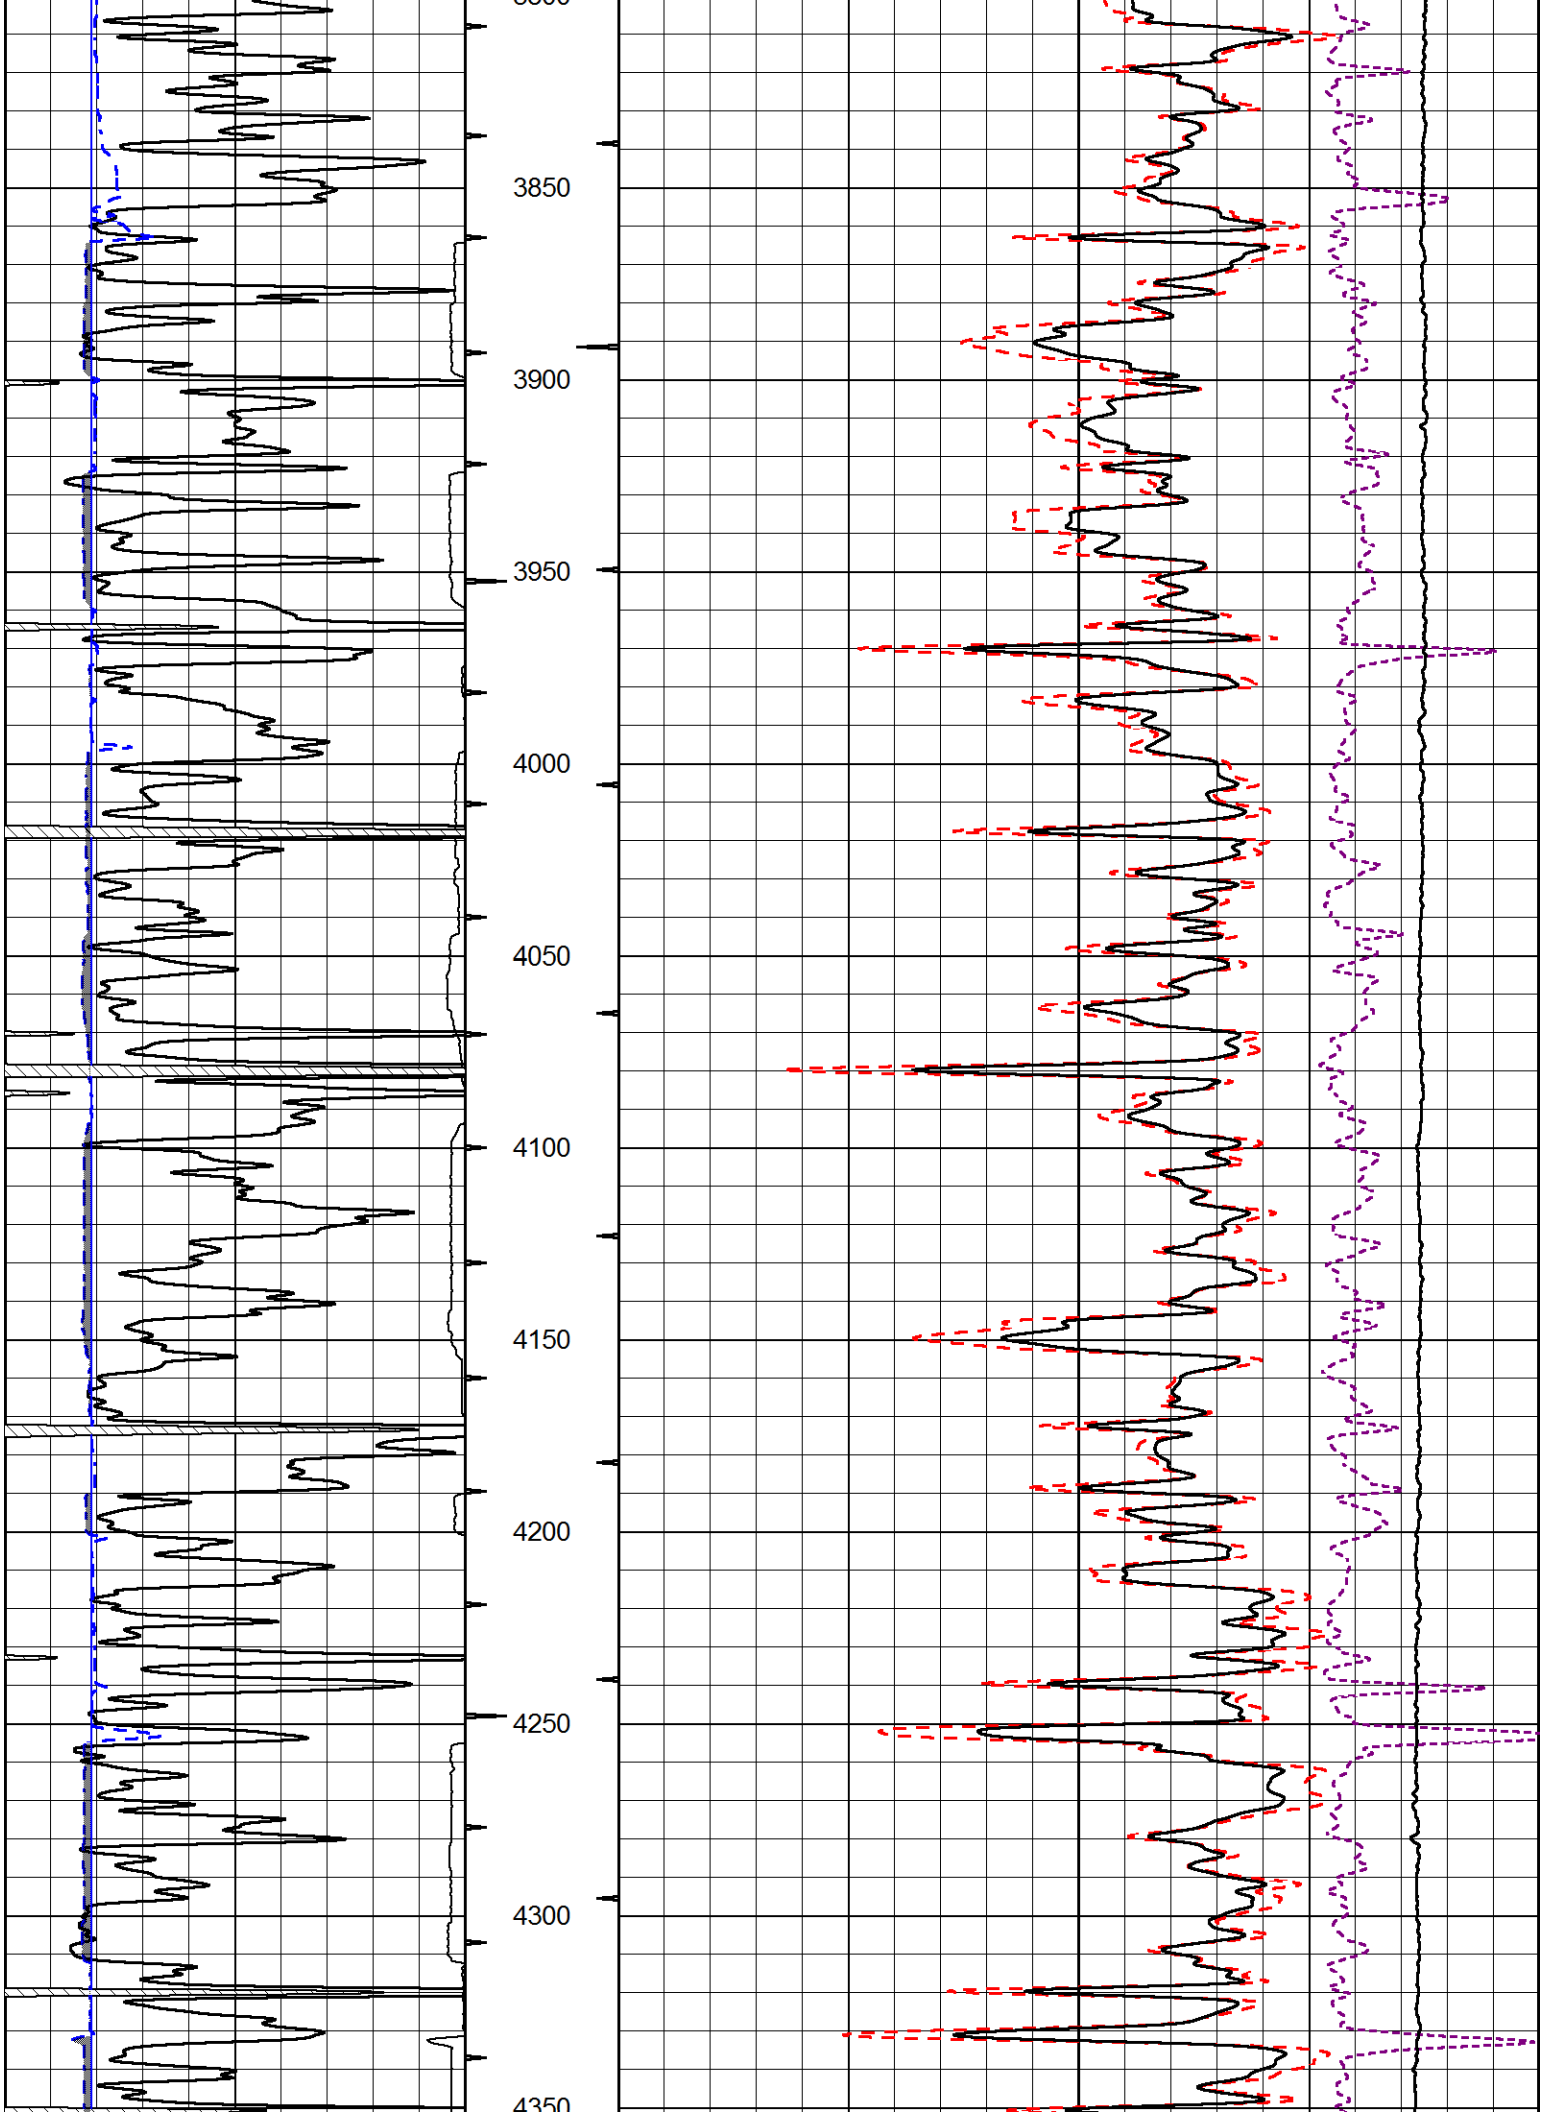
Dataset: american warrior_sunray 1-12.db: field/well/STKML/pass3.8
Total length: 43.08 ft
Total weight: 685.00 lb
O.D.: 4.00 in

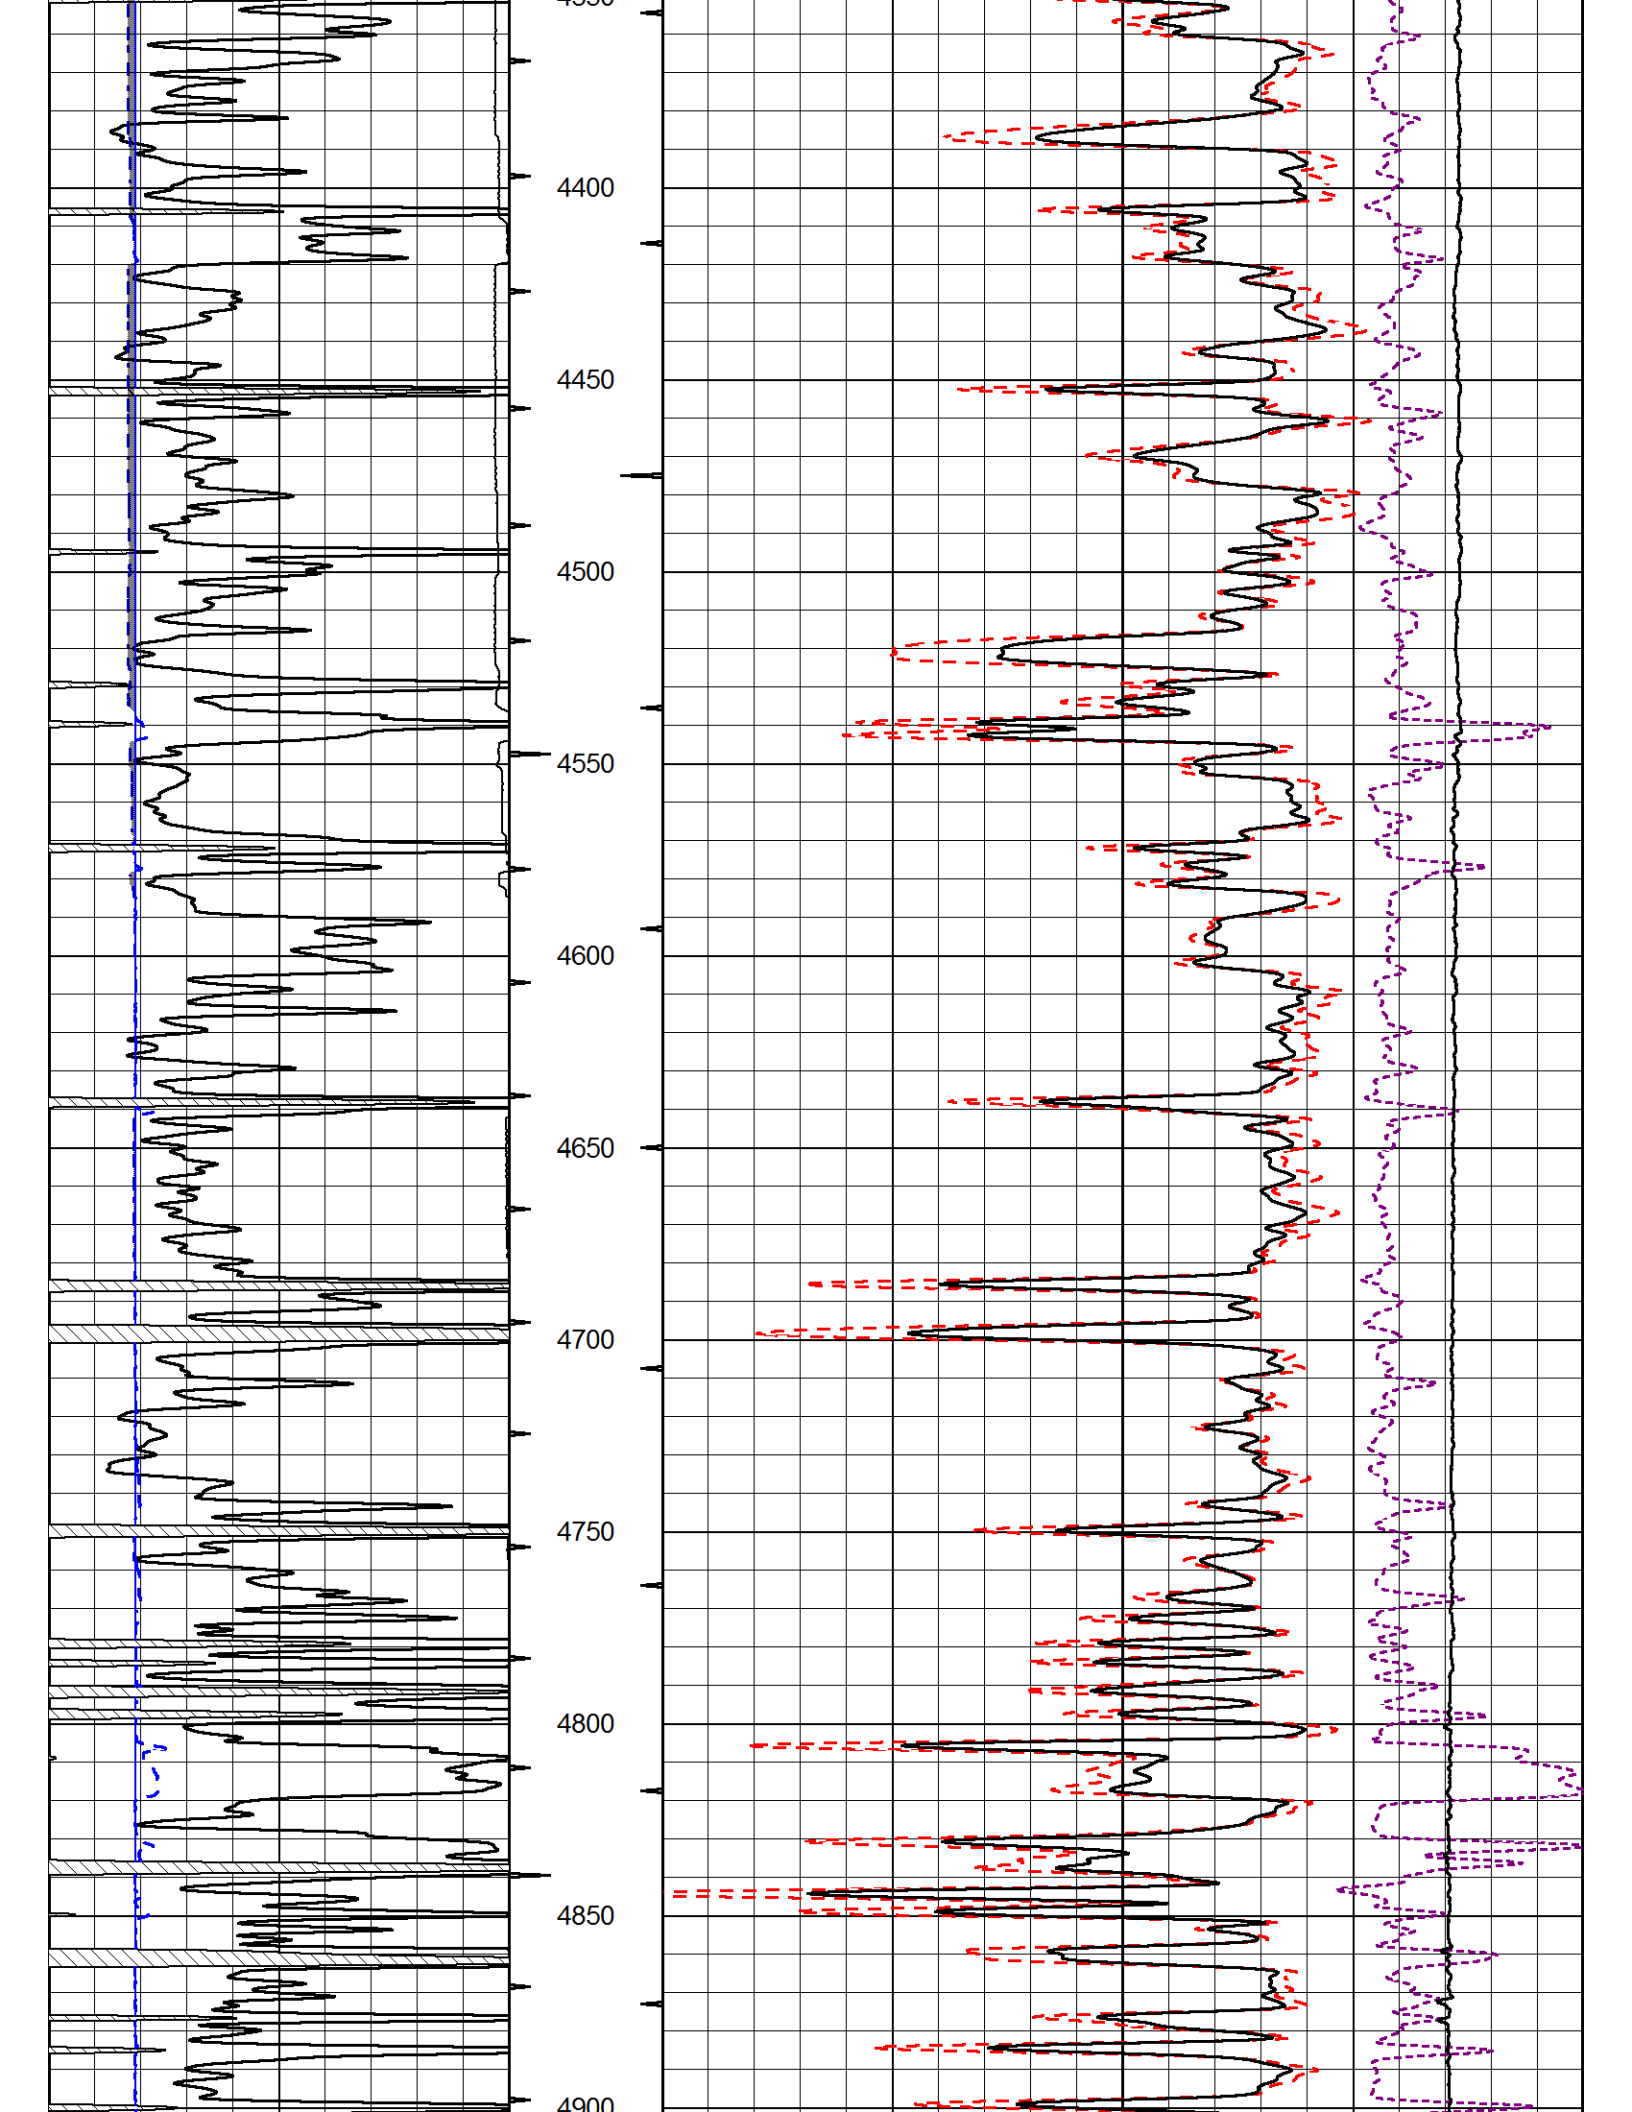
PIONEER
Pioneer Energy Services

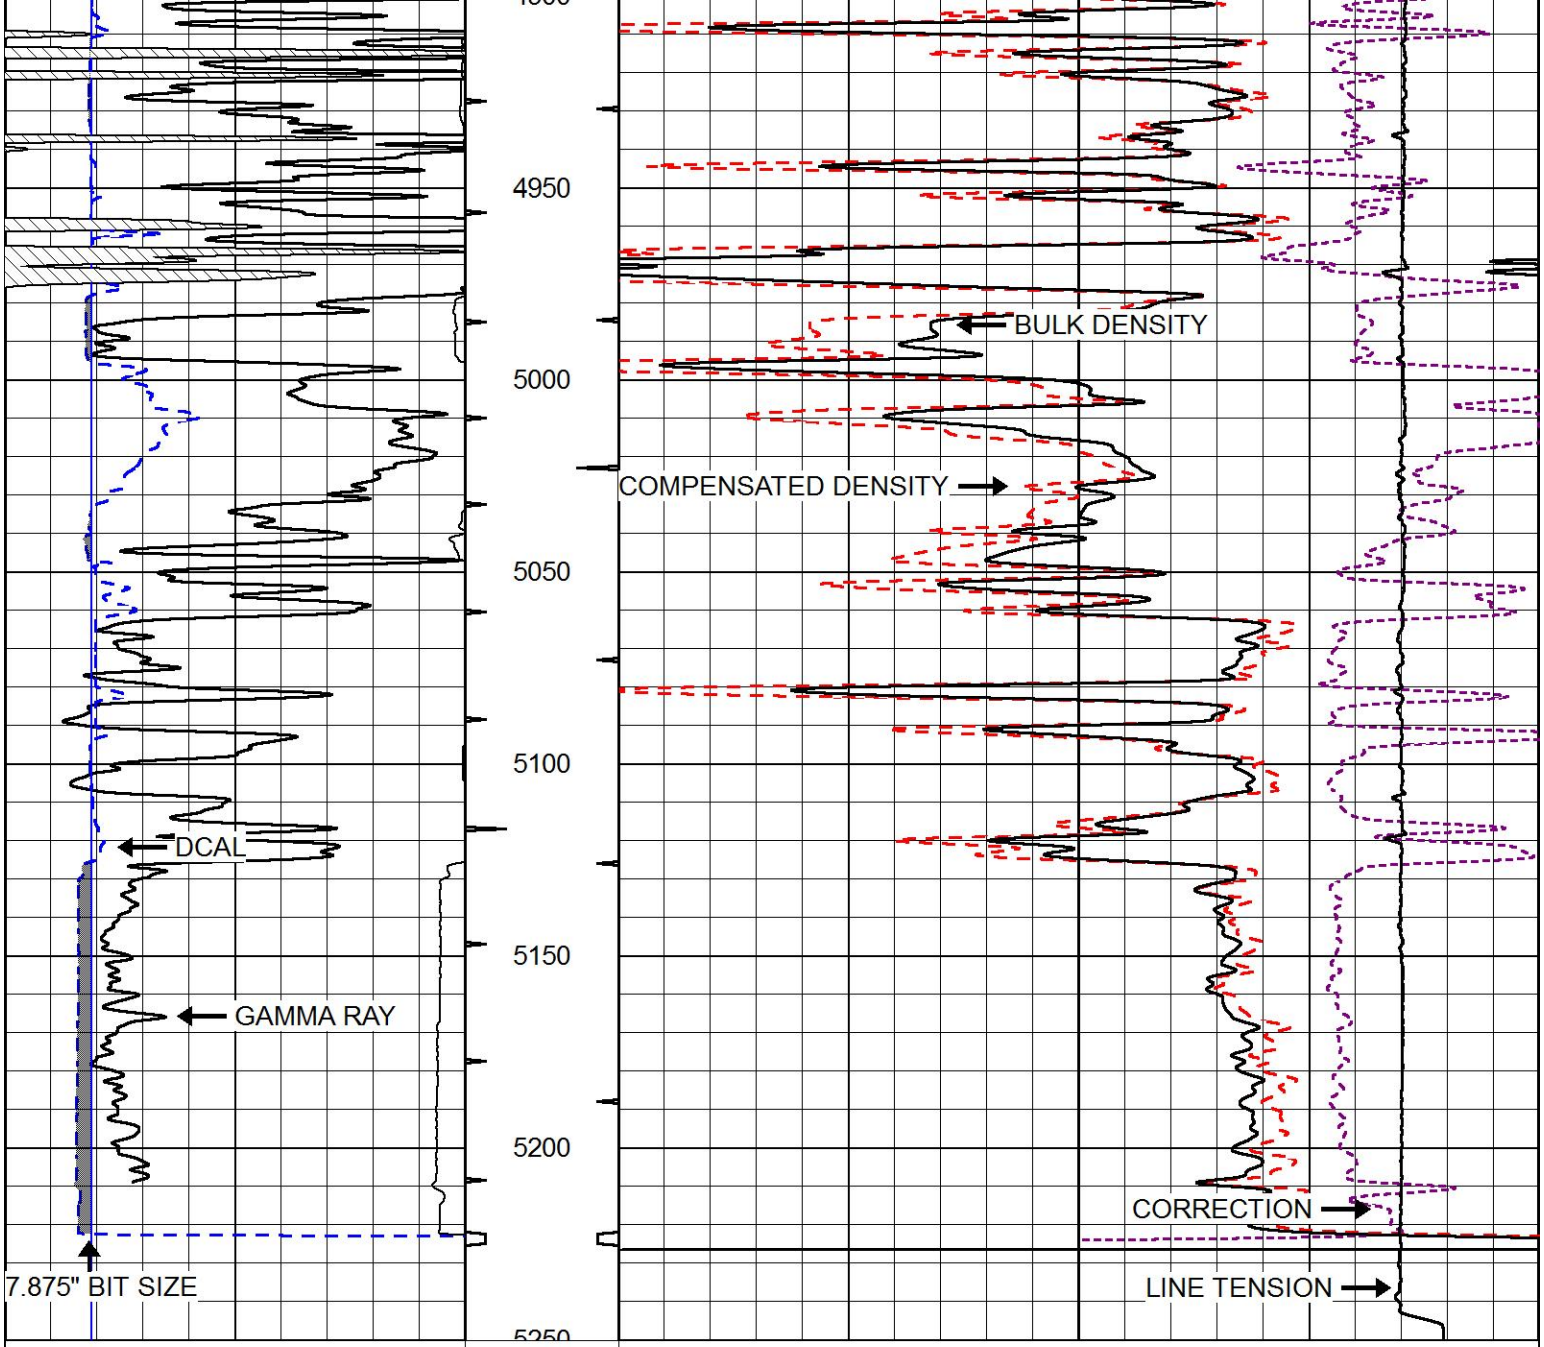
MAIN PASS

Database File: american warrior_sunray 1-12.db
Dataset Pathname: STKML/pass3.1
Presentation Format: cdl
Dataset Creation: Mon Apr 16 22:12:03 2018
Charted by: Depth in Feet scaled 1:600




3850
3900
3950
4000
4050
4100
4150
4200
4250
4300
4350


4400
4450
4500
4550
4600
4650
4700
4750
4800
4850
4900



0	GAMMA RAY (GAPI)	150
6	DCAL (in)	16

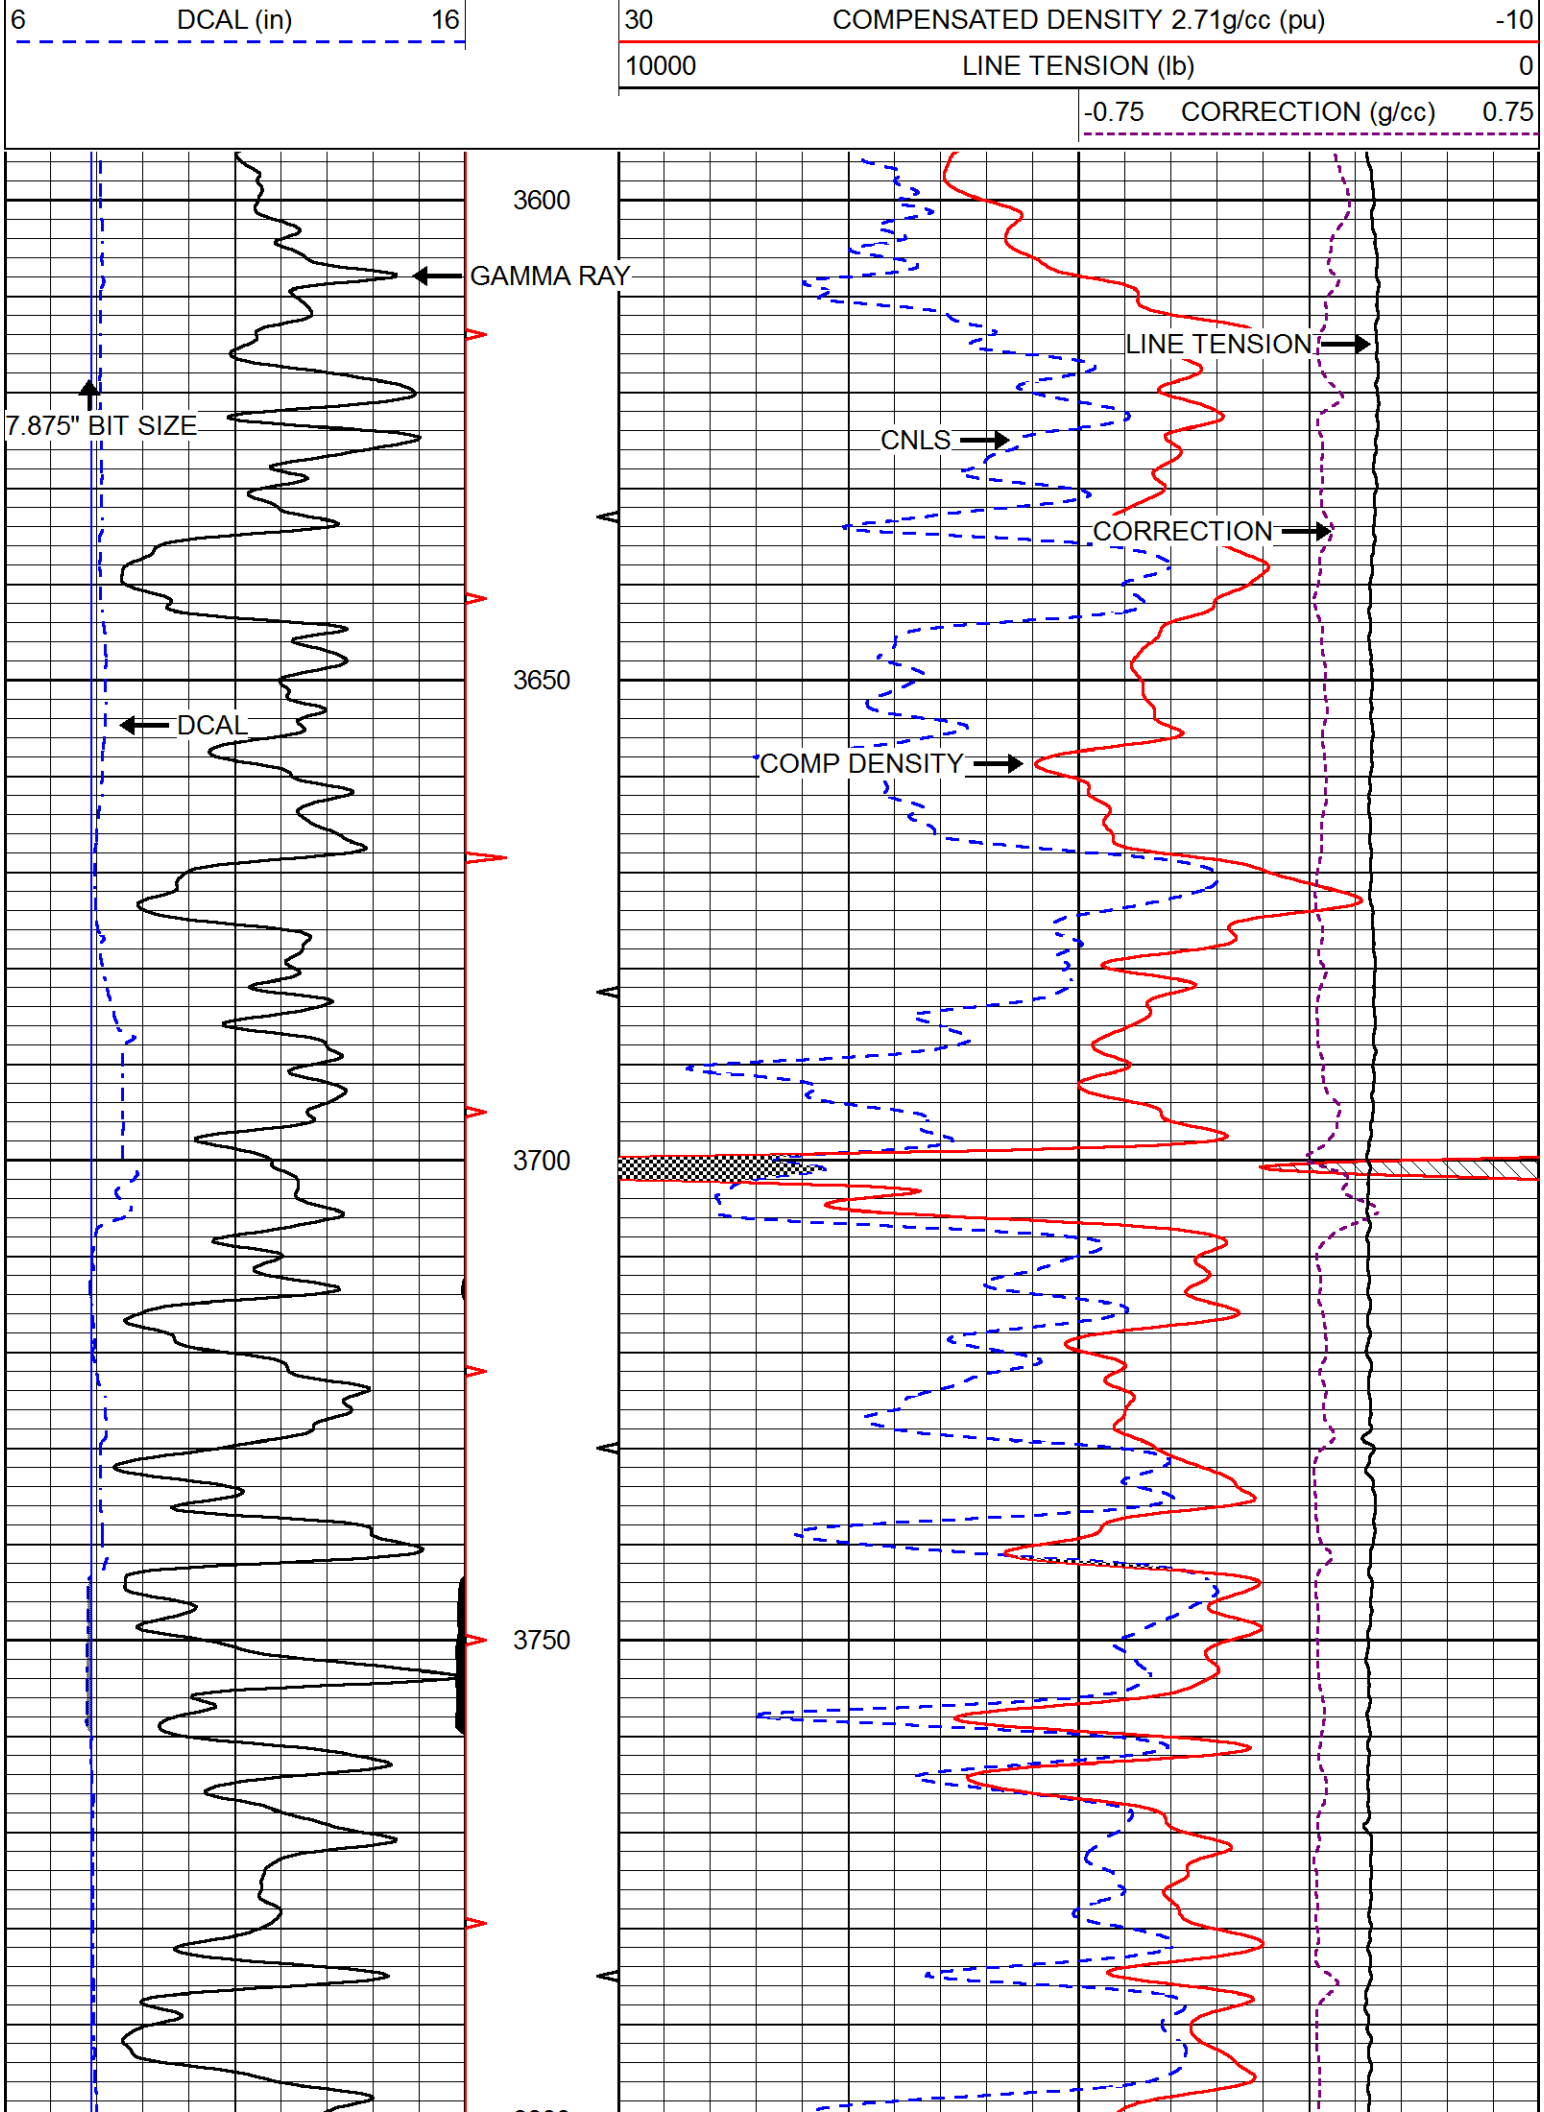
	COMPENSATED DENSITY (2.71 MA)	
30	(pu)	-10
2	BULK DENSITY (g/cc)	3
15000	LINE TENSION (lb)	0
-0.25	CORRECTION (g/cc)	0.25

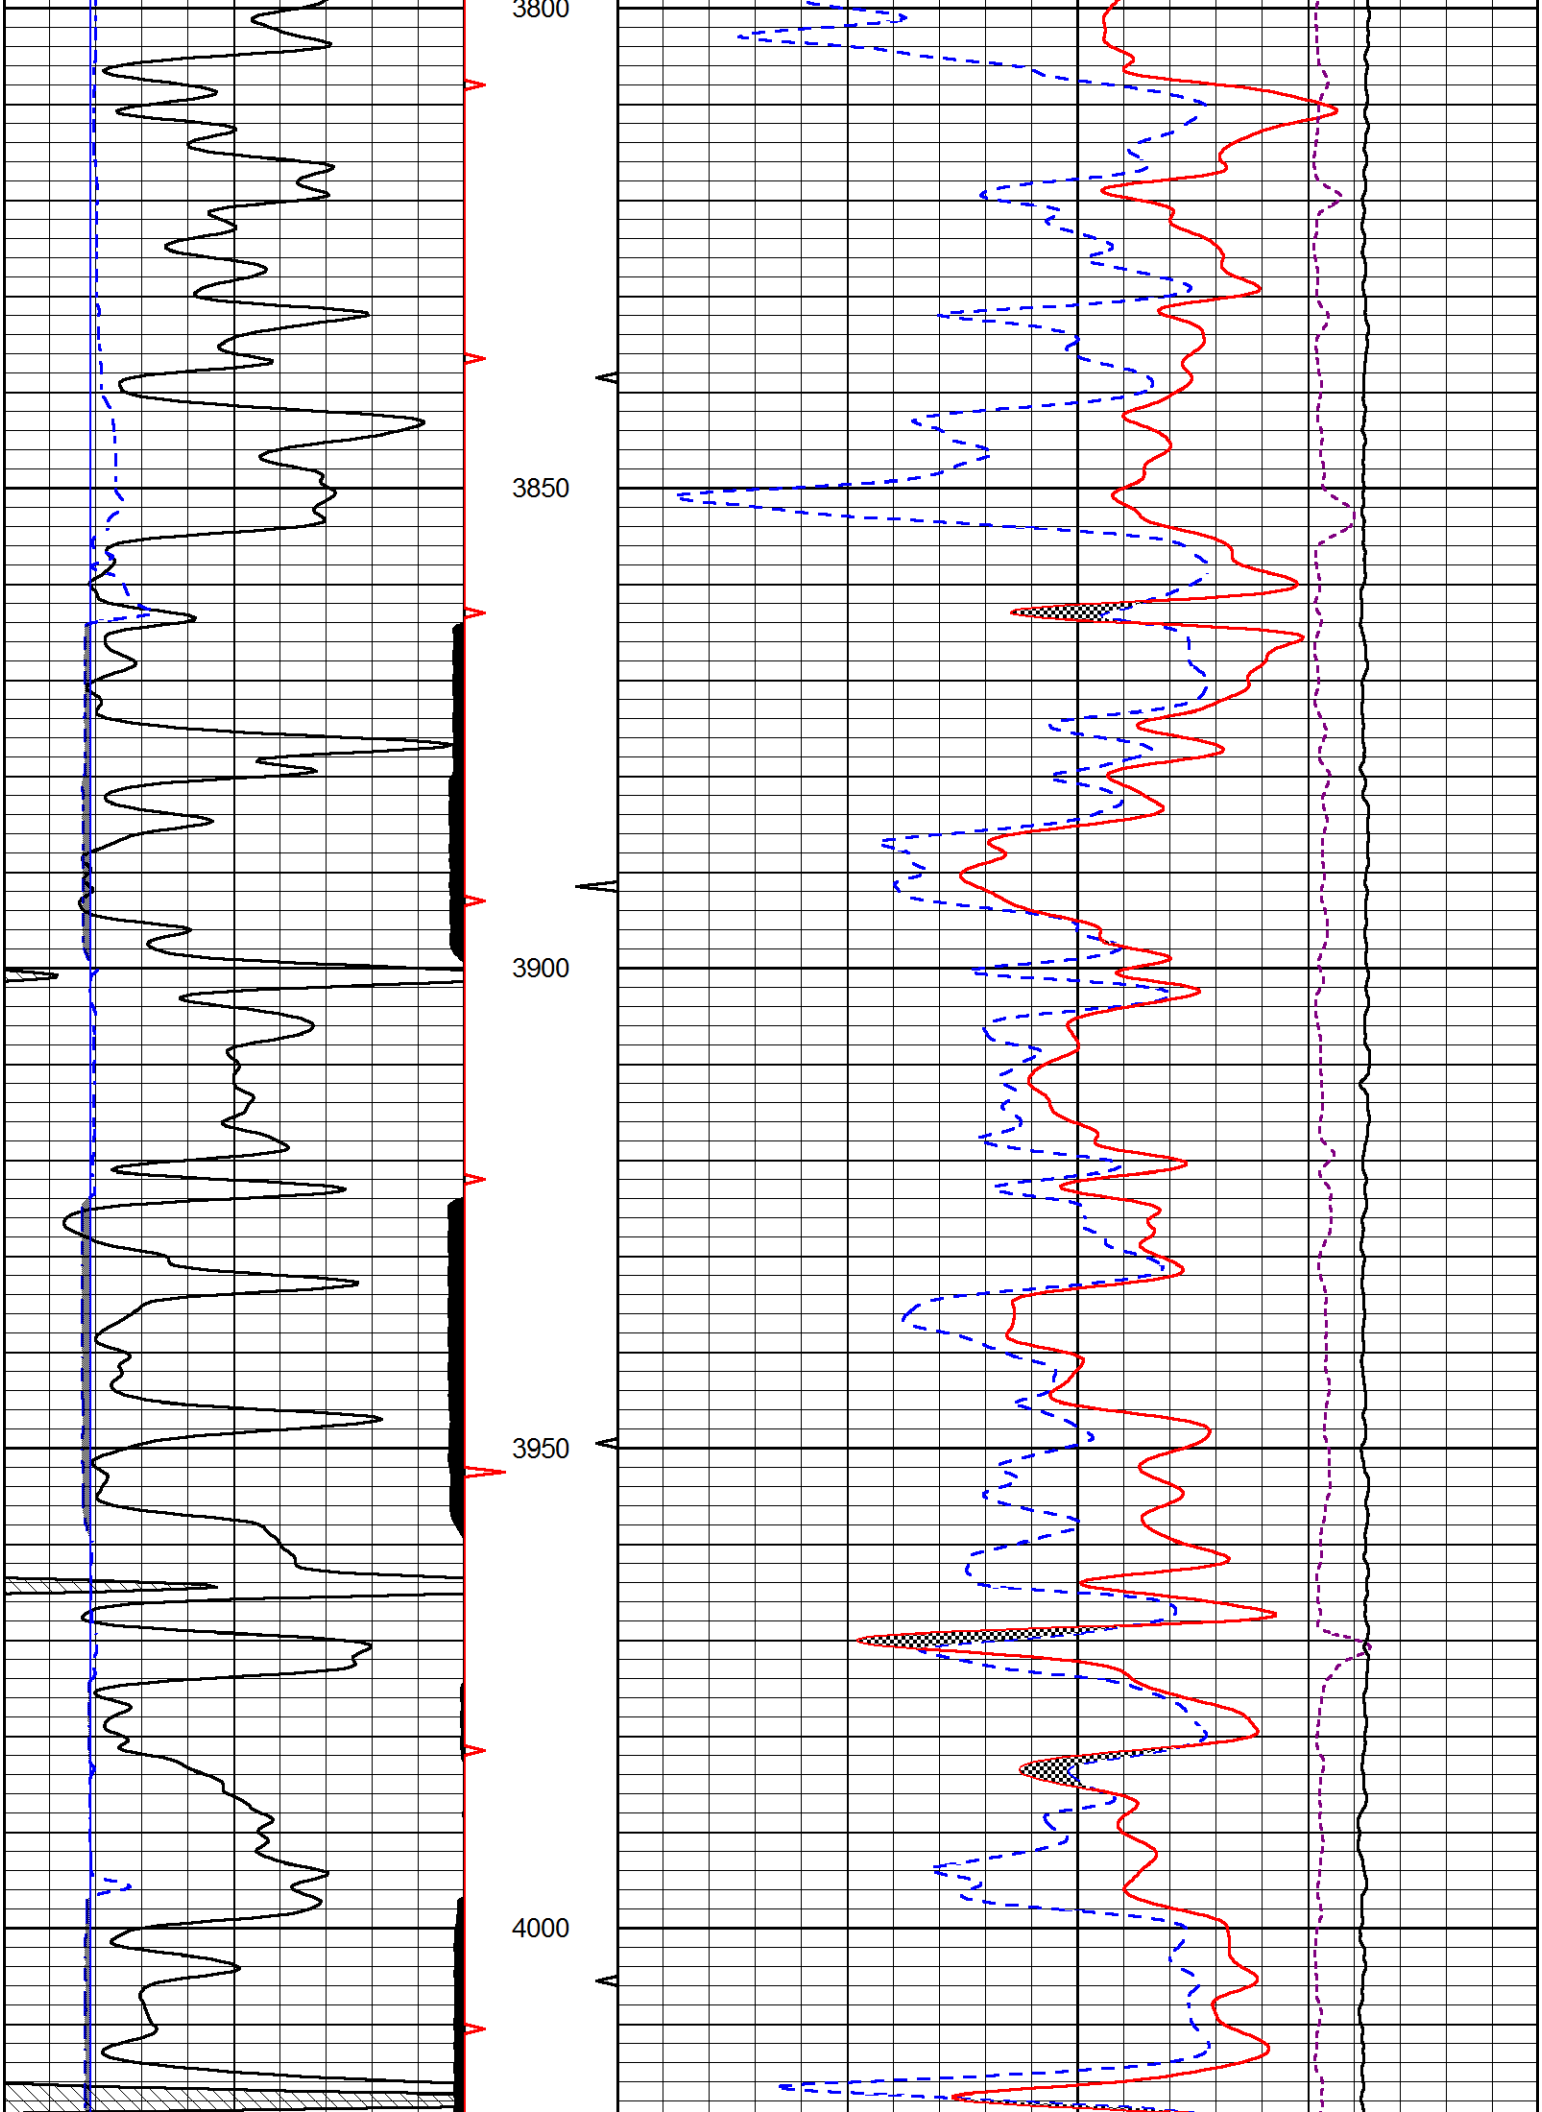
PIONEER
Pioneer Energy Services

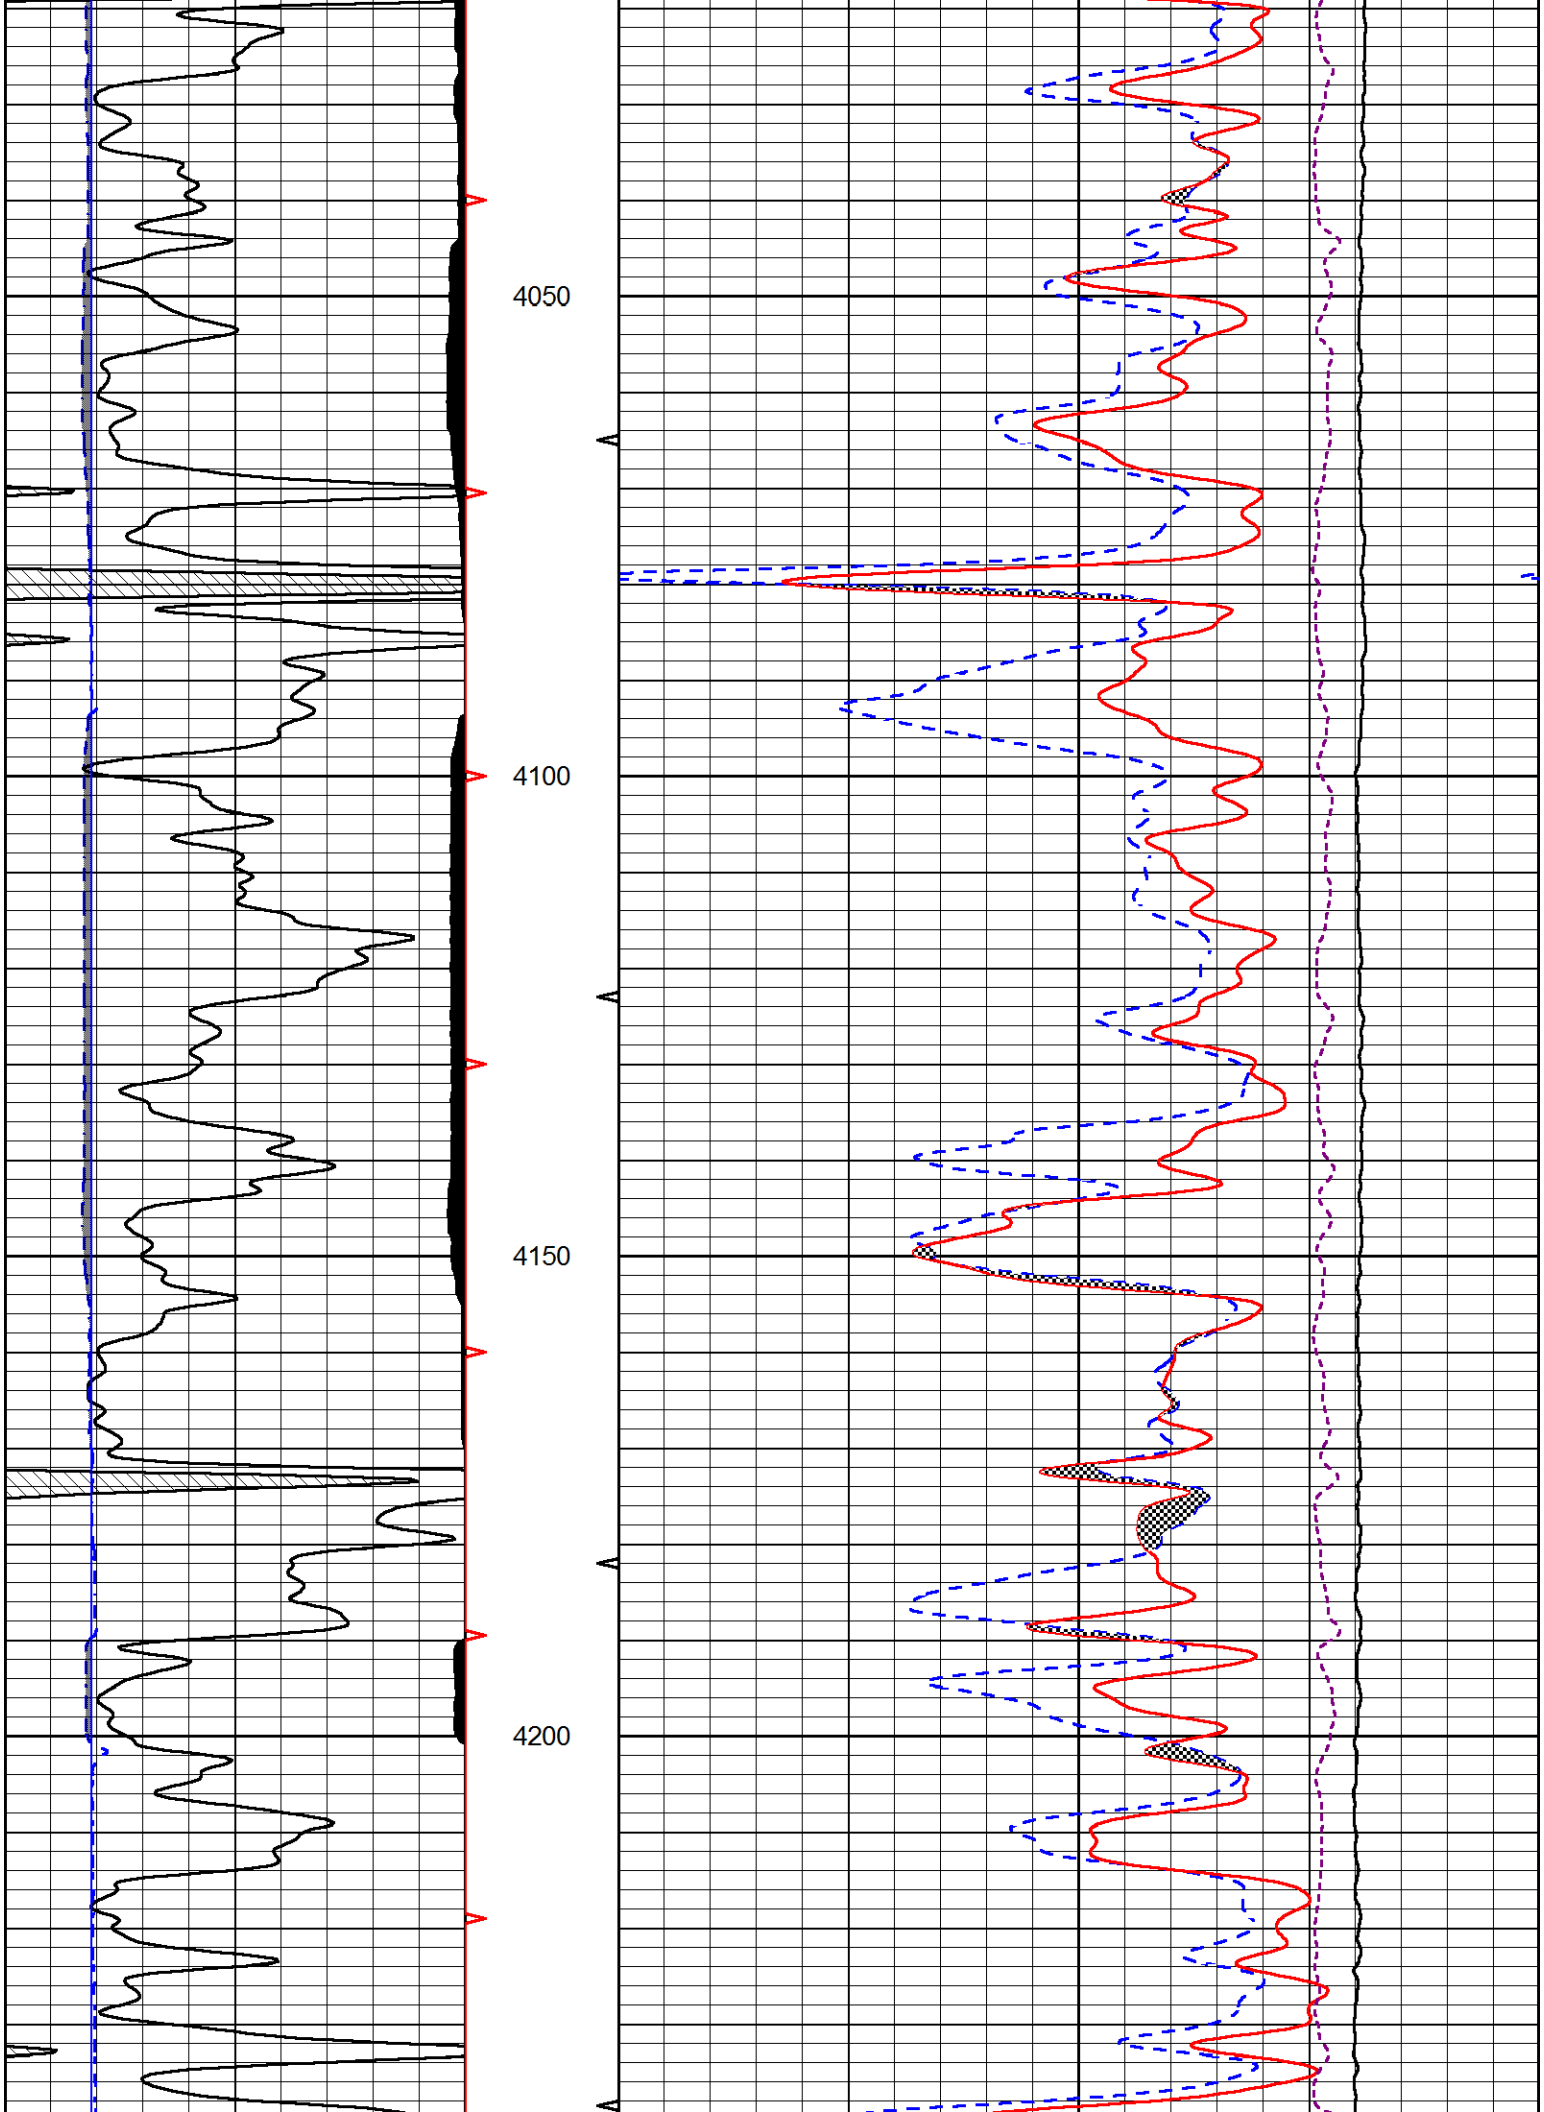
MAIN PASS

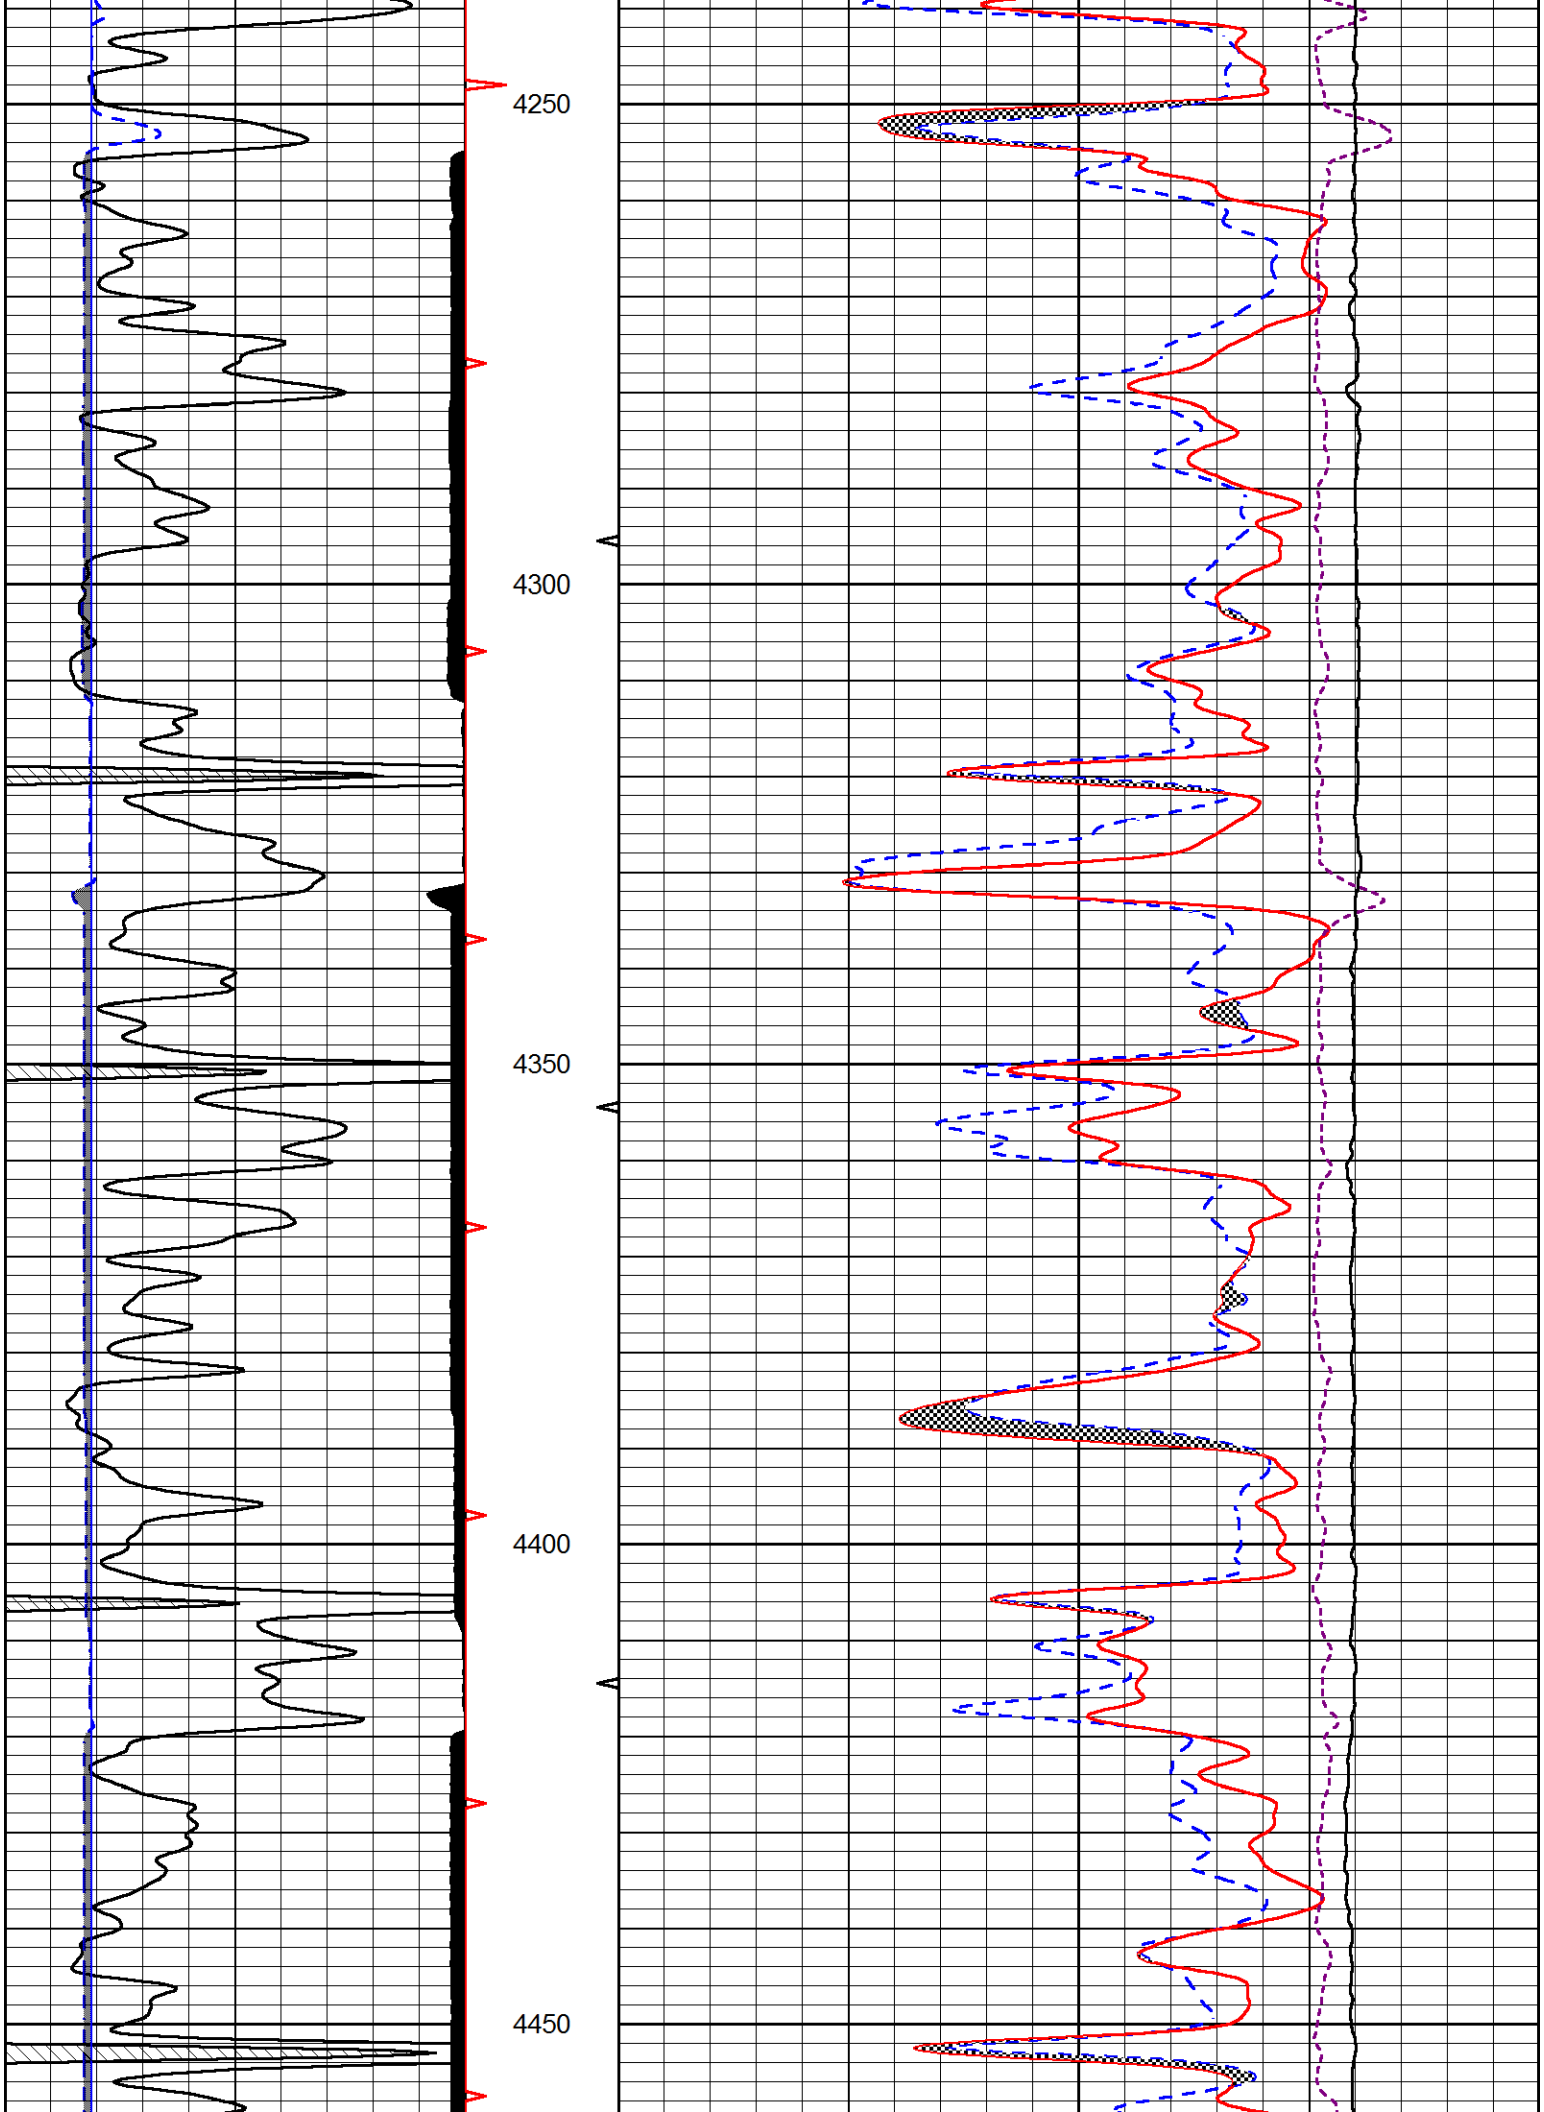
Database File	american warrior_sunray 1-12.db
Dataset Pathname	STKML/pass3.1
Presentation Format	cndlspec
Dataset Creation	Mon Apr 16 22:12:03 2018
Charted by	Depth in Feet scaled 1:240

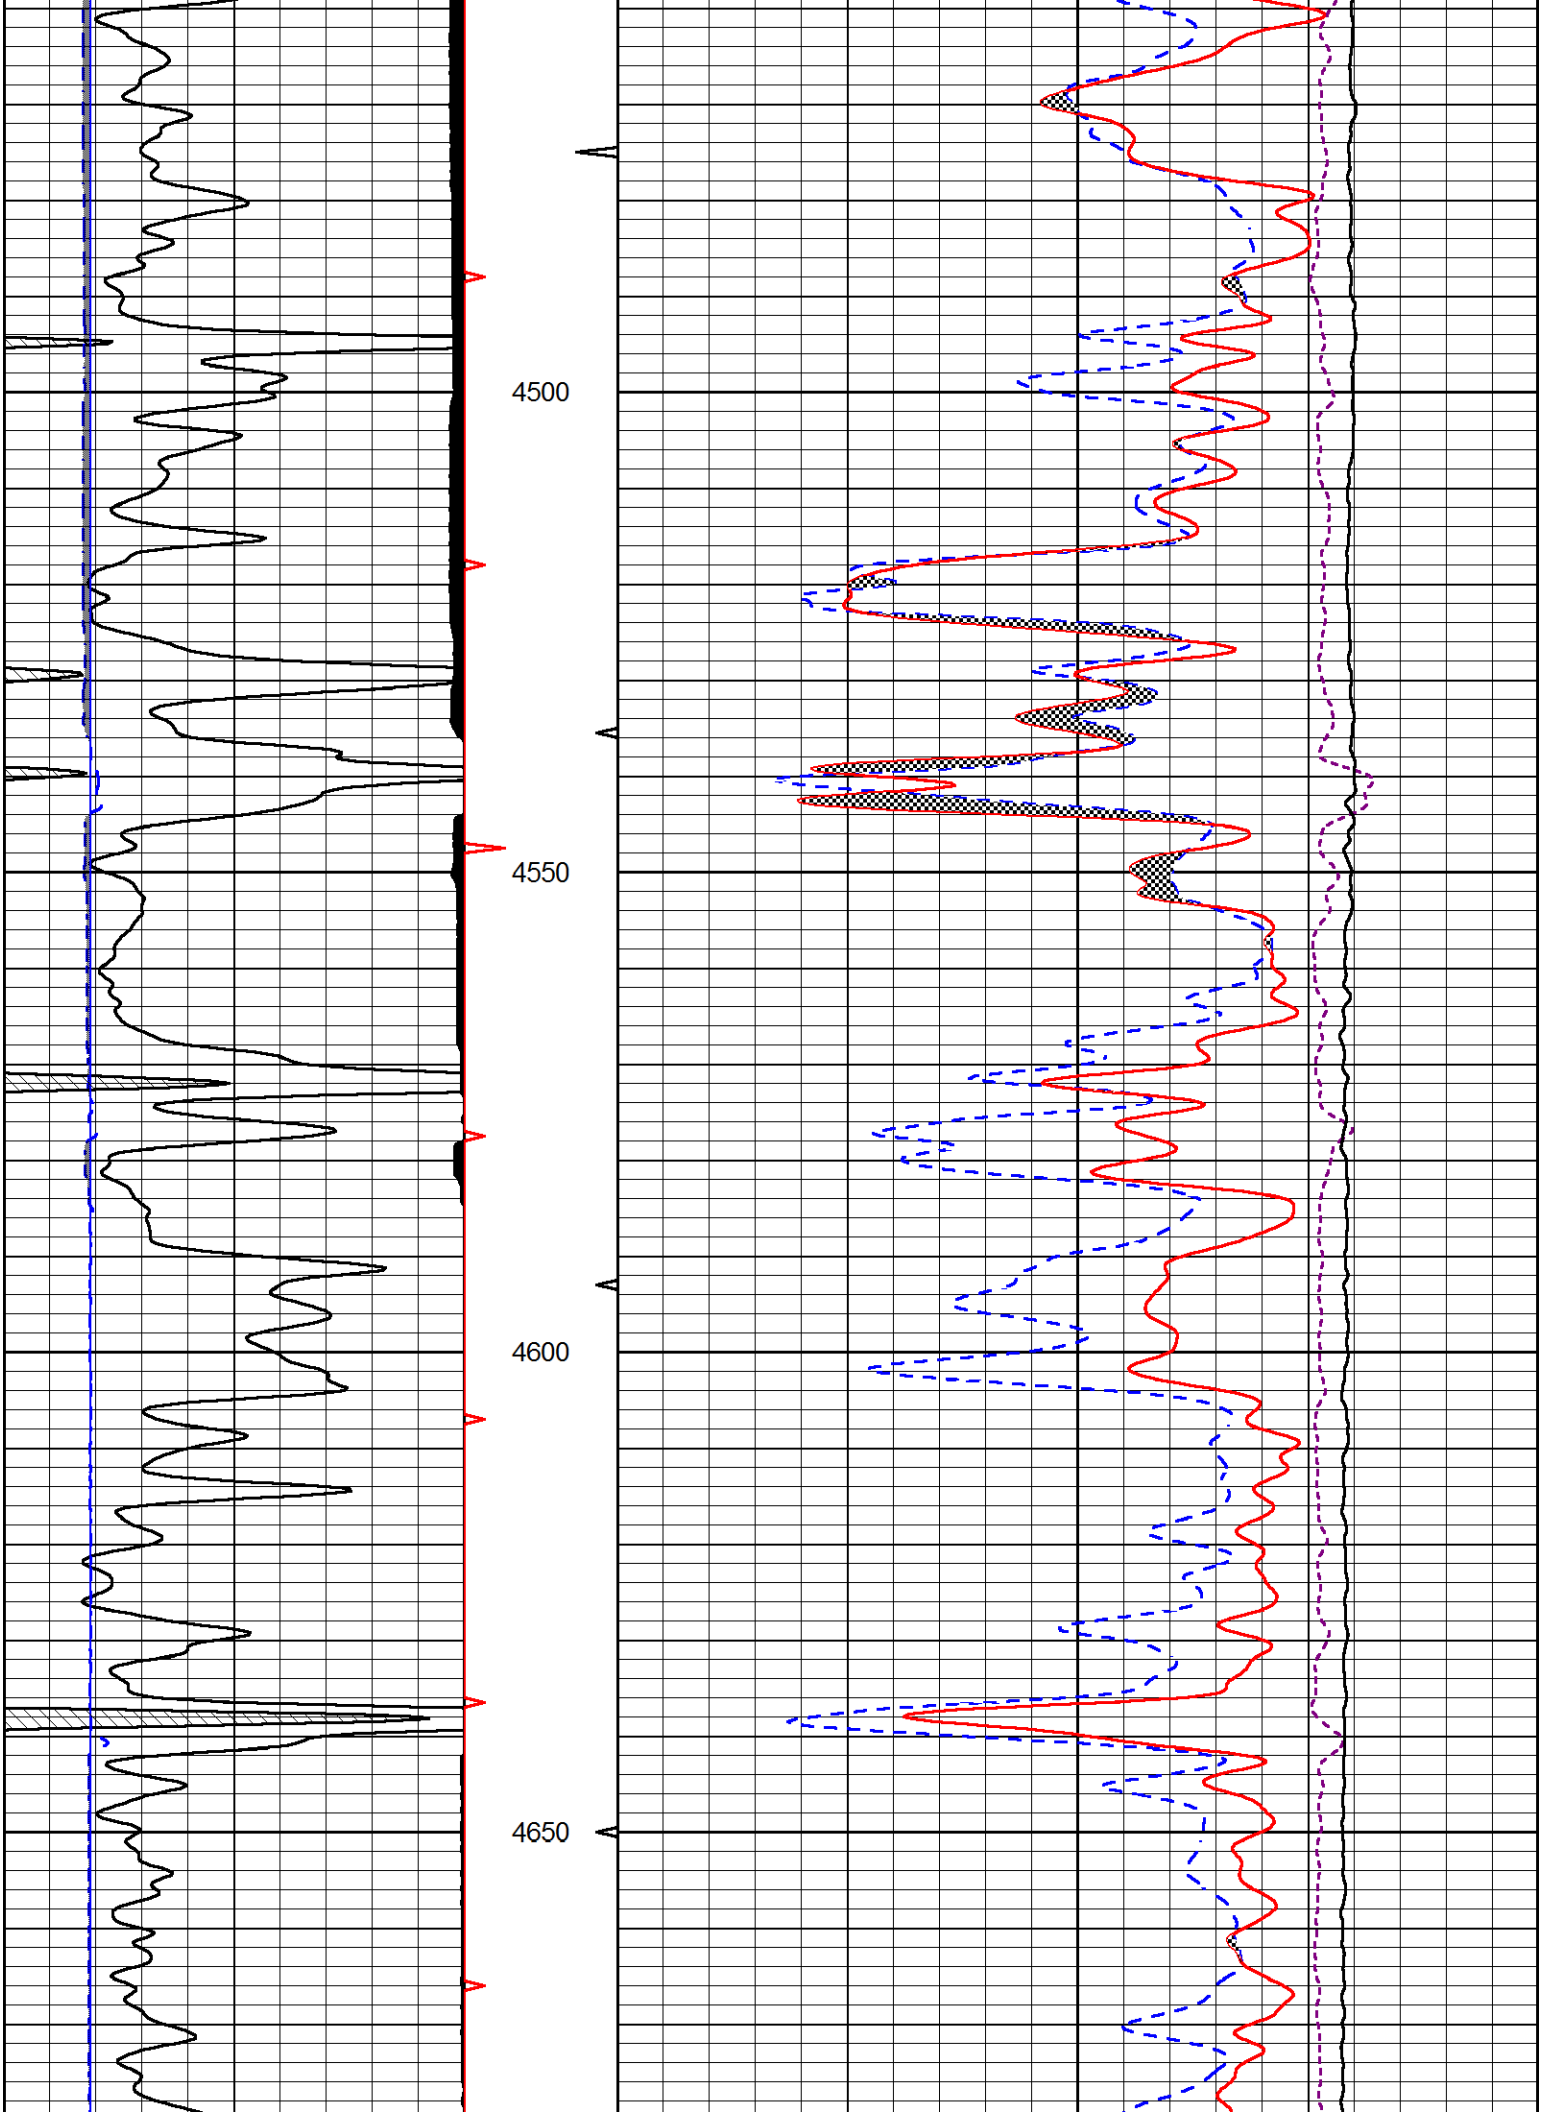
0	GAMMA RAY (GAPI)	150
30	CNLS (pu)	-10

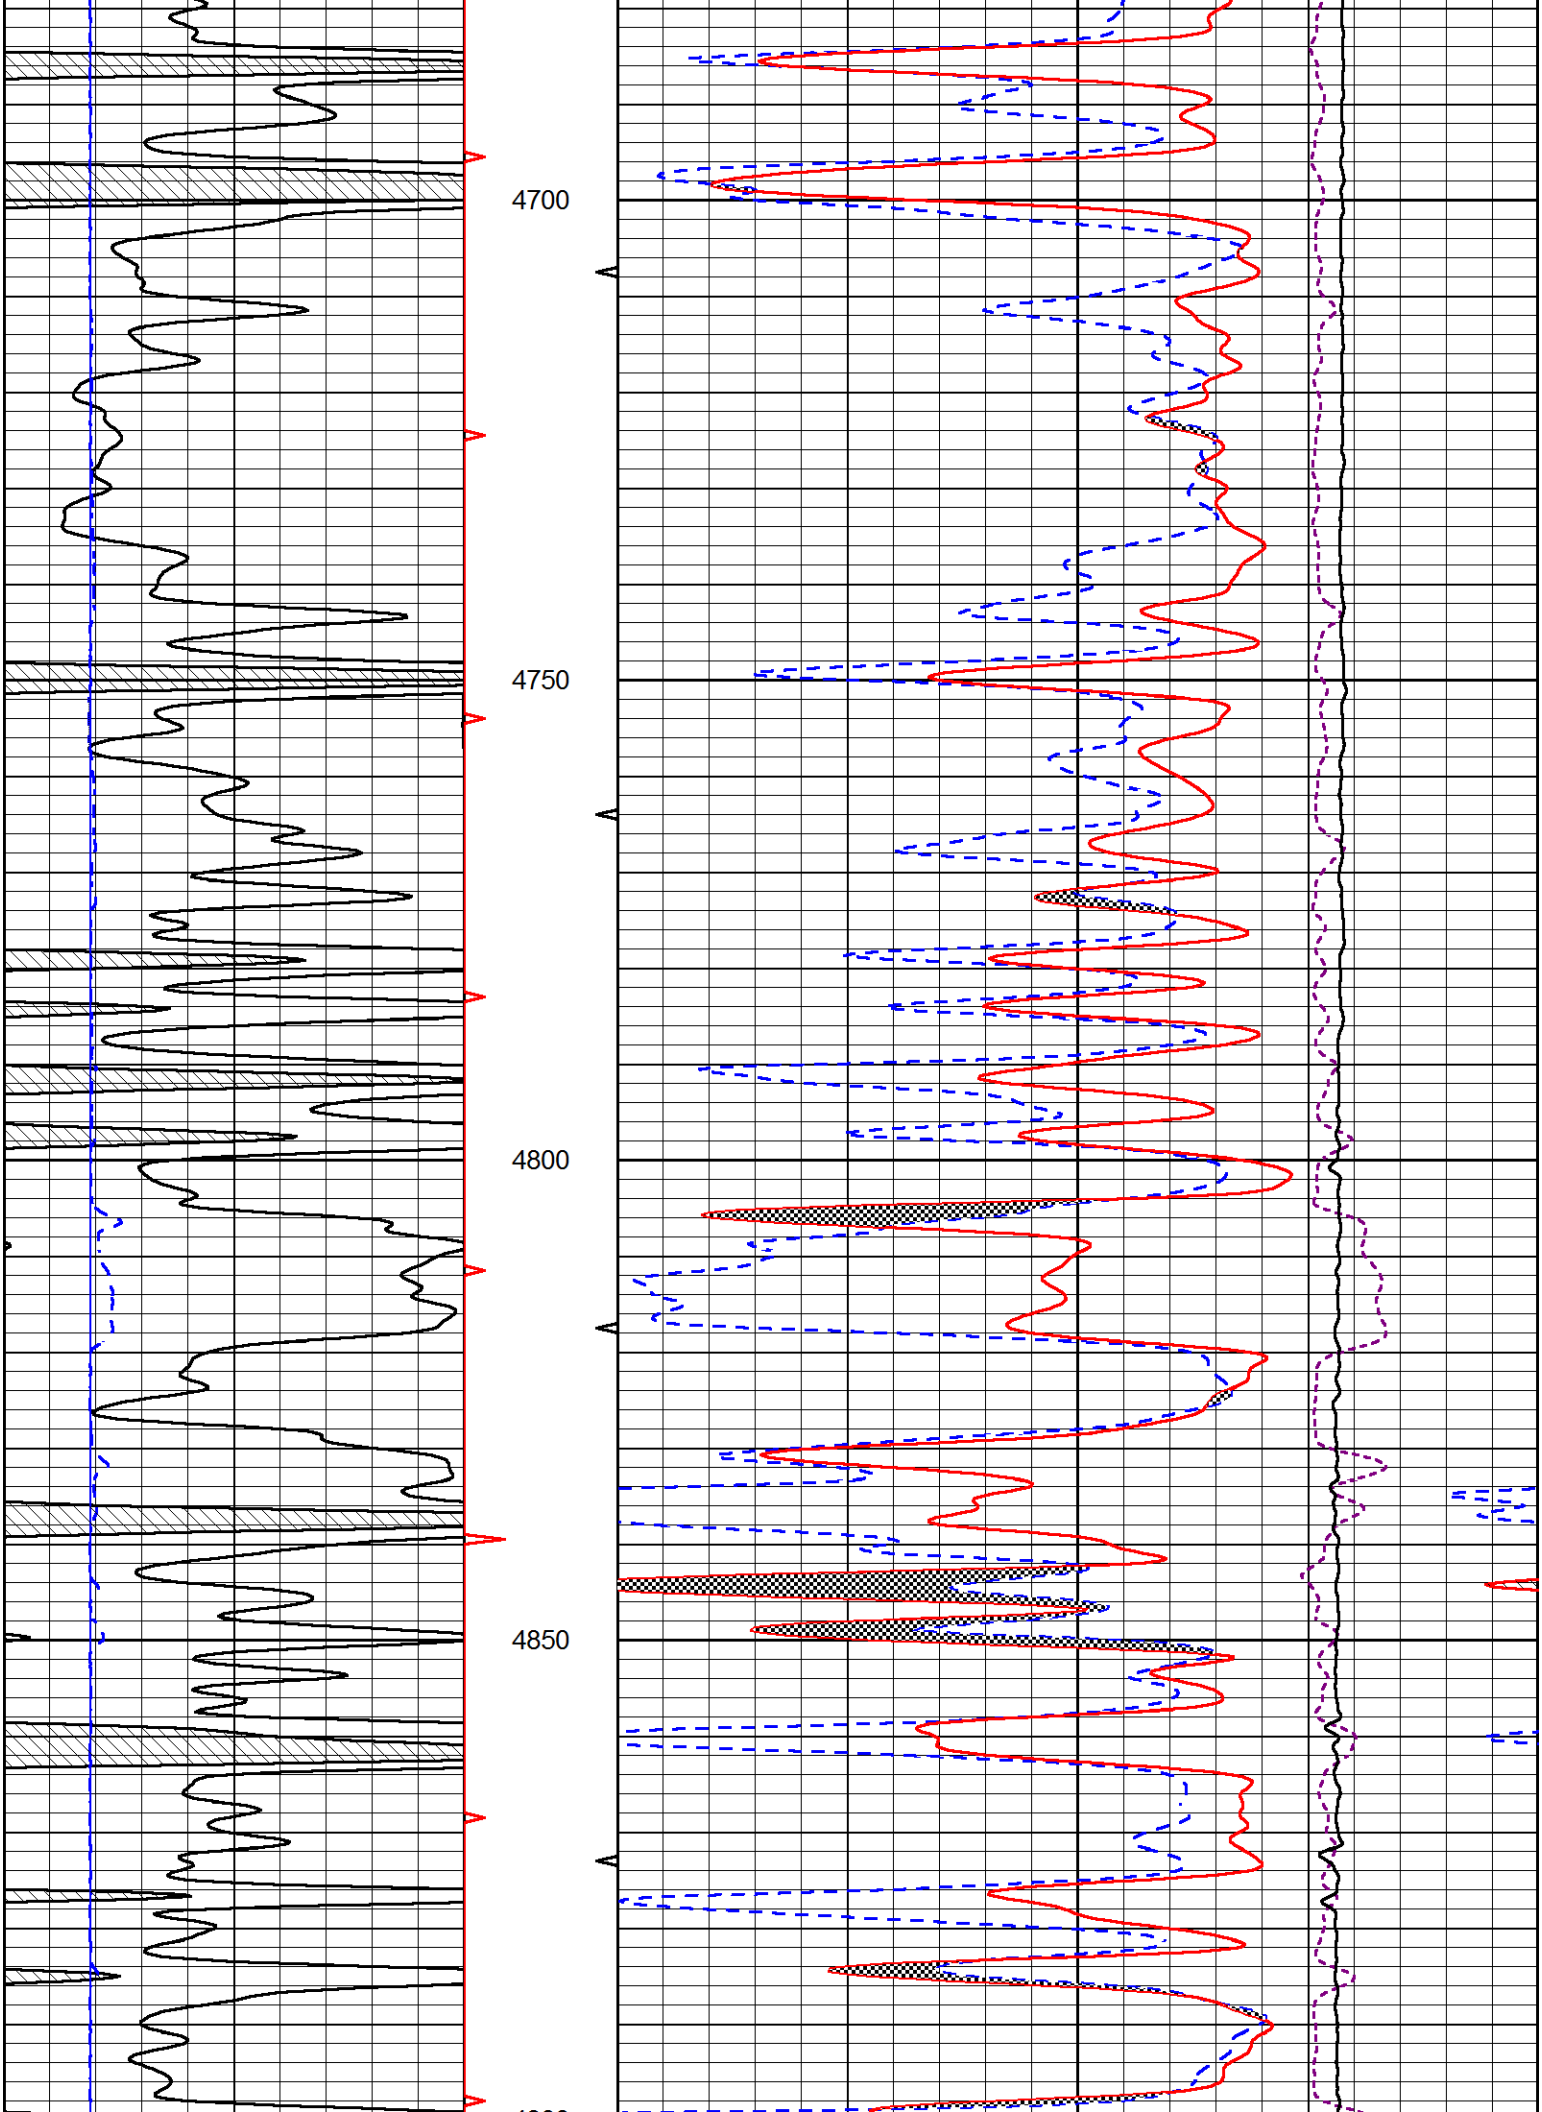

6
DCAL (in)
16
30
COMPENSATED DENSITY 2.71g/cc (pu)
-10
10000
LINE TENSION (lb)
0
-0.75
CORRECTION (g/cc)
0.75
3600
3650
3700
3750
GAMMA RAY
7.875" BIT SIZE
DCAL
LINE TENSION
CNLS
CORRECTION
COMP DENSITY

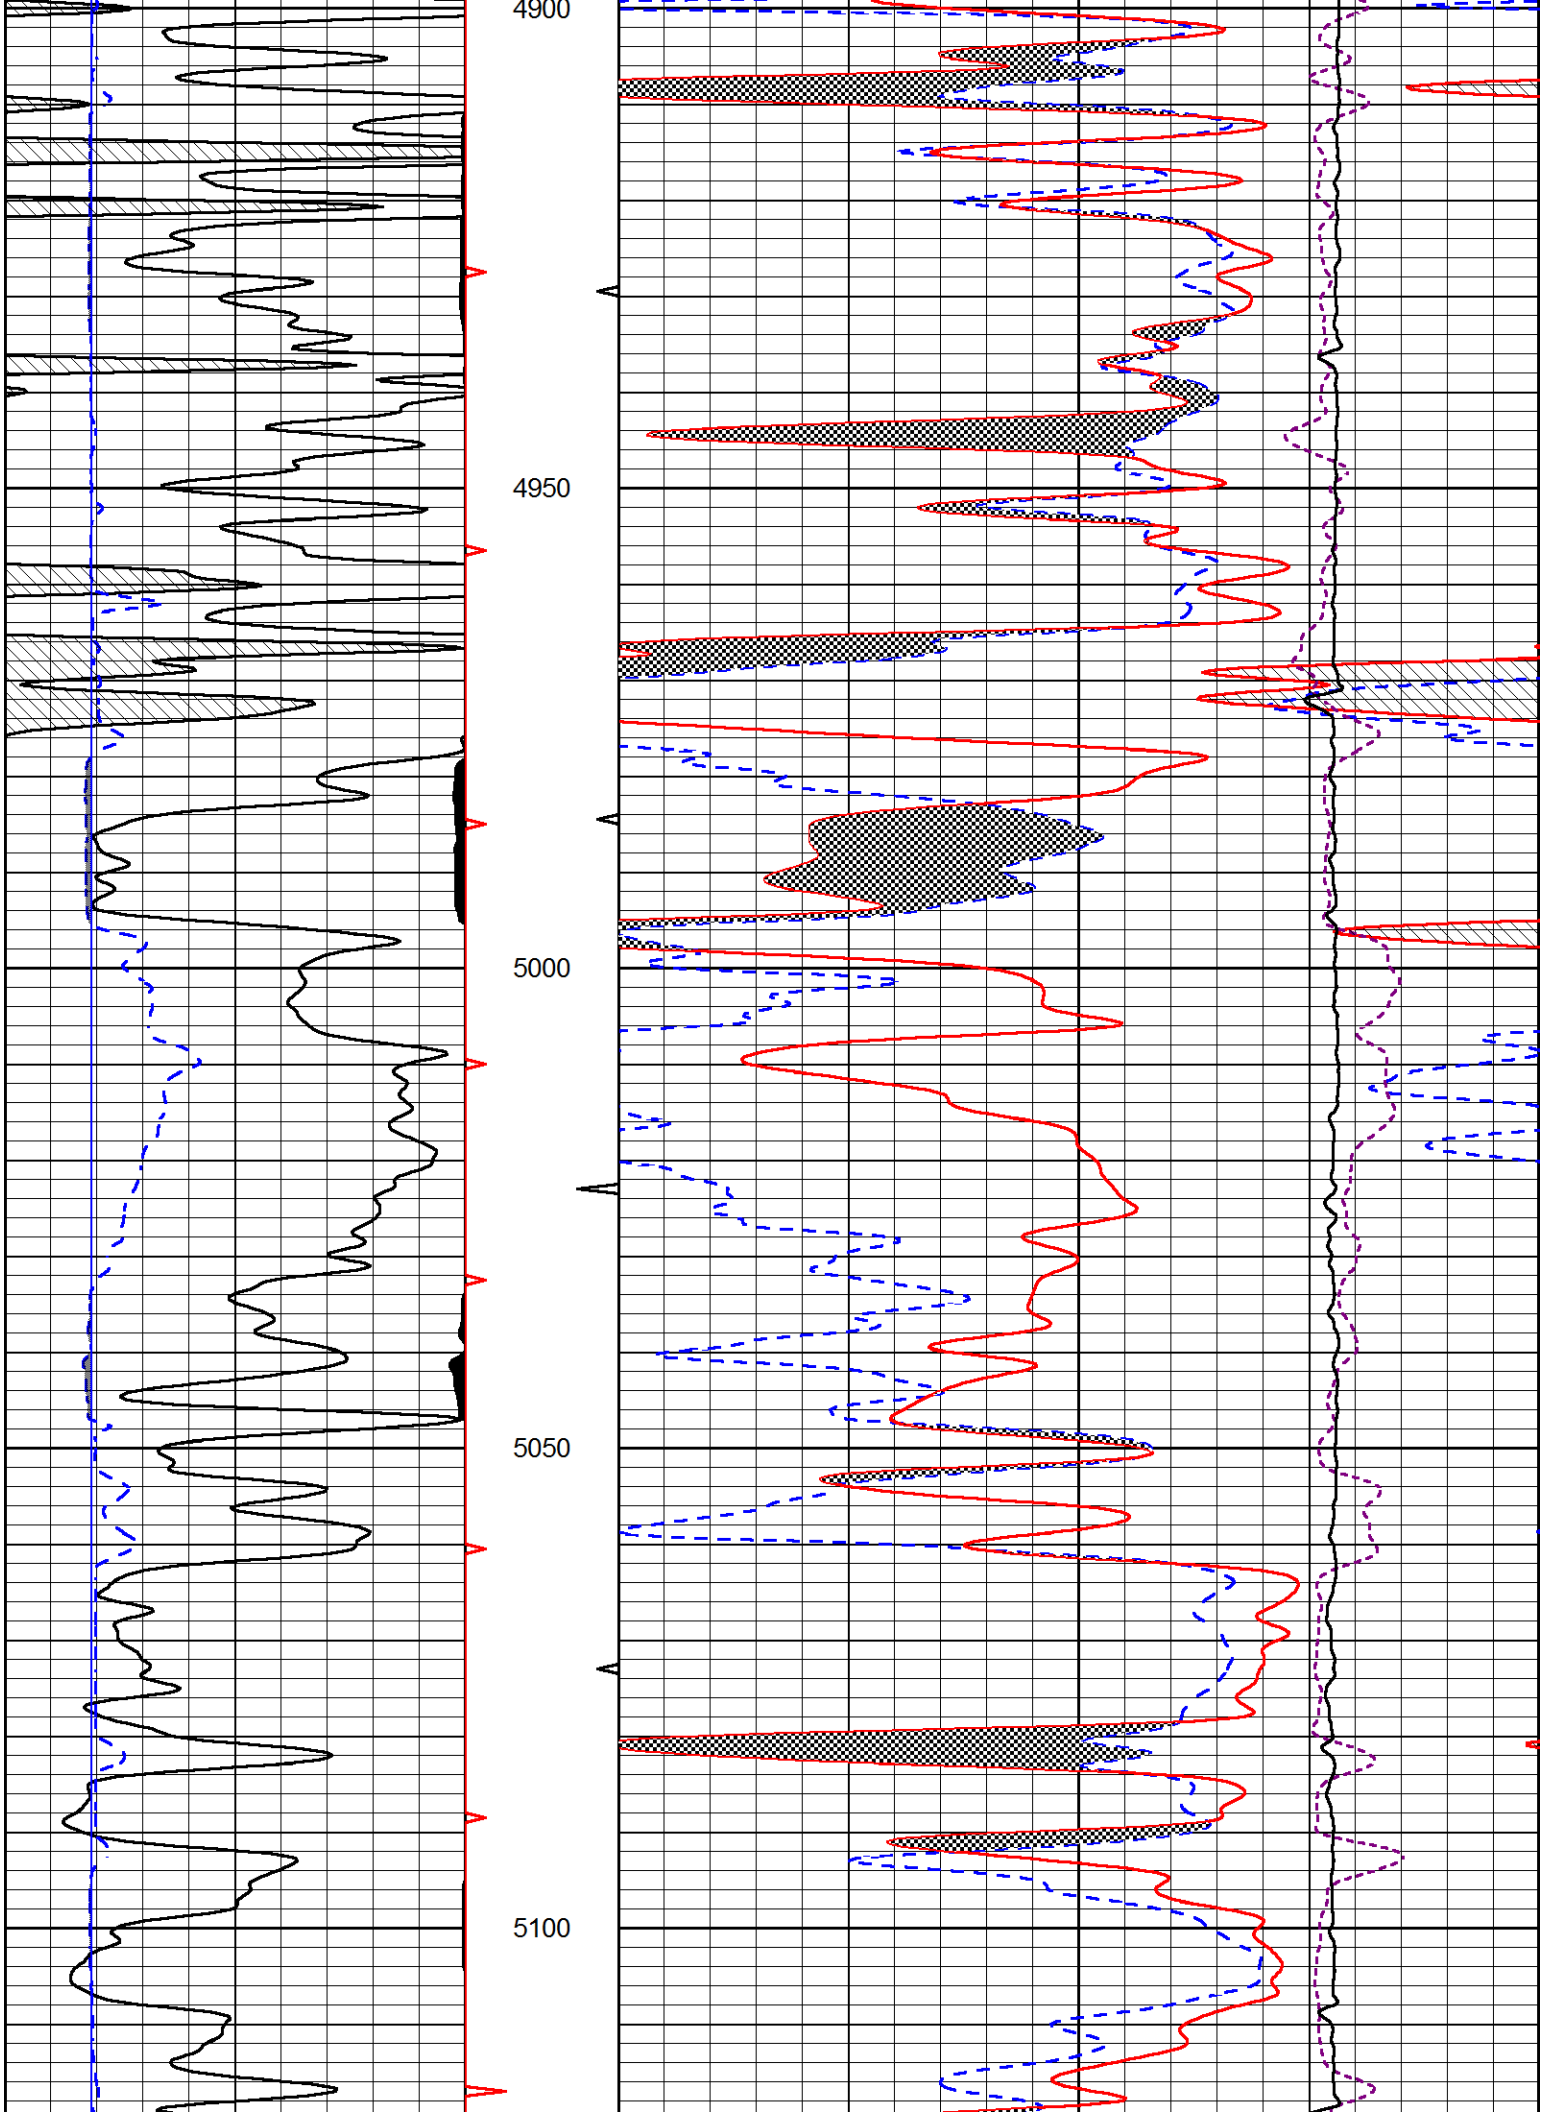

3800
3850
3900
3950
4000

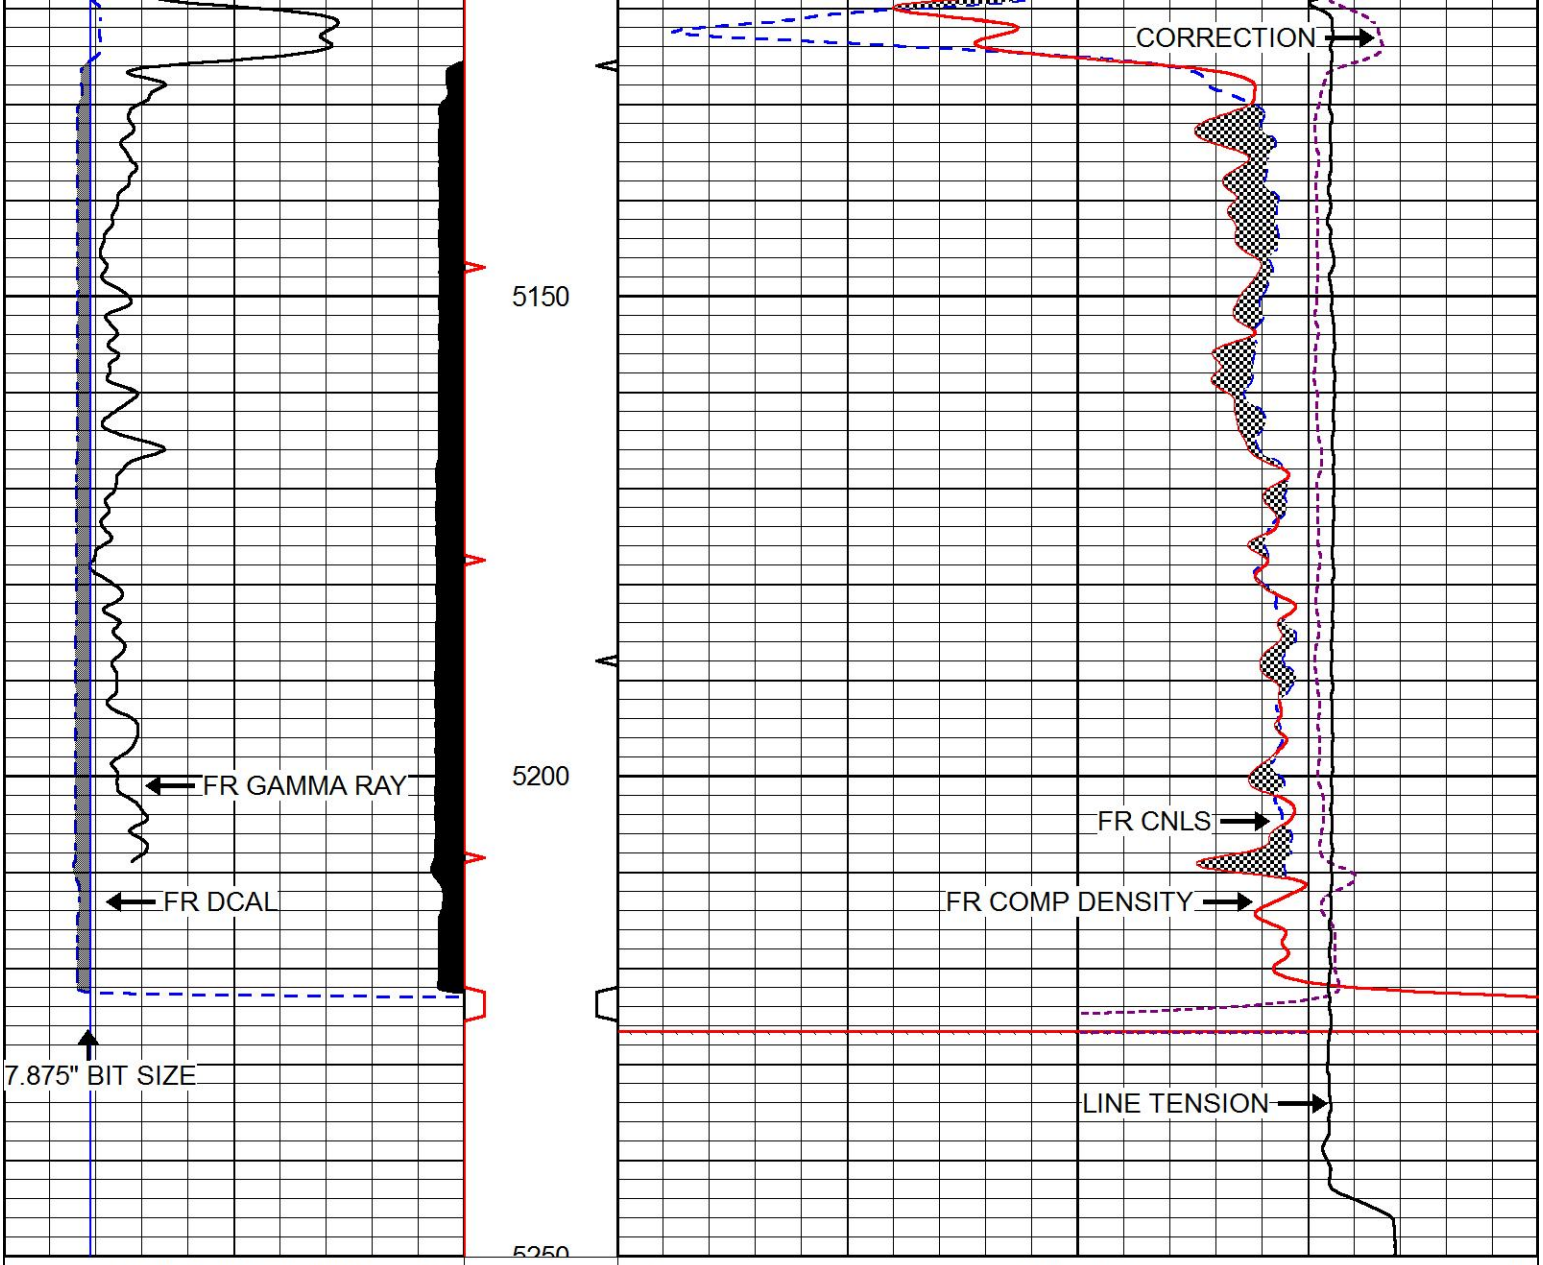

4050
4100
4150
4200


4250
4300
4350
4400
4450


4500
4550
4600
4650


4700
4750
4800
4850


4900
4950
5000
5050
5100



0	GAMMA RAY (GAPI)	150
6	DCAL (in)	16

30	CNLS (pu)	-10
30	COMPENSATED DENSITY 2.71g/cc (pu)	-10
10000	LINE TENSION (lb)	0
-0.75	CORRECTION (g/cc)	0.75

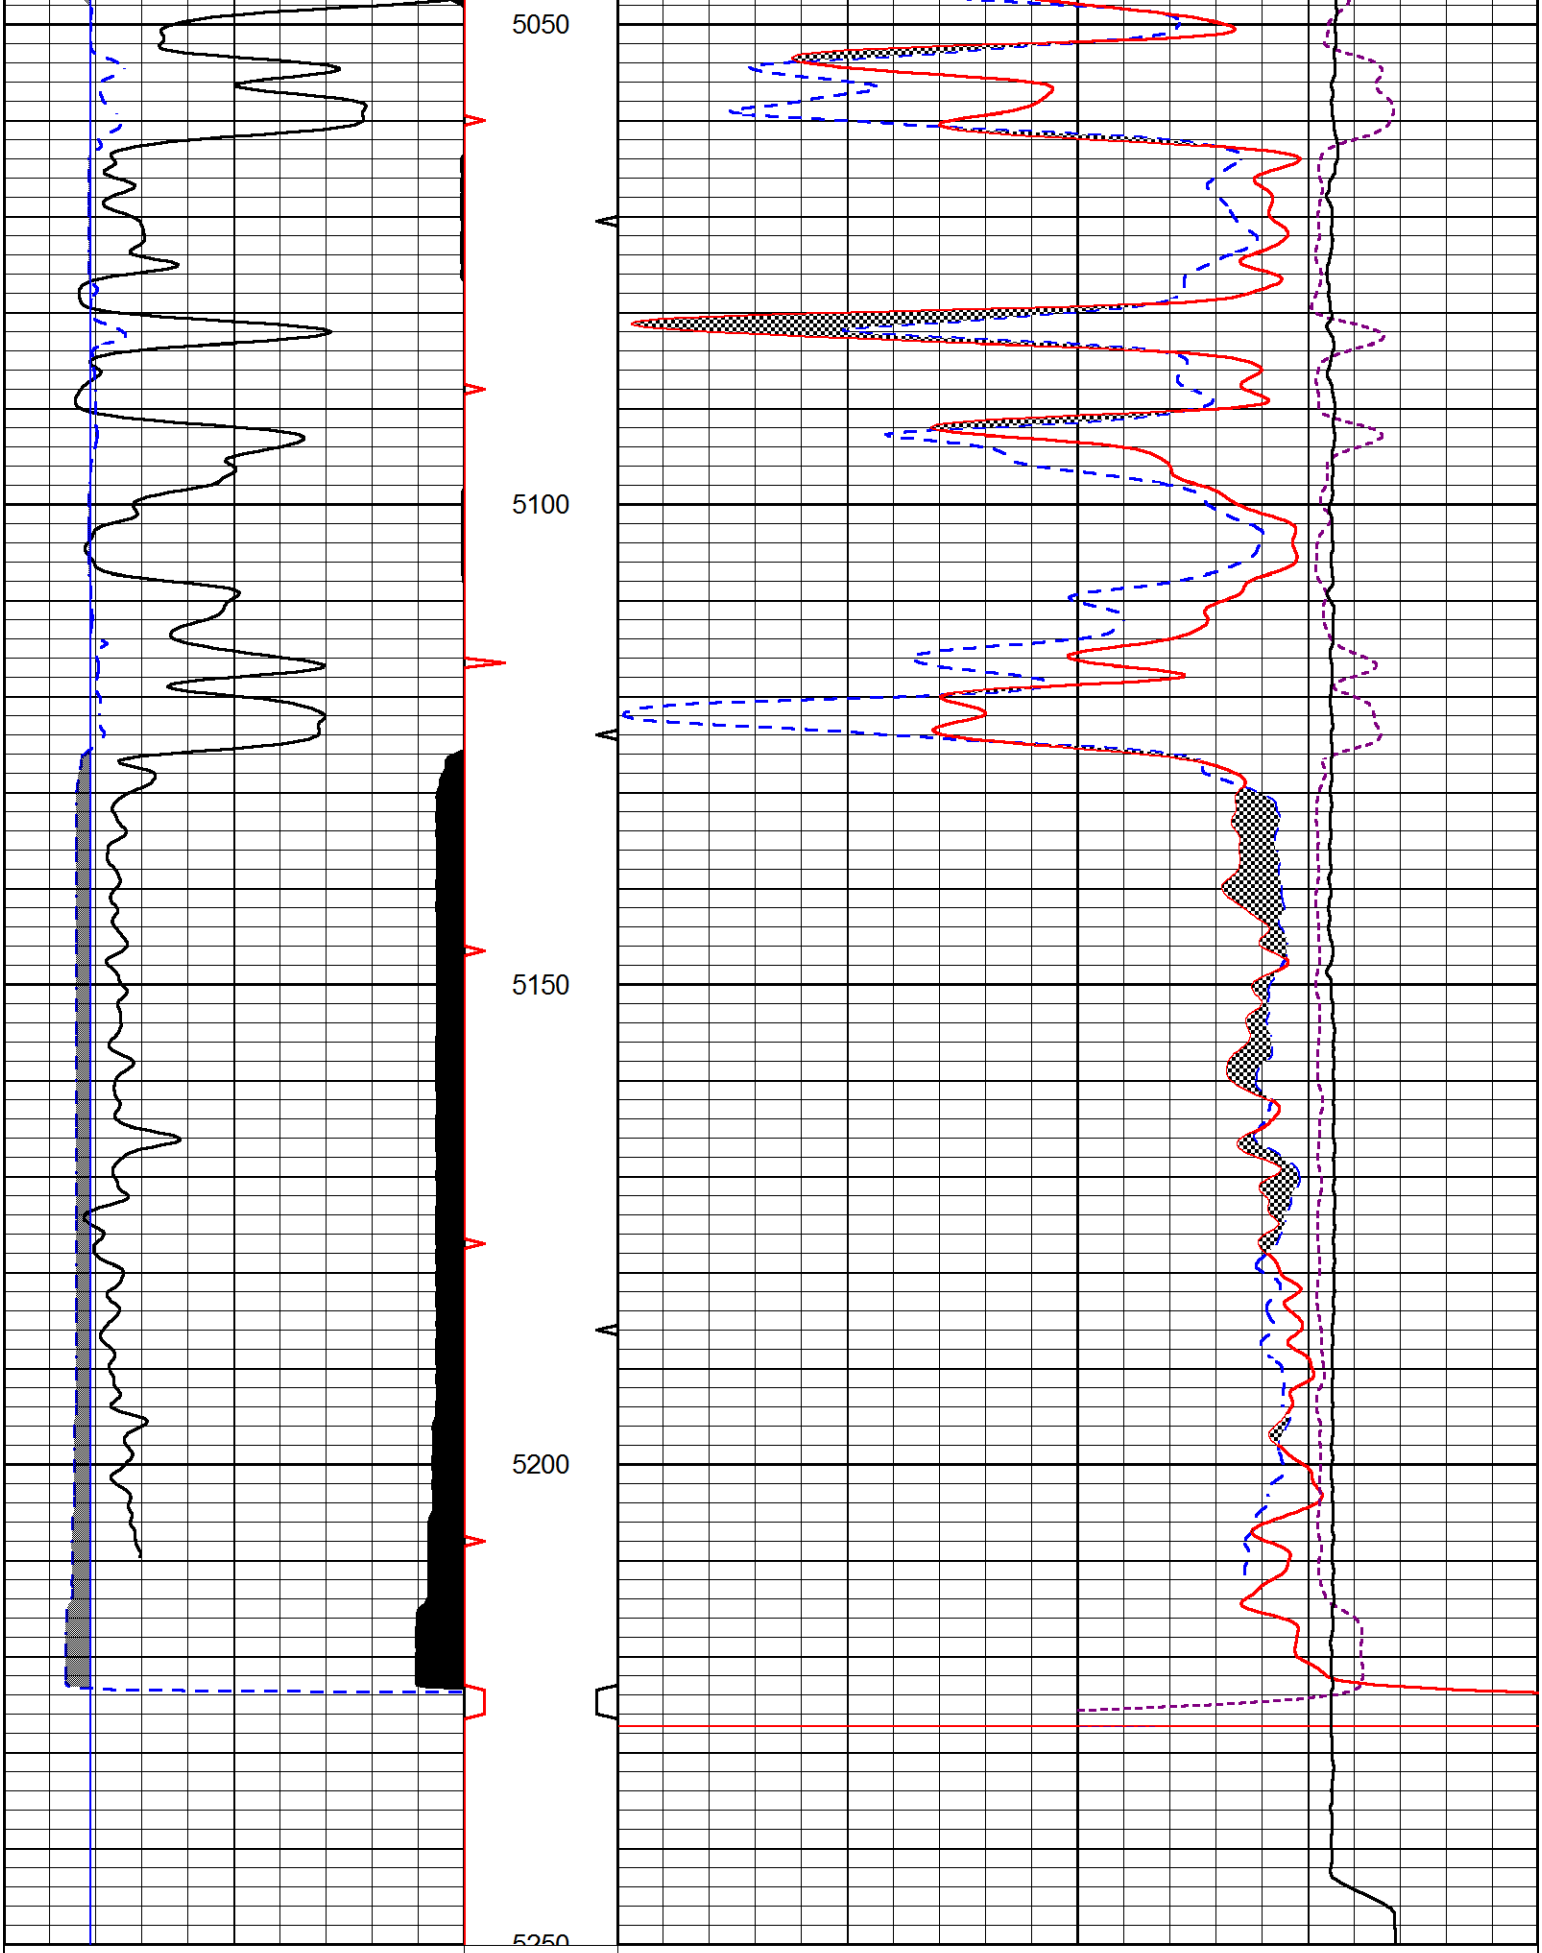
PIONEER
Pioneer Energy Services

REPEAT SECTION

Database File	american warrior_sunray 1-12.db
Dataset Pathname	STKML/pass2.1
Presentation Format	cndlspec
Dataset Creation	Mon Apr 16 22:06:58 2018
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	DCAL (in)	16

30	CNLS (pu)	-10
30	COMPENSATED DENSITY 2.71g/cc (pu)	-10
10000	LINE TENSION (lb)	0
-0.75	CORRECTION (g/cc)	0.75


5050
5100
5150
5200
0 GAMMA RAY (GAPI) 150
6 DCAL (in) 16
30 CNLS (pu) -10
30 COMPENSATED DENSITY 2.71g/cc (pu) -10
10000 LINE TENSION (lb) 0
-0.75 CORRECTION (g/cc) 0.75

Calibration Report

Database File	american warrior_sunray 1-12.db
Dataset Pathname	STKML/pass3.8
Dataset Creation	Mon Apr 16 21:58:34 2018

Dual Induction Calibration Report

Serial-Model:	933 (HT)-PSI HIGH TEMP
Calibration Performed:	Mon Apr 16 20:15:16 2018

	Readings		References			Results	
Loop:	Air	Loop	Air	Loop		Gain	Offset
Deep	167.000	835.000	0.000	255.000	mmho/m	0.700	-17.700
Medium	142.000	1349.000	0.000	255.000	mmho/m	0.565	-61.600

Microlog Calibration Report

Serial-Model:	PSI-01-PSIML
Performed:	Mon Apr 16 11:11:21 2018

	Readings		References			Results	
	Zero	Cal	Zero	Cal		m	b
Normal	0.0000	1.0000	0.0000	1.0000	Ohm-m	23500.0000	-1.0000
Inverse	0.0000	1.0000	0.0000	1.0000	Ohm-m	28000.0000	-0.6000
Caliper	1.0001	1.1397	6.5000	18.5000	in	70.0000	-65.9650

Compensated Density Calibration Report

Serial-Model:	182-152-M&W
Source / Verifier:	16955B / 2ci
Master Calibration Performed:	Mon Apr 16 11:11:26 2018

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.755	g/cc	4992.81	6098.44	cps
Aluminum	2.630	g/cc	945.67	3945.60	cps

Spine Angle = 75.33

Density/Spine Ratio = 0.509

	Size		Reading
Small Ring	4.50	in	1.09
Large Ring	15.00	in	1.03

Compensated Neutron Calibration Report

Serial Number:	207-MW
Tool Model:	M&W
Calibration Performed:	MON APR 16 10:30:30 2018

Detector	Readings	Target	Normalization

Short Space	6240.00	cps	1000.00	cps	1.6025
Long Space	460.00	cps	1000.00	cps	1.9500

Gamma Ray Calibration Report

Serial Number:	89	
Tool Model:	M&W	
Calibration Performed:	Mon Jan 15 11:20:44 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6000	GAPI/cps

PIONEER
Pioneer Energy Services

Company	AMERICAN WARRIOR, INC.
Well	SUNRAY #1-12
Field	UNKNOWN
County	GREELEY
State	KANSAS