



COMPENSATED DENSITY SIDEWALL NEUTRON LOG

Company		COLT ENERGY INC.	
Well		HOLT # C3	
Field		CENTERVILLE	
County		LINN	
State		KANSAS	
Location:		API #: 15-107-25340-0000	
Permanent Datum		NE SE SW NW	
Log Measured From		2174' FNL & 1028' FWL	
Drilling Measured From		SEC 10 TWP 21S RGE 22E	
Elevation		932'est	
Other Services		DIL	
K.B. ---		Elevation	
D.F. ---		G.L. 932'est	
G.L. 932'est			
Date	12-08-2020		
Run Number	ONE		
Depth Driller	595'		
Depth Logger	601'		
Bottom Logged Interval	599'		
Top Log Interval	SURFACE		
Casing Driller	8.625" @ 20'		
Casing Logger	8.625" @ 20'		
Bit Size	6.75"		
Type Fluid in Hole	MUD		
Density / Viscosity			
pH / Fluid Loss			
Source of Sample			
Rm @ Meas. Temp			
Rmt @ Meas. Temp			
Rmc @ Meas. Temp			
Source of Rmf / Rmc			
Rm @ BHT			
Time Circulation Stopped			
Time Logger on Bottom			
Maximum Recorded Temperature			
Equipment Number	OW2		
Location	HOMINY, OK		
Recorded By	W. LOWERY		
Witnessed By	MR. BALLARD		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

OW2-9315
MATRIX LIMESTONE 2.71 G/CC
ABHV COMPUTED WITH 4 1/2 CASING


CREW : M. KIDD





5" CDL/SWN SECTION

Database File	ow2-9315 colt energy.db
Dataset Pathname	CDL/pass1.4
Presentation Format	_neu4
Dataset Creation	Tue Dec 08 13:13:09 2020
Charted by	Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	TBHV	30	Density Porosity (pu)		-10
4	Bit size (in)	14	ABHV	30	Neutron Porosity (pu)		-10
4	Neutron Caliper (in)	14			-0.5	Correction (g/cc)	0.5
4	Density Caliper (in)	14			5000	Line Tension (lb)	0

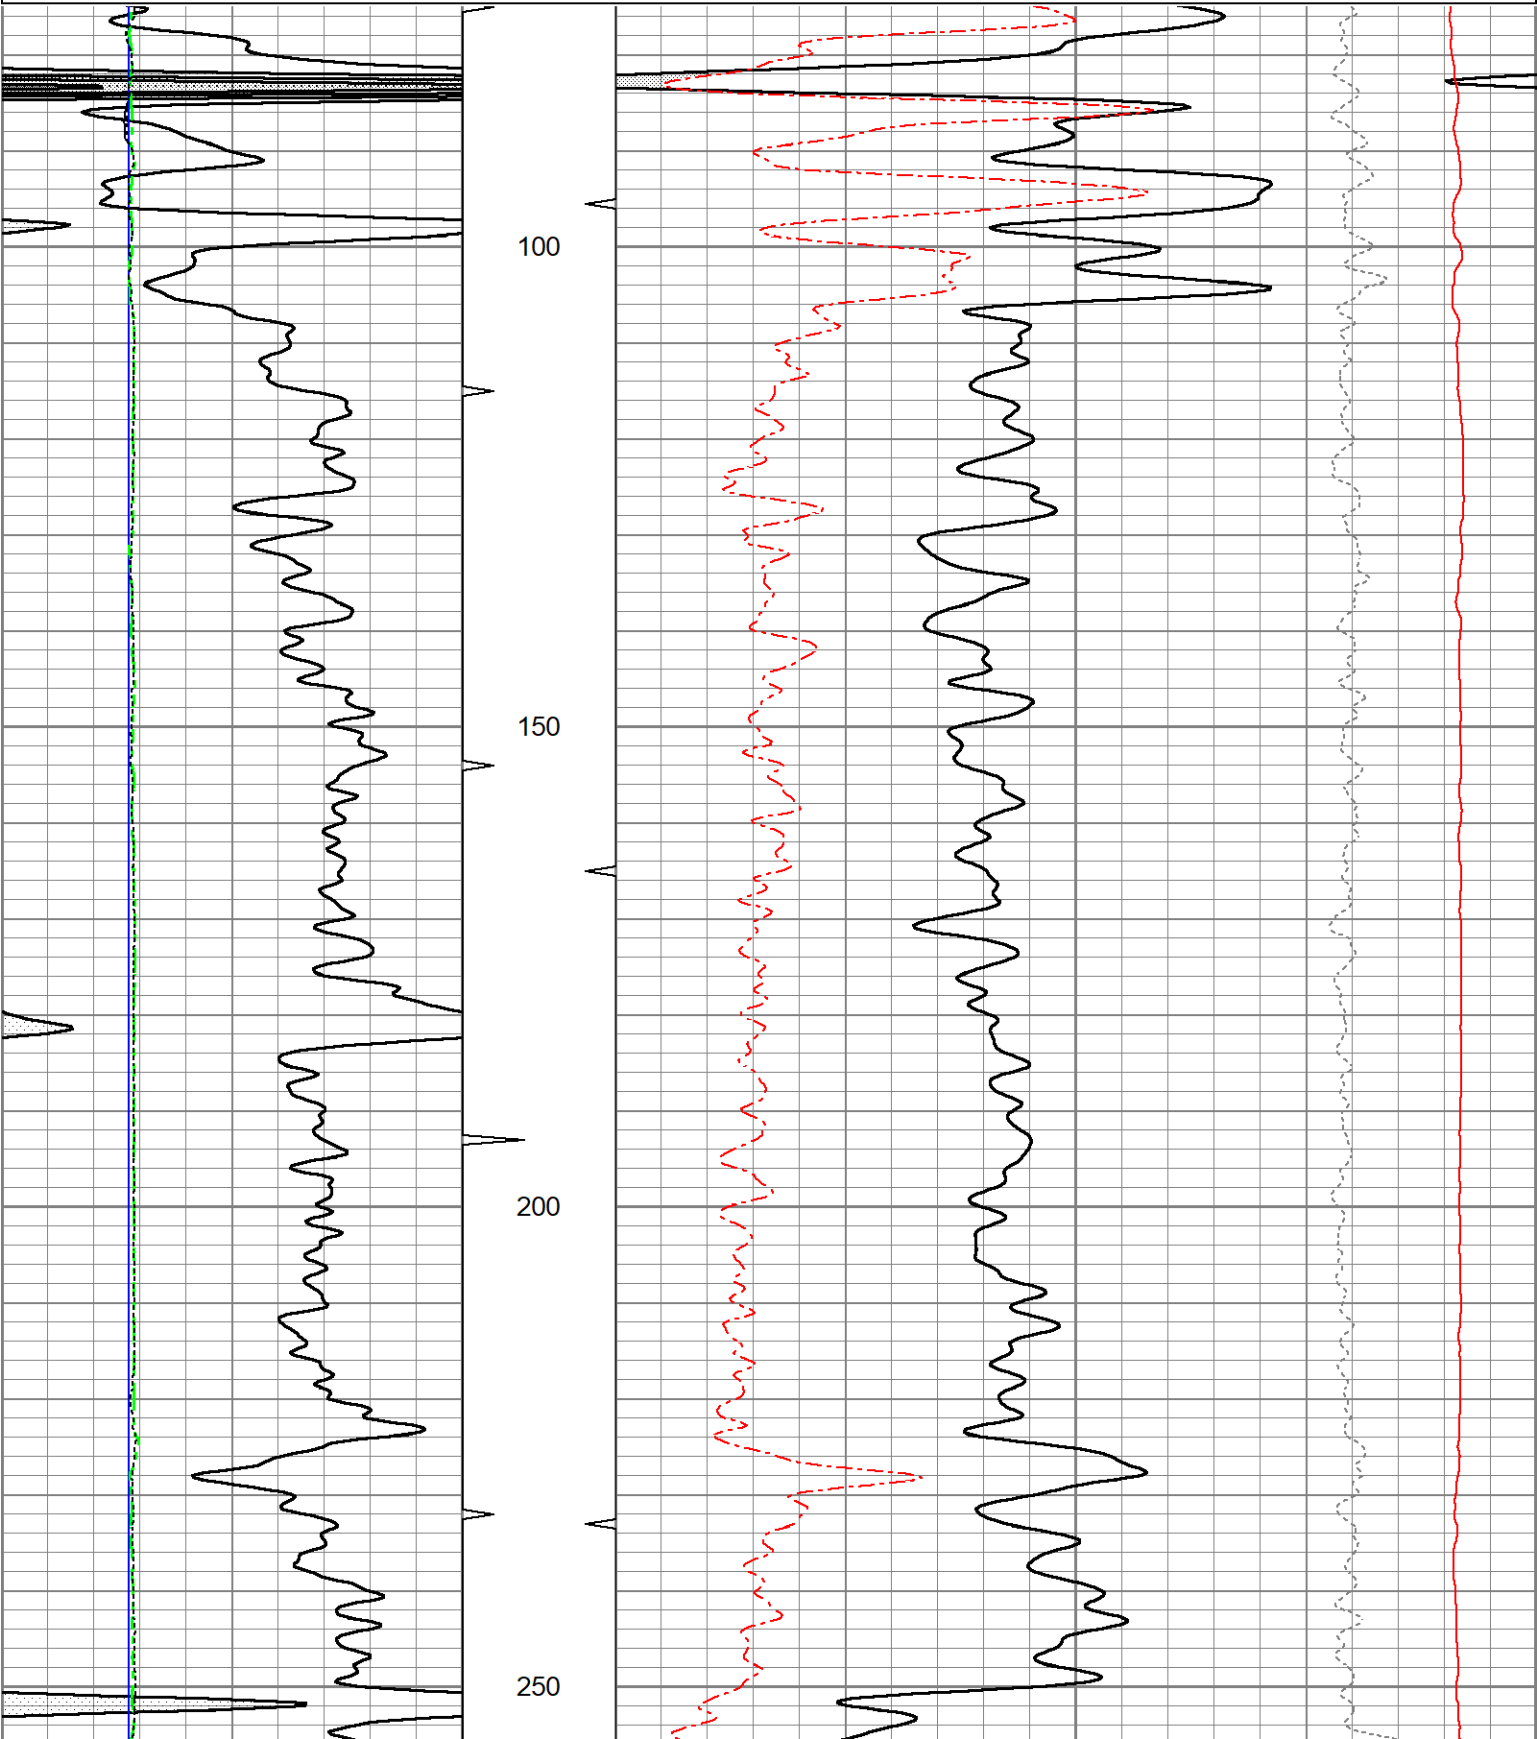

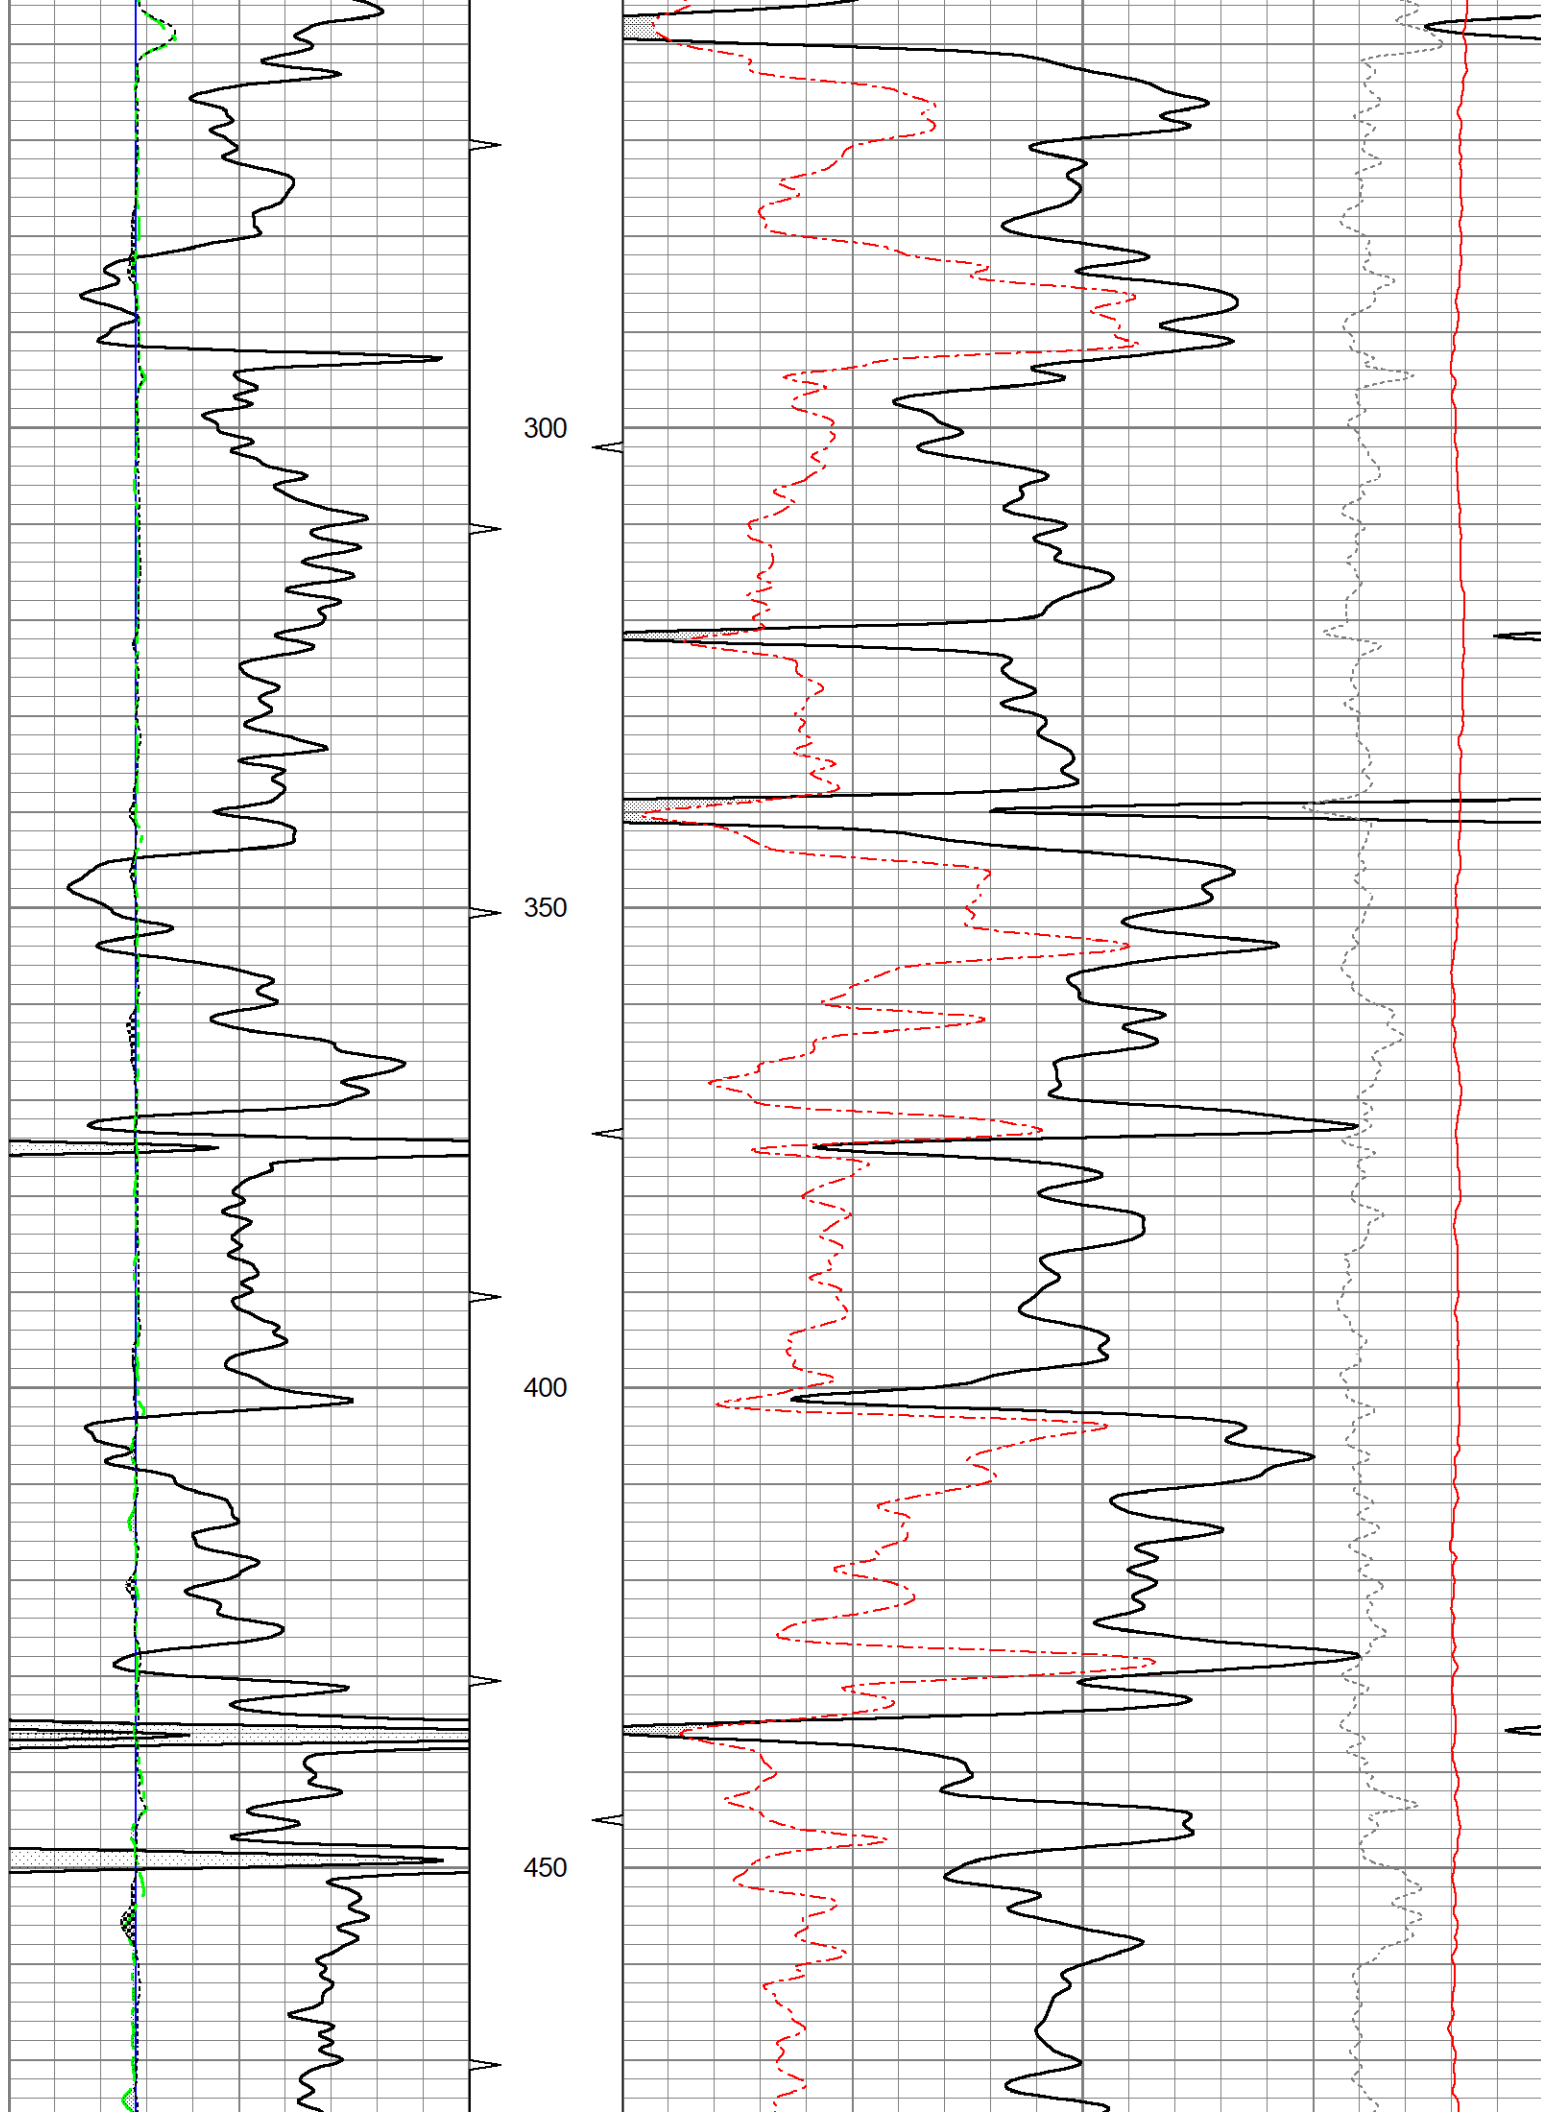


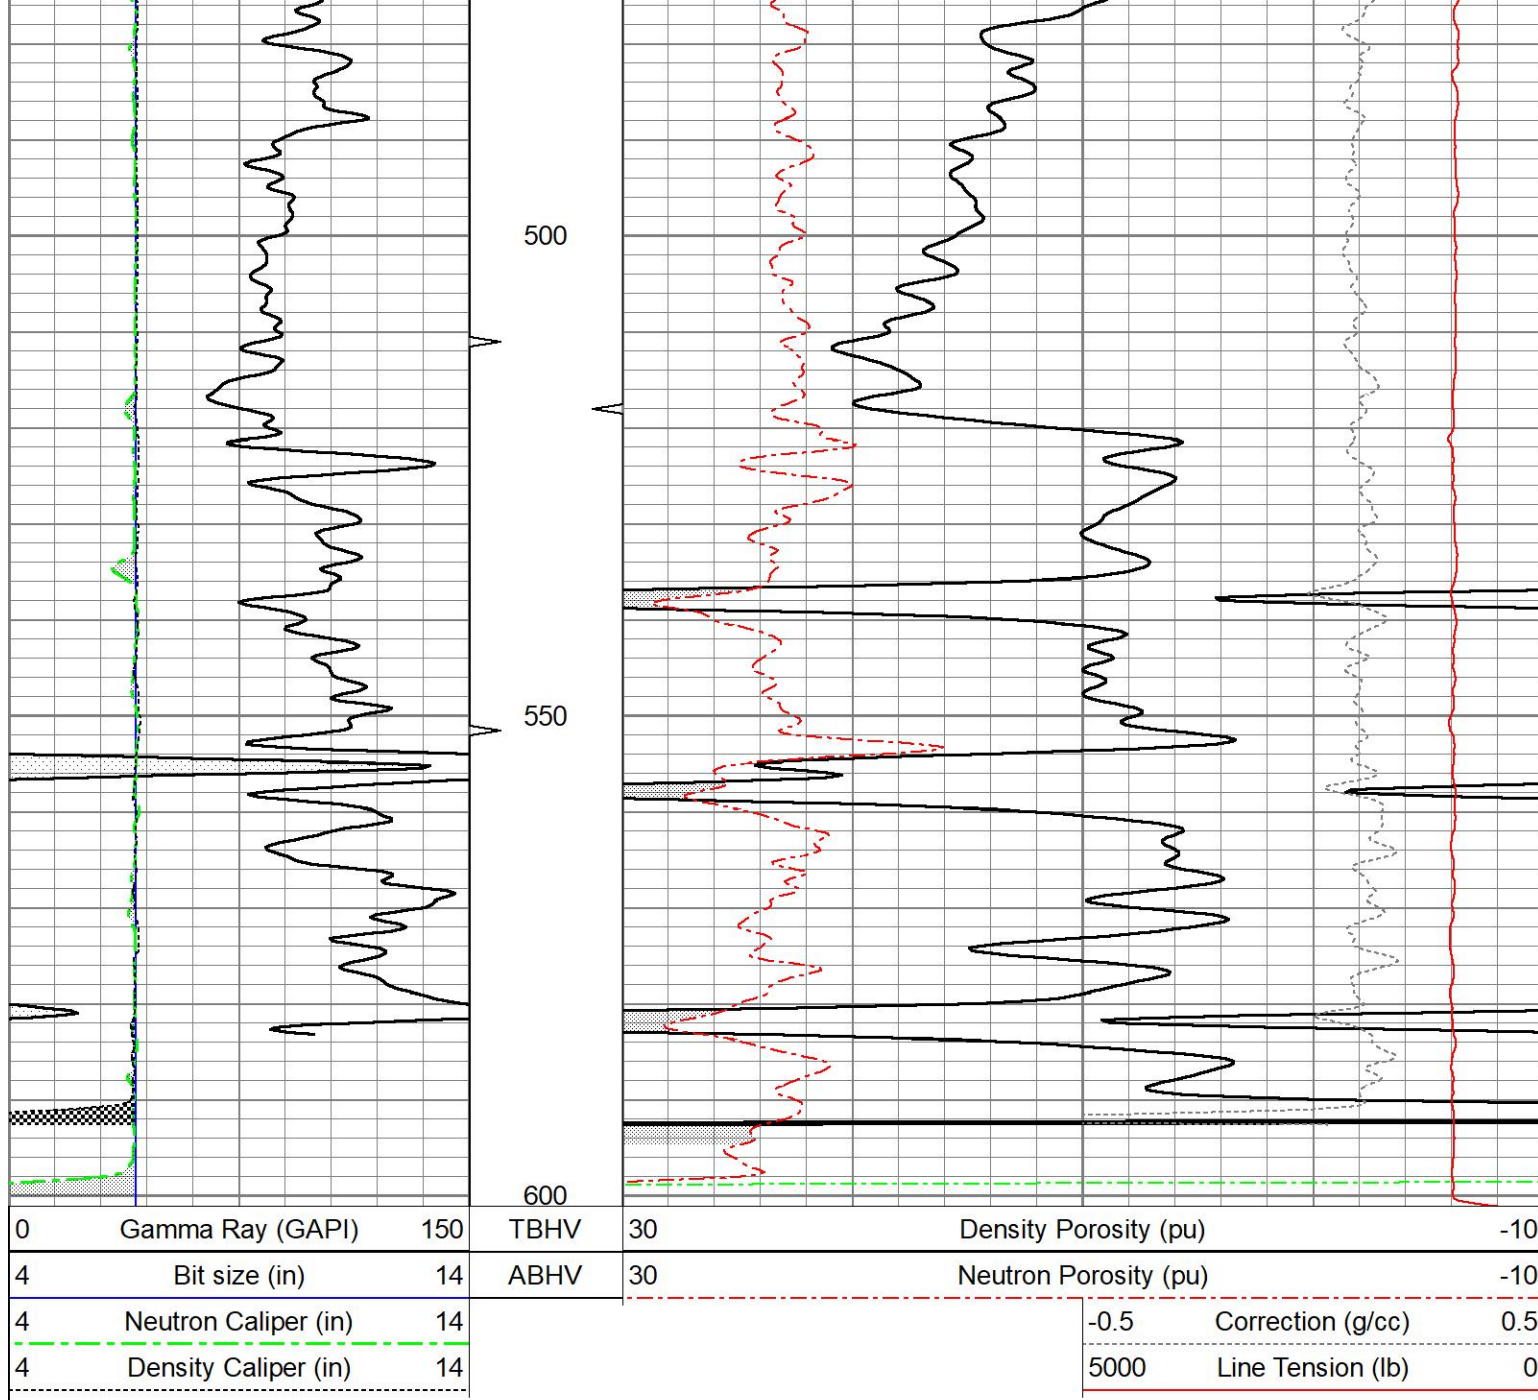



5" CDL SECTION


Database File ow2-9315 colt energy.db
 Dataset Pathname CDL/pass1.3
 Presentation Format bulk4
 Dataset Creation Tue Dec 08 13:12:10 2020
 Charted by Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	TBHV	2	Bulk Density (g/cc)	3
4	Bit size (in)	14	ABHV	30	Density porosity (pu)	-10
4	Neutron Caliper (in)	14			-0.5	Correction (g/cc) 0.5
4	Density Caliper (in)	14			5000	Line Tension (lb) 0



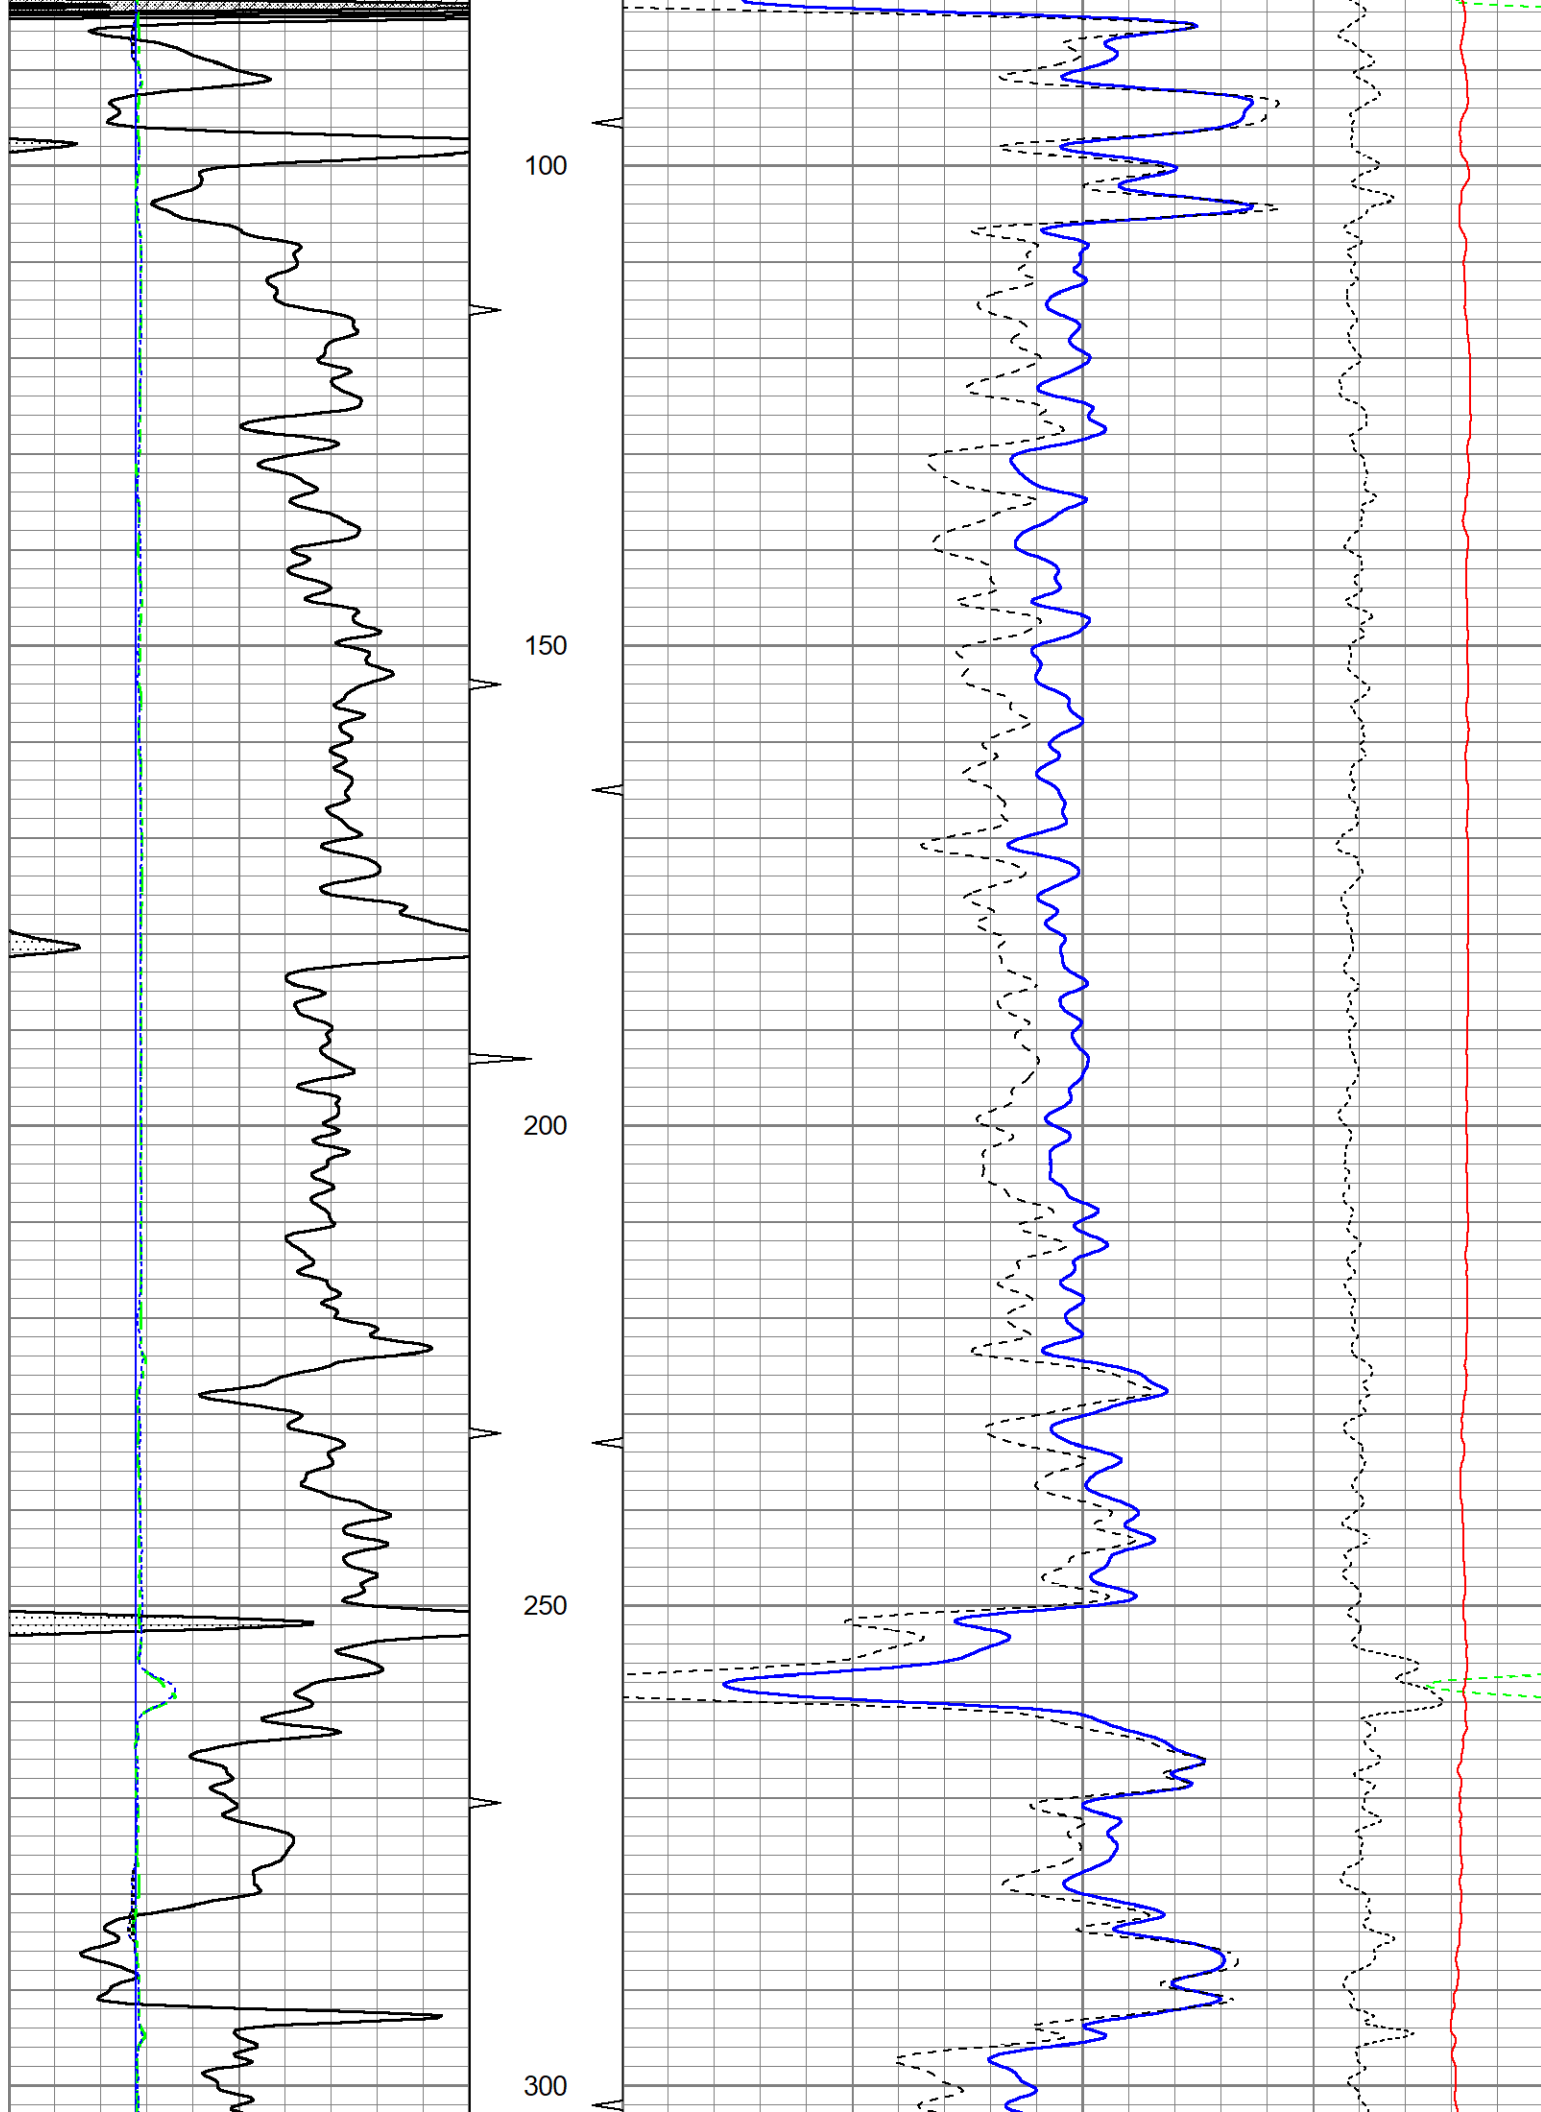

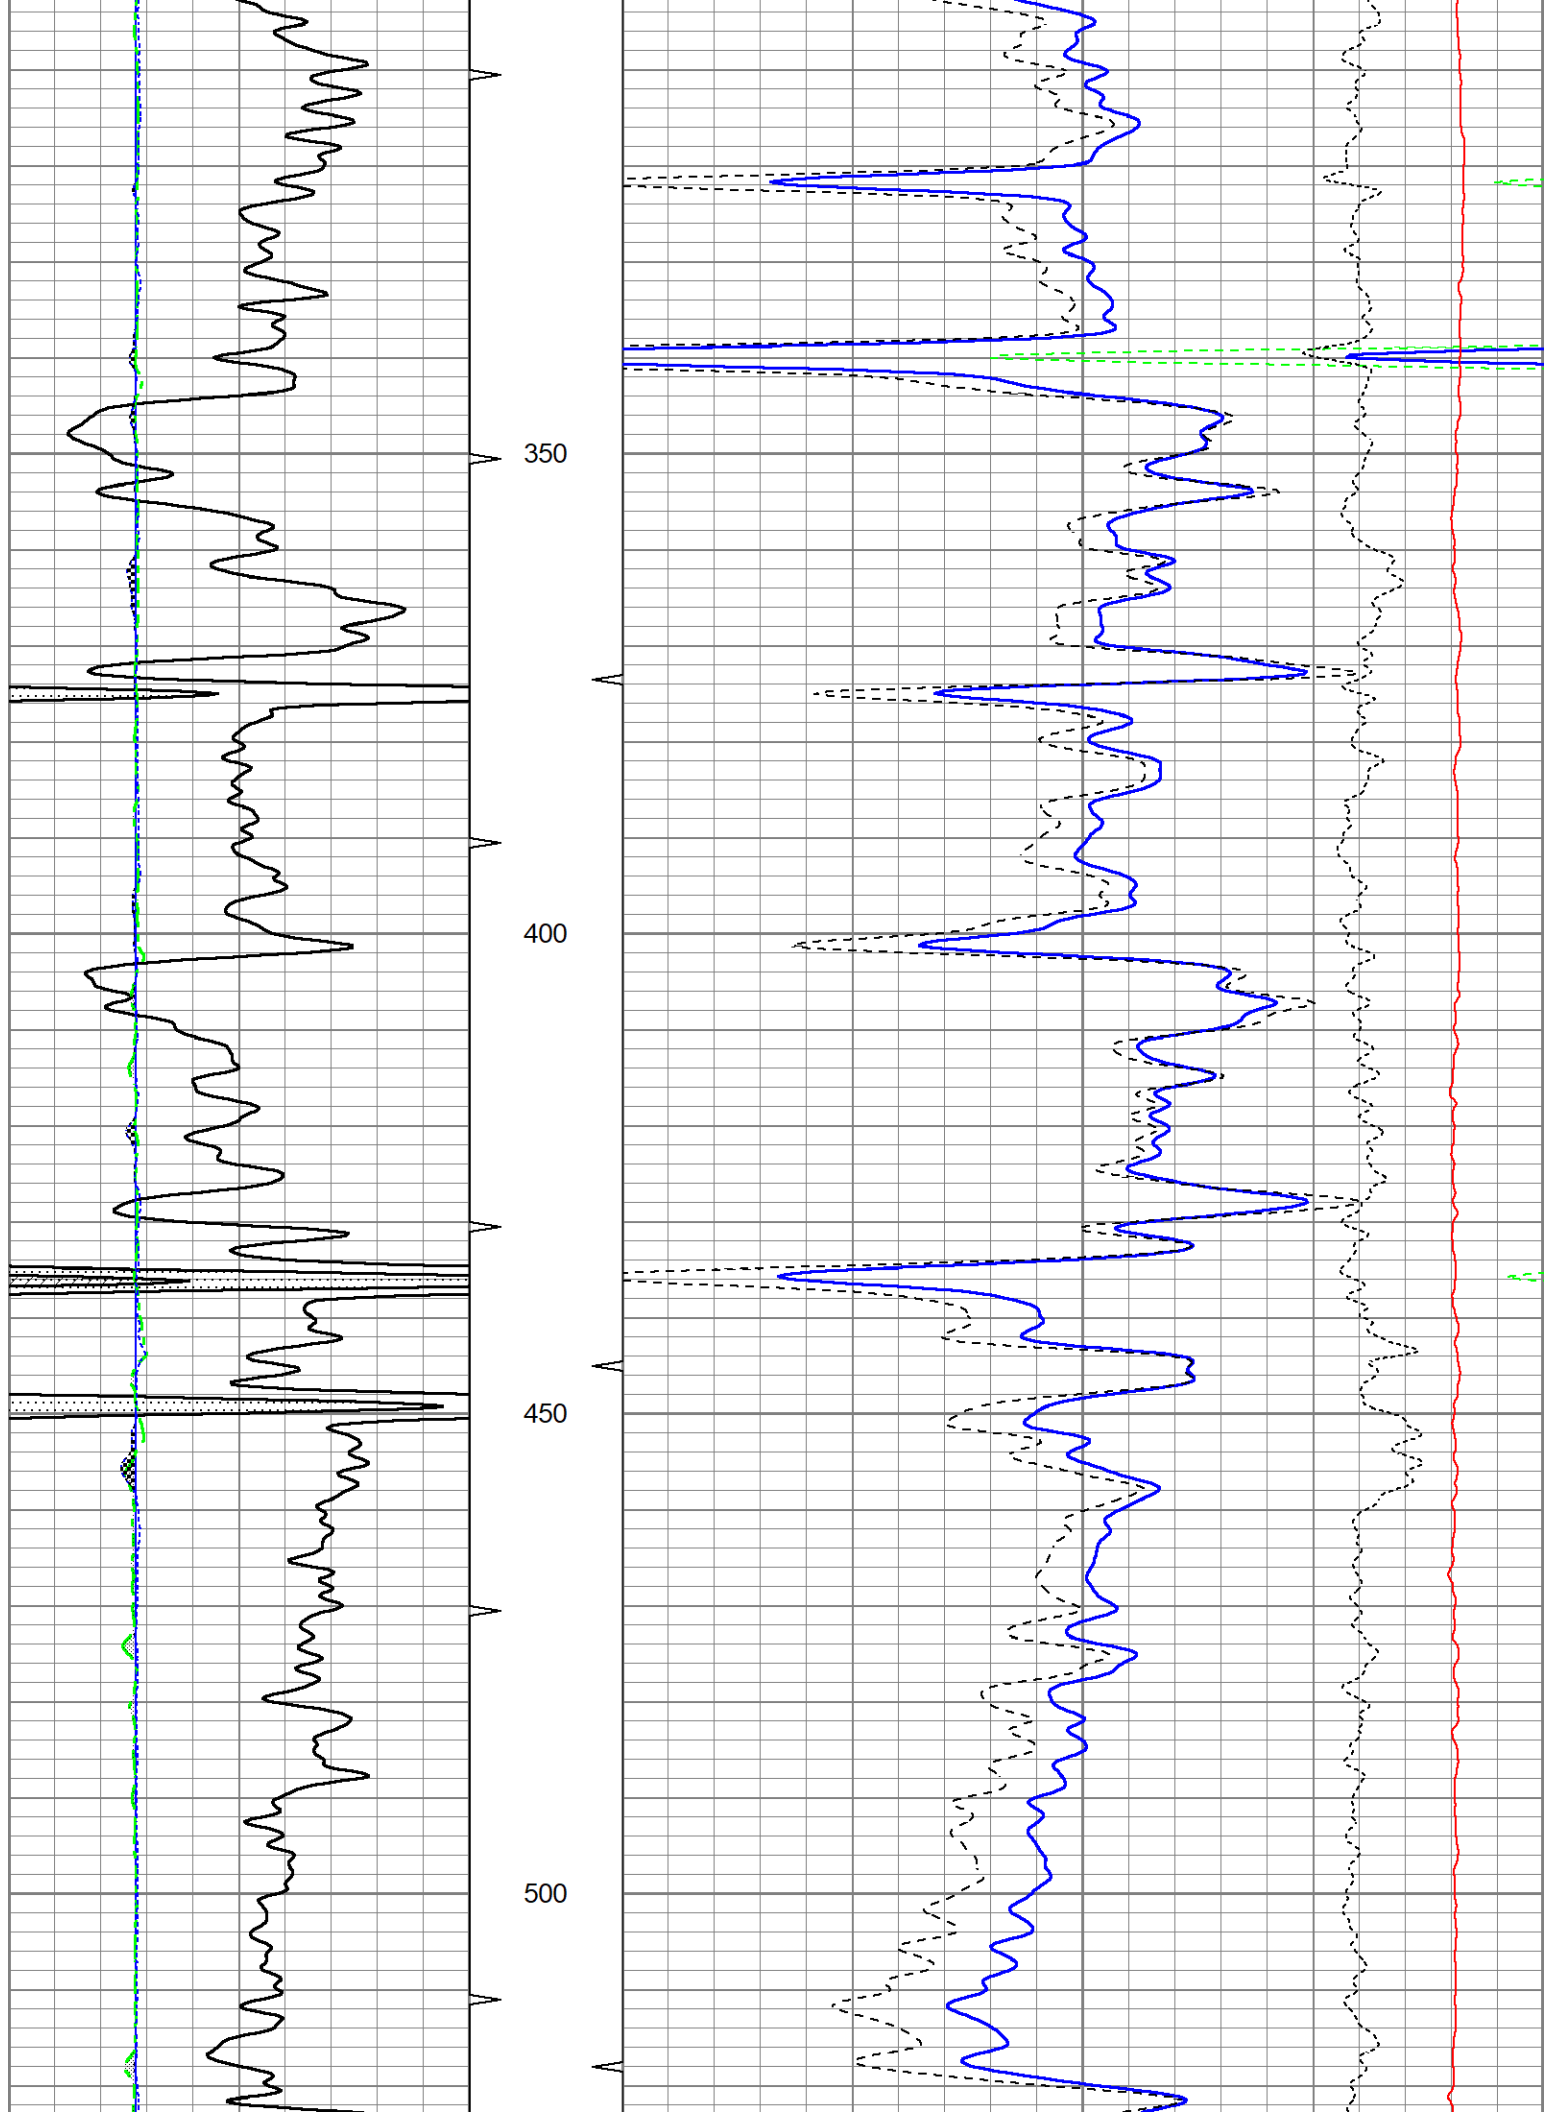

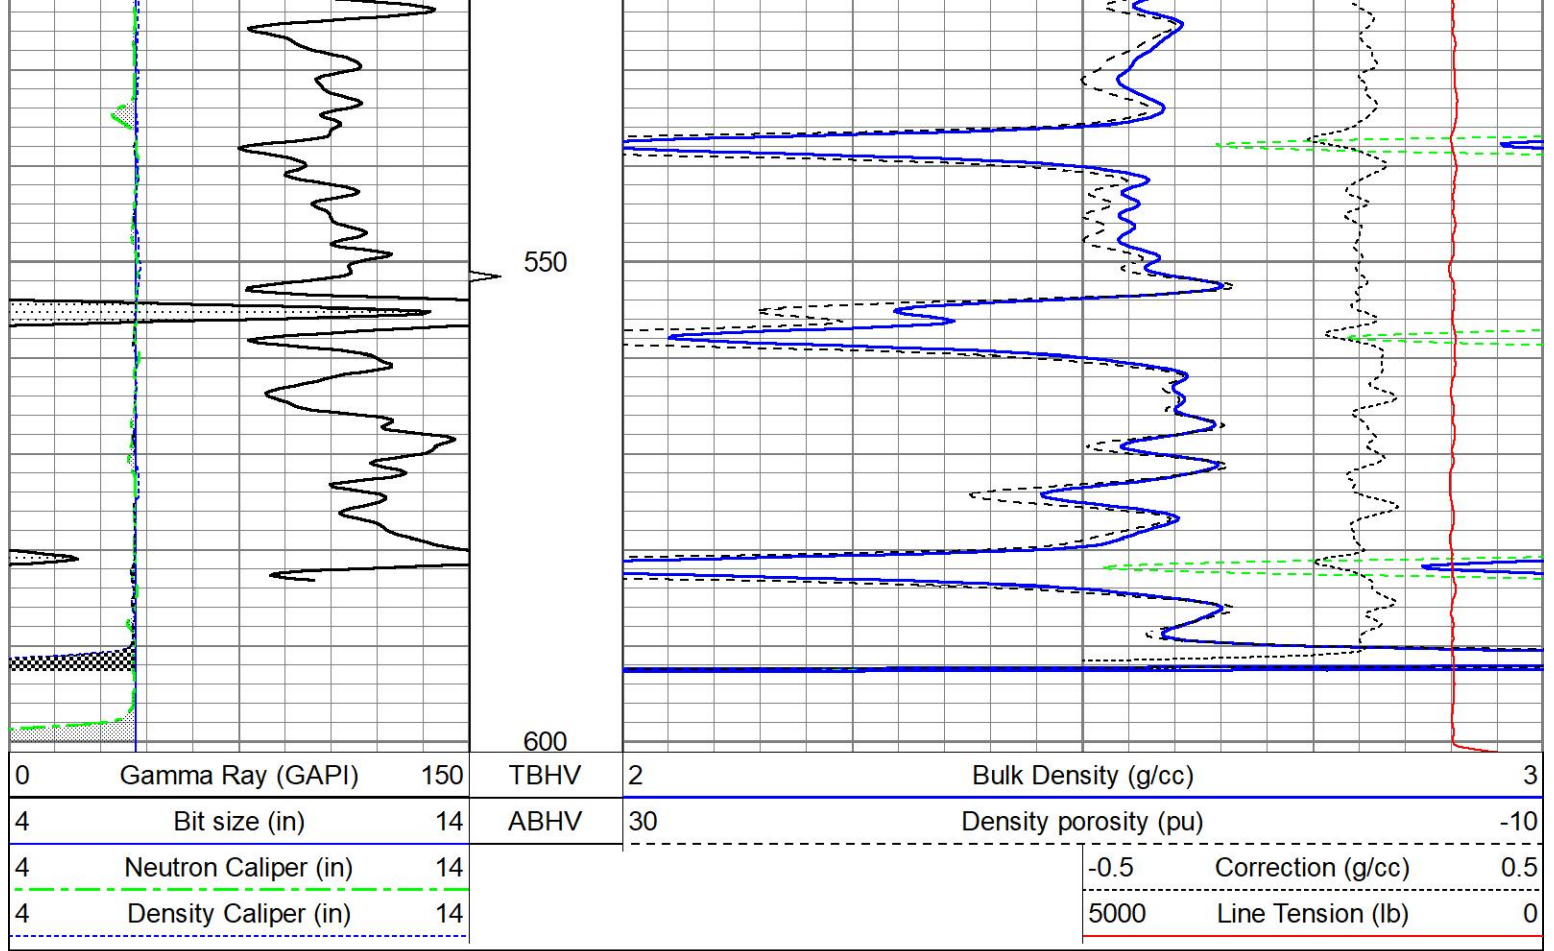

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
GR	15.60		Cable-CableHead Isolation Sub	1.42	3.00	20.00
			Gamma-Oilex2122 (2122) Gamma Ray Section	2.83	3.50	75.00
LSD	10.22		Density-Oilex2122 (2122) Density Section	6.08	4.00	250.00
DCAL	9.94					
SSD	9.76					
			Neutron-Sidewall3015 (3015) Sidewall Neutron Section	7.81	4.00	150.00
SCAL	2.54					
SWAL	2.45					

SWN NEU	2.15 2.15				
Dataset: ow2-9315 colt energy.db: field/well/CDL/pass1 Total length: 18.15 ft Total weight: 495.00 lb O.D.: 4.00 in					