

MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	FRINK - REYNOLDS #2-33		
Field	MULBERRY CREEK		
County	FORD	State	KANSAS
Location:	APL # : 15-057-21006-0000 2472' FNL & 1650' FVL S/2 - SW - SE - NW		Other Services CDL/CNL/PE DIL/SONIC
Permanent Datum	GROUND LEVEL	Elevation	2504
Log Measured From	KELLY BUSHING 13' A.G.L.	Elevation	K.B. 2517 D.F. 2515 G.L. 2504
Drilling Measured From	KELLY BUSHING		
Date	2/13/19		
Run Number	TWO		
Depth Driller	5290		
Depth Logger	5290		
Bottom Logged Interval	5274		
Top Log Interval	4200		
Casing Driller	8 5/8"@655'		
Casing Logger	650		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 9,800 PPM	
Density / Viscosity	9.1/82		
pH / Fluid Loss	11.0/9.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.450@80F		
Rmf @ Meas. Temp	.338@80F		
Rmc @ Meas. Temp	.540@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.281@128F		
Time Circulation Stopped	5.5 HOURS		
Time Logger on Bottom	10:00 P.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEN LeBLANC		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS


KINGSDOWN, KS., & HWY 54, 2N. ON "RD. 125" TO "WILBURN RD.", 5W. TO "RD. 120", 3/4N., E. INTO


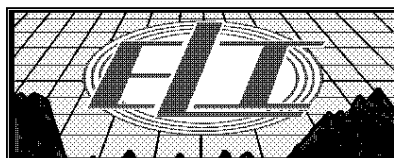



MAIN SECTION


Database File: 3341pe.db
 Dataset Pathname: pass7.3
 Presentation Format: micro
 Dataset Creation: Wed Feb 13 21:55:58 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

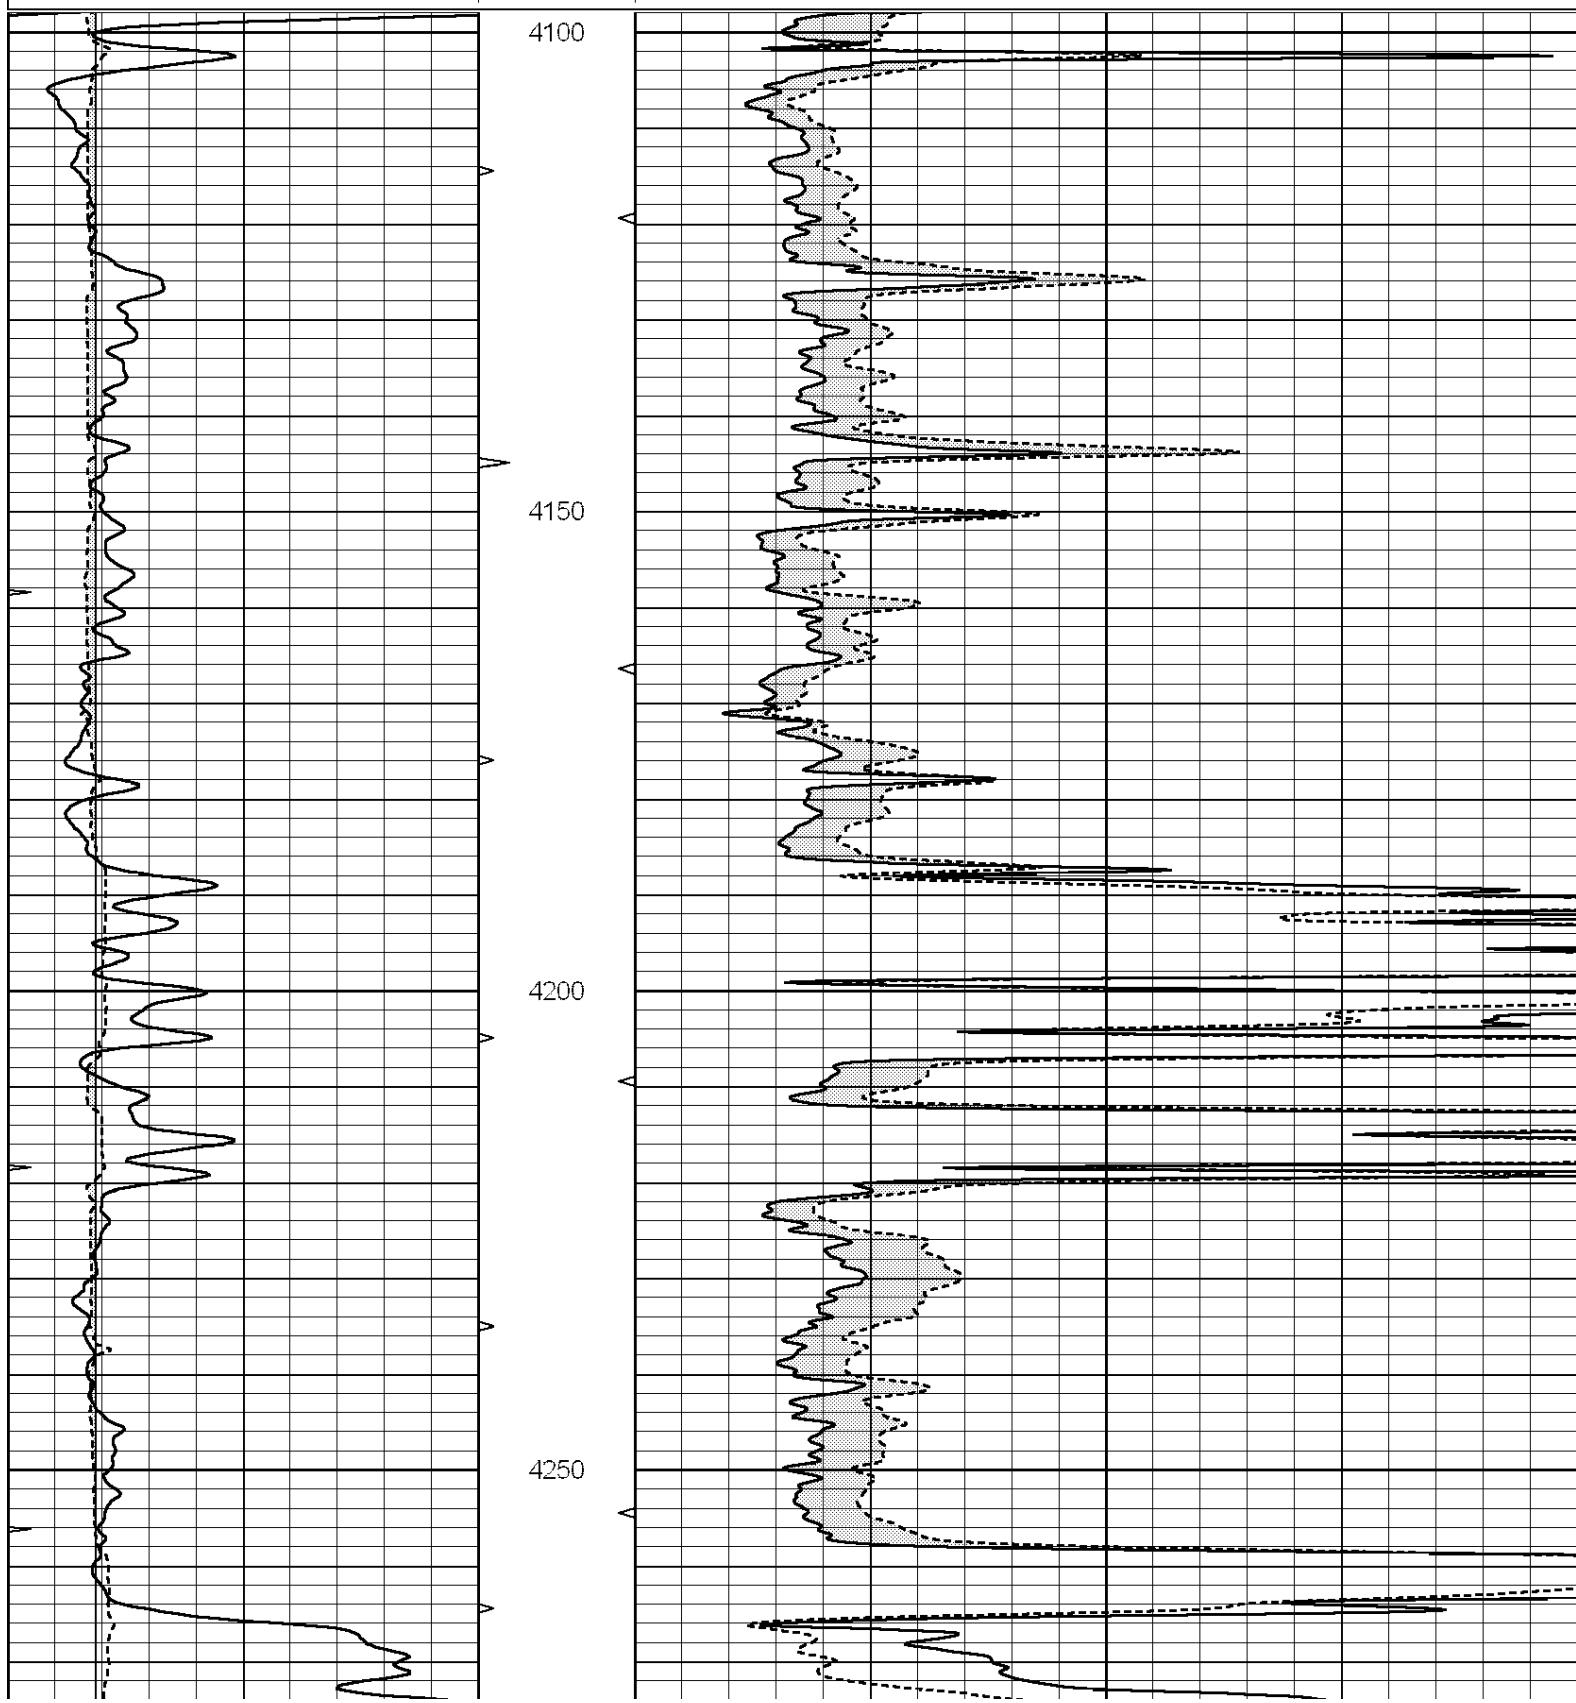

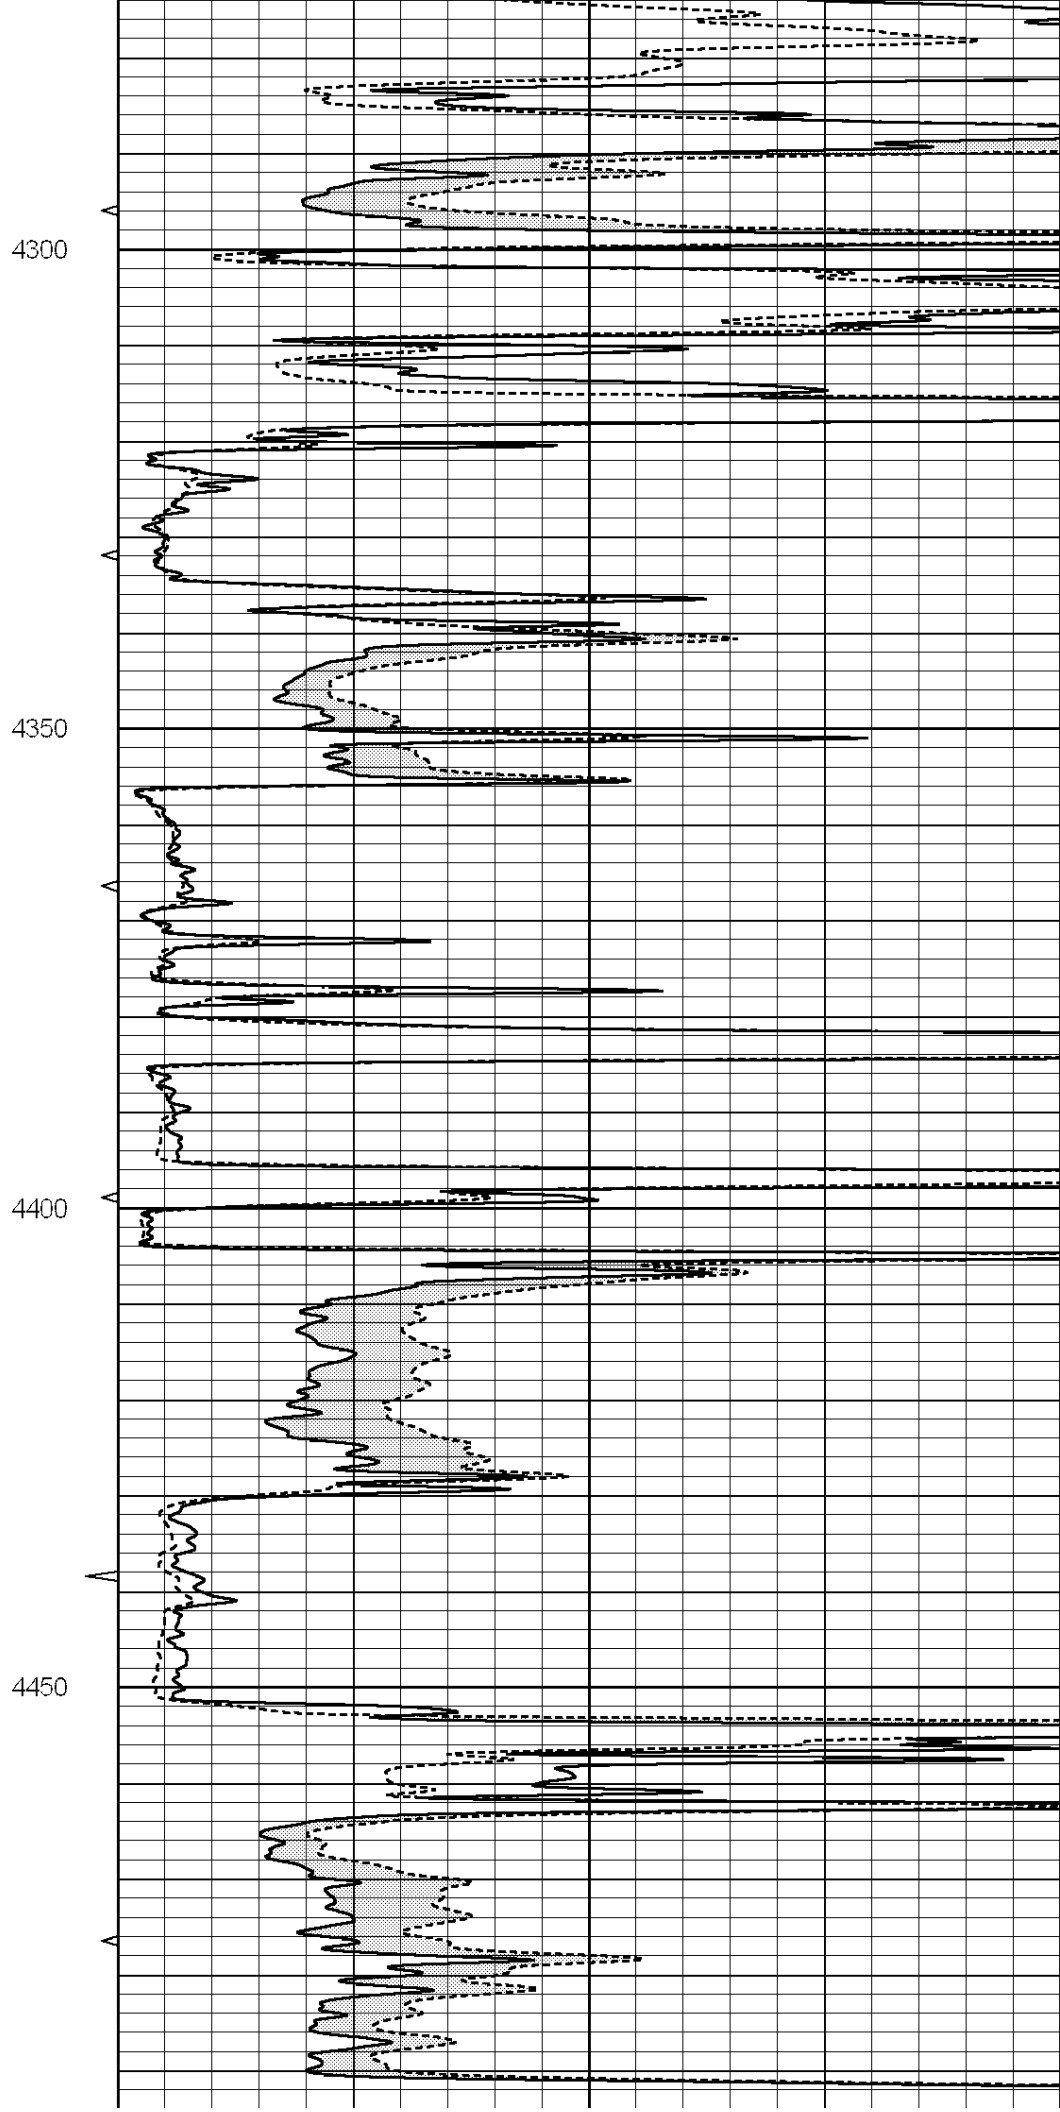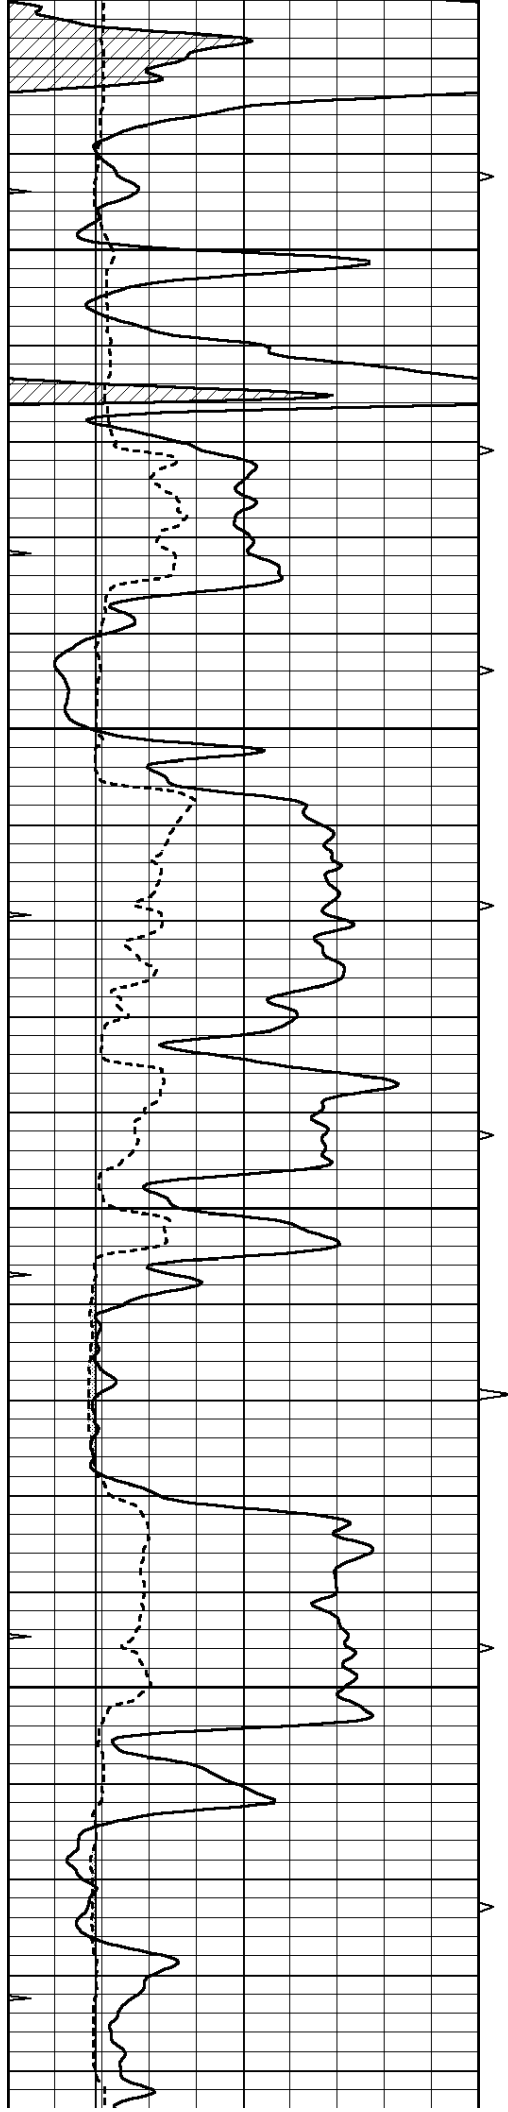

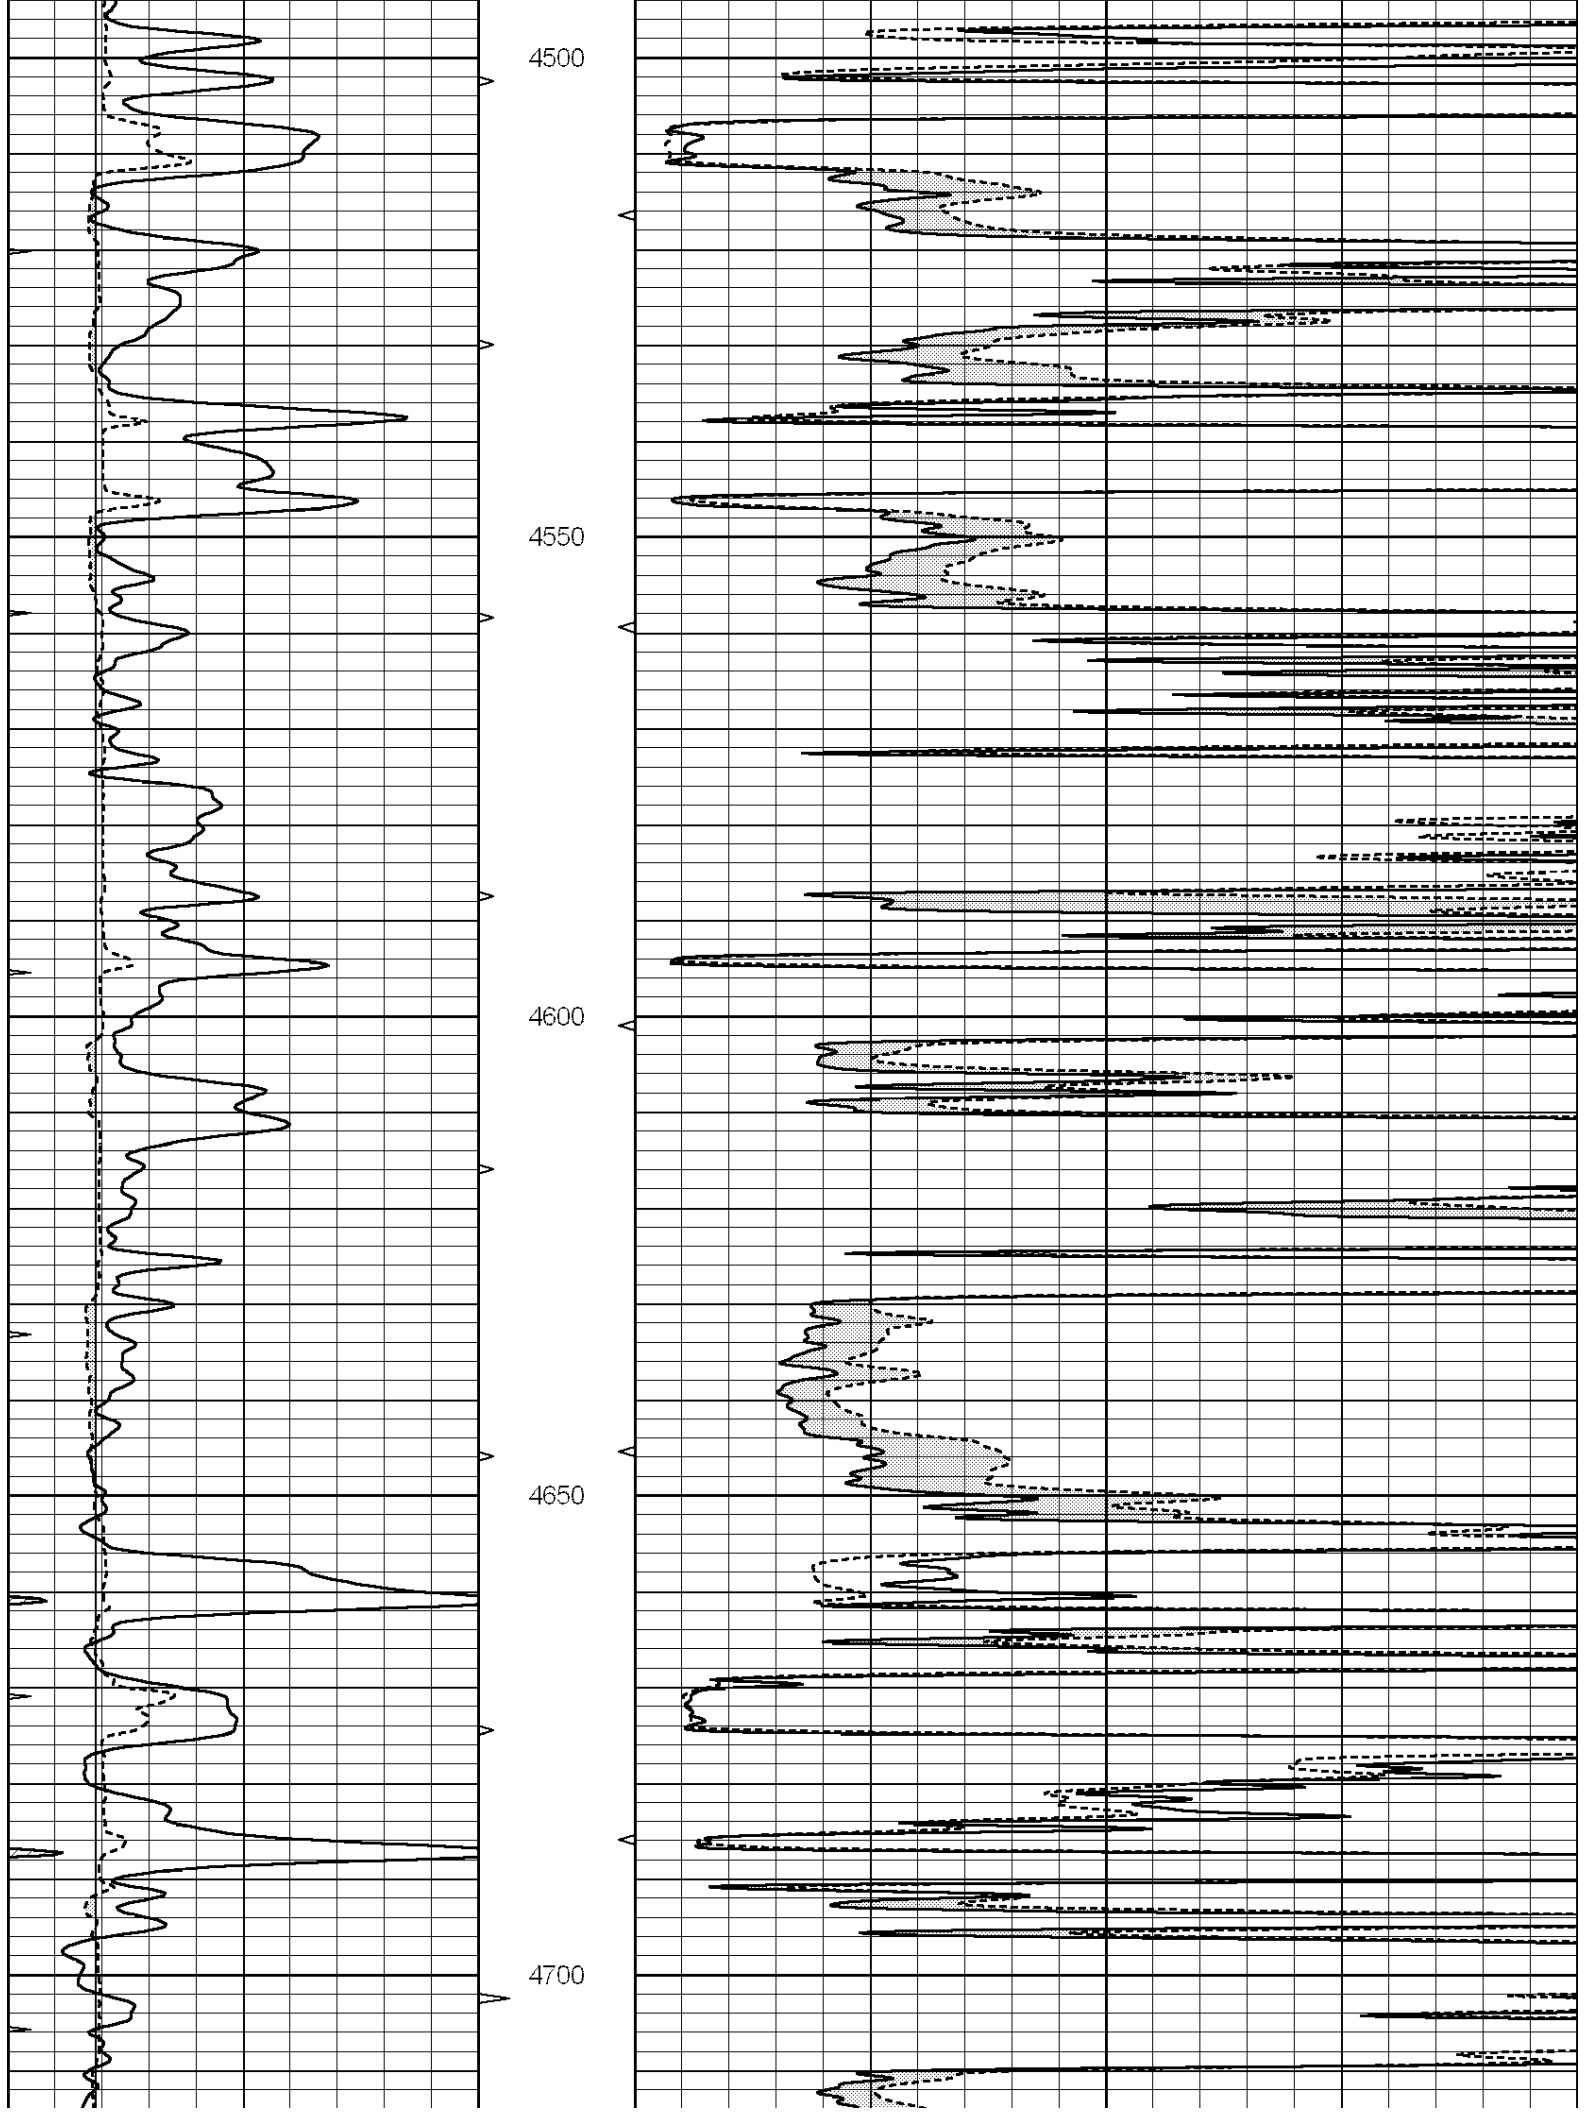

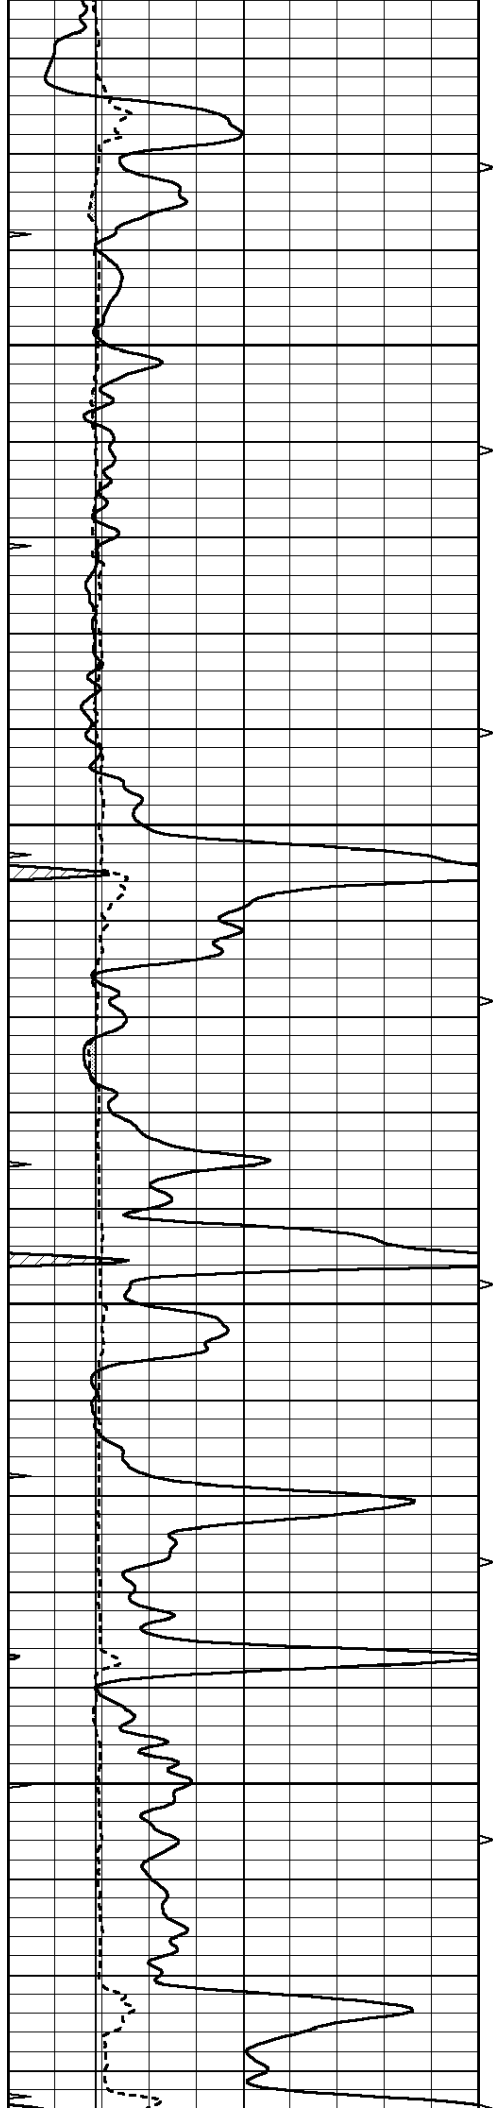



4750

4800

4850

4900

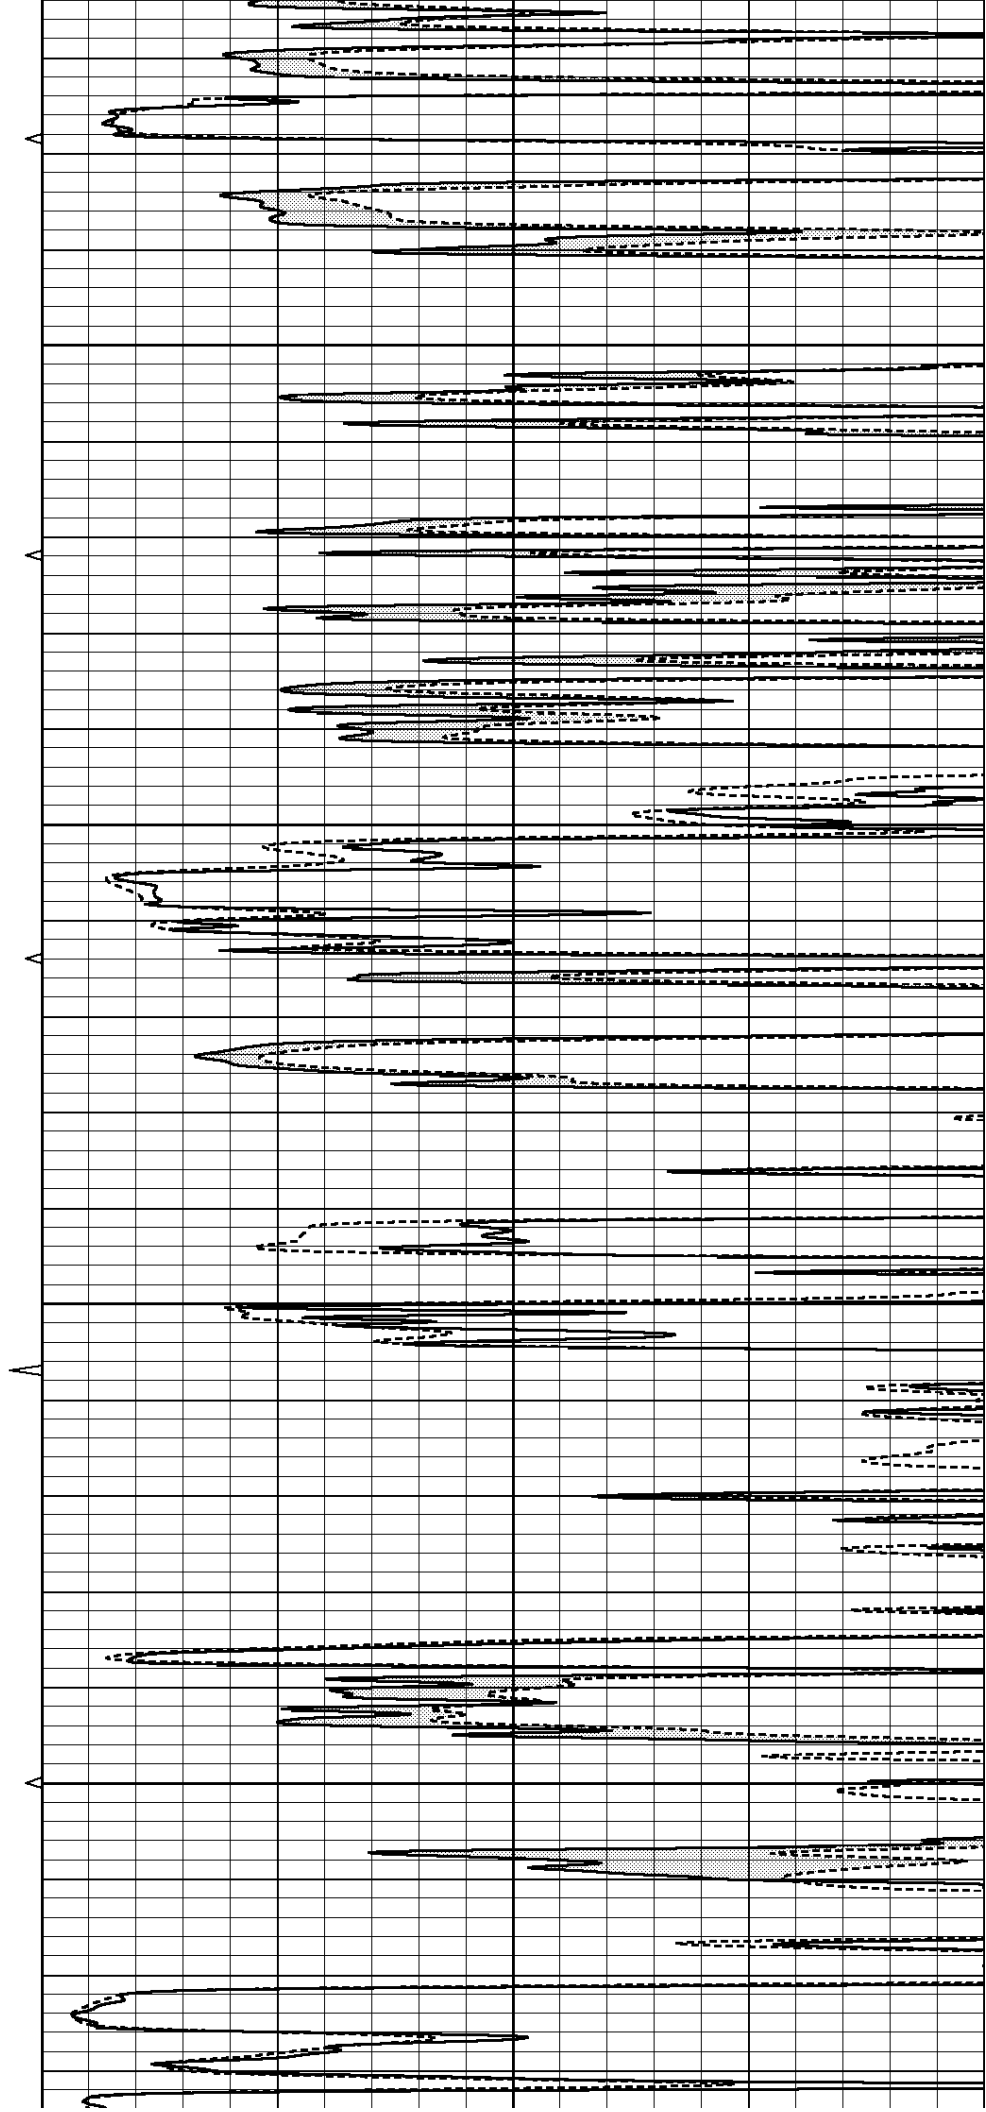

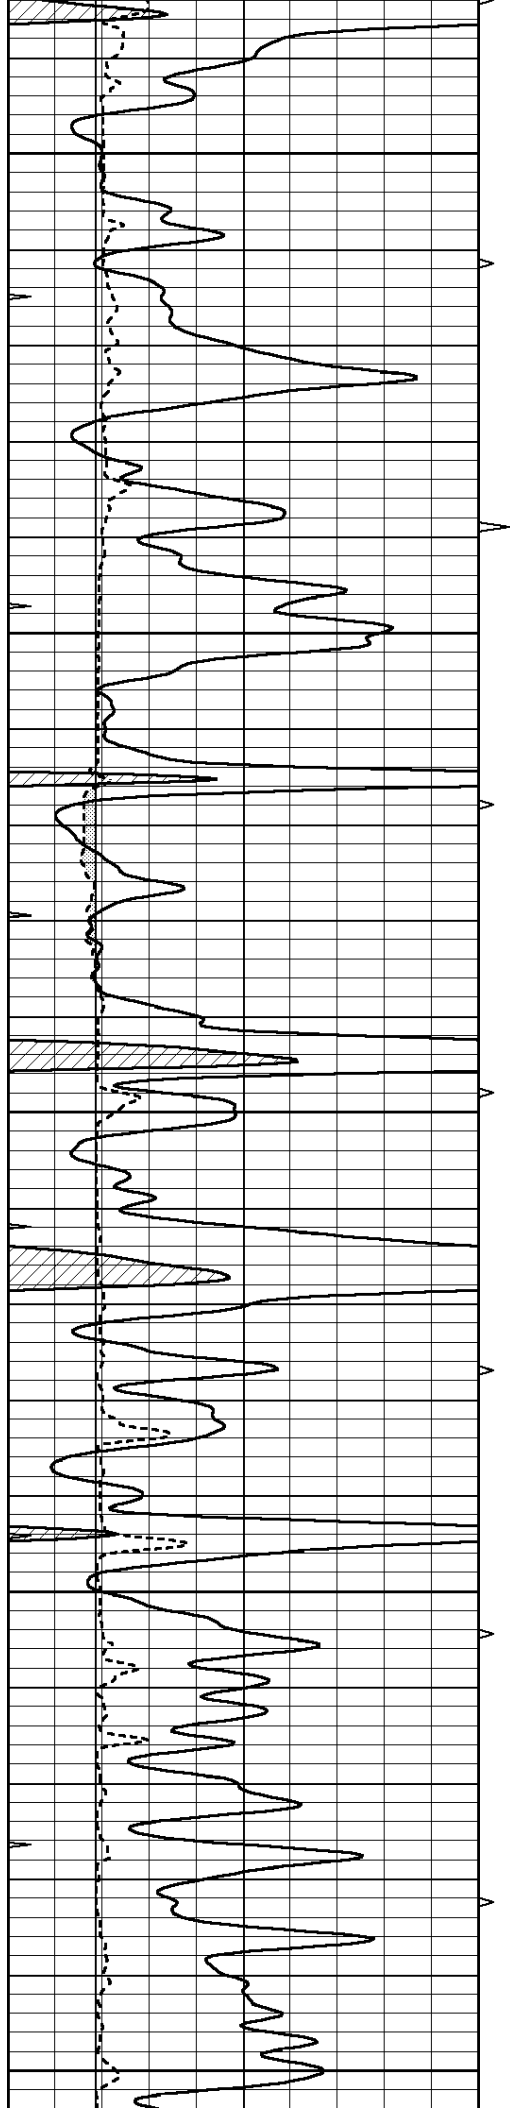


4950



5000

5050

5100

5150

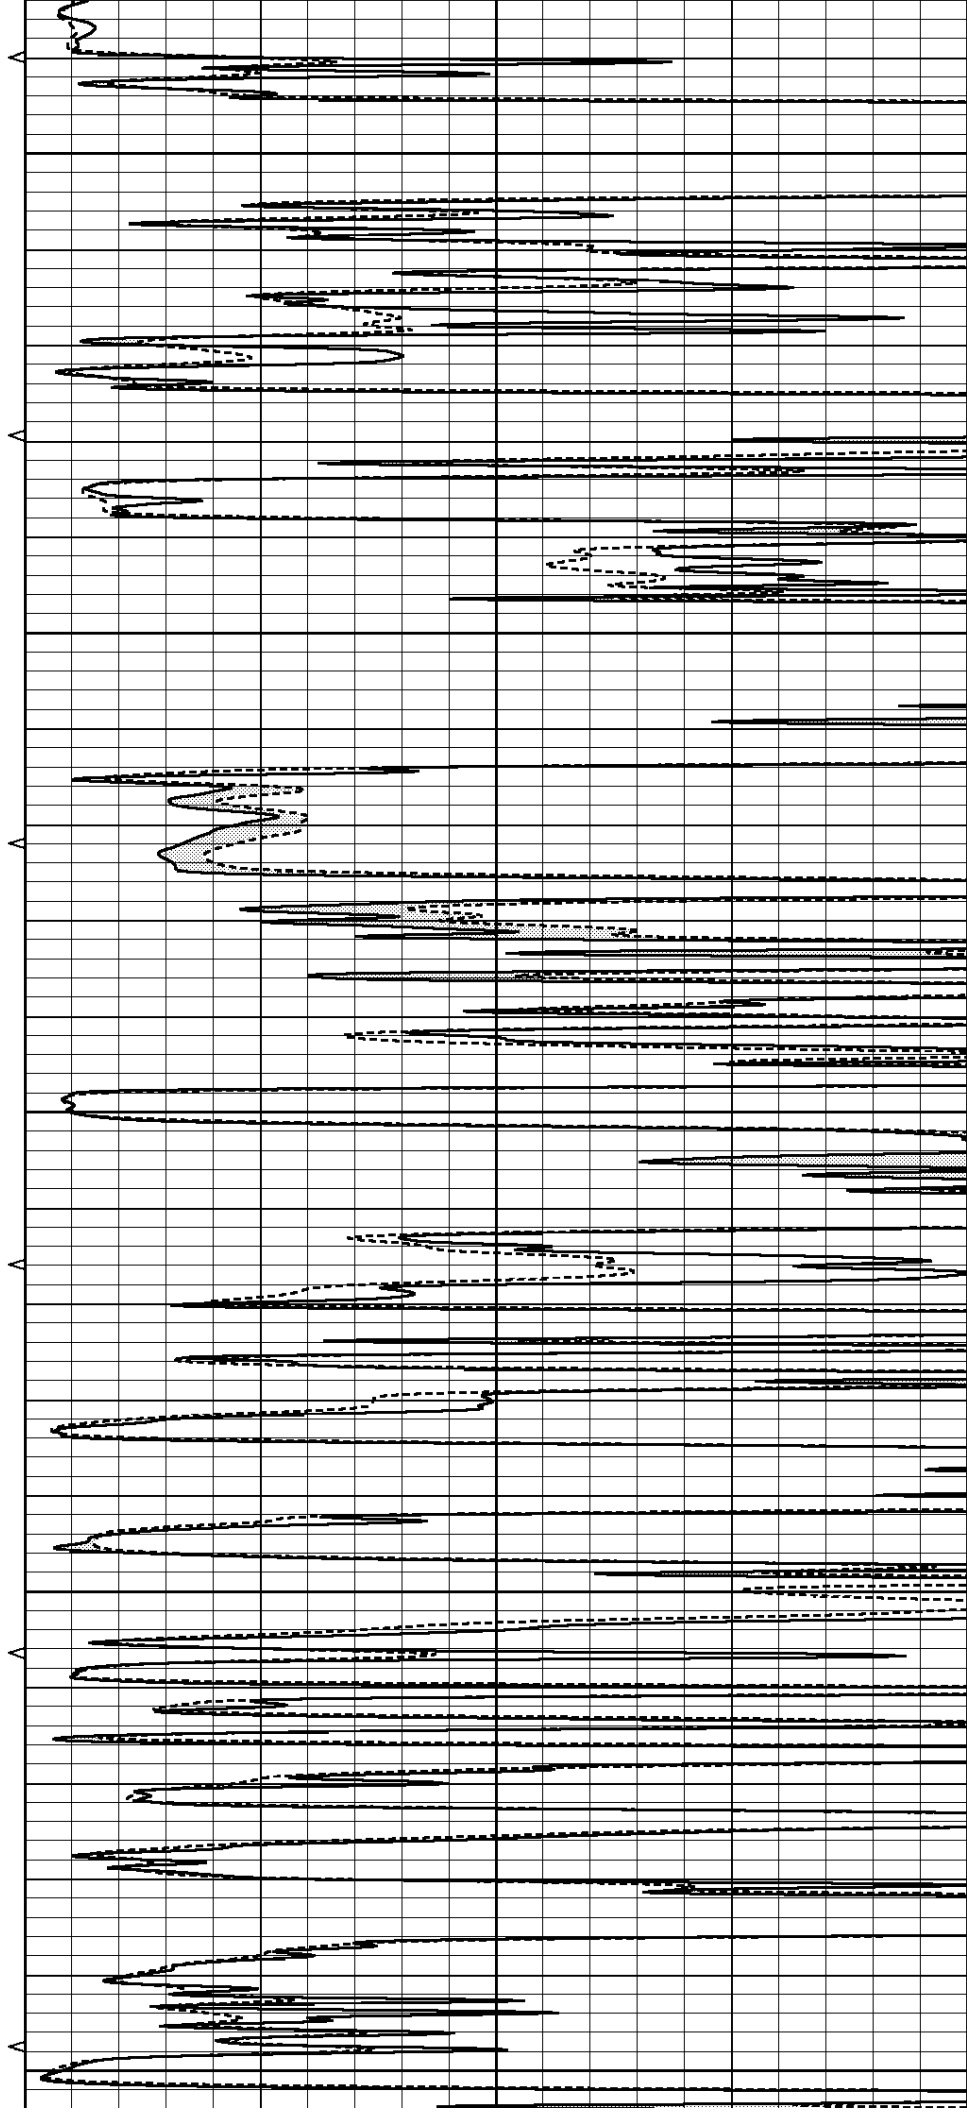

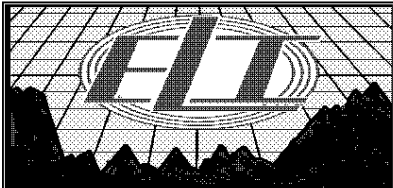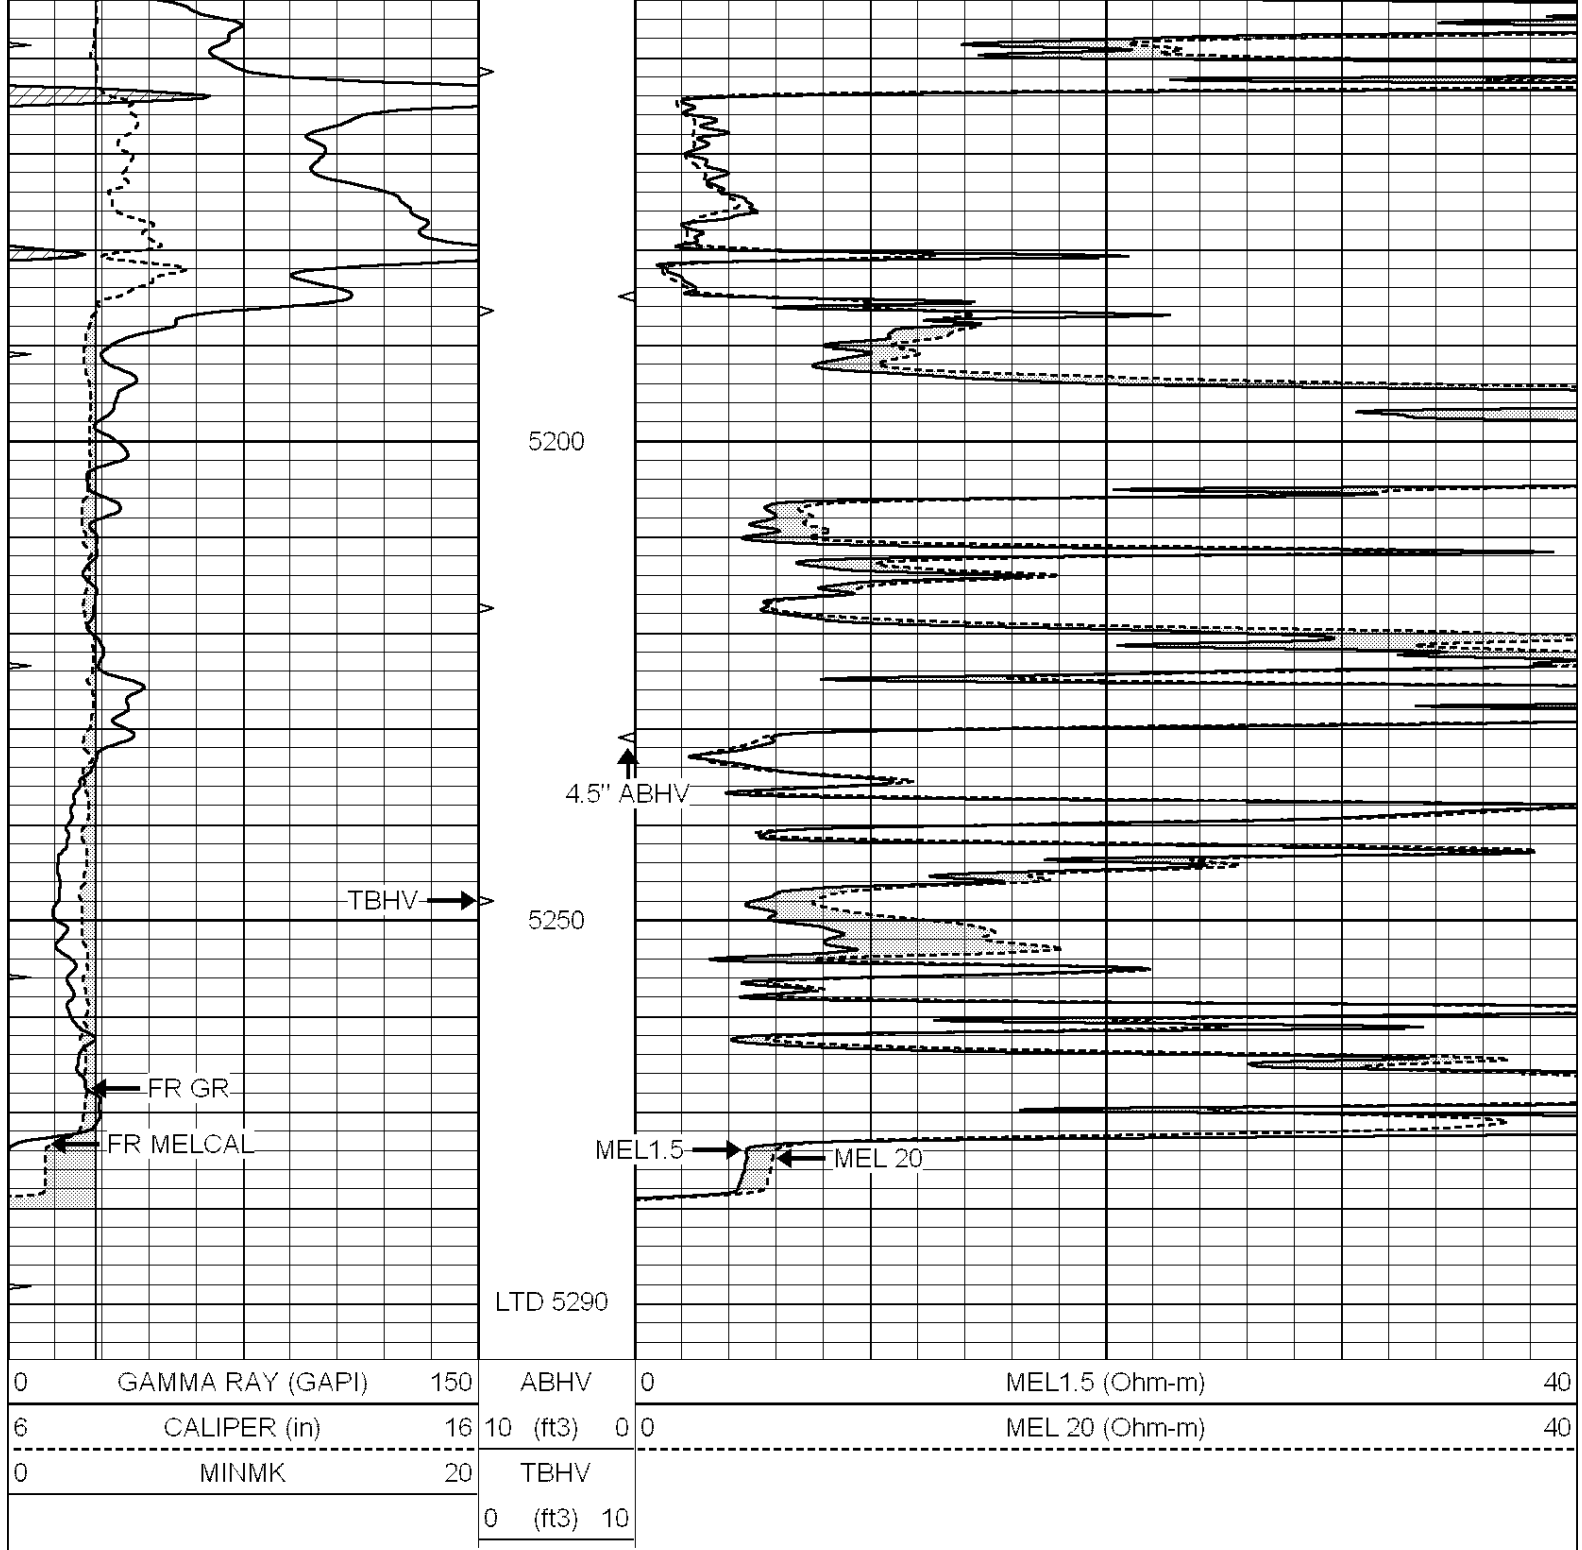


REPEAT SECTION

Database File: 3341pe.db
 Dataset Pathname: pass6.3
 Presentation Format: micro
 Dataset Creation: Wed Feb 13 21:47:12 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			

0 (ft3) 10

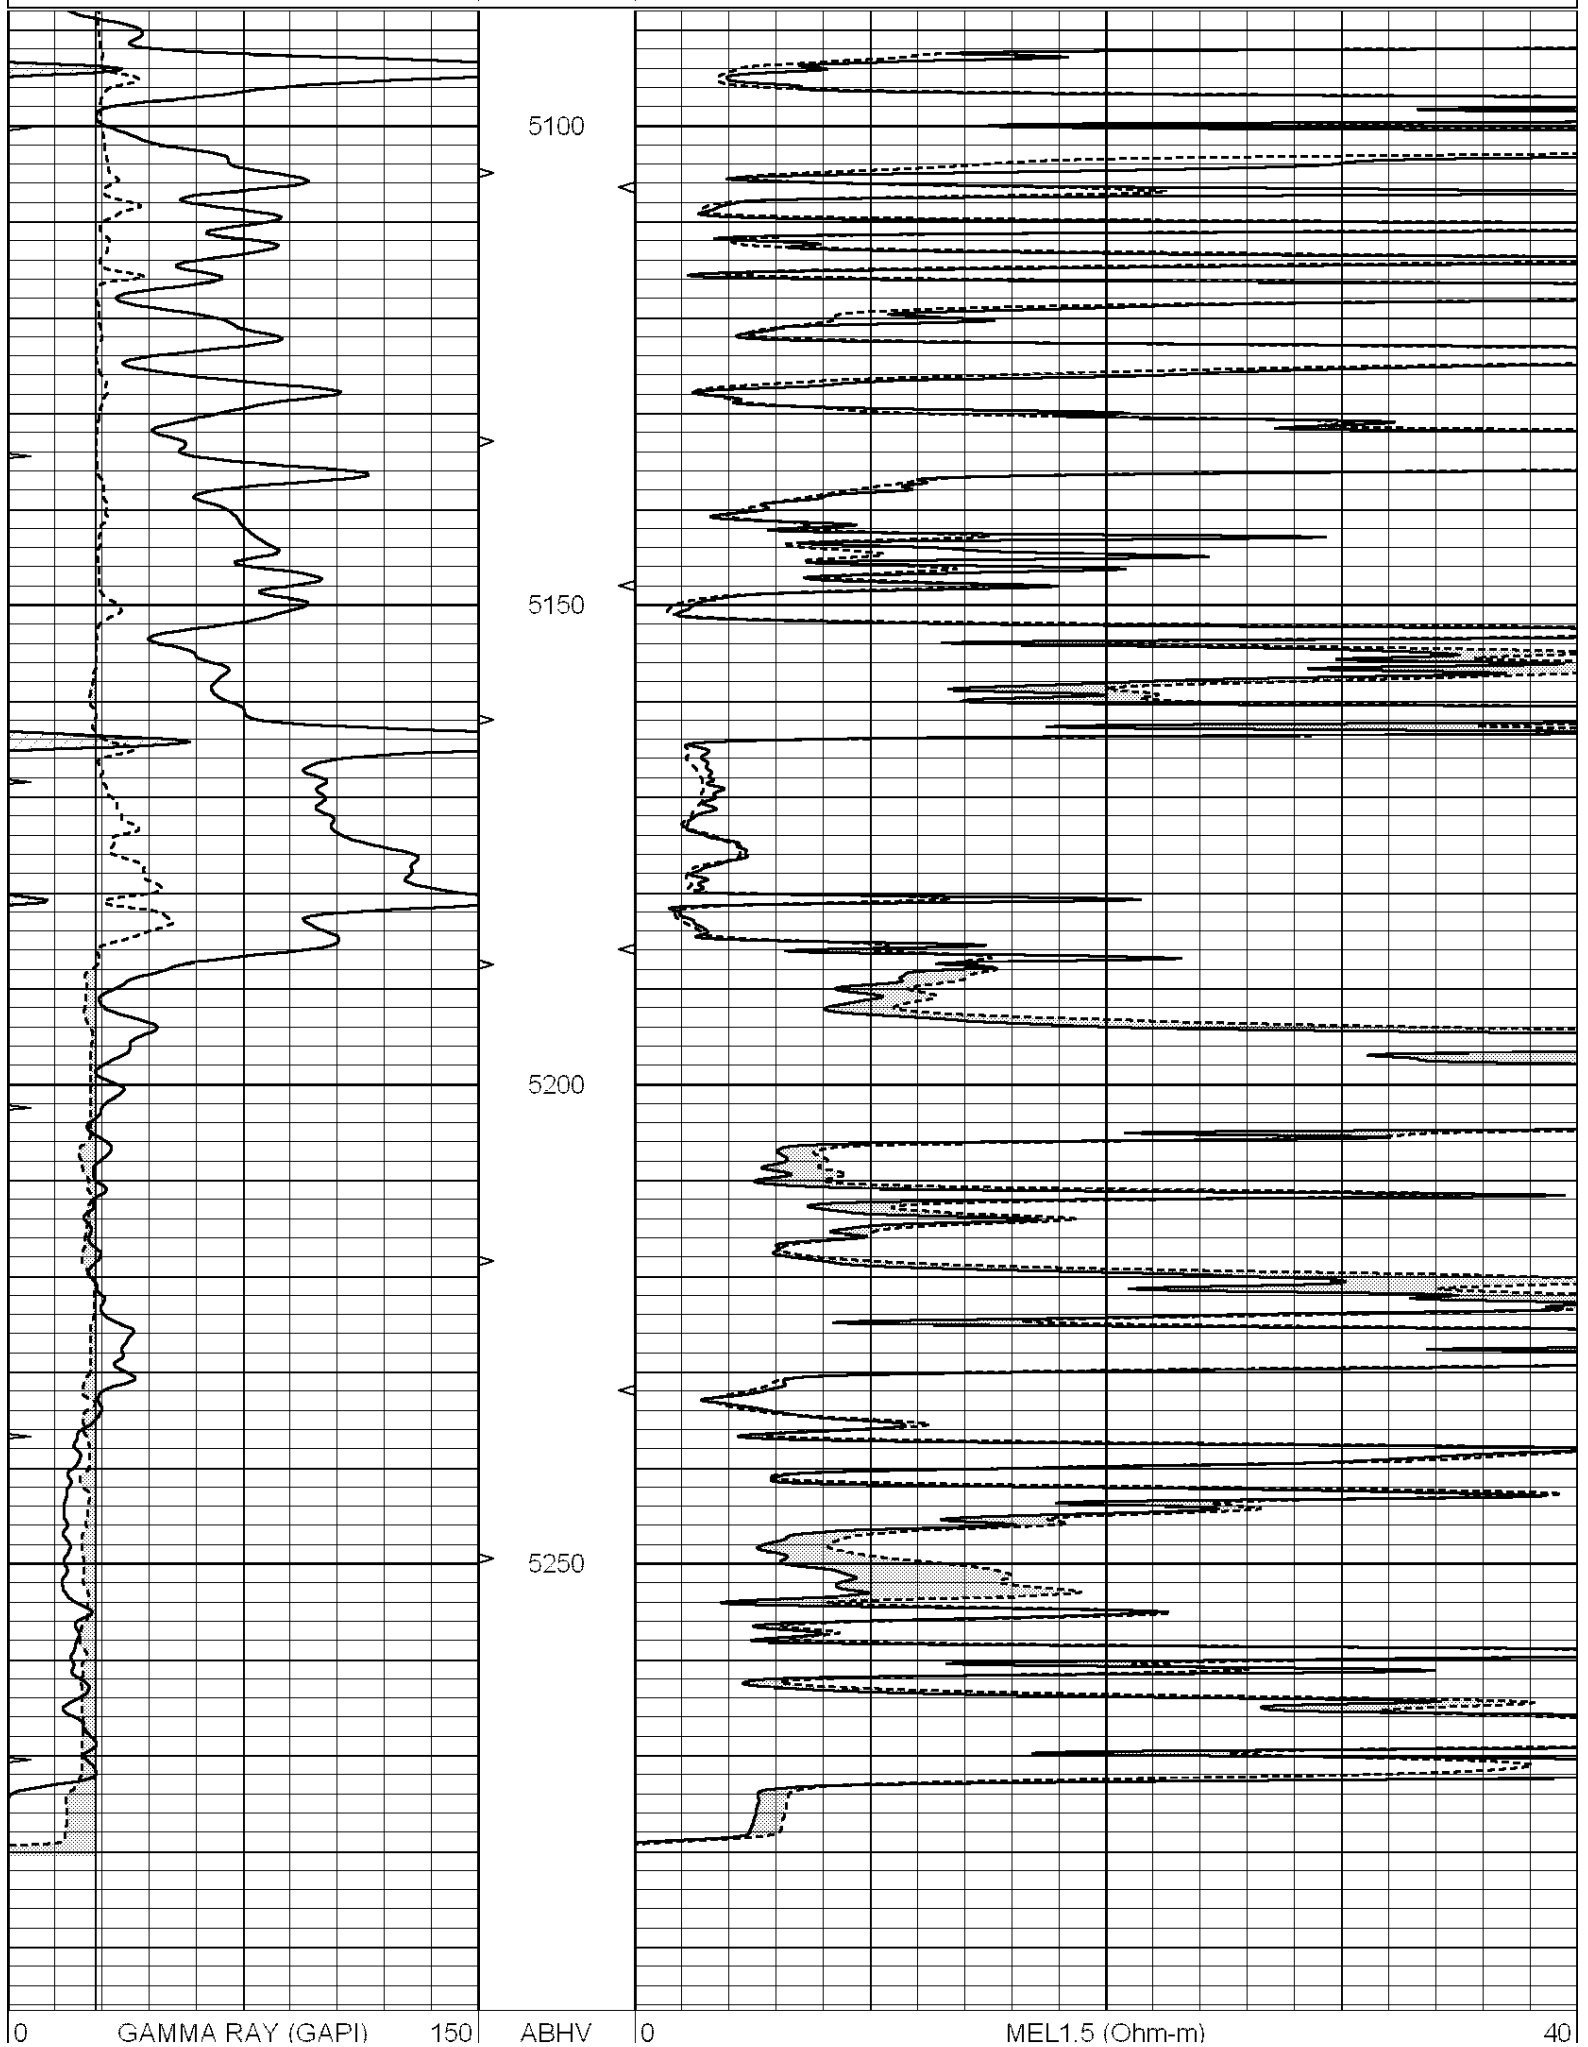

6	CALIPER (in)	16	10 (ft3)	0	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV				
			0 (ft3)	10			

Calibration Report			
Database File:	3341pe.db		
Dataset Pathname:	pass7.3		
Dataset Creation:	Wed Feb 13 21:55:58 2019 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Wed Feb 13 21:21:01 2019		
Caliper Calibration:	Gain=5.042	Offset=1.346	
References	Low Cal	High Cal	
Readings	7.900	20.000	
	1.300	3.700	
1.5" Calibration:	Gain=60.000	Offset=-1.300	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.001	1.240	
2" Calibration:	Gain=69.000	Offset=-1.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.001	1.076	
Gamma Ray Calibration Report			
Serial Number:	110959		
Tool Model:	OPEN_GR		
Performed:	Wed Jan 16 04:23:33 2019		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2300	GAPI/cps	