

DUAL INDUCTION LOG


Company	PALOMINO PETROLEUM, INC.		
Well	ZIEGENBALG TRUST #1		
Field	WILDCAT		
County	GOVE		
State	KANSAS		
Company	PALOMINO PETROLEUM, INC.		
Well	ZIEGENBALG TRUST #1		
Field	WILDCAT		
County	GOVE		
State	KANSAS		
Location:	API # : 15-063-22346-0000		Other Services CDL/CNL/PE MEL/SONIC
Permanent Datum	GROUND LEVEL		Elevation
Log Measured From	KELLY BUSHING 10' A.G.L.		2493
Drilling Measured From	KELLY BUSHING		K.B. 2503 D.F. 2501 G.L. 2493
Date	2/24/19		
Run Number	ONE		
Depth Driller	4420		
Depth Logger	4420		
Bottom Logged Interval	4418		
Top Log Interval	00		
Casing Driller	8 5/8"@223'		
Casing Logger	224		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 3,000 PPM
Density / Viscosity	9.4/50		
pH / Fluid Loss	10.5/7.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.950@50F		
Rmf @ Meas. Temp	.713@50F		
Rmc @ Meas. Temp	1.14@50F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.396@120F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	12:45 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JERRY A. SMITH		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
QUINTER, KS., S. SIDE OF I-70, TAKE "RD. Z" WEST TO "RD. 58", SOUTH TO "RD.N" 1W., N. INTO

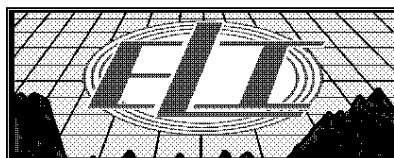

MAIN SECTION


Database File: 3345pe.db
Dataset Pathname: pass3.7
Presentation Format: dil2
Dataset Creation: Sun Feb 24 14:09:16 2019 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50



1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

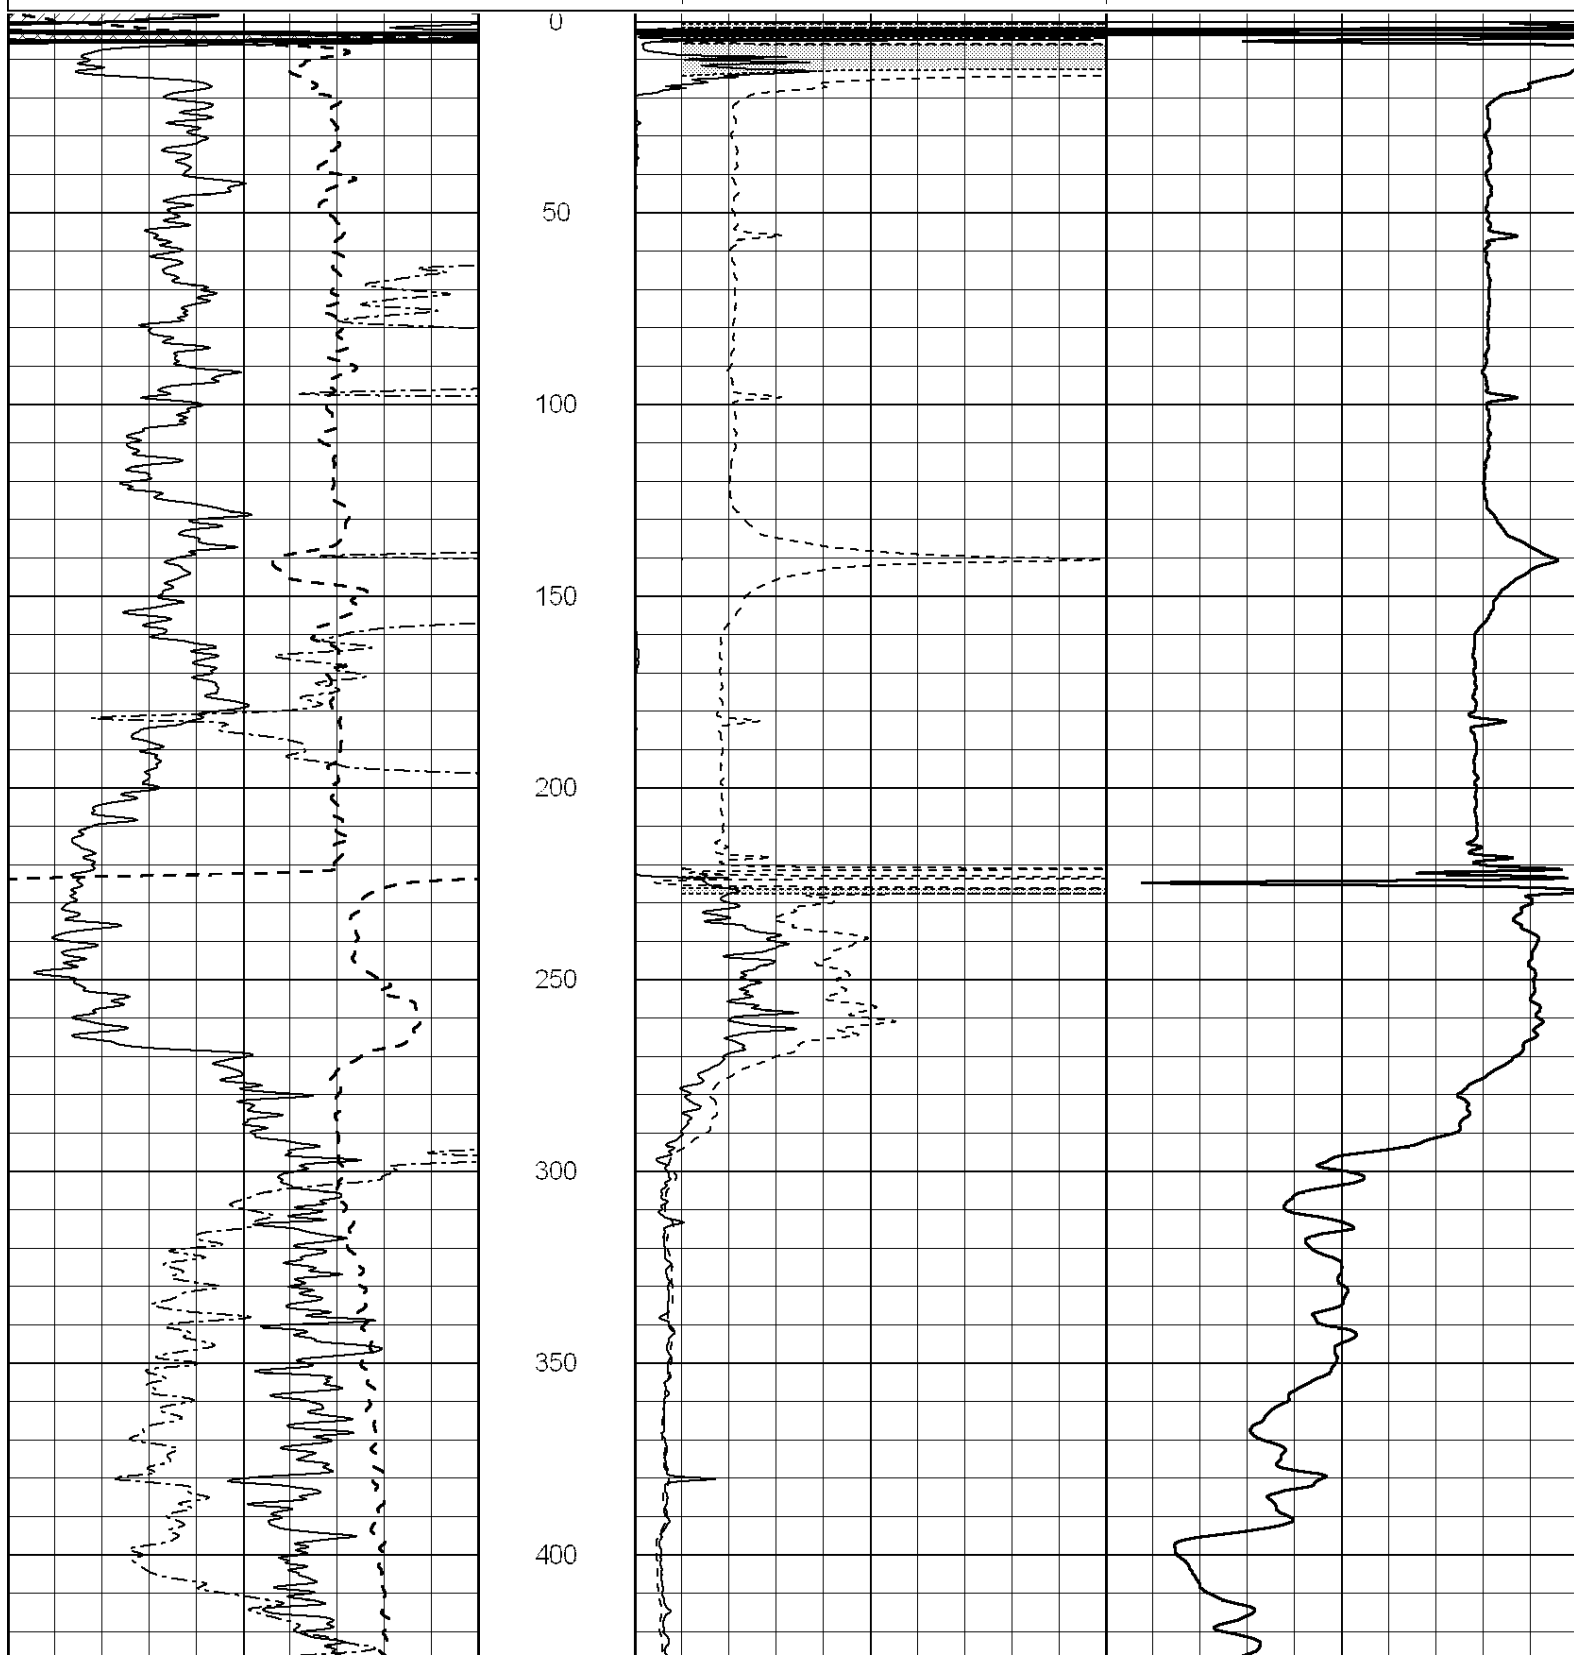

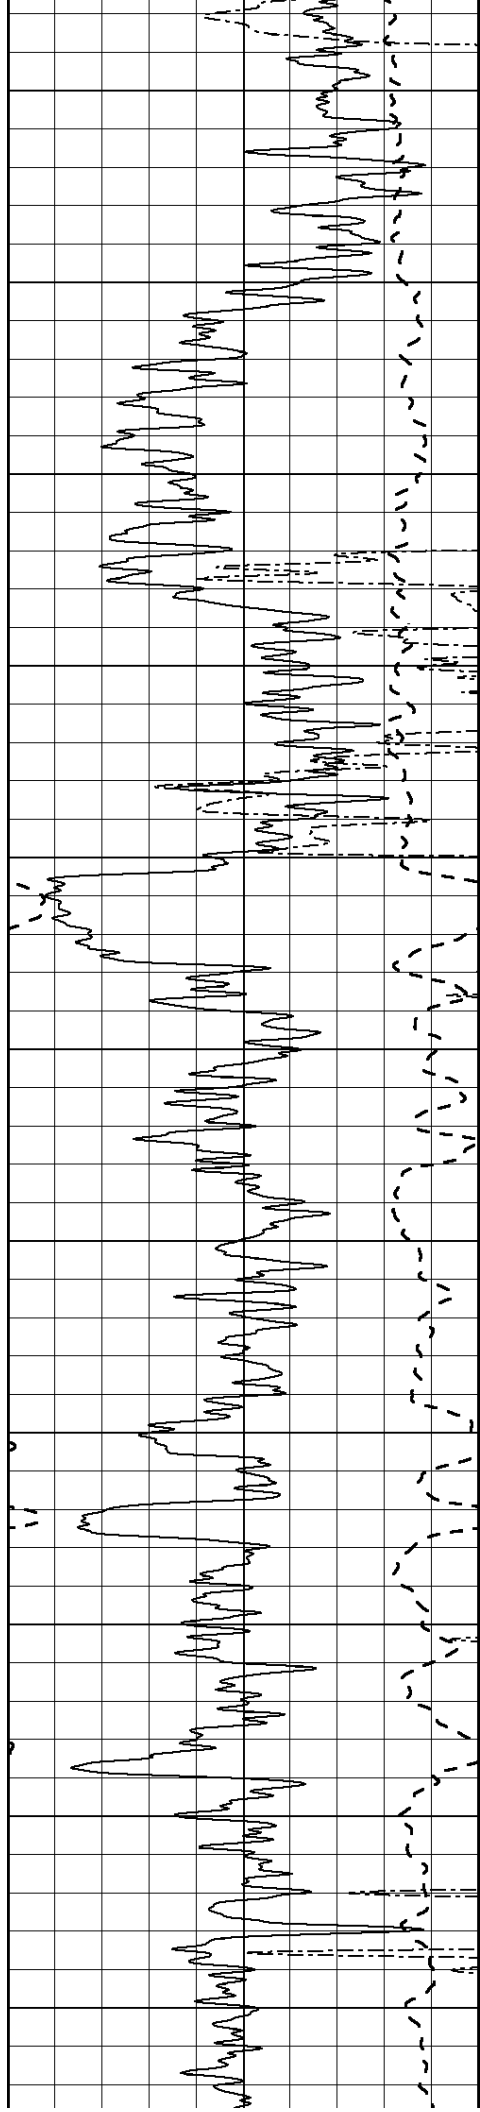

450
500
550
600
650
700
750
800
850
900
950

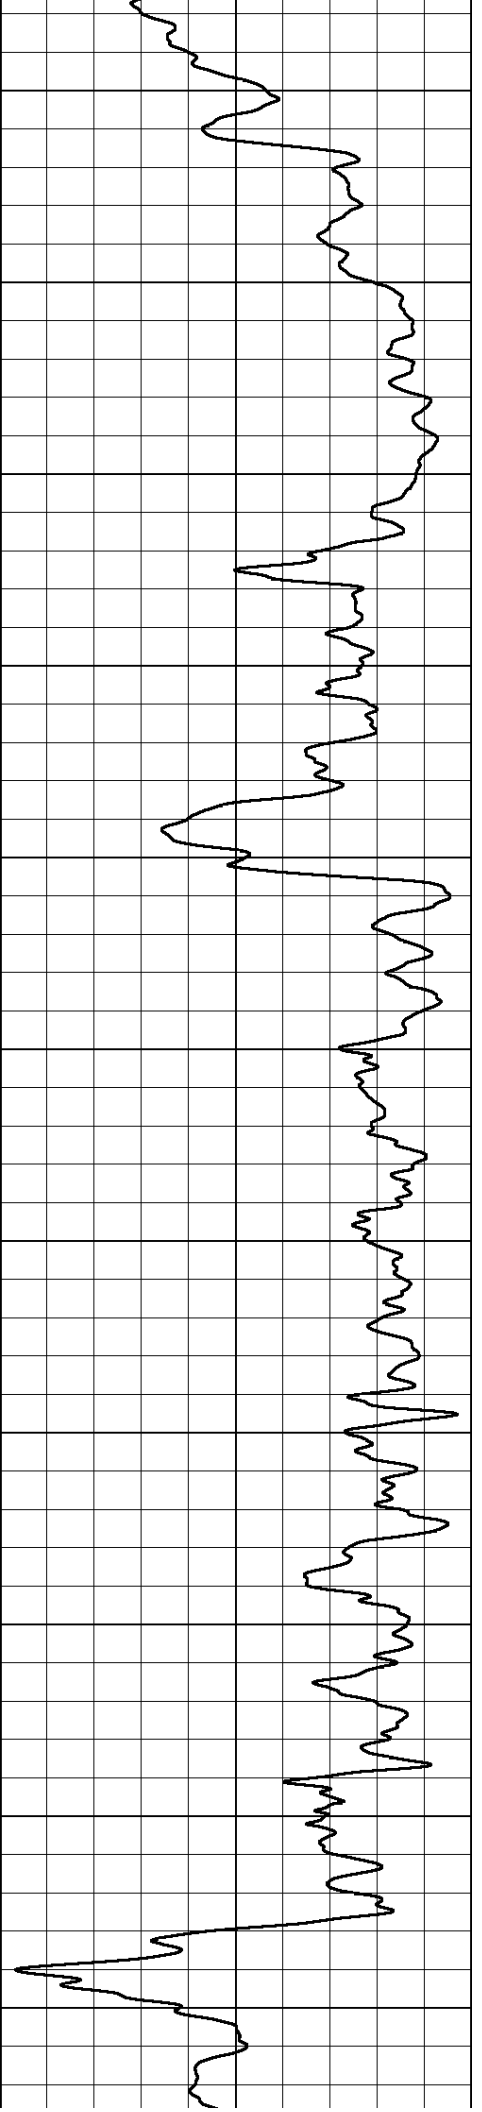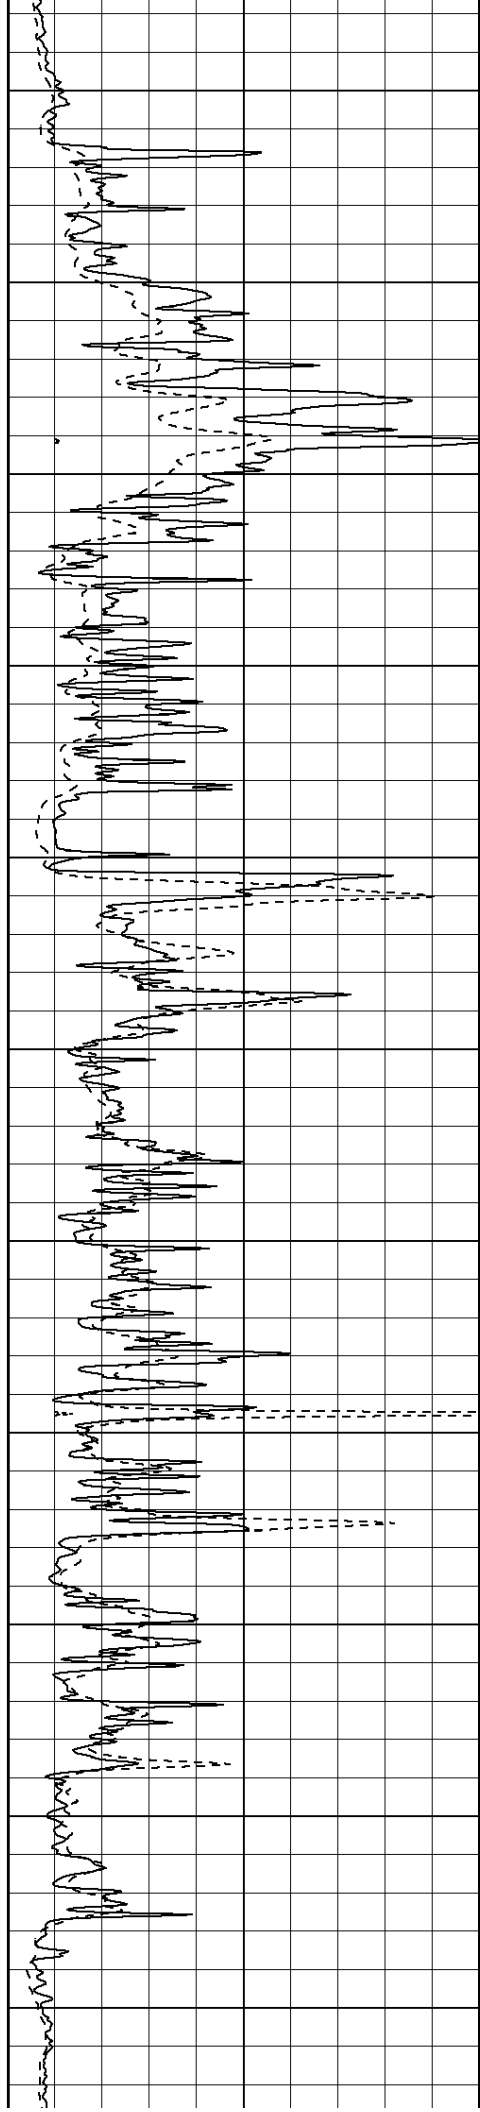

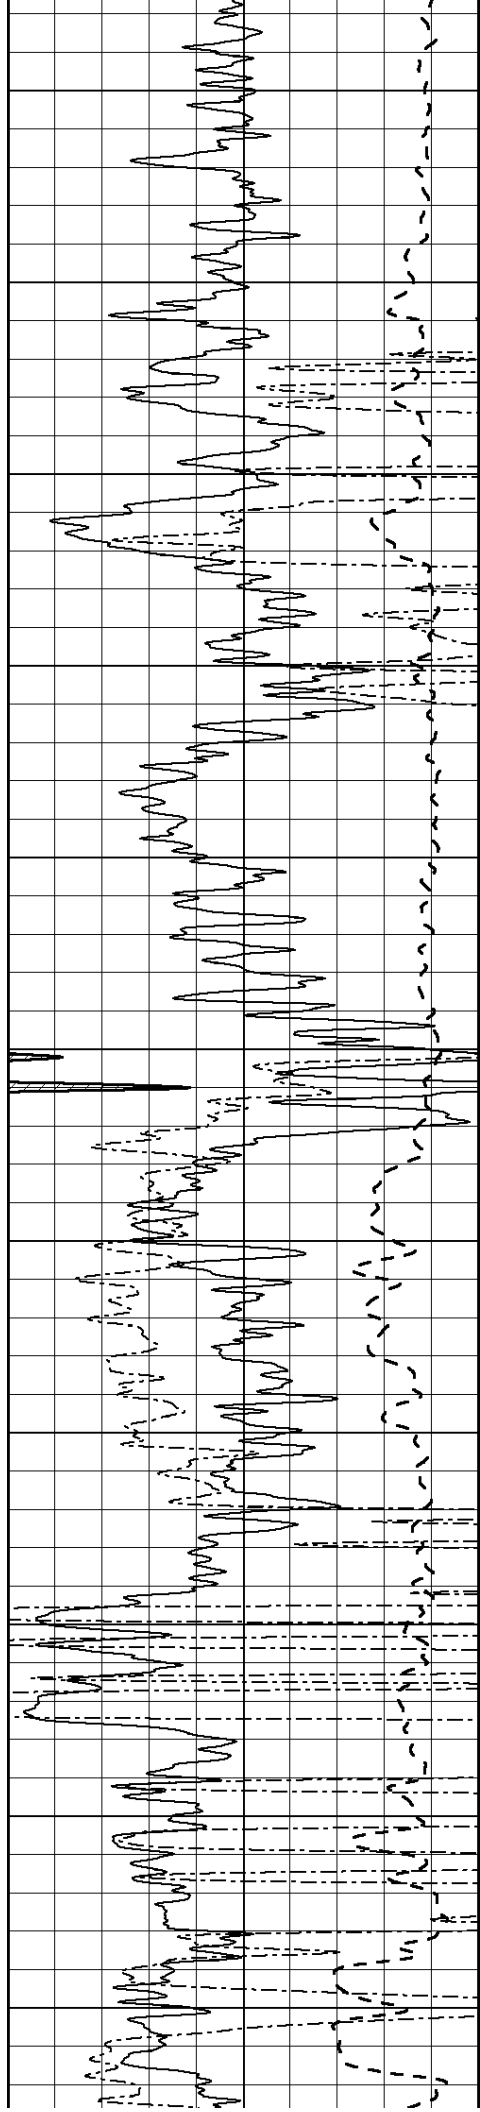

1000

1050

1100

1150

1200

1250



1300



1350


1400

1450

1500

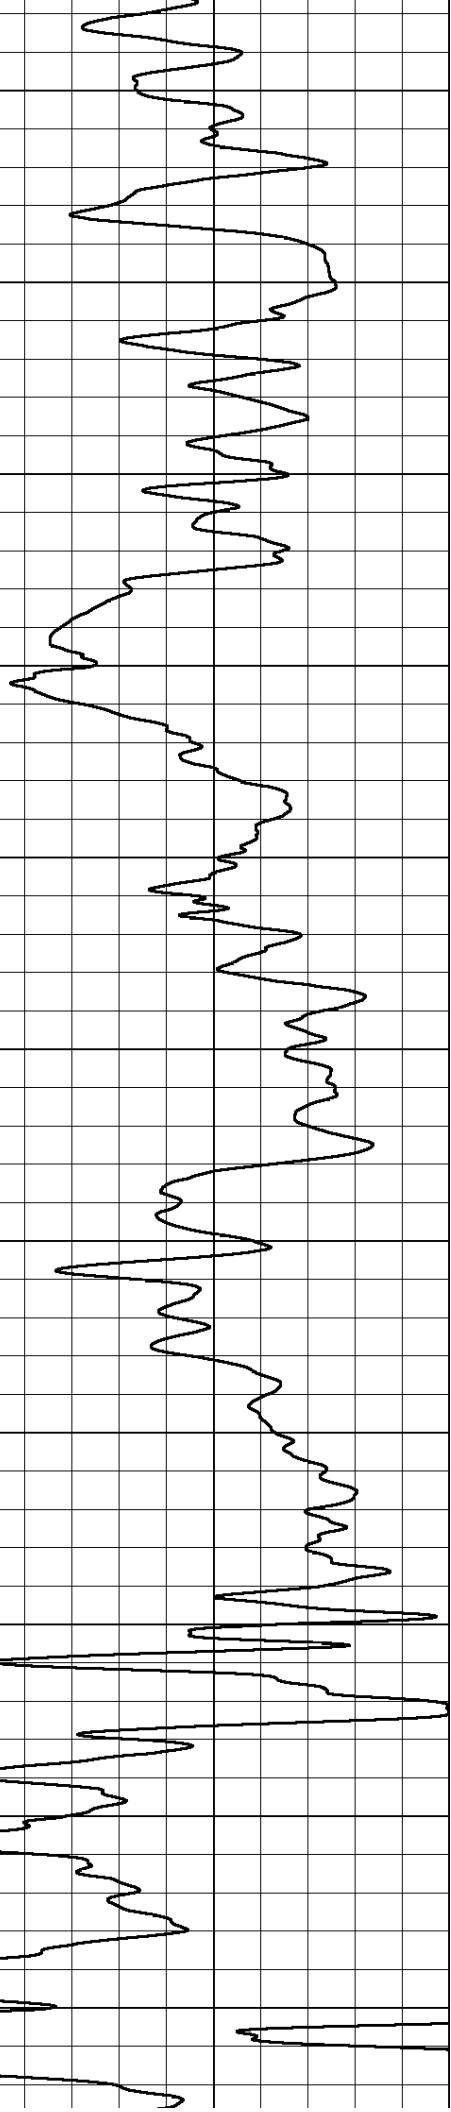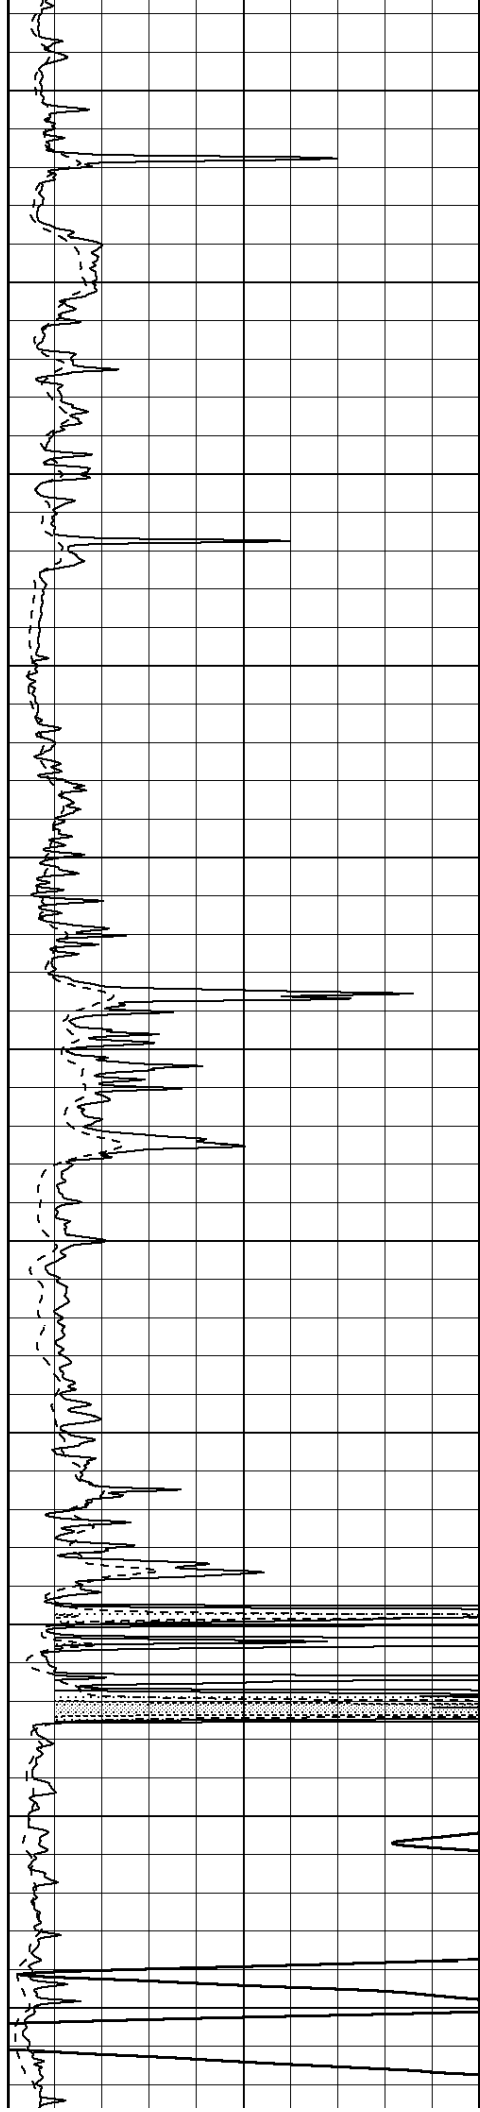

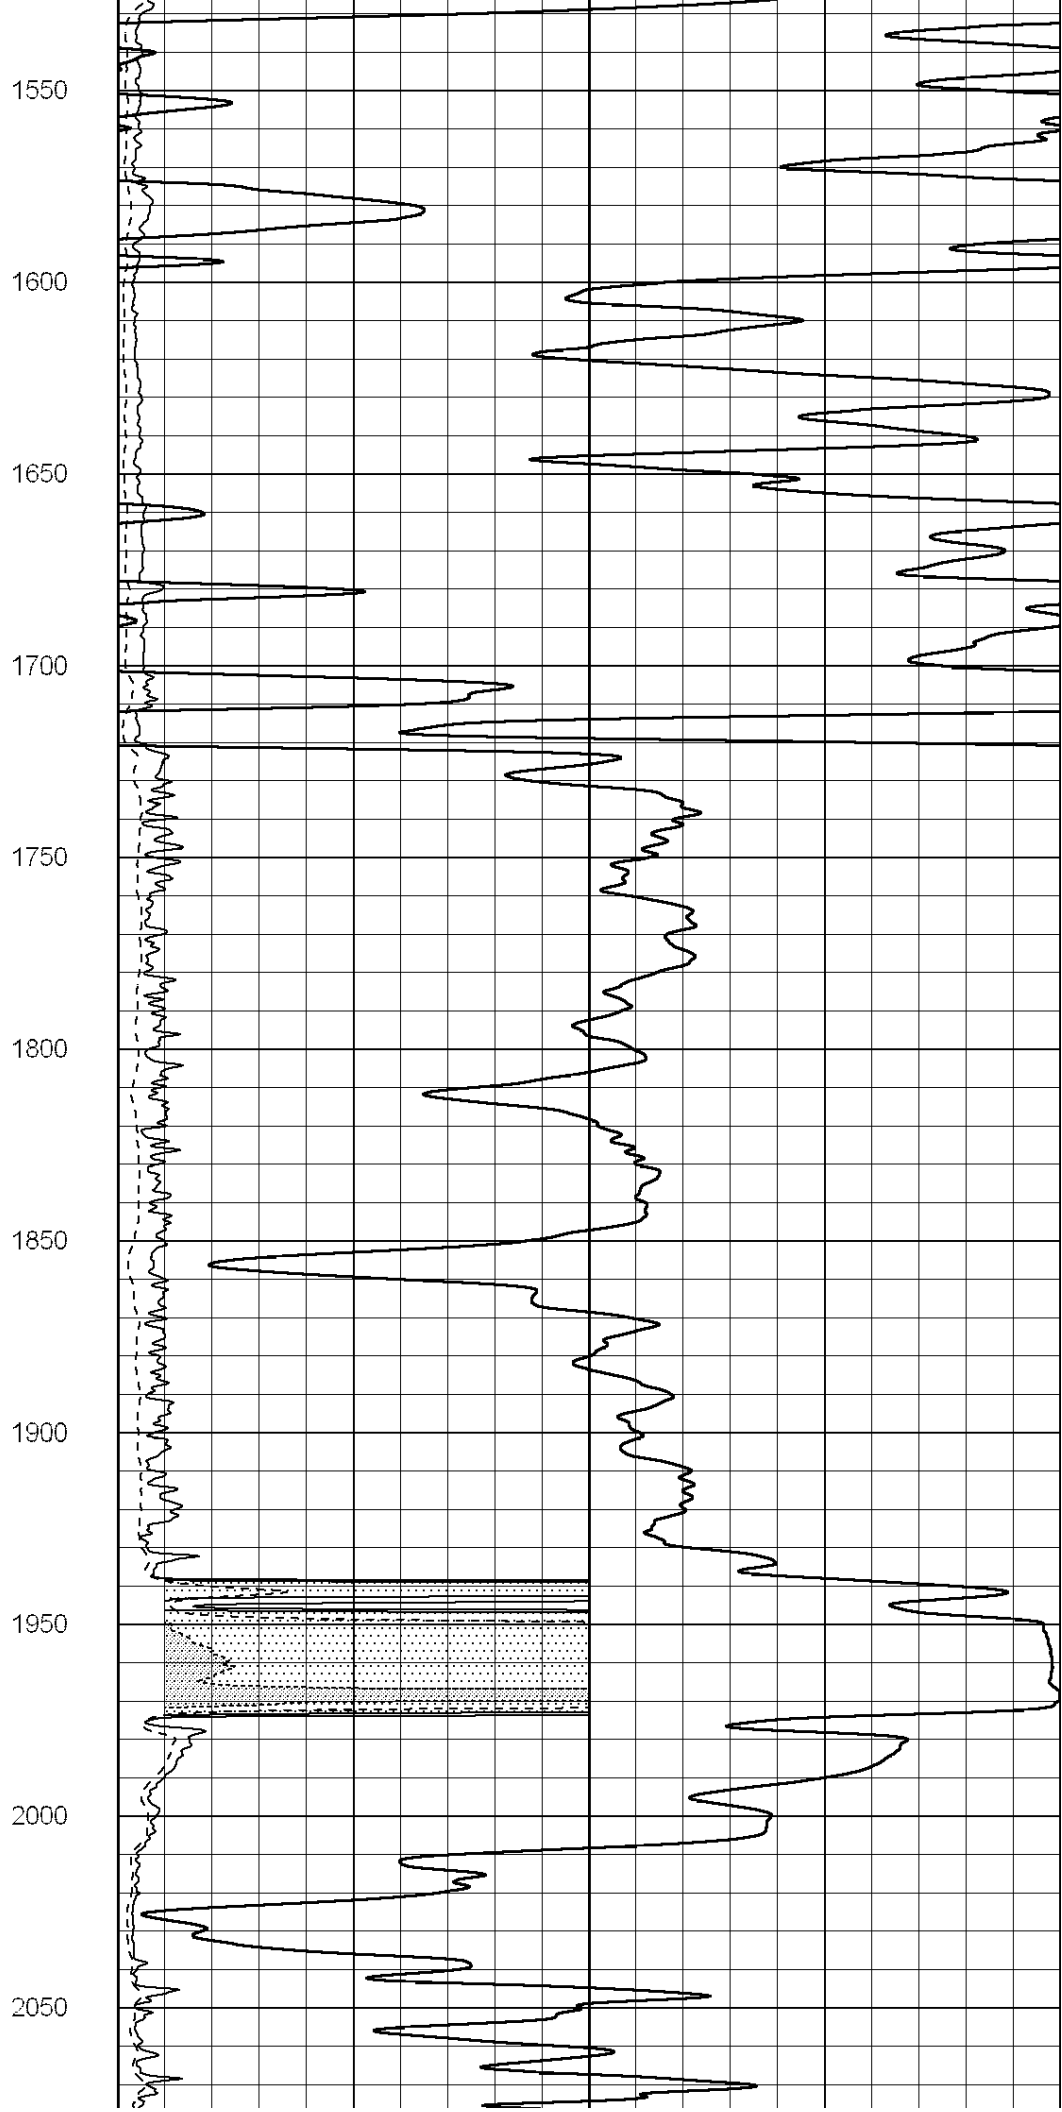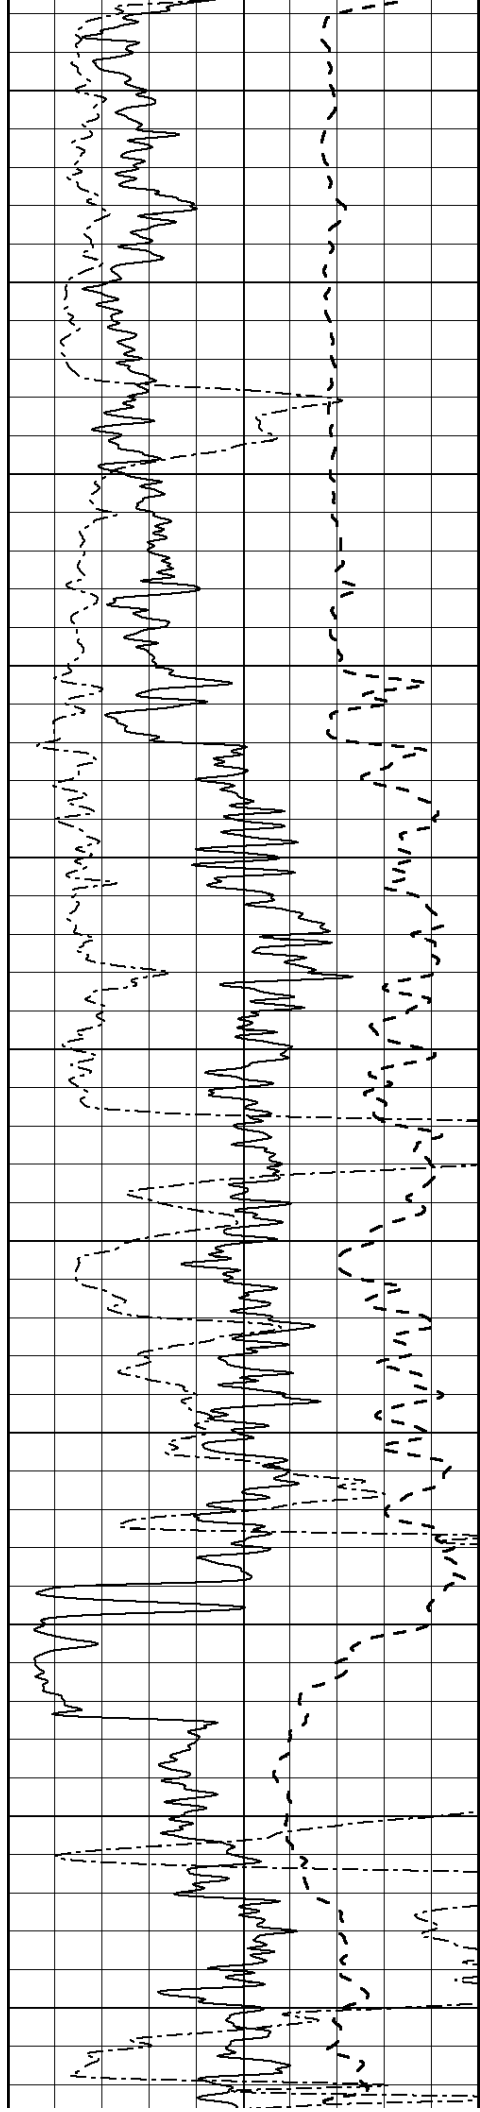

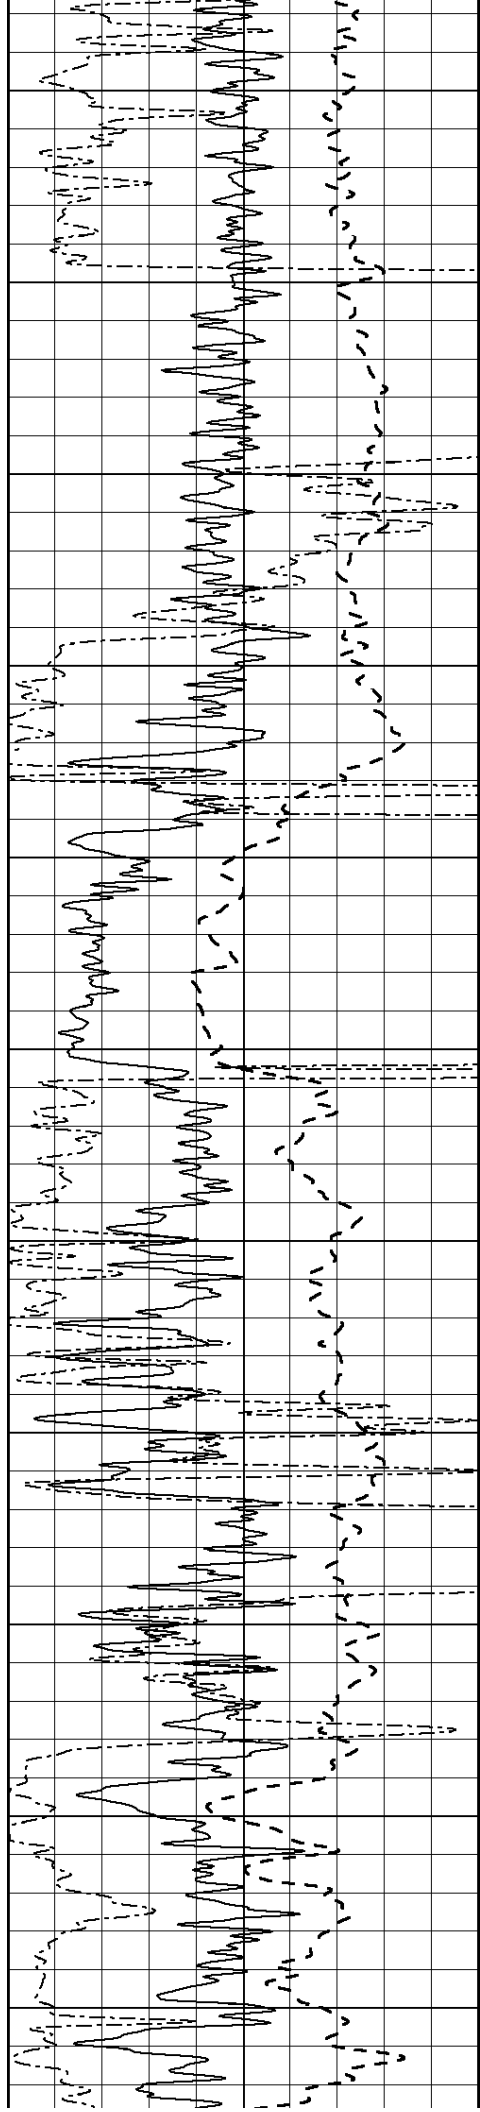

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

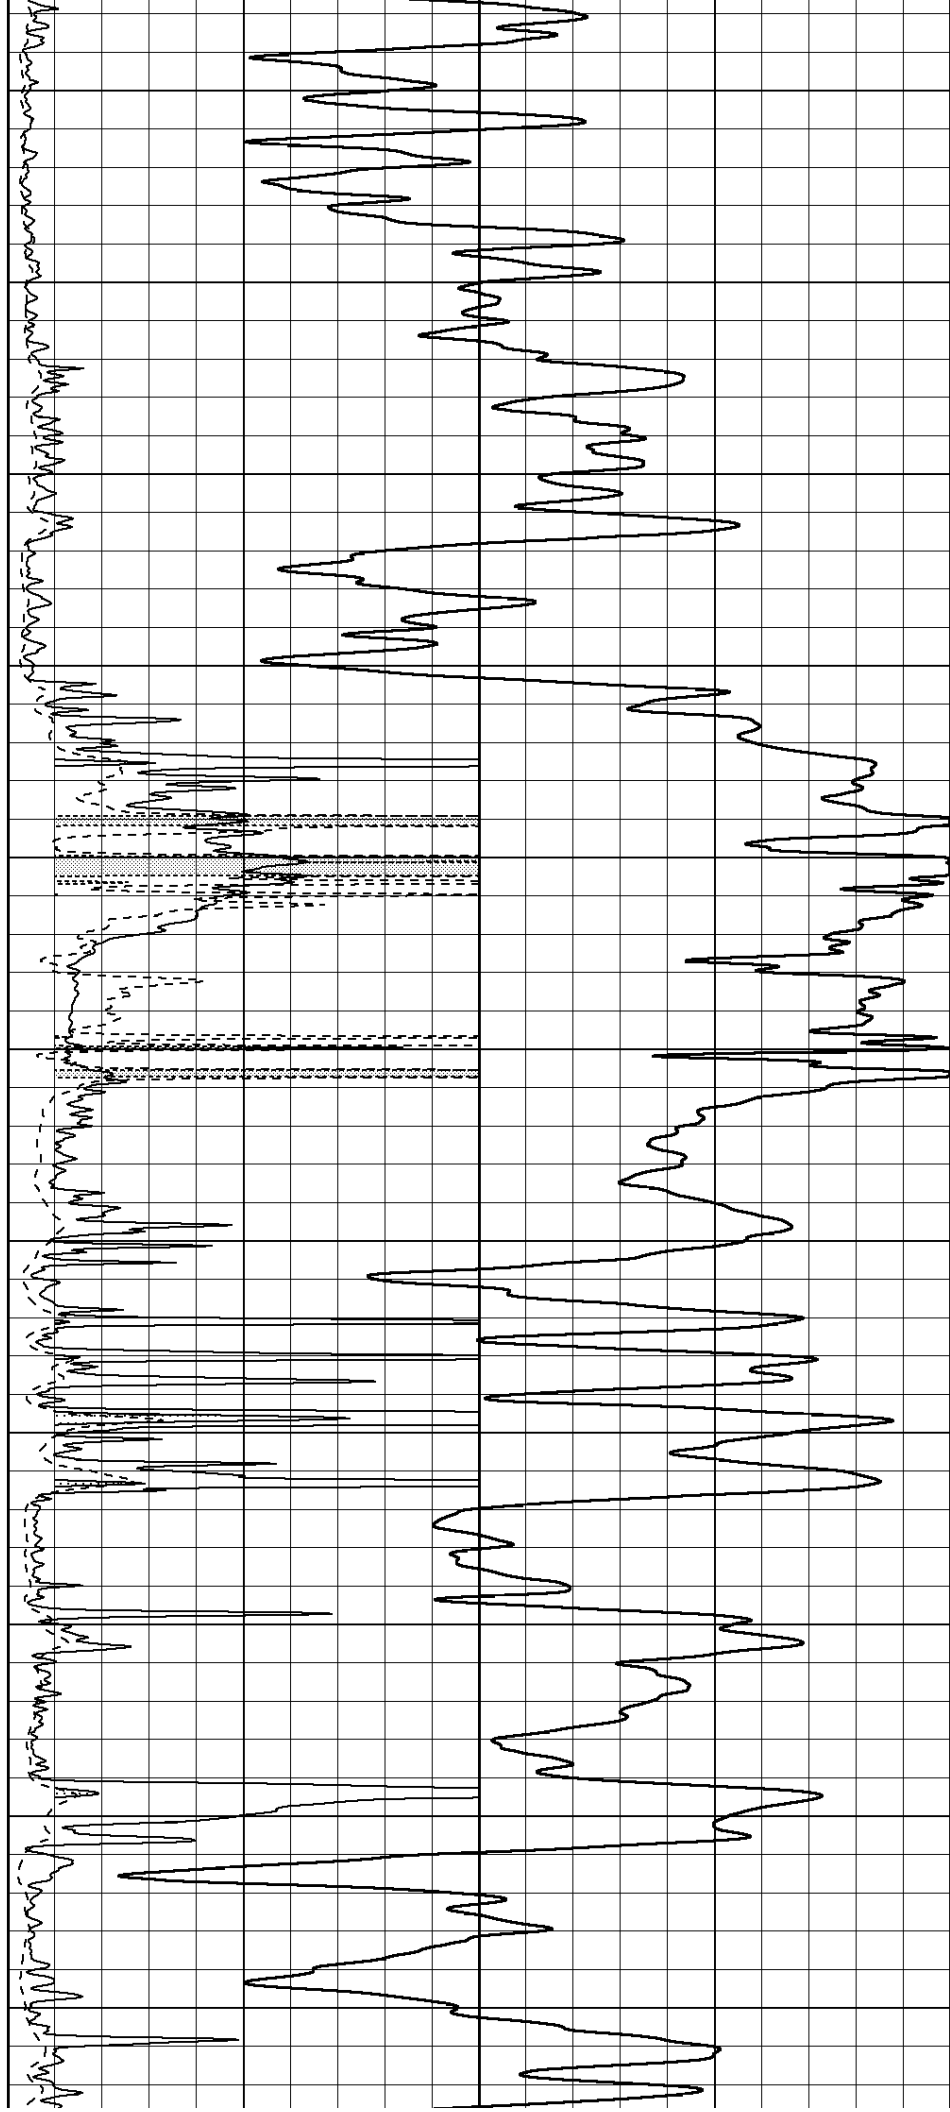

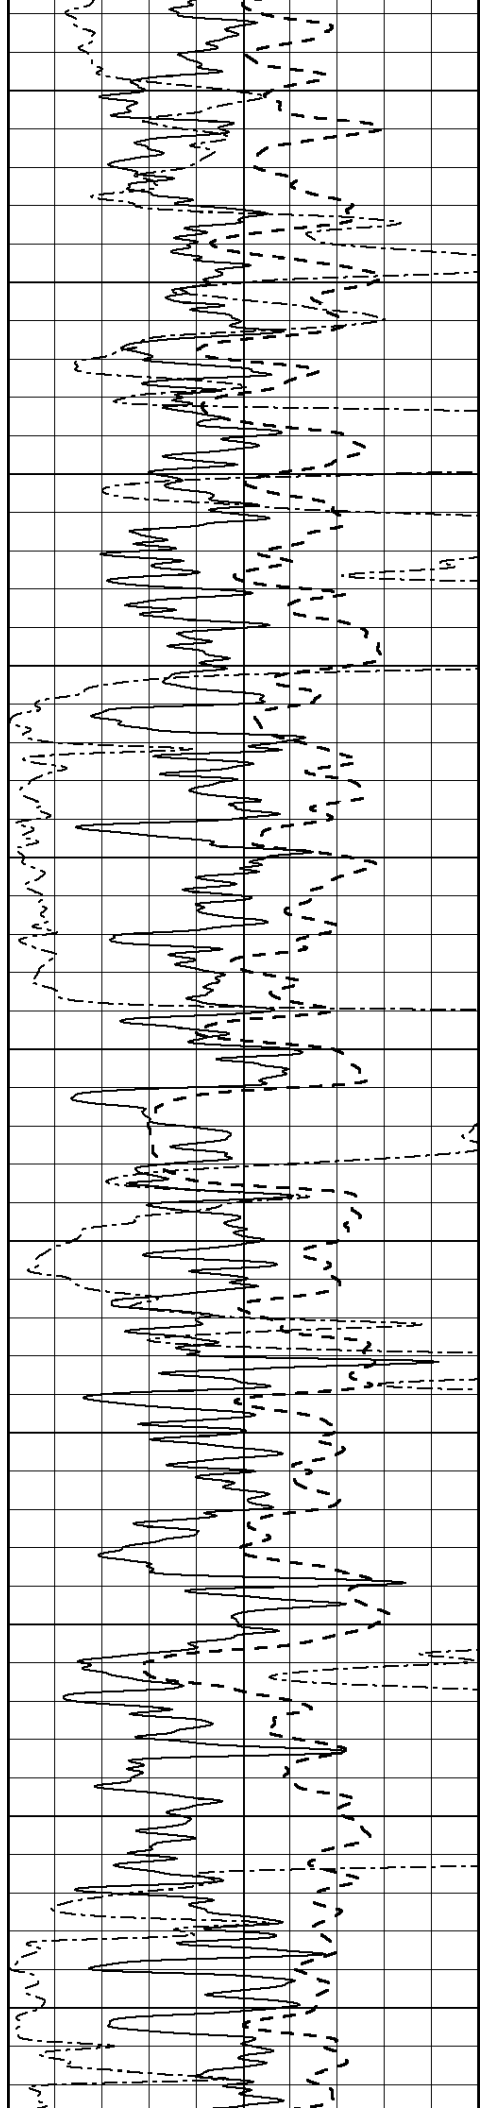

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

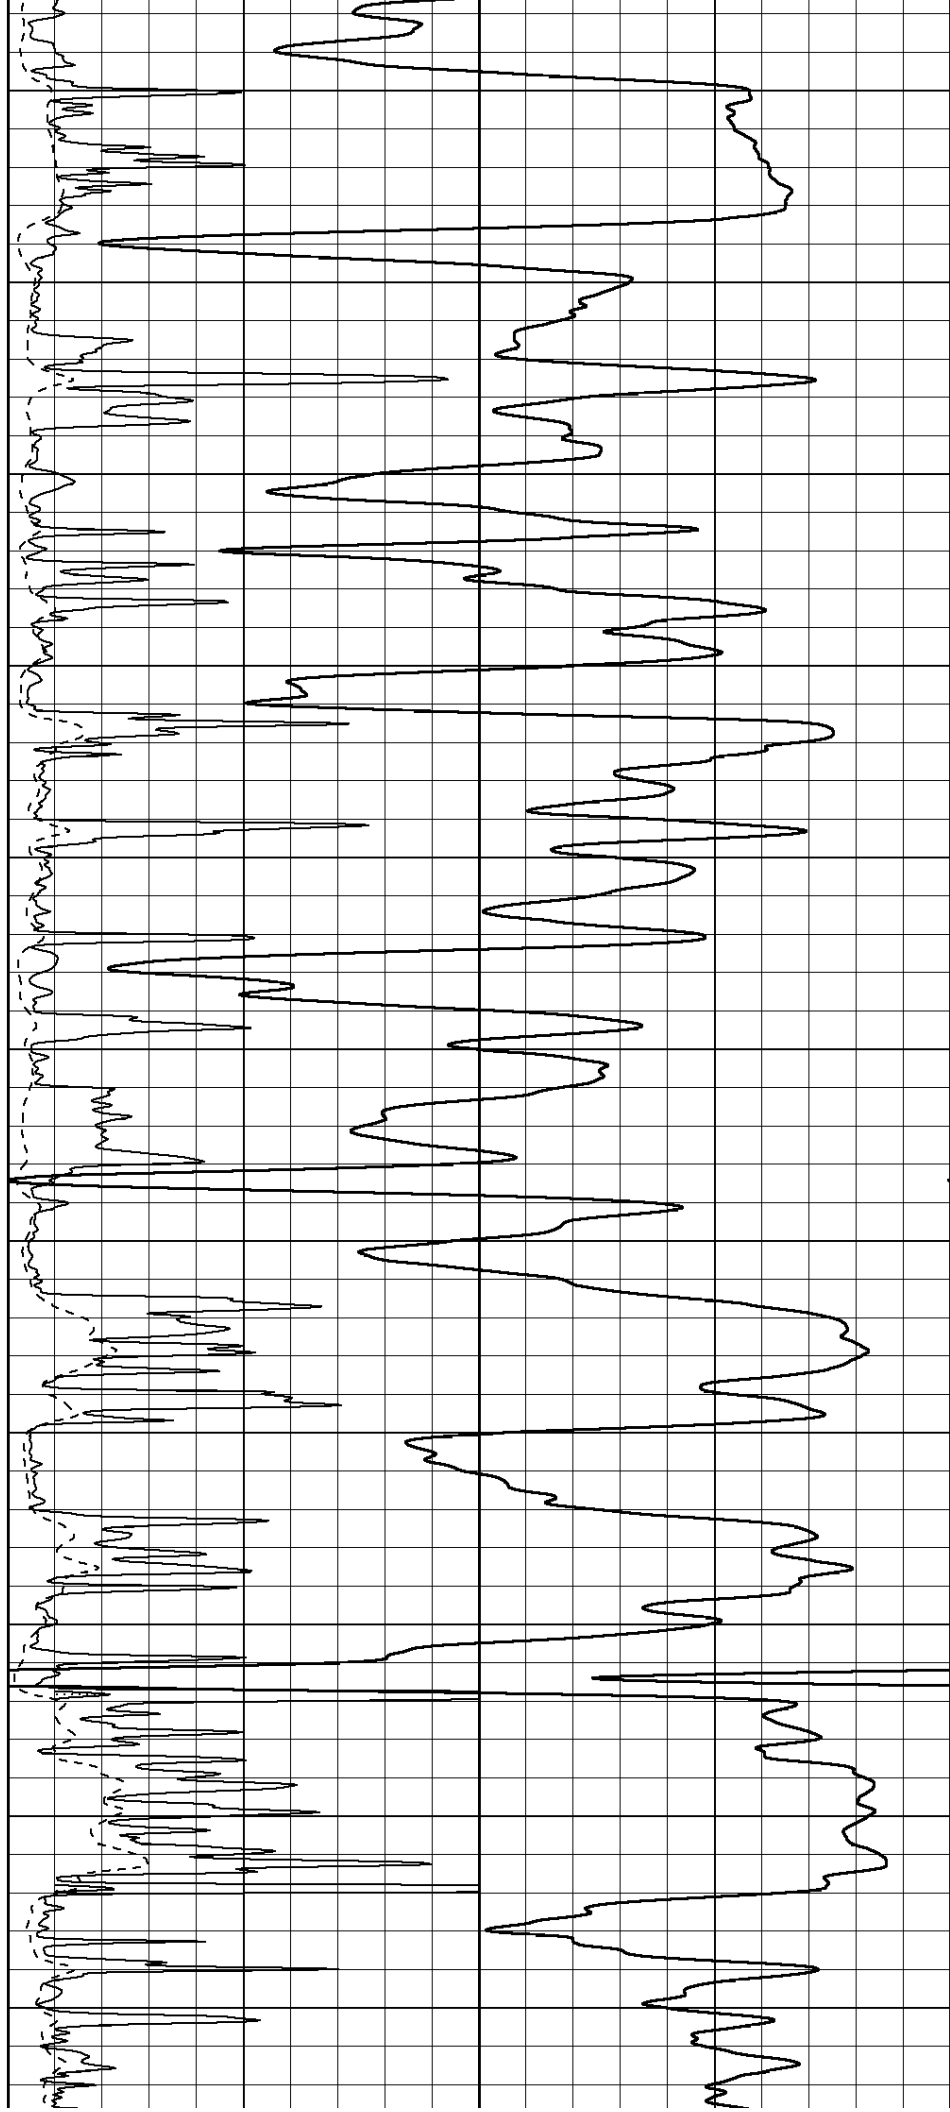

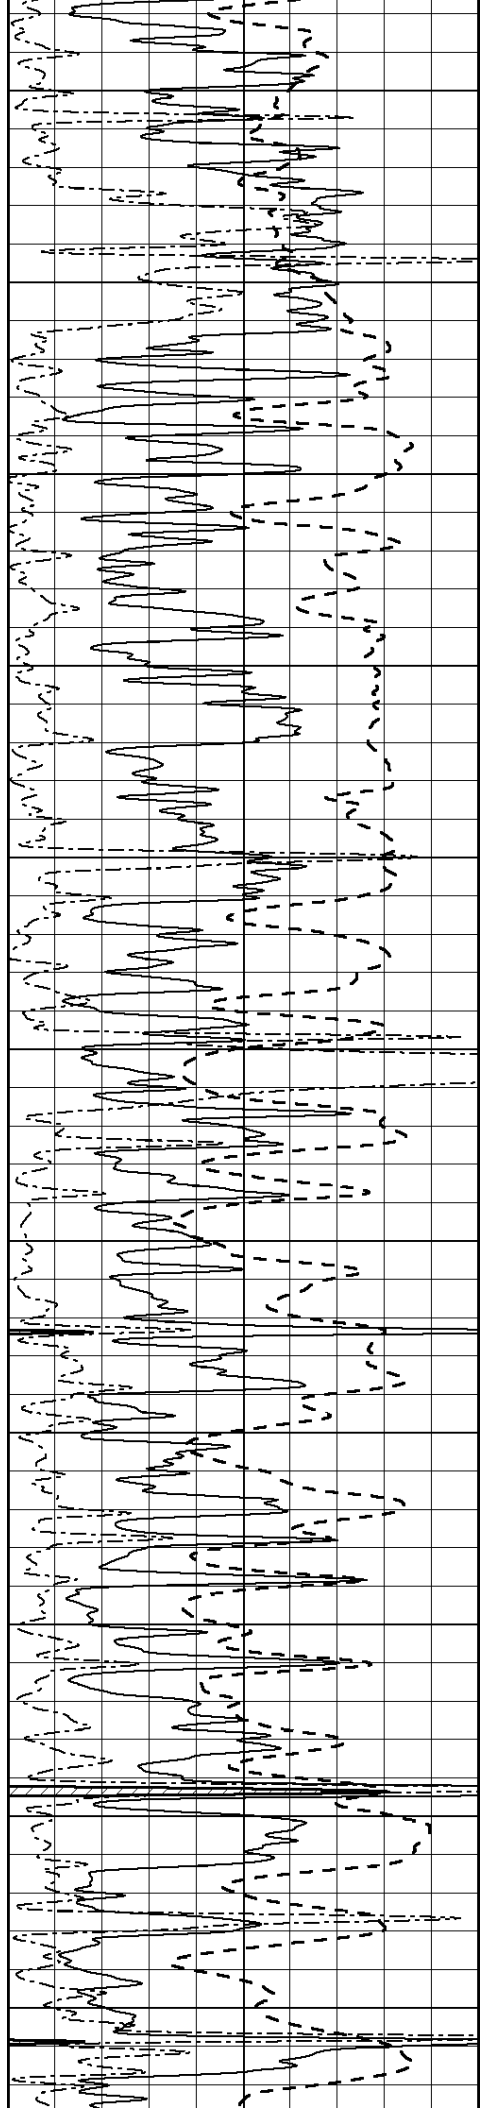

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

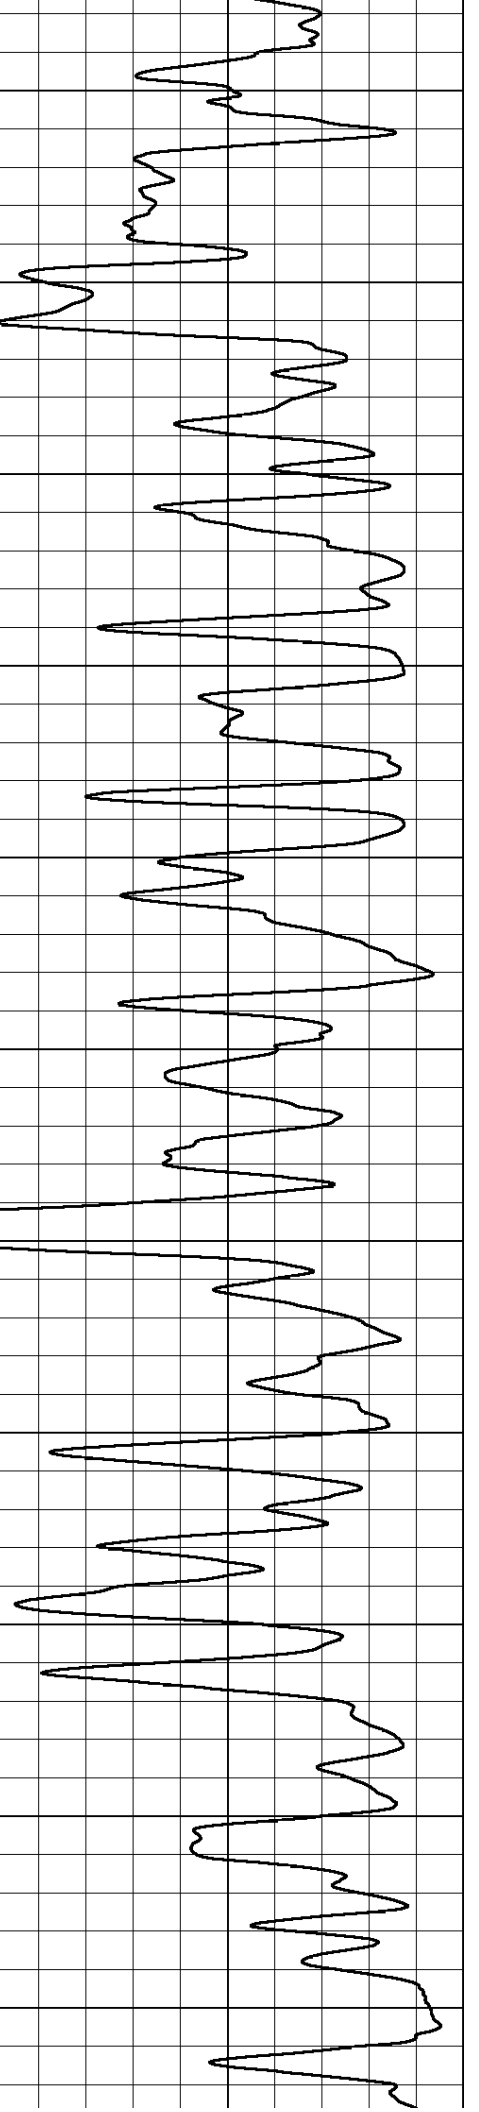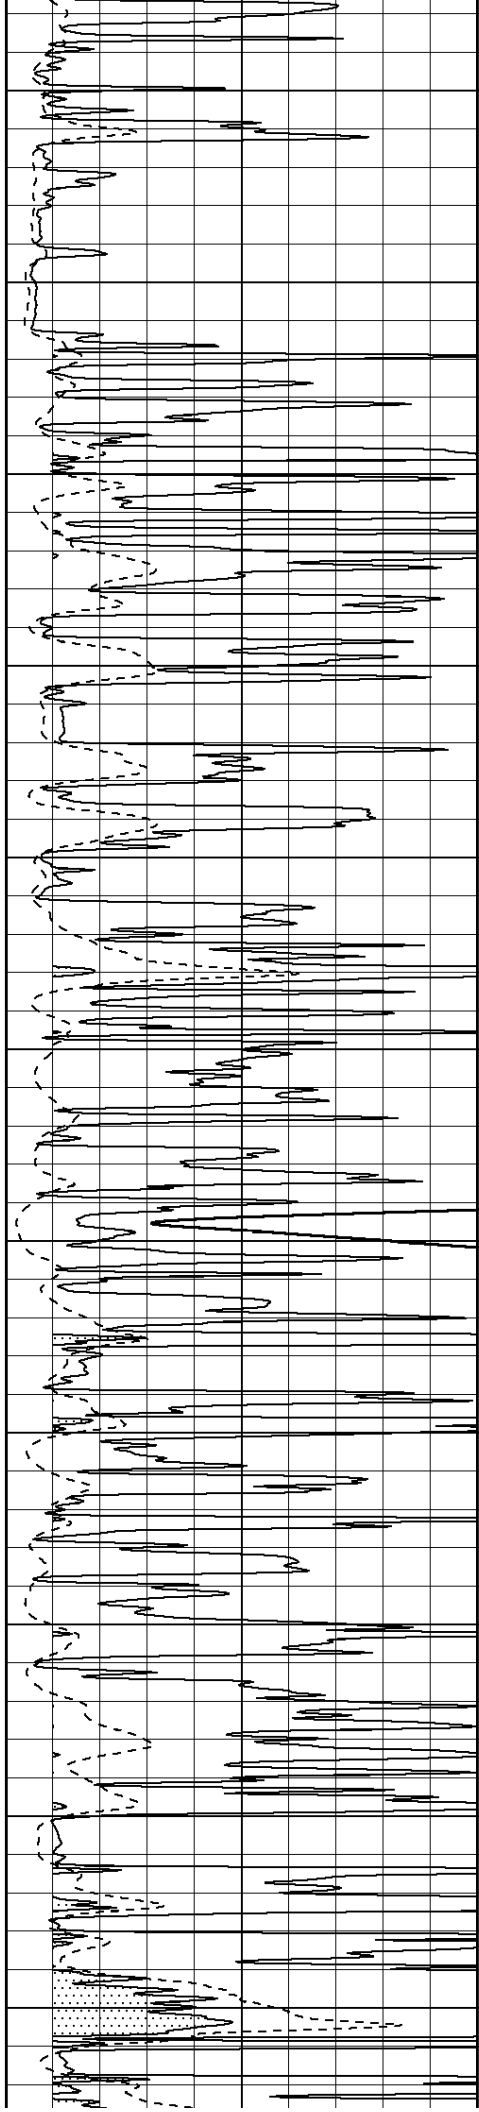

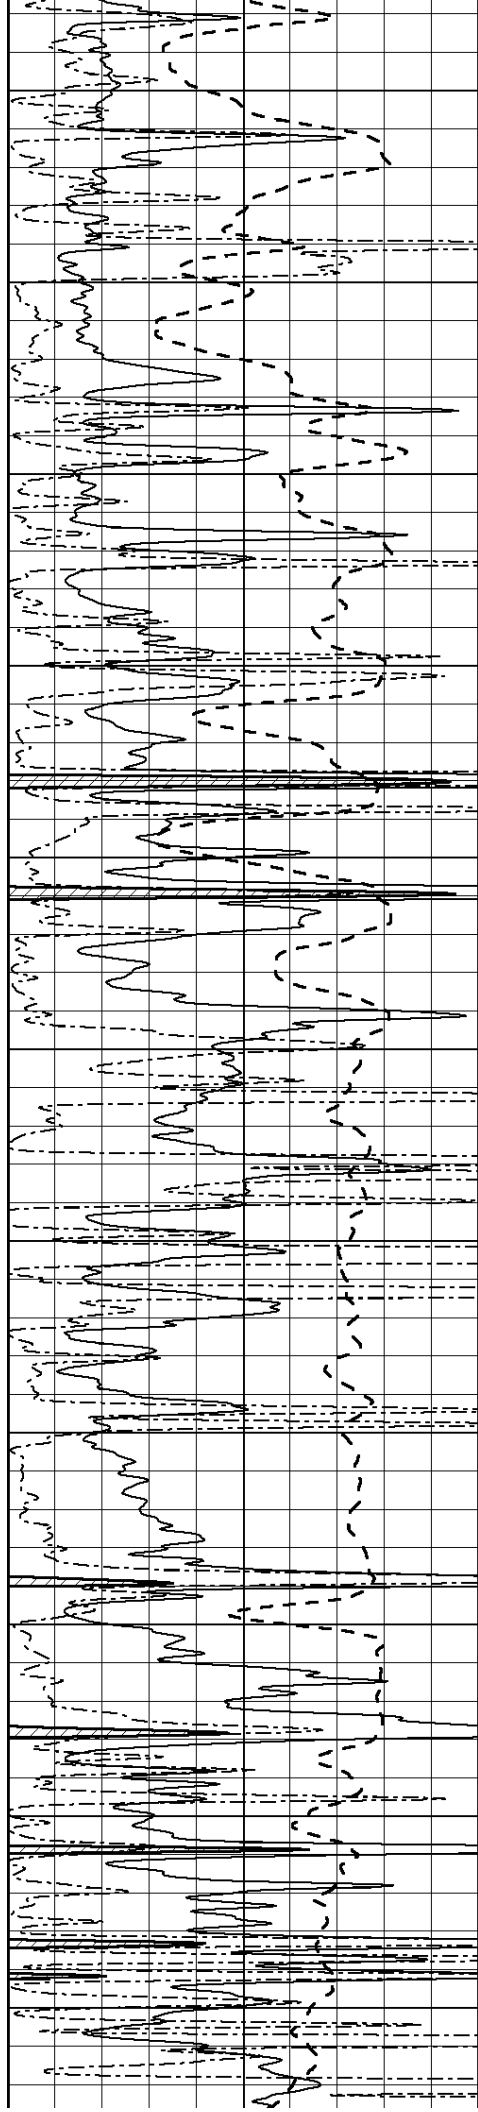

3750

3800

3850

3900

3950

4000



4050



4100

4150

4200



4250

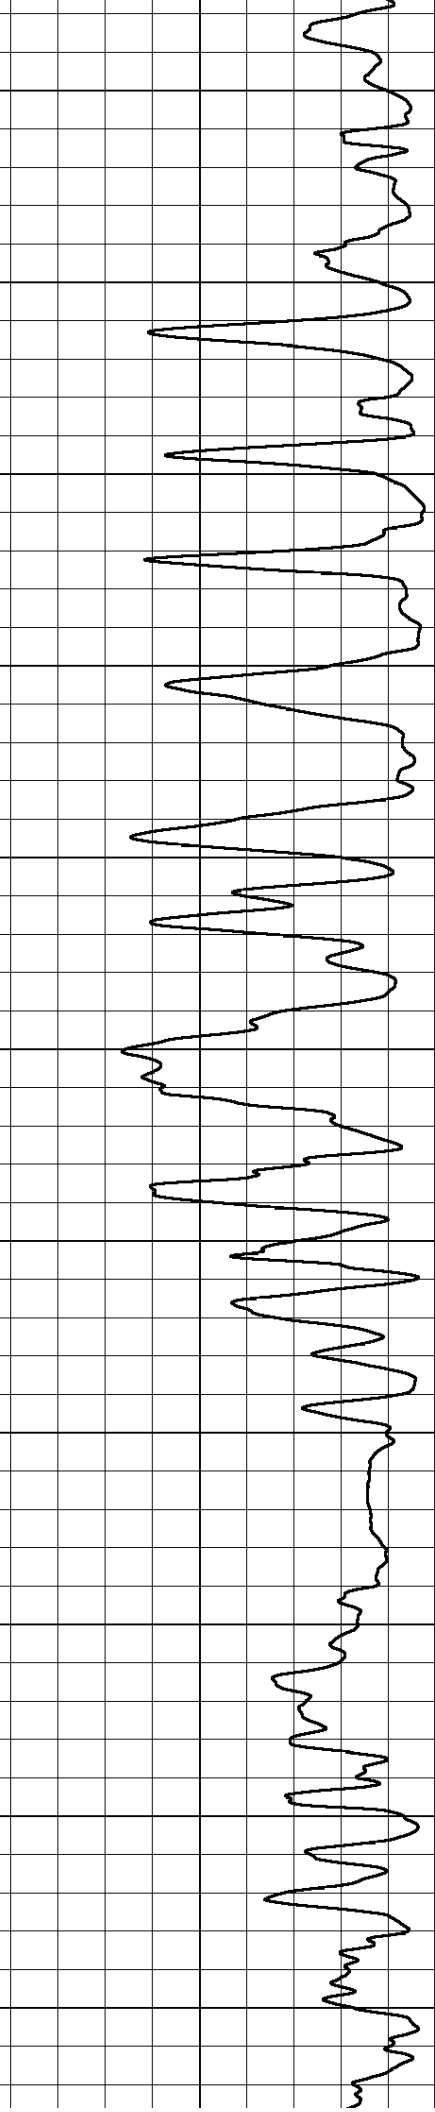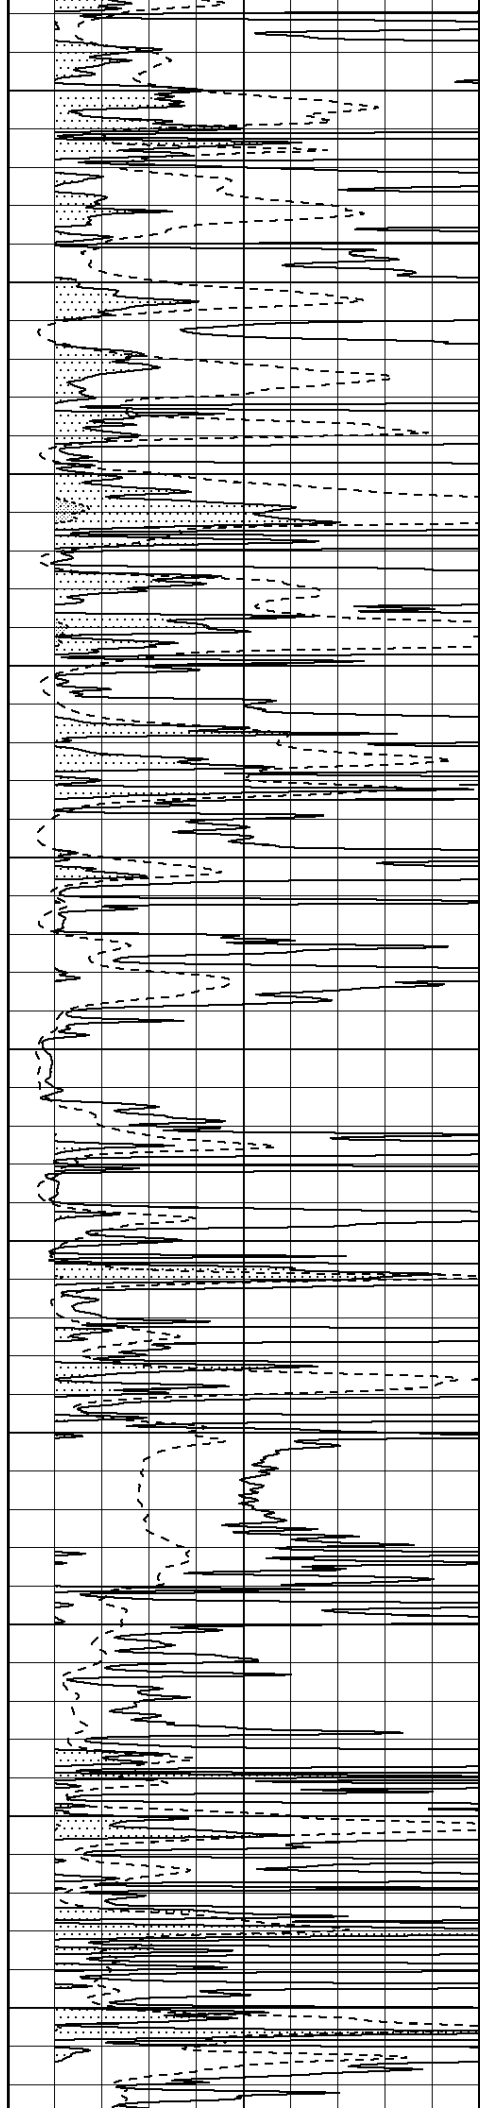


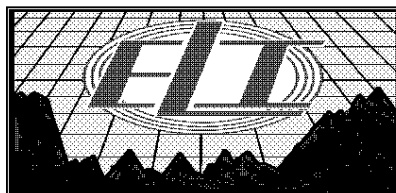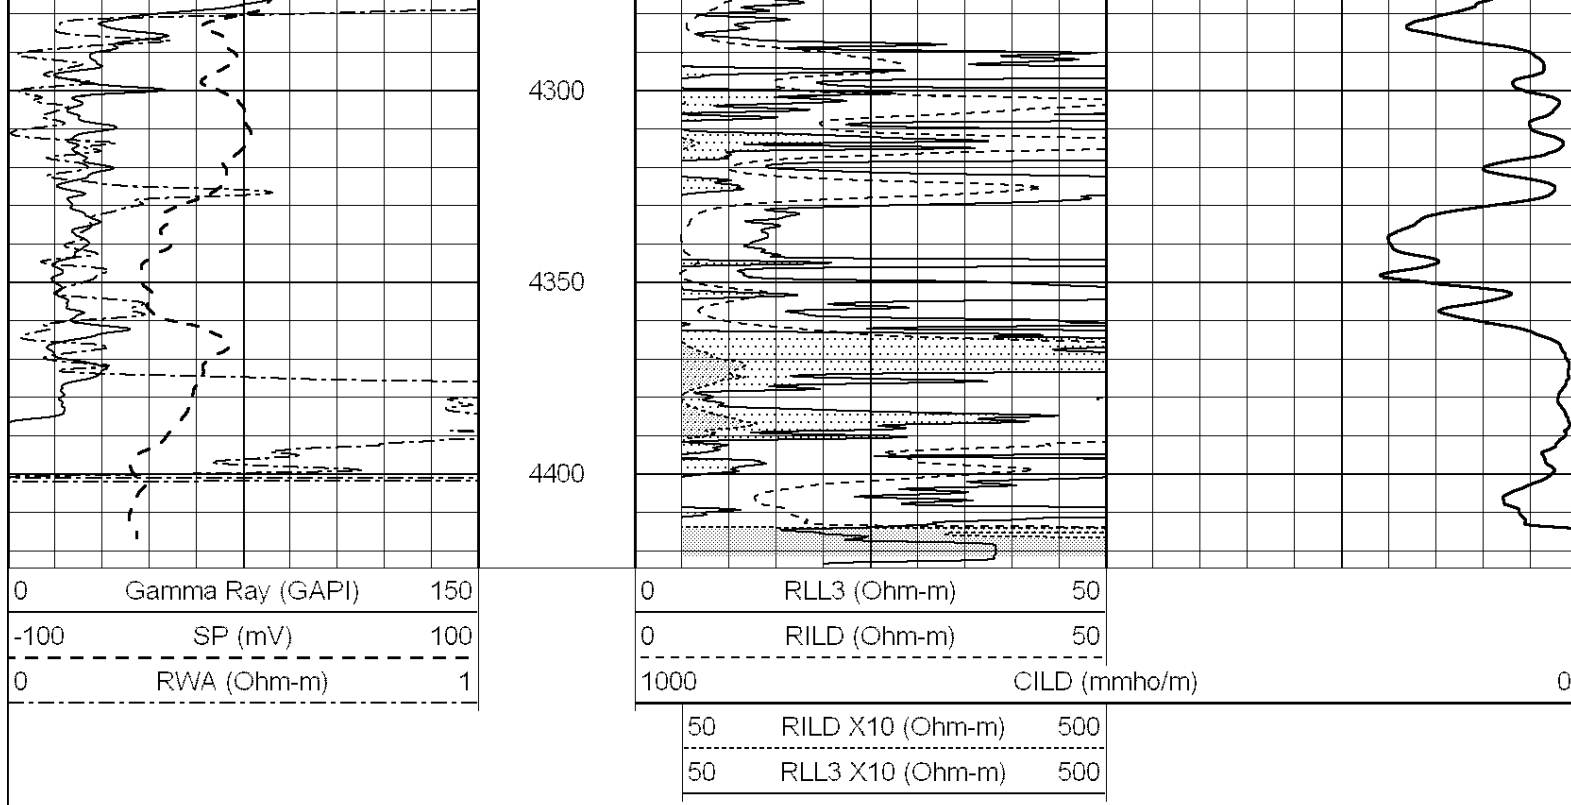



ANHYDRITE

Database File: 3345pe.db
 Dataset Pathname: pass3.8
 Presentation Format: _dil
 Dataset Creation: Sun Feb 24 14:10:48 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

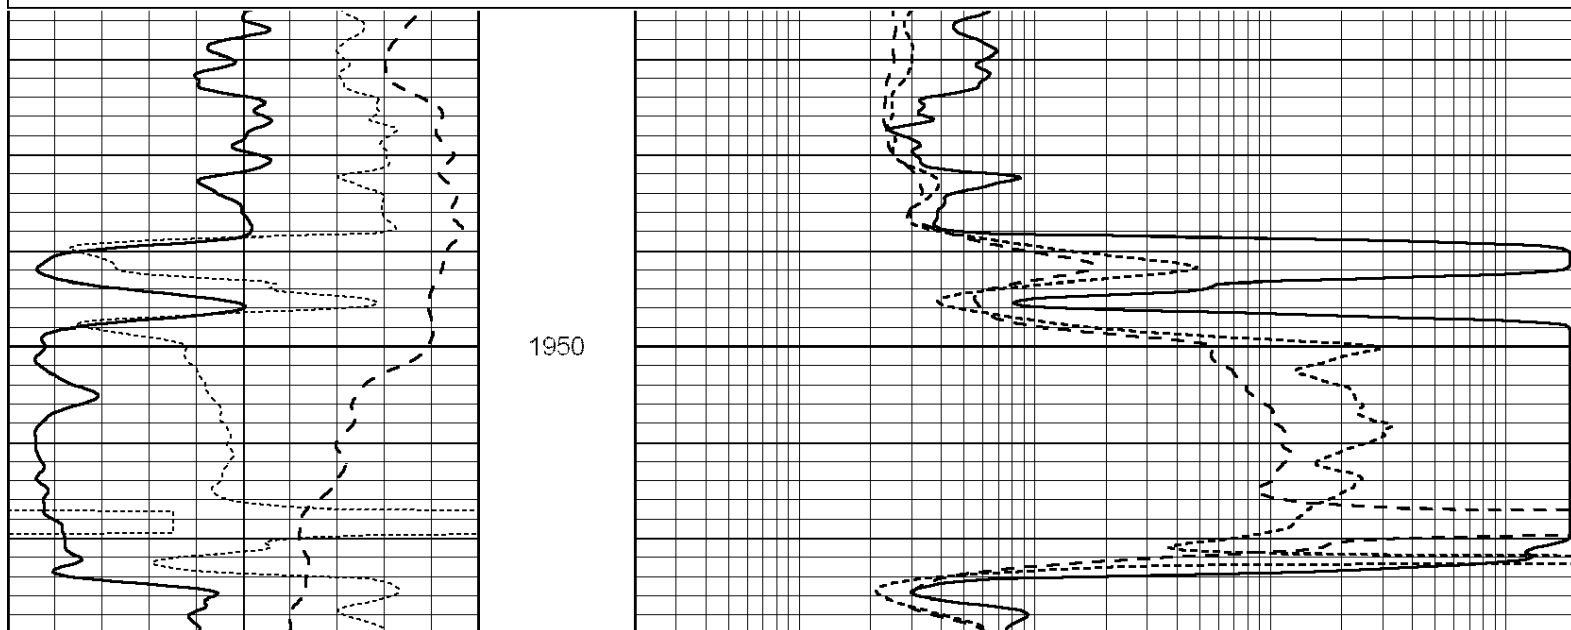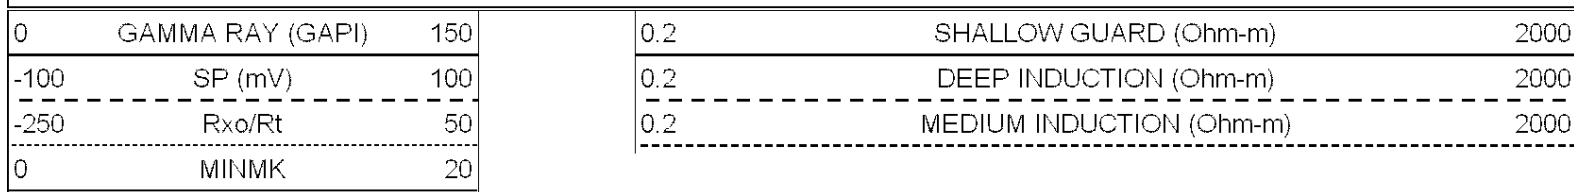



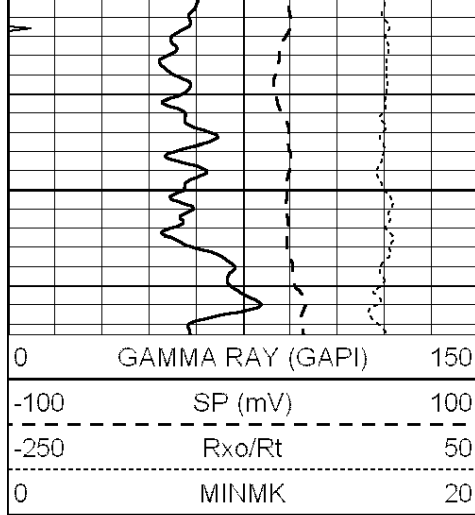


2000

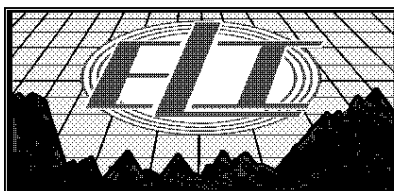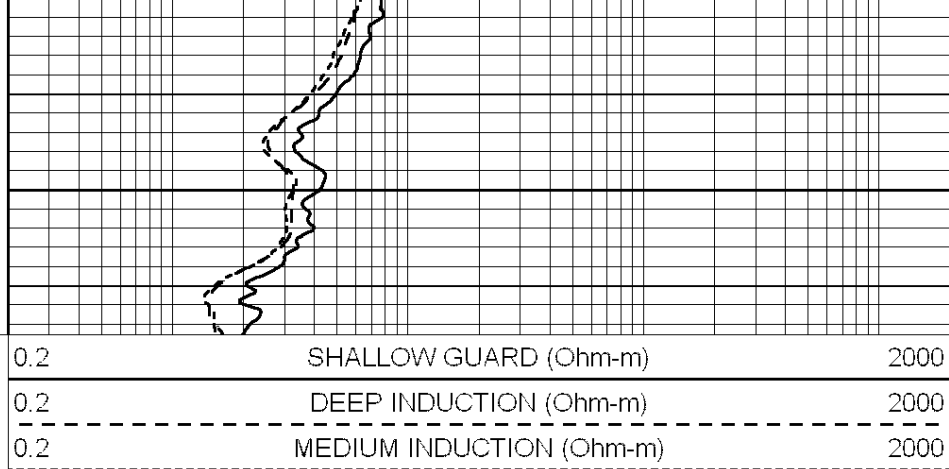


MAIN SECTION


Database File: 3345pe.db
 Dataset Pathname: pass3.7
 Presentation Format: _dil
 Dataset Creation: Sun Feb 24 14:09:16 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

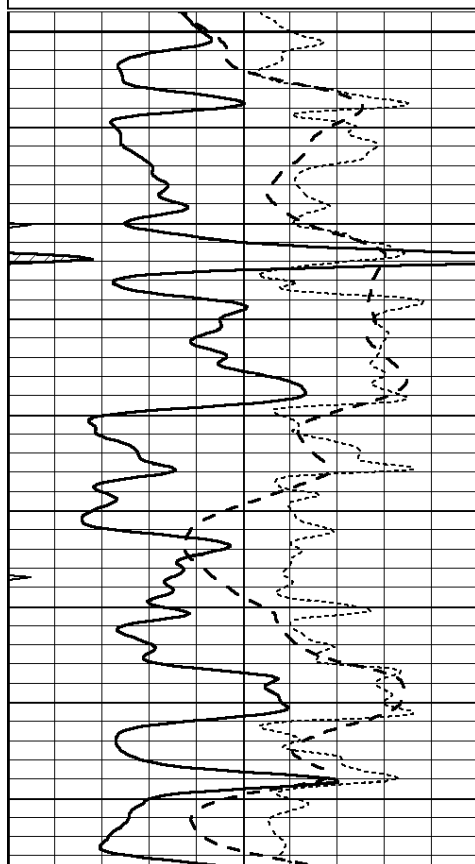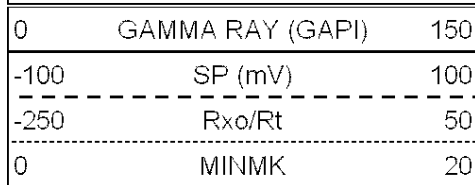

3500

3550

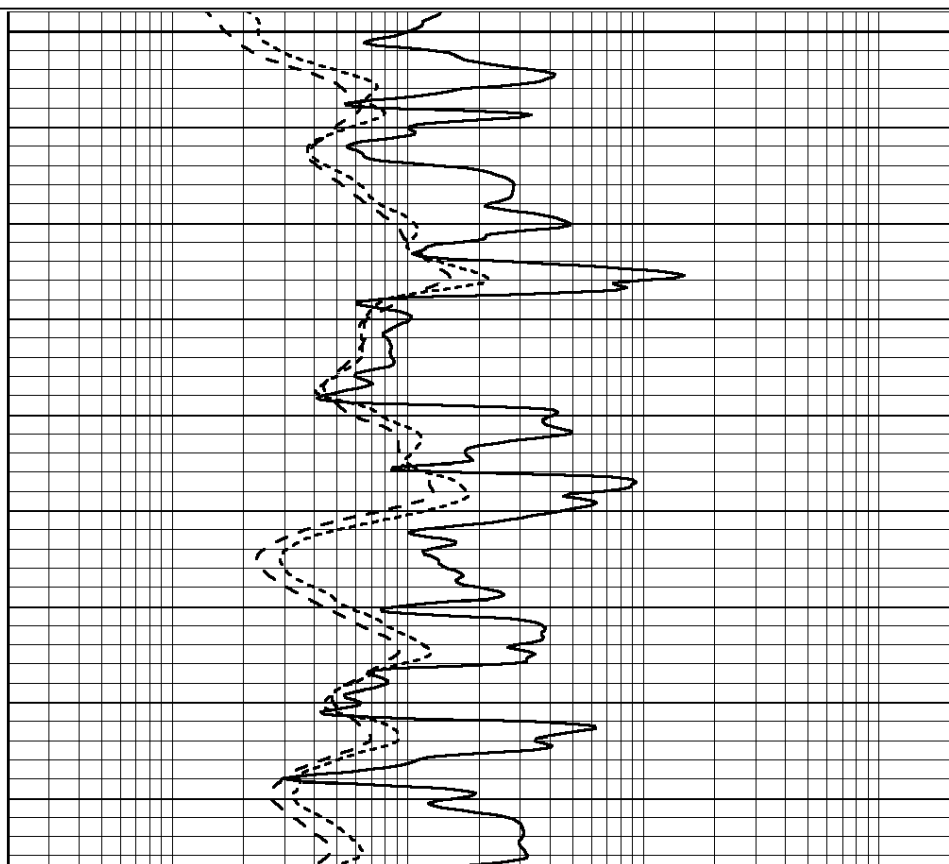

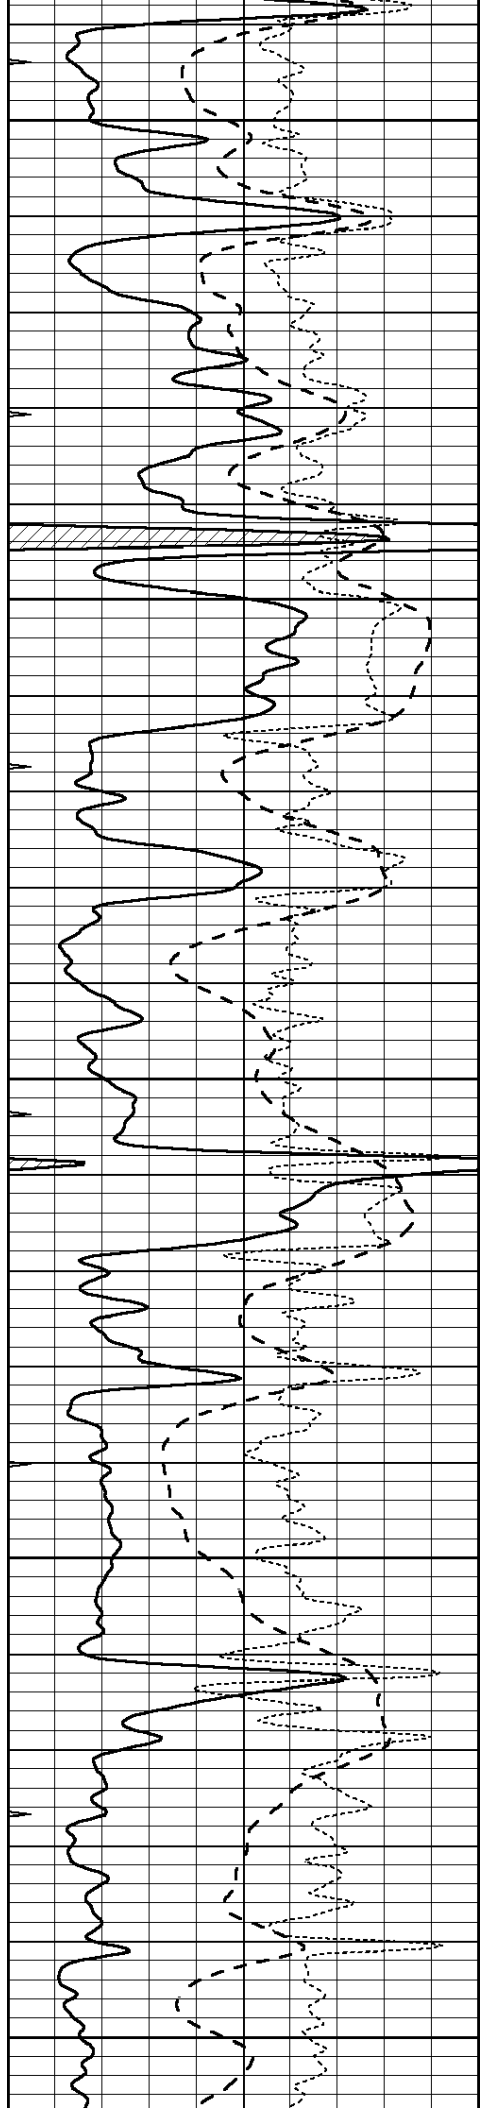


3600


3650

3700

3750

3800

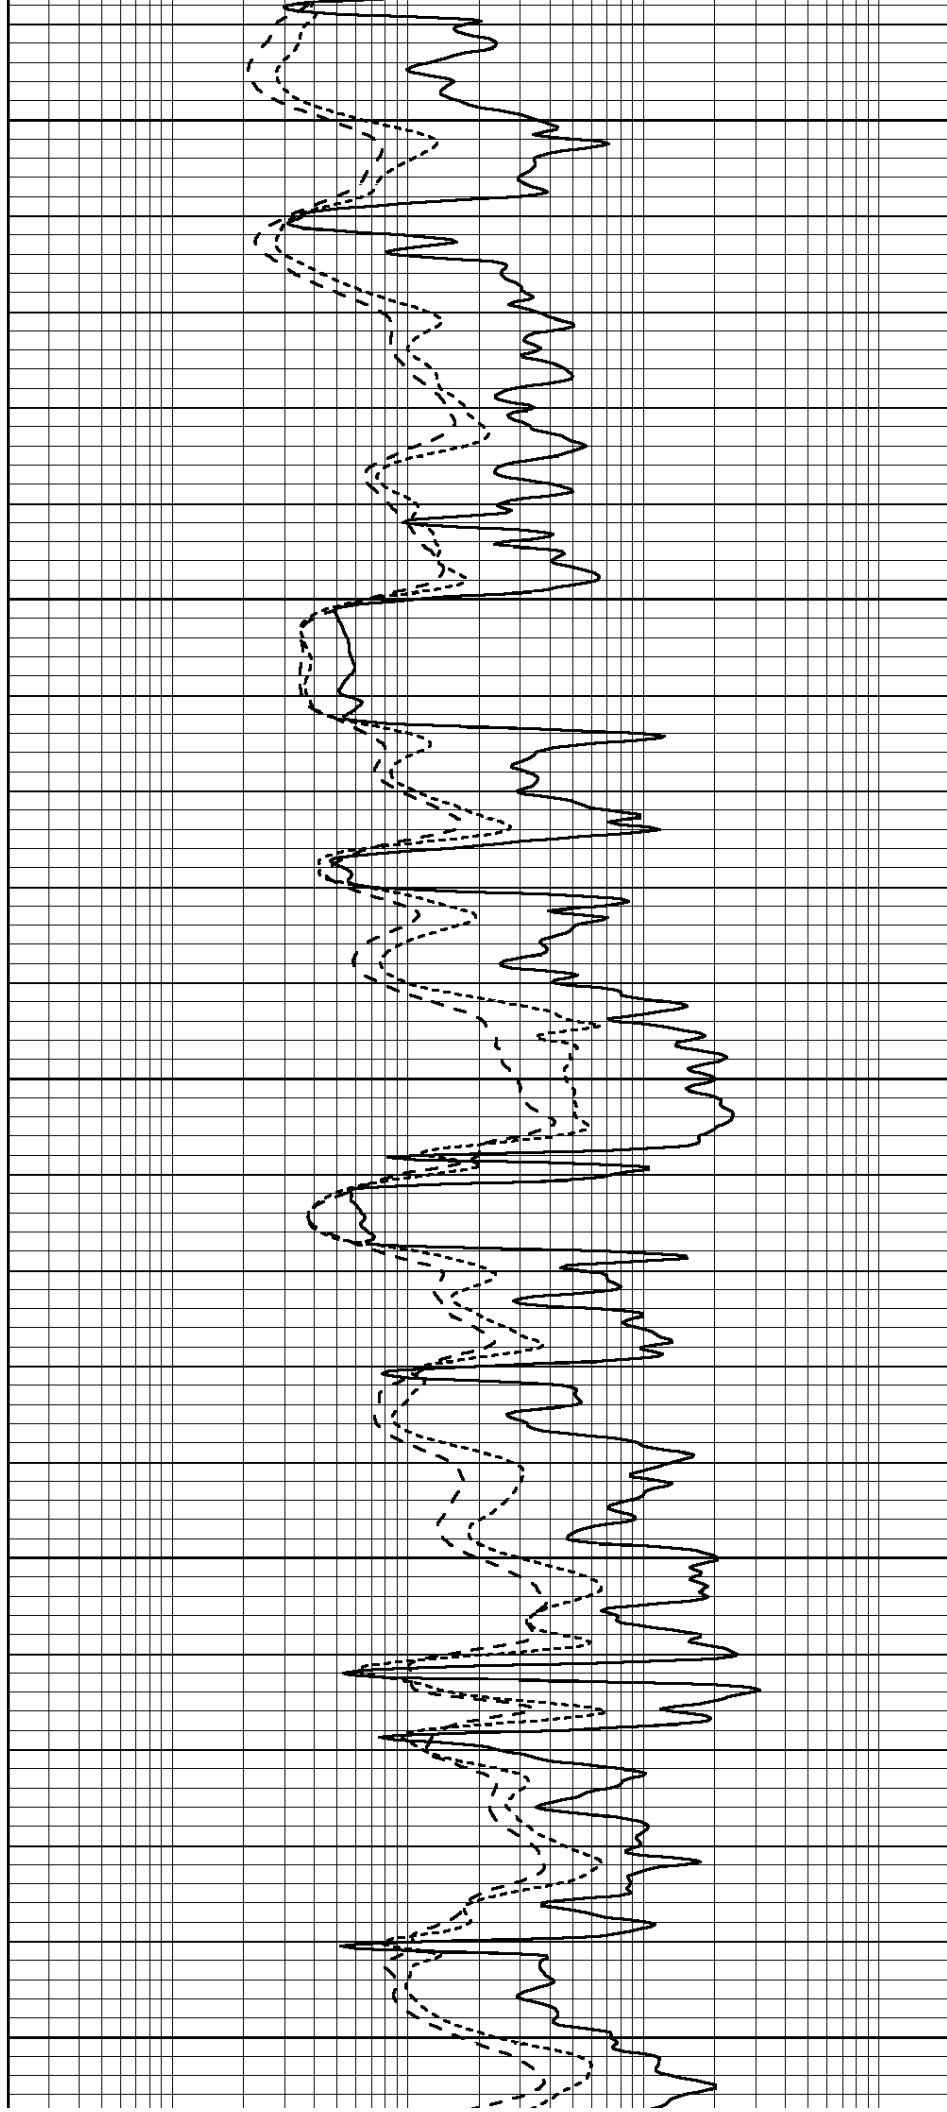

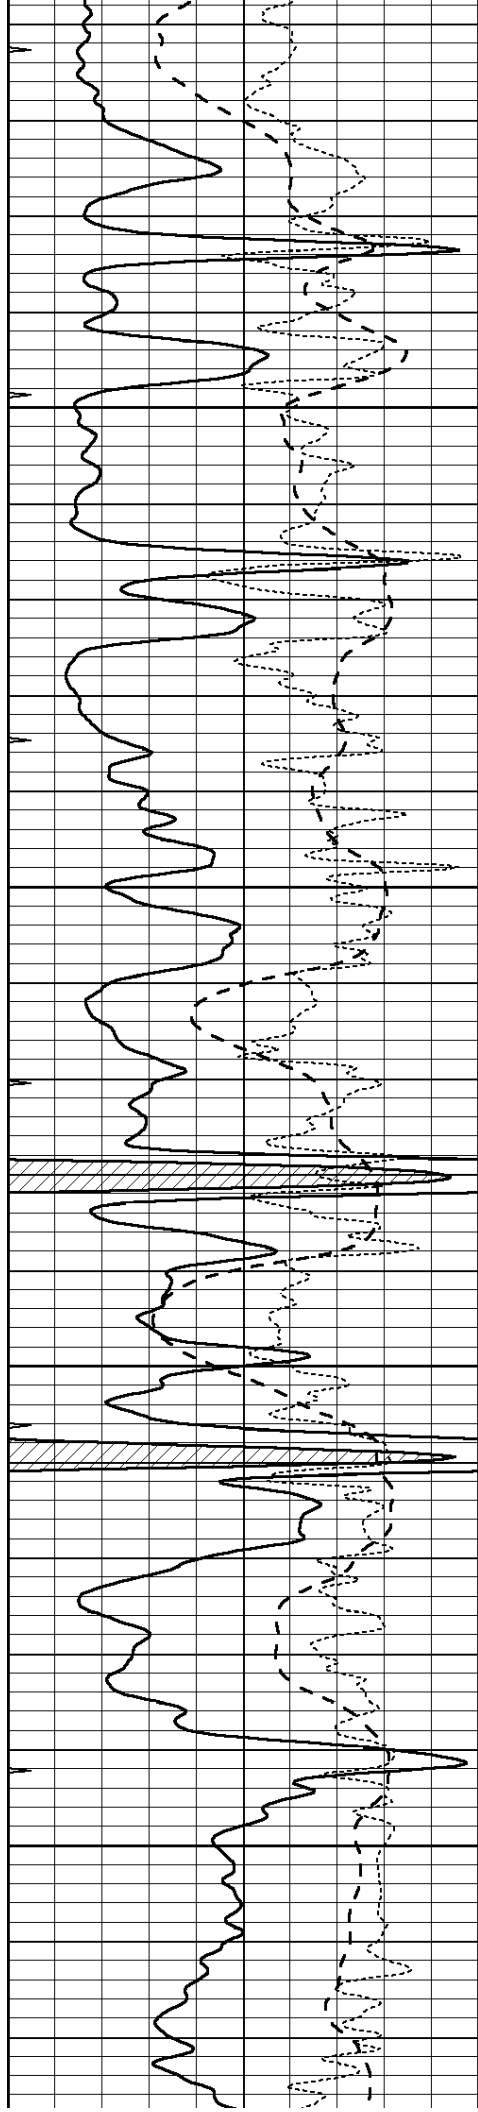



3850

3900

3950

4000

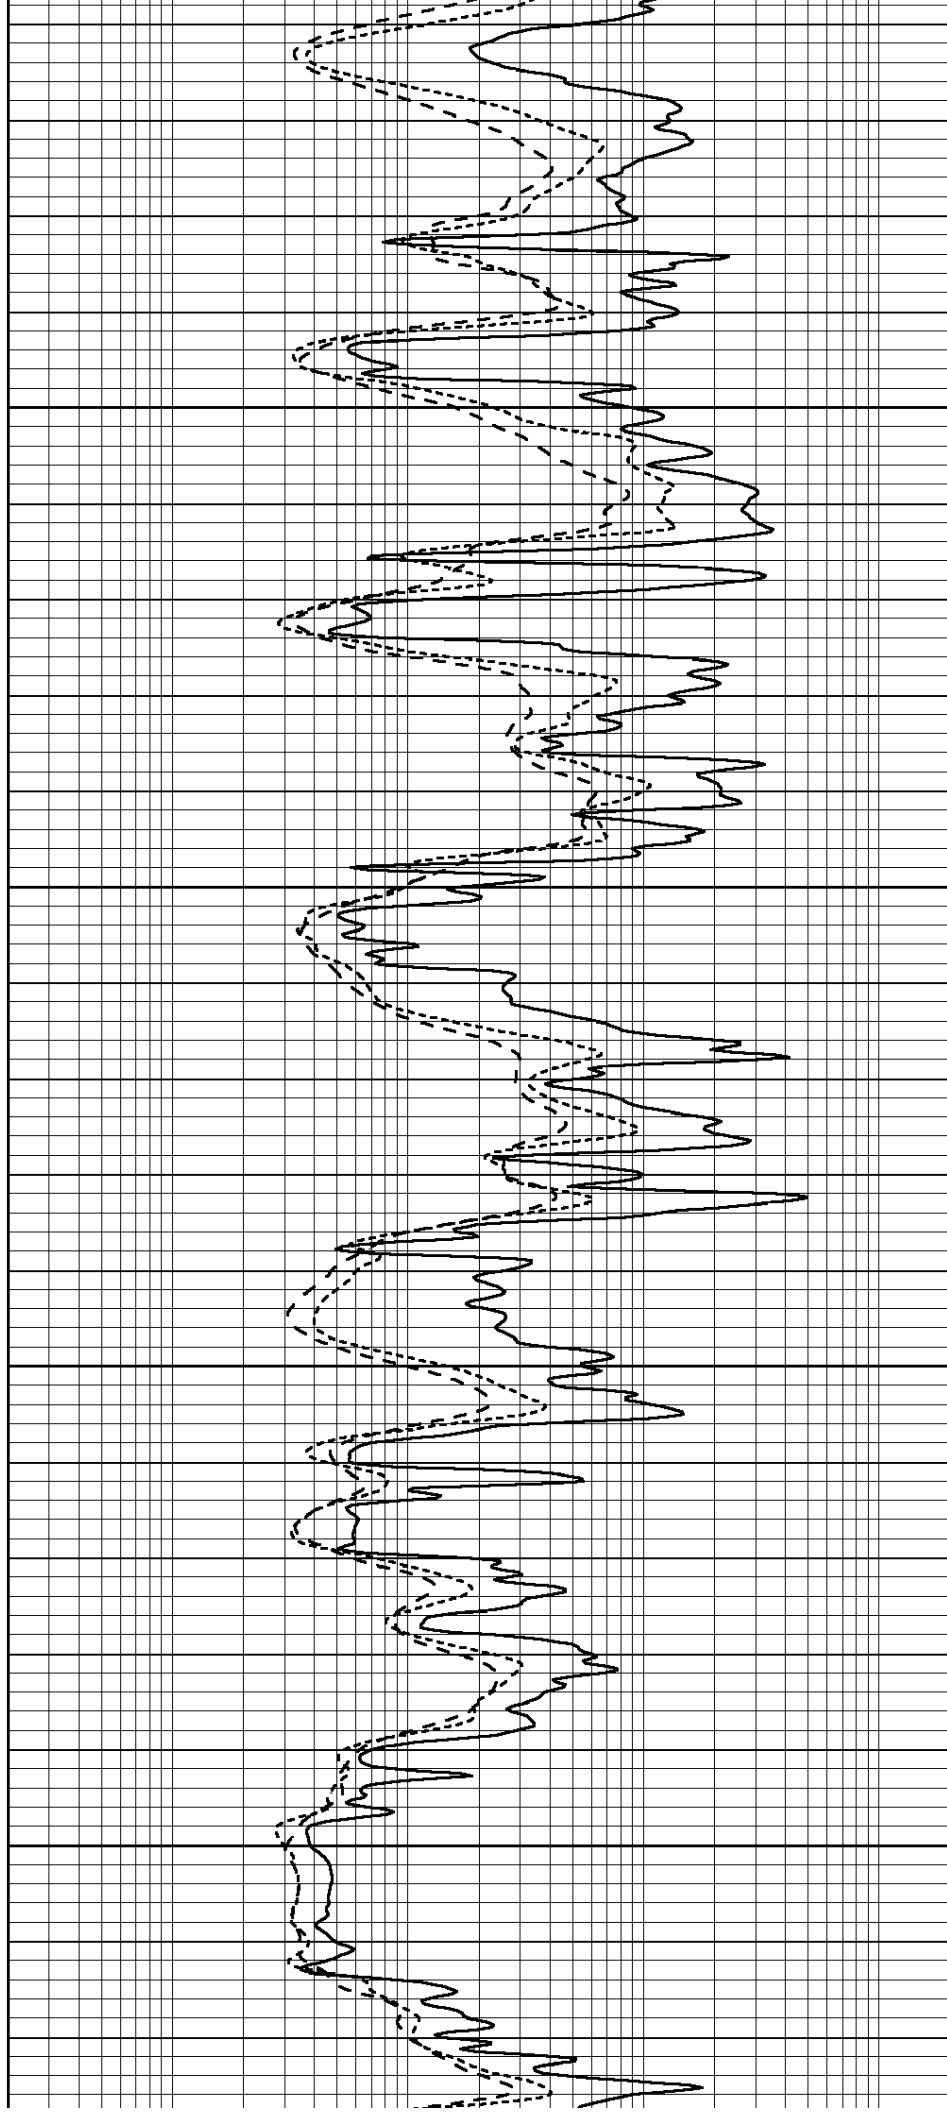

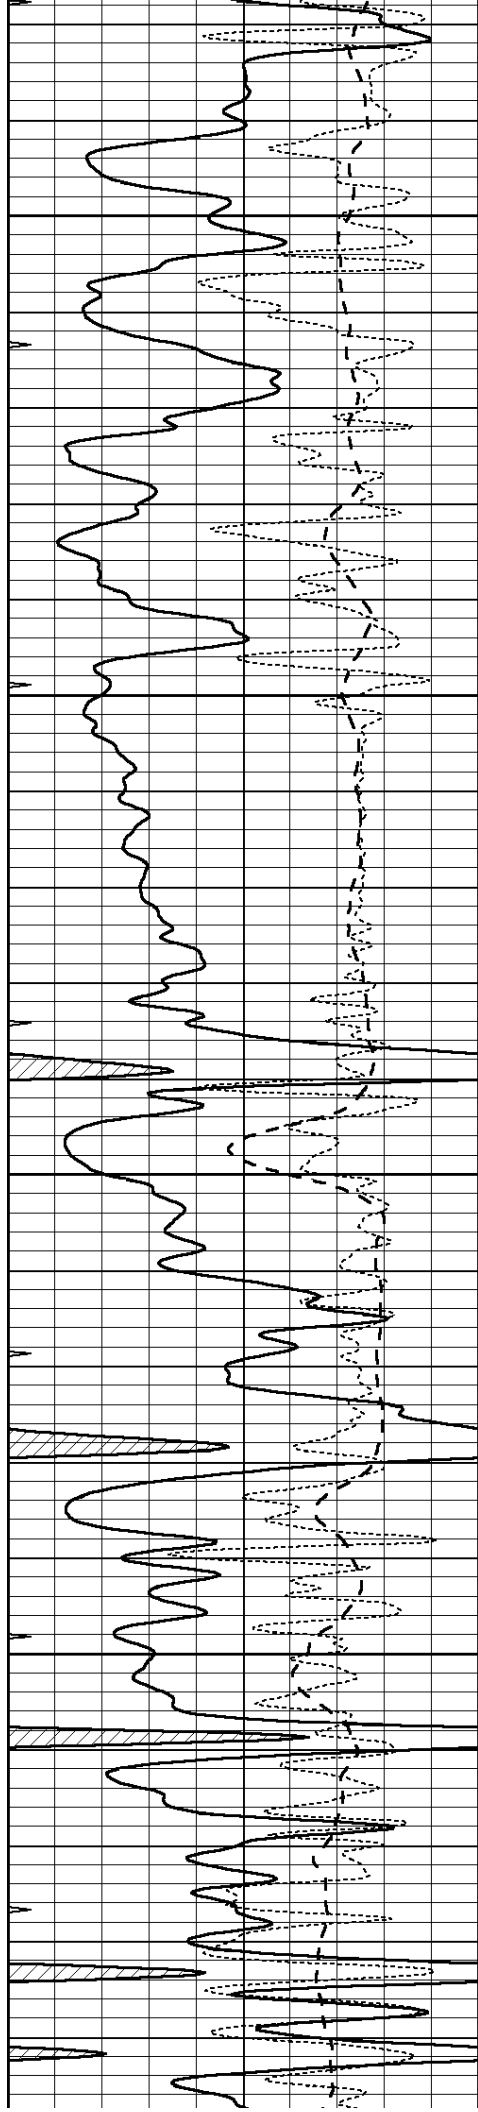




4050

4100

4150

4200

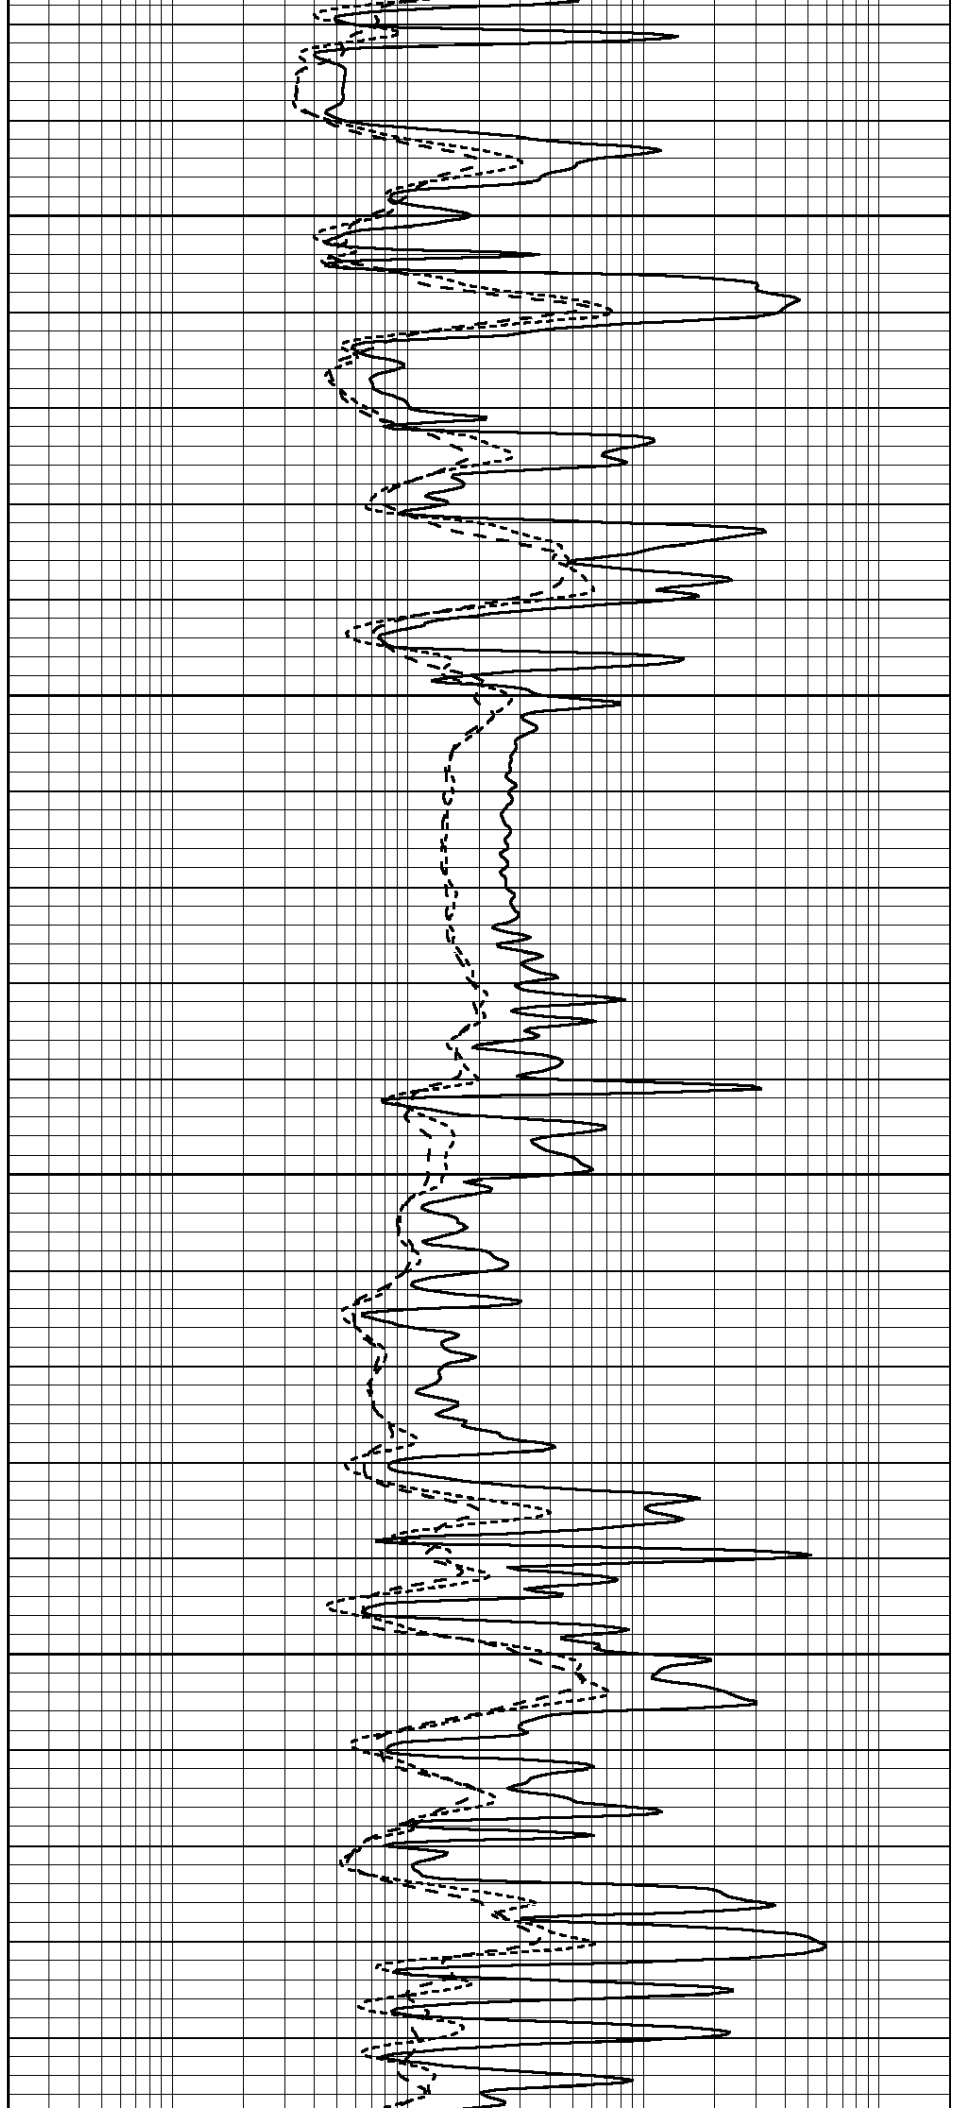

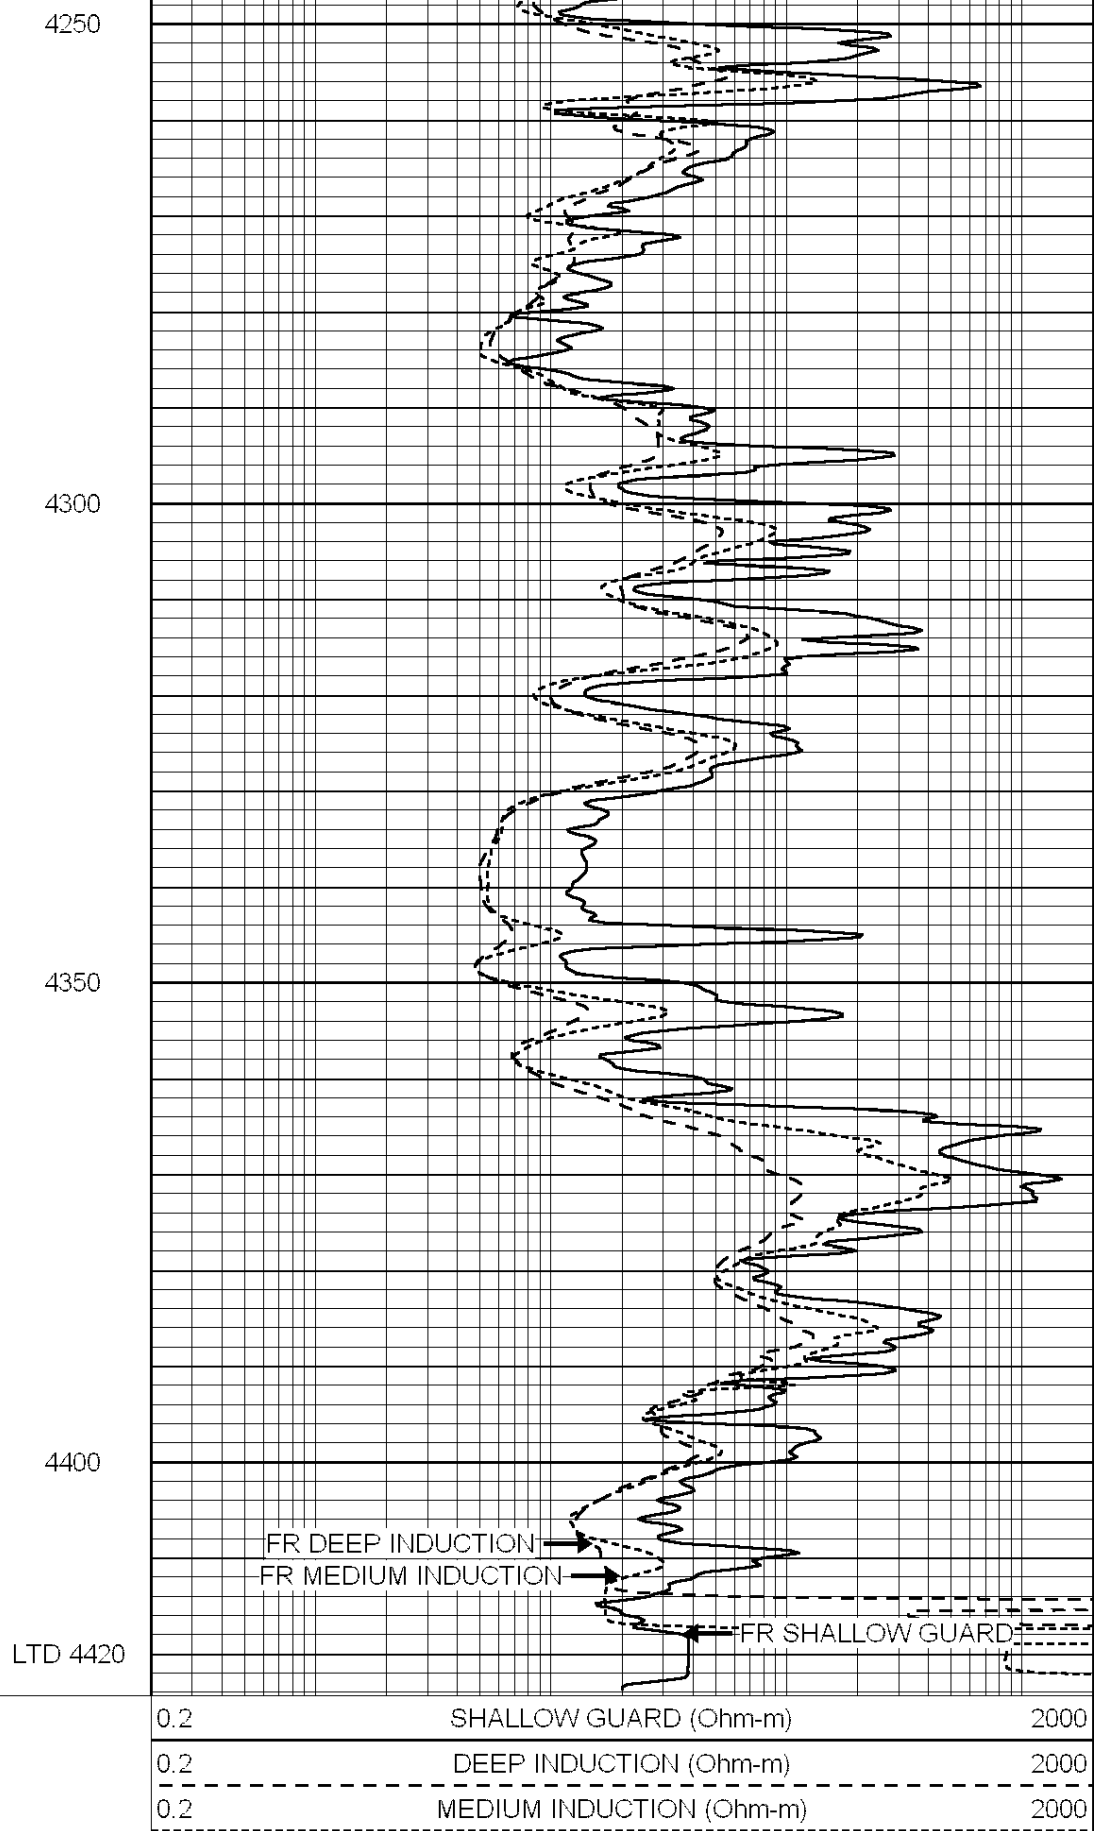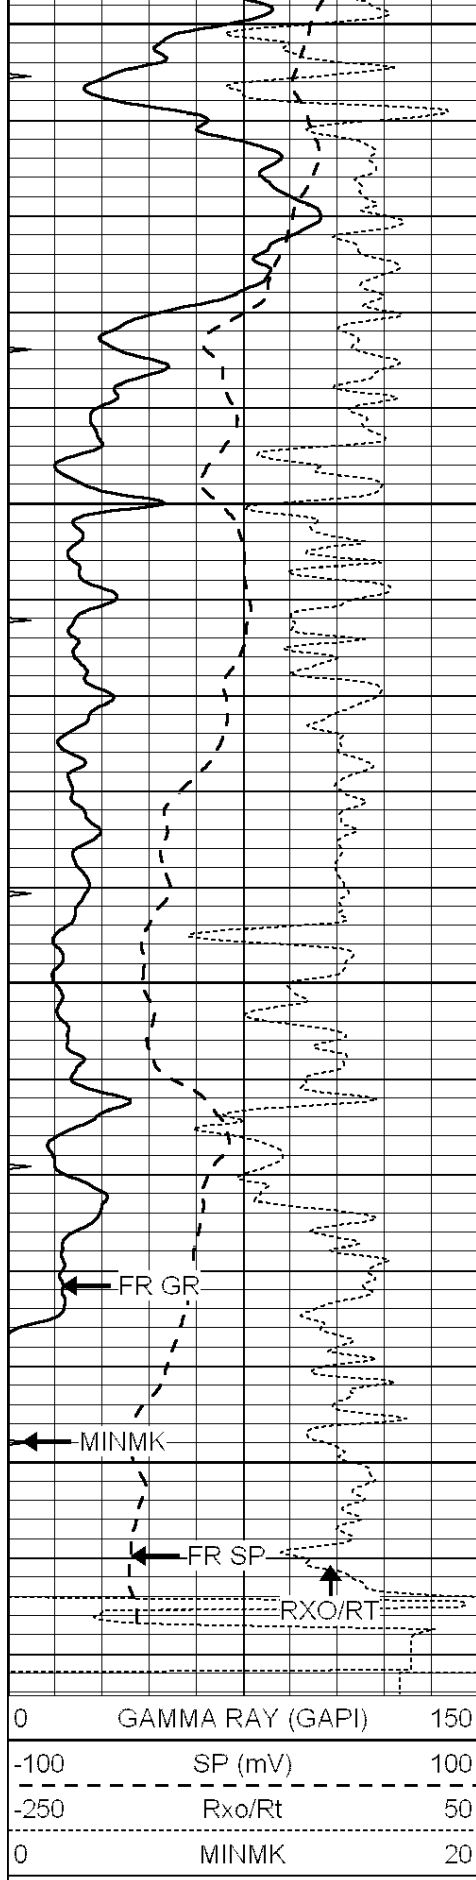


REPEAT SECTION

Database File: 3345pe.db
Dataset Pathname: pass2.13
Presentation Format: _dil
Dataset Creation: Sun Feb 24 13:20:48 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

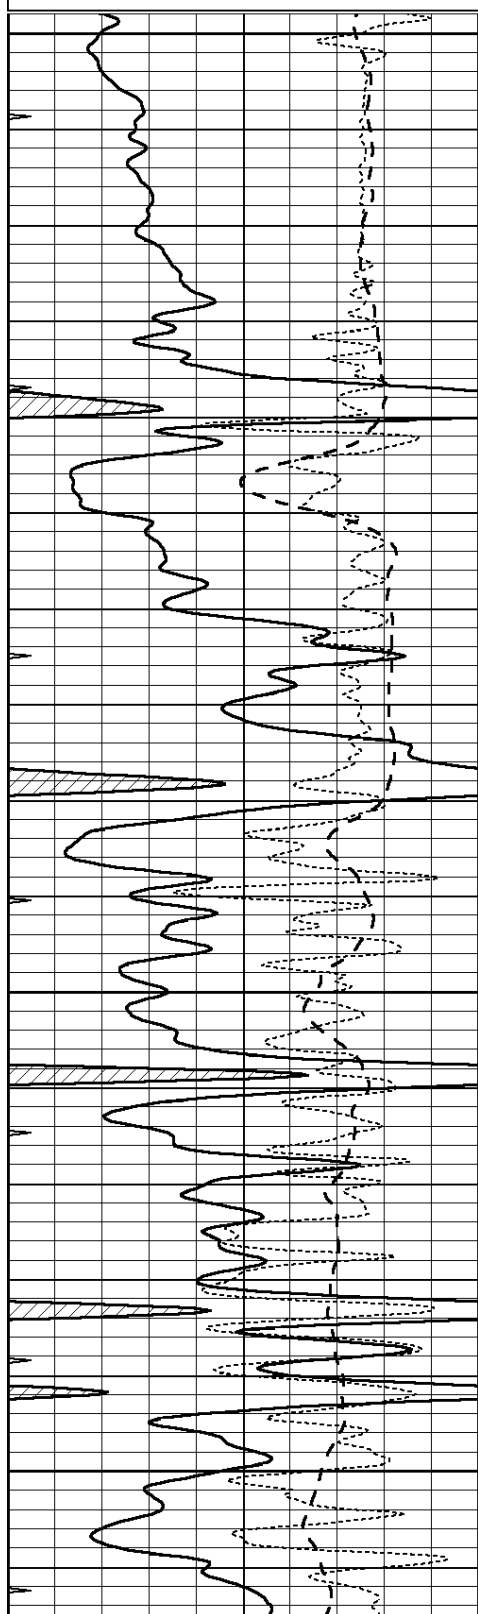



4100

4150

4200

4250

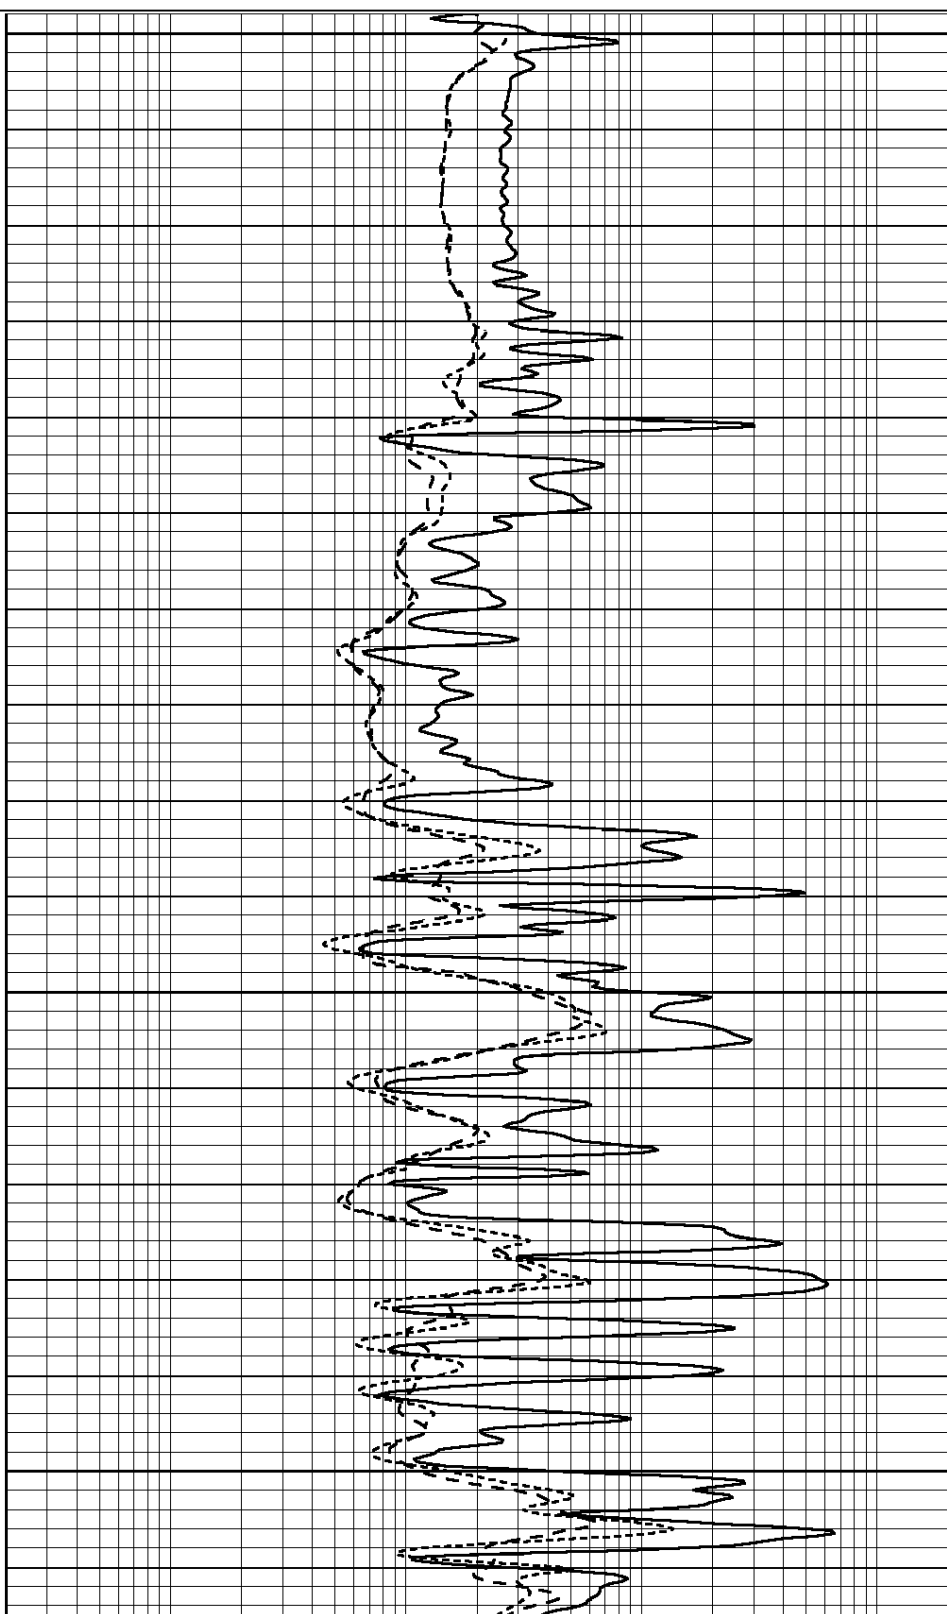

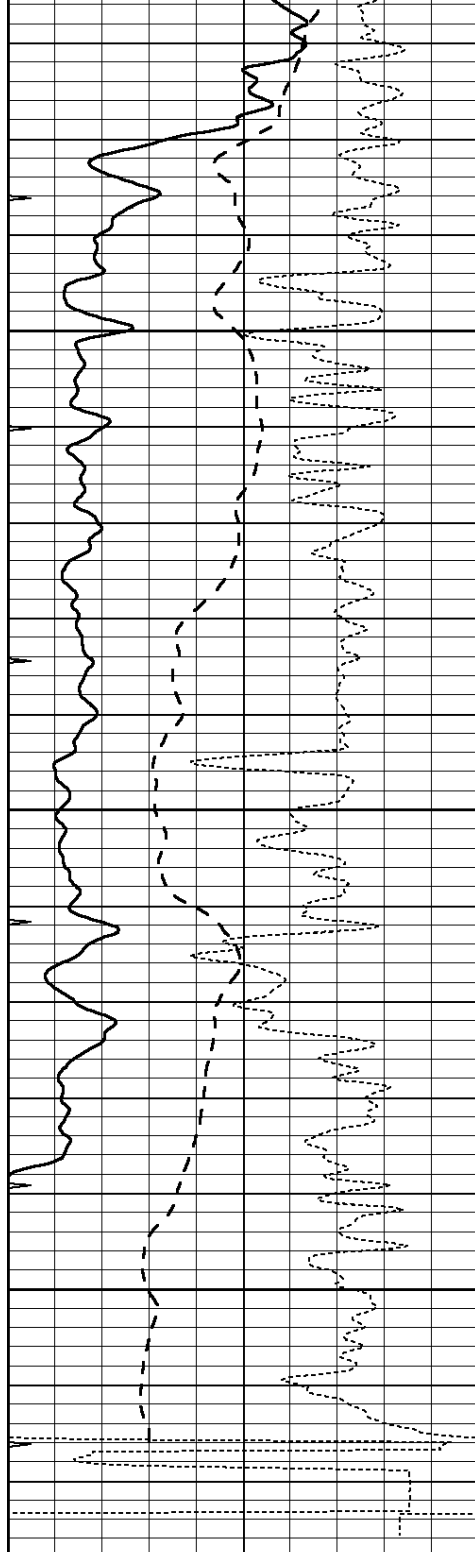


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4300

4350

4400

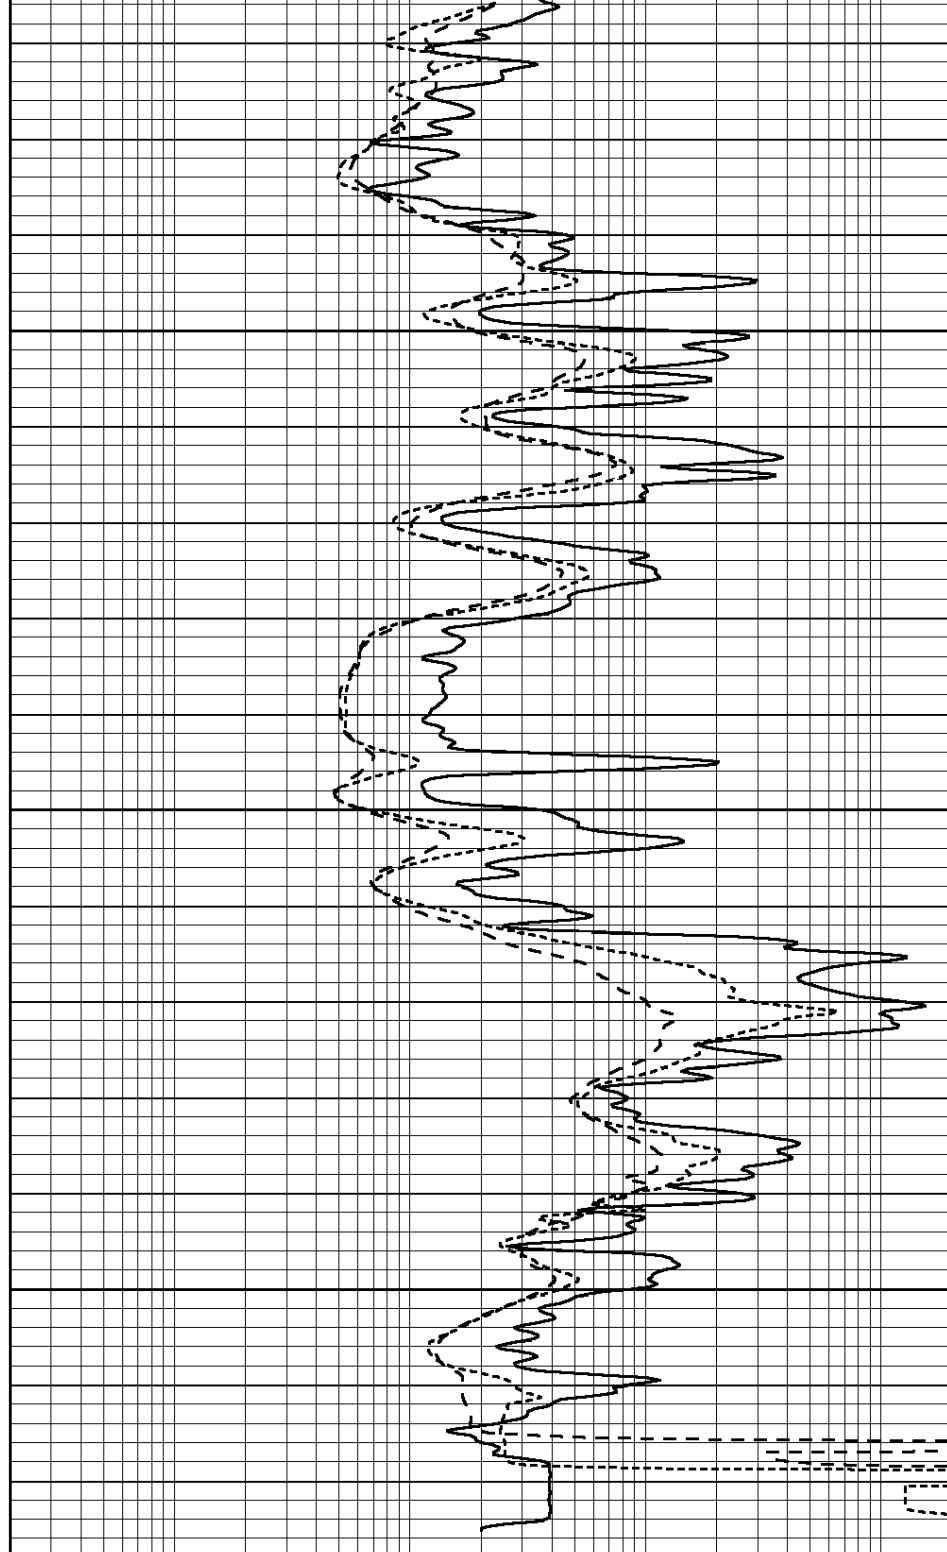

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 1598ddn.db
 Dataset Pathname: pass4
 Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model:

PROBE7-DILG

Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002			Model: PRB					

Master Calibration				Performed Mon Aug 21 11:27:42 2017				
	Background	Magnesium		Aluminum		Sandstone		
Window 1	837.1	10632.5		2945.1		12110.1		cps
Window 2	772.0	9117.4		2570.1		10197.3		cps
Window 3	631.7	4669.0		1481.9		5042.9		cps
Window 4	187.0	187.5		185.9		189.9		cps
Long Space	0.0	8345.4		1798.1		9425.3		cps
Short Space	1.1	1927.9		1285.9		2050.2		cps
Rho		1.7100		2.5960		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio		: 0.558		
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept		: -19.6		

Before Survey Verification				Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
After Survey Verification				
Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
Compensated Neutron Calibration Report				
Serial Number:		070808		
Tool Model:		Probe		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				
Serial Number:	070558			
Tool Model:	OPEN_GR			
Performed:	Wed May 31 00:09:32 2017			
Calibrator Value:	1.0	GAPI		
Background Reading:	0.0	cps		
Calibrator Reading:	1.0	cps		
Sensitivity:	0.2800	GAPI/cps		