

MICRO LOG

Company	GORE OIL COMPANY
Well	BARC UNIT #2
Field	BARRY
County	ROOKS
State	KANSAS
Company	GORE OIL COMPANY
Well	BARC UNIT #2
Field	BARRY
County	ROOKS
State	KANSAS
Location:	API # : 15-163-24403-0000
Permanent Datum	528' FNL & 2600' FWL
Log Measured From	GROUND LEVEL Elevation 2036
Drilling Measured From	KELLY BUSHING 5' A.G.L. KELLY BUSHING Elevation K.B. 2041 D.F. 2039 G.L. 2036
Date	11/03/19
Run Number	TWO
Depth Driller	3555
Depth Logger	3555
Bottom Logged Interval	3553
Top Log Interval	2800
Casing Driller	8 5/8" @ 274
Casing Logger	274
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.2/53
pH / Fluid Loss	10.0/8.0
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.65 @ 65F
Rmt @ Meas. Temp	.49 @ 65F
Rmc @ Meas. Temp	.78 @ 65F
Source of Rmt / Rmc	MEASURED
Rm @ BHT	.37 @ 112F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	///
Maximum Recorded Temperature	112F
Equipment Number	1523
Location	HAYS, KANSAS
Recorded By	GUS PFANENSTIEL
Witnessed By	CHUCK SCHMALTZ


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
ZURICH NORTH TO T RD. EAST 1/2 MILES,
SOUTH INTO.

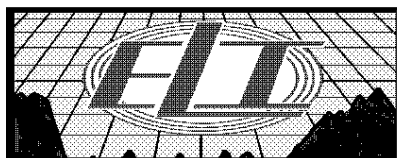



MAIN PASS



Database File: 4457ddn.db
Dataset Pathname: pass6.1
Presentation Format: _micro
Dataset Creation: Sun Nov 03 14:40:57 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

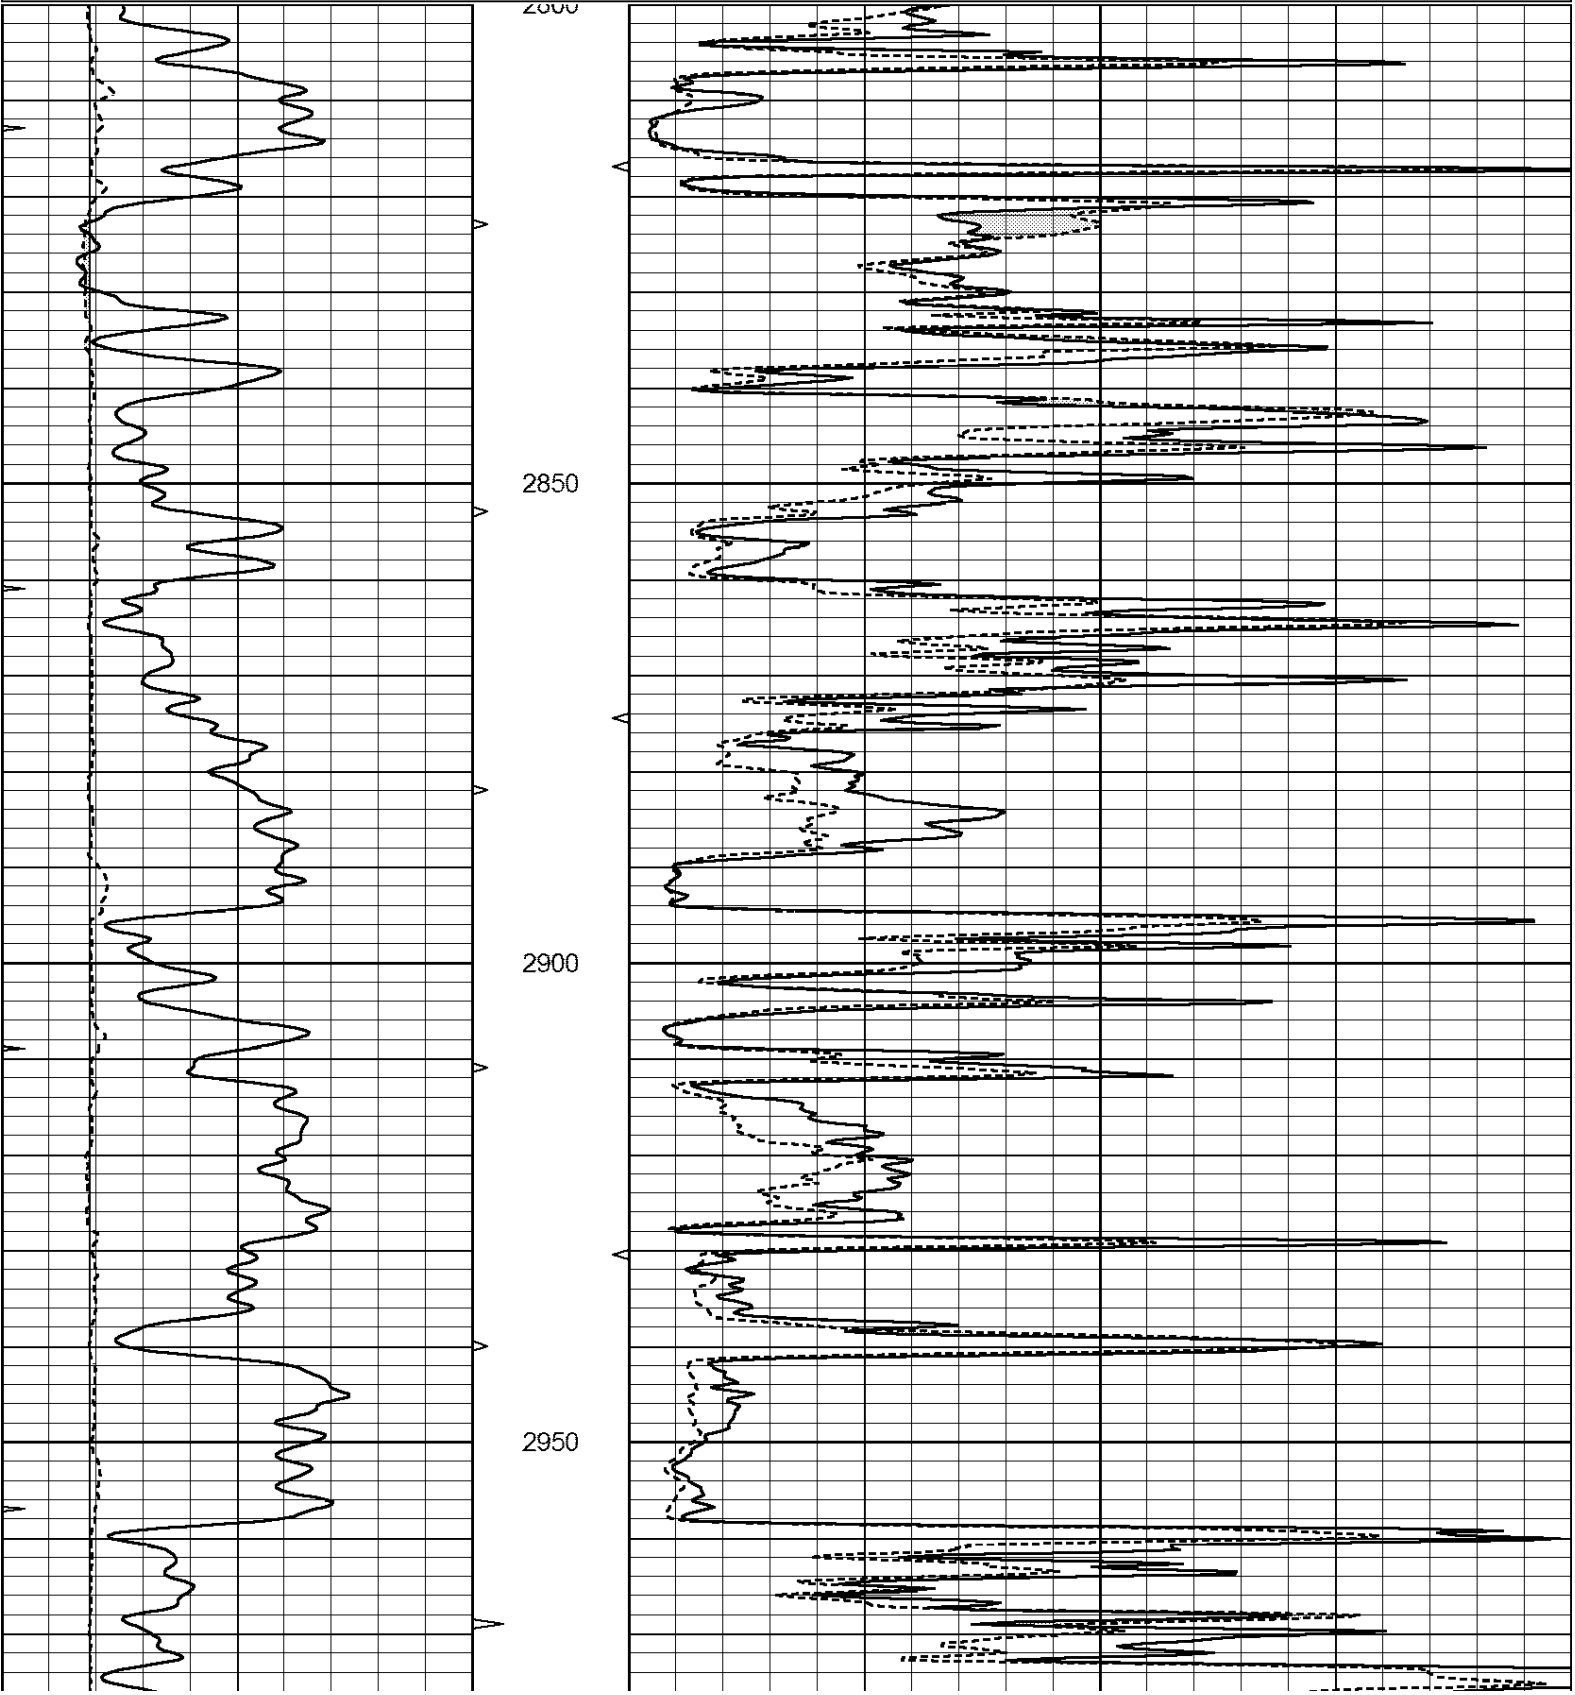

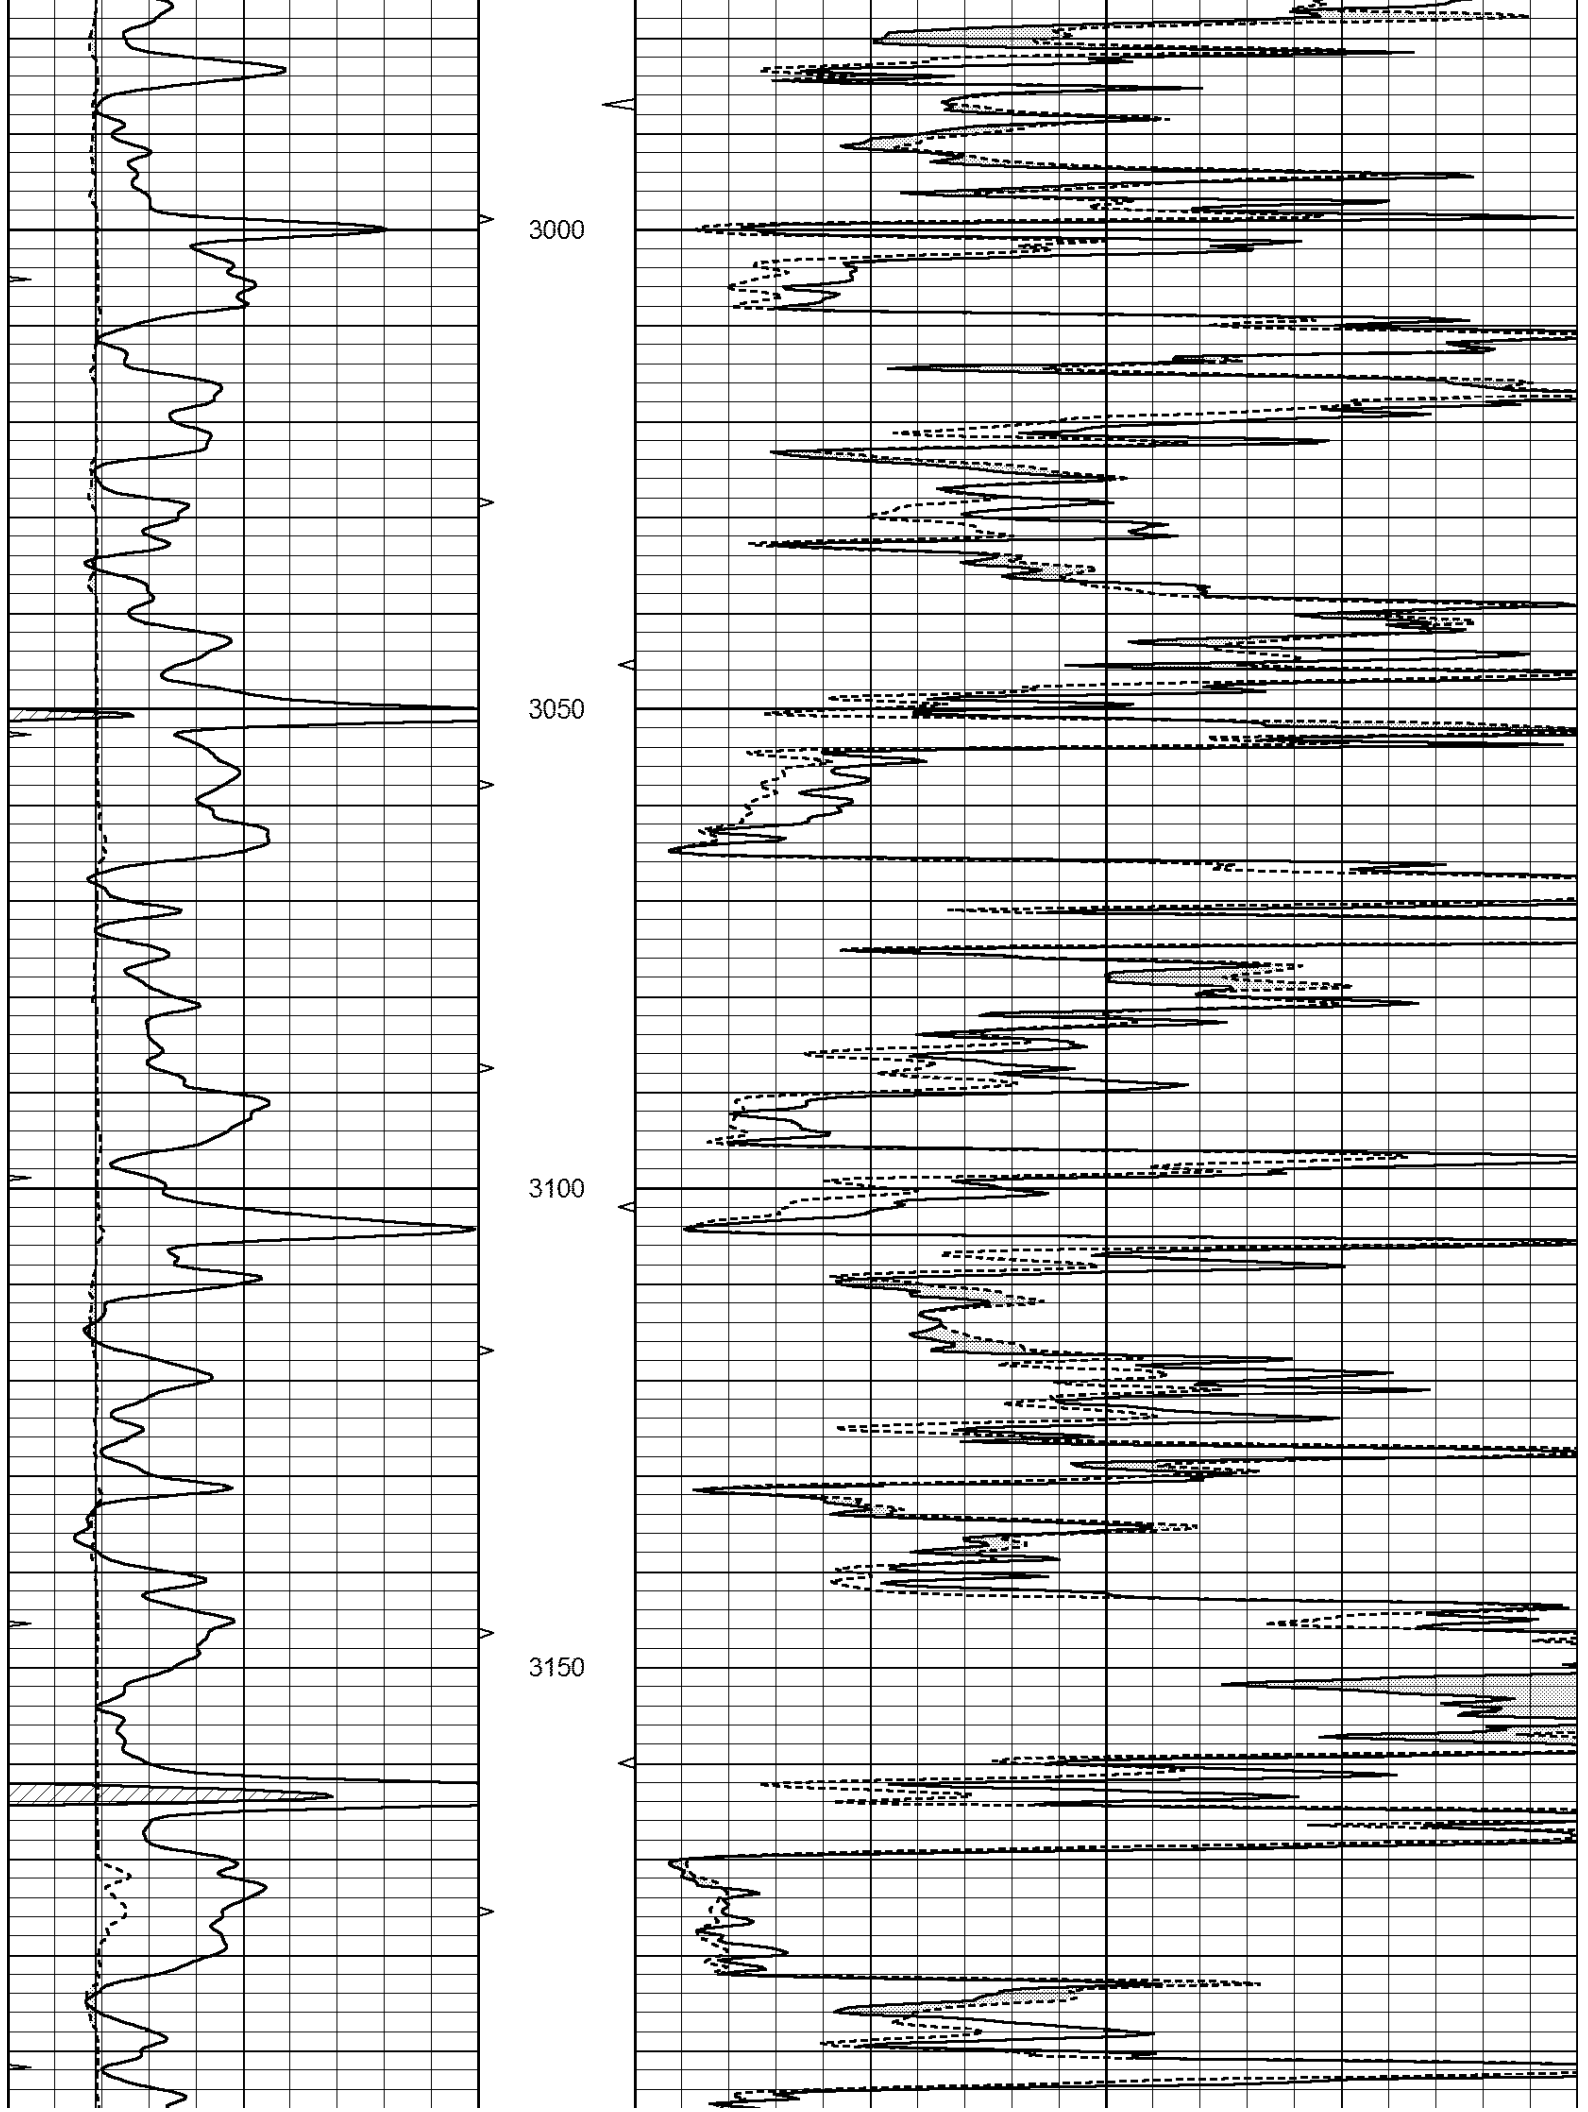

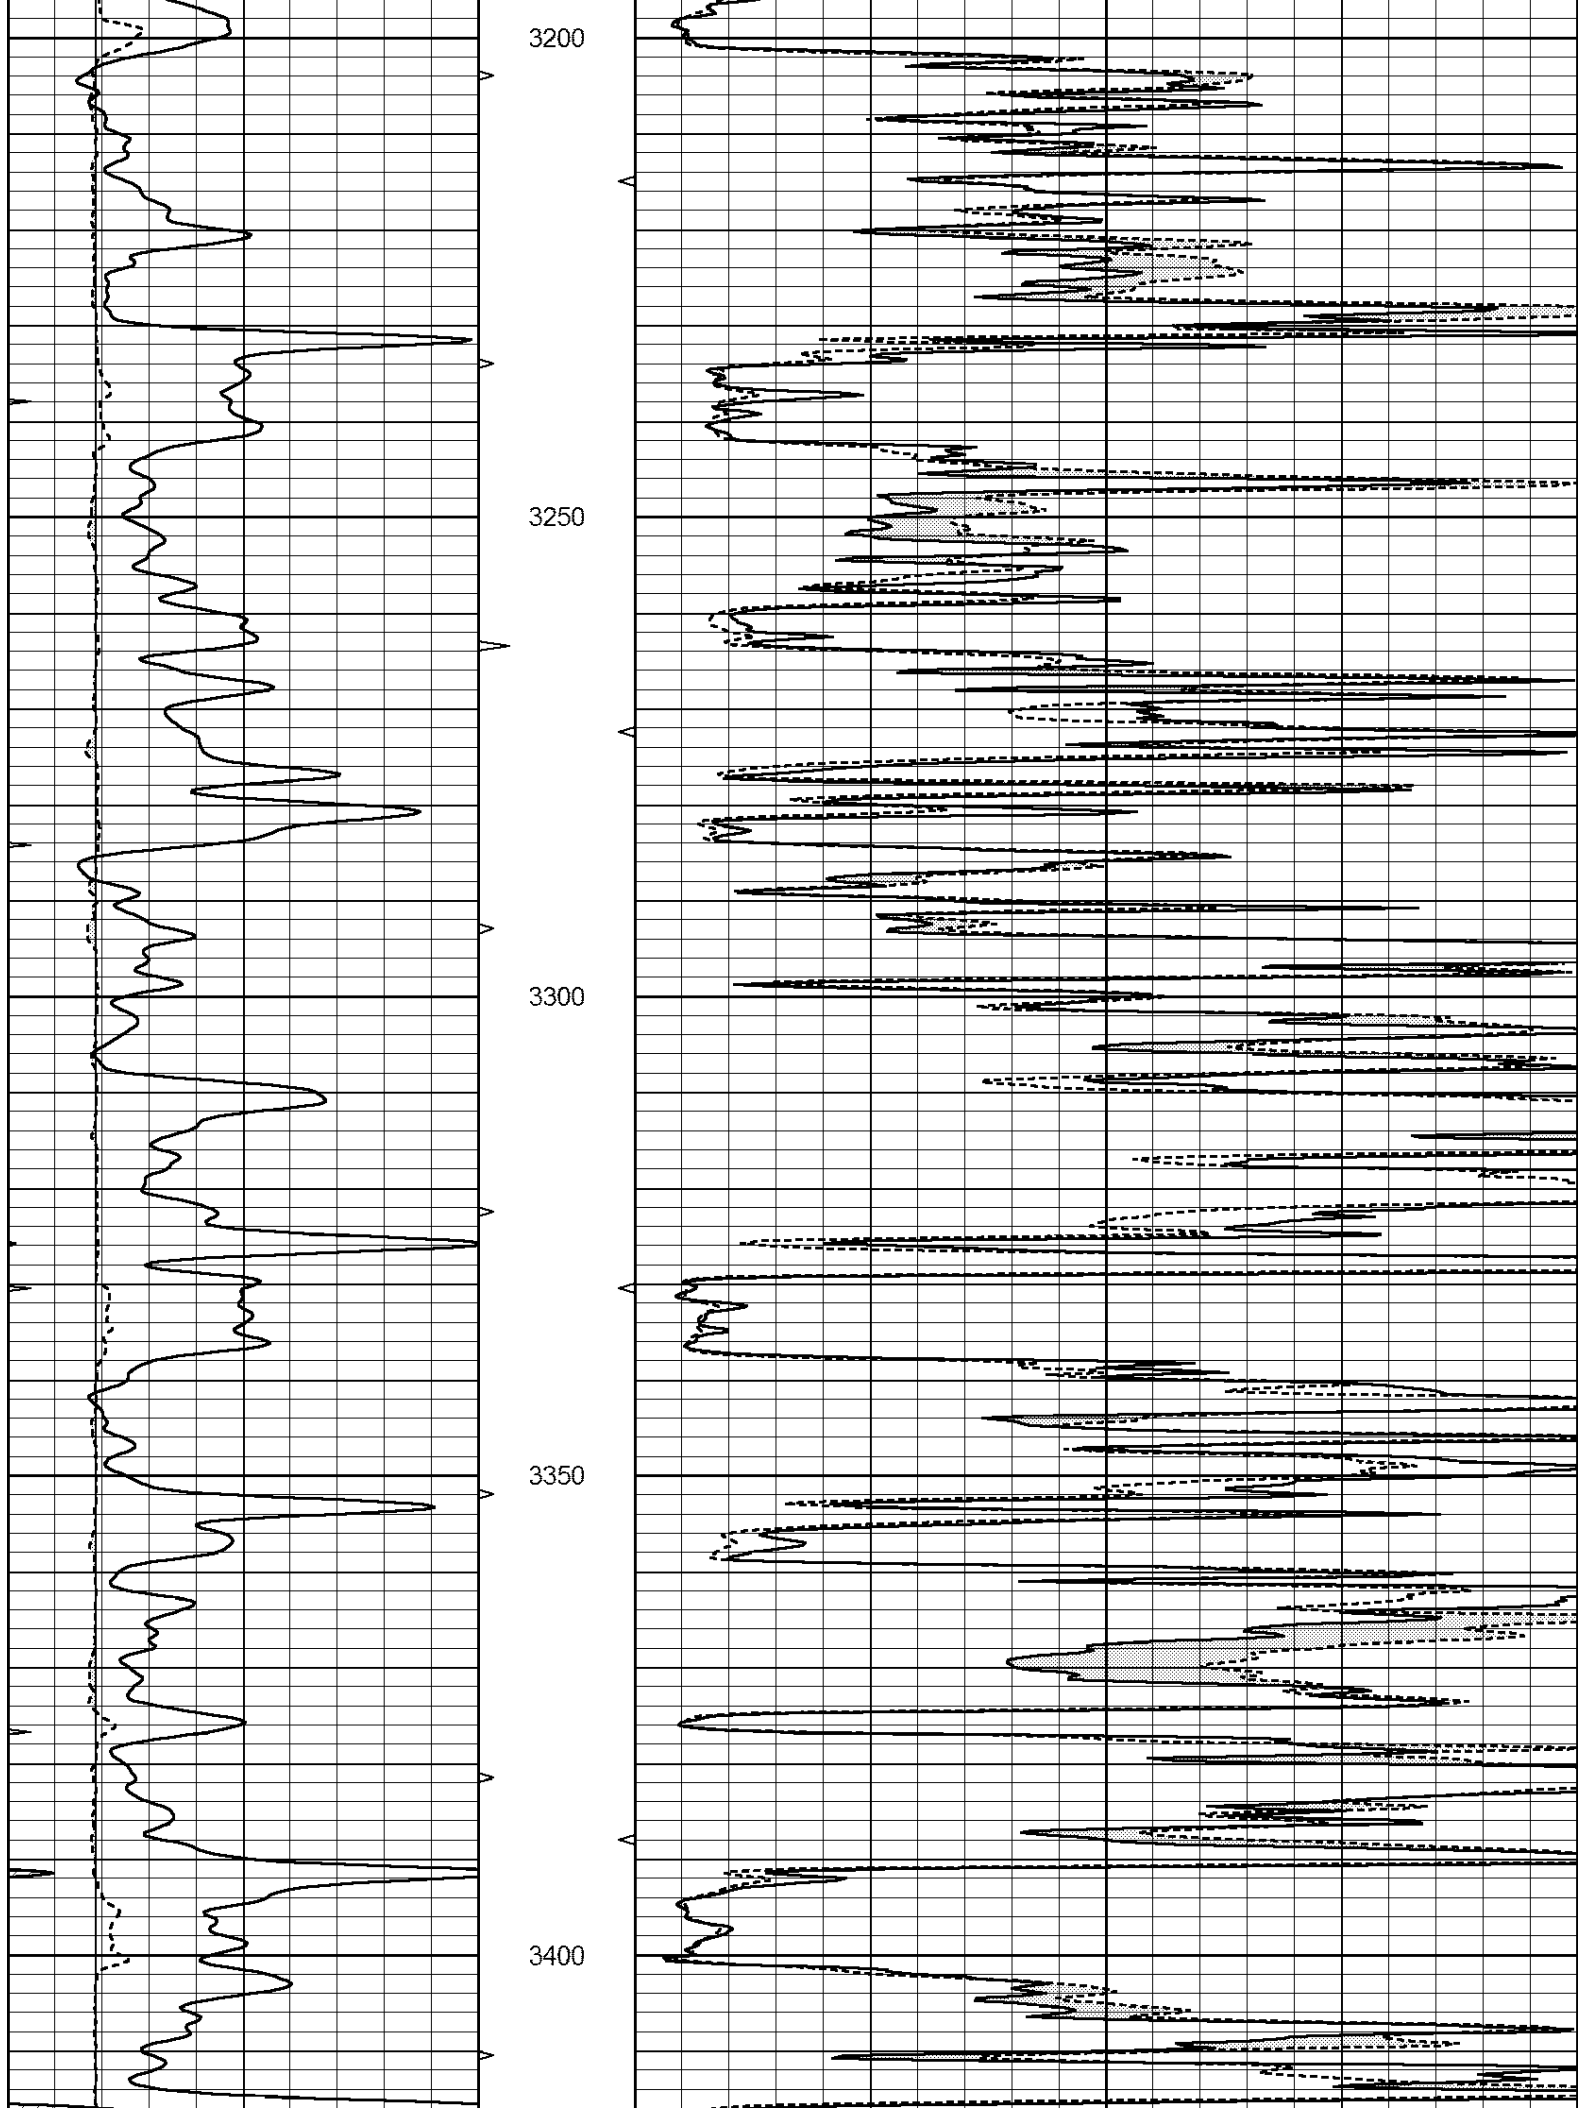

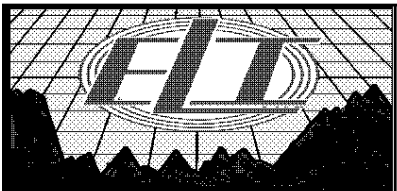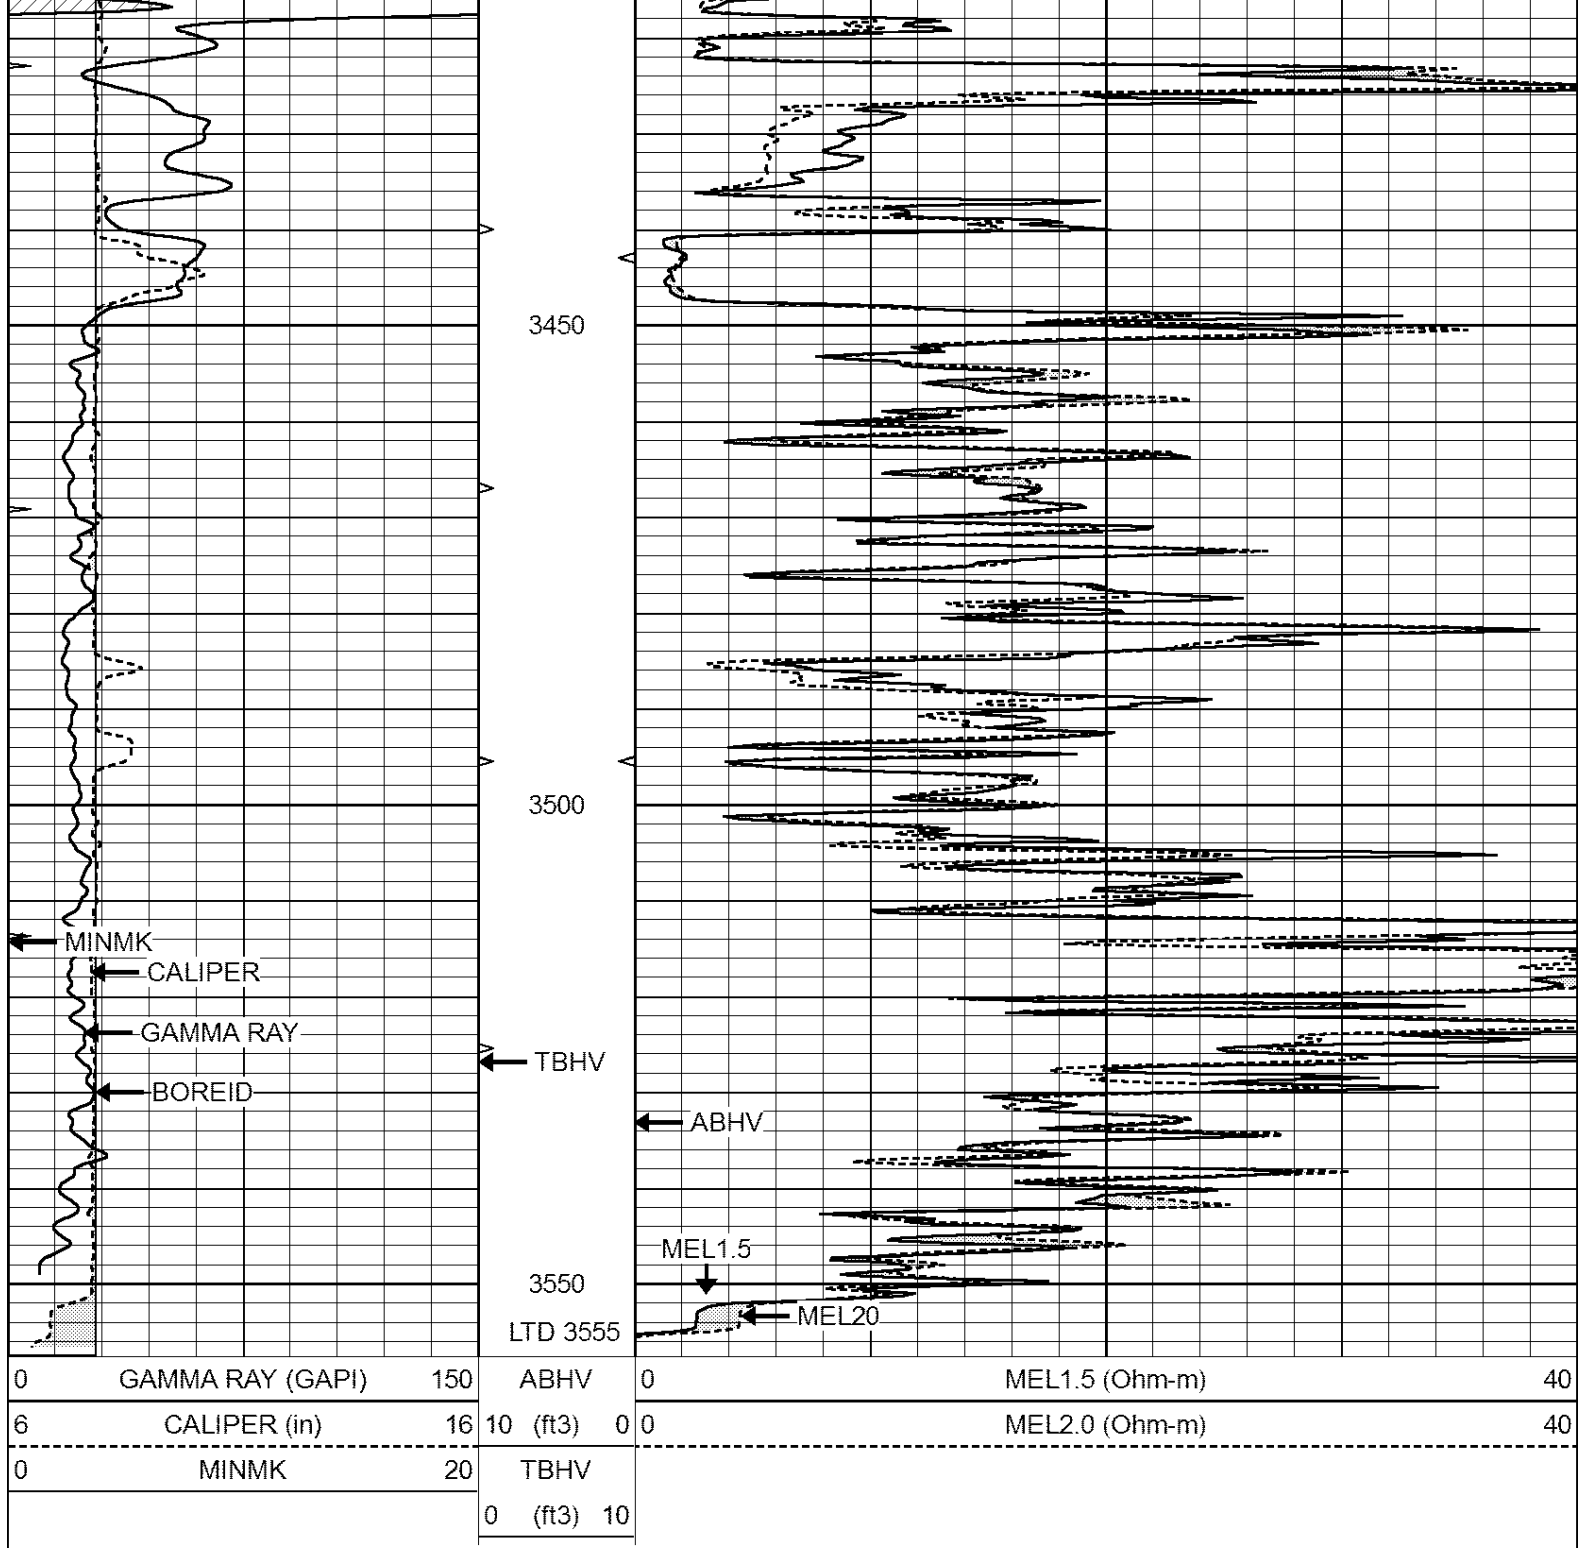


REPEAT SECTION

Database File: 4457ddn.db
 Dataset Pathname: pass5RP
 Presentation Format: _micro
 Dataset Creation: Sun Nov 03 14:21:08 2019 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			

0 (ft3) 10

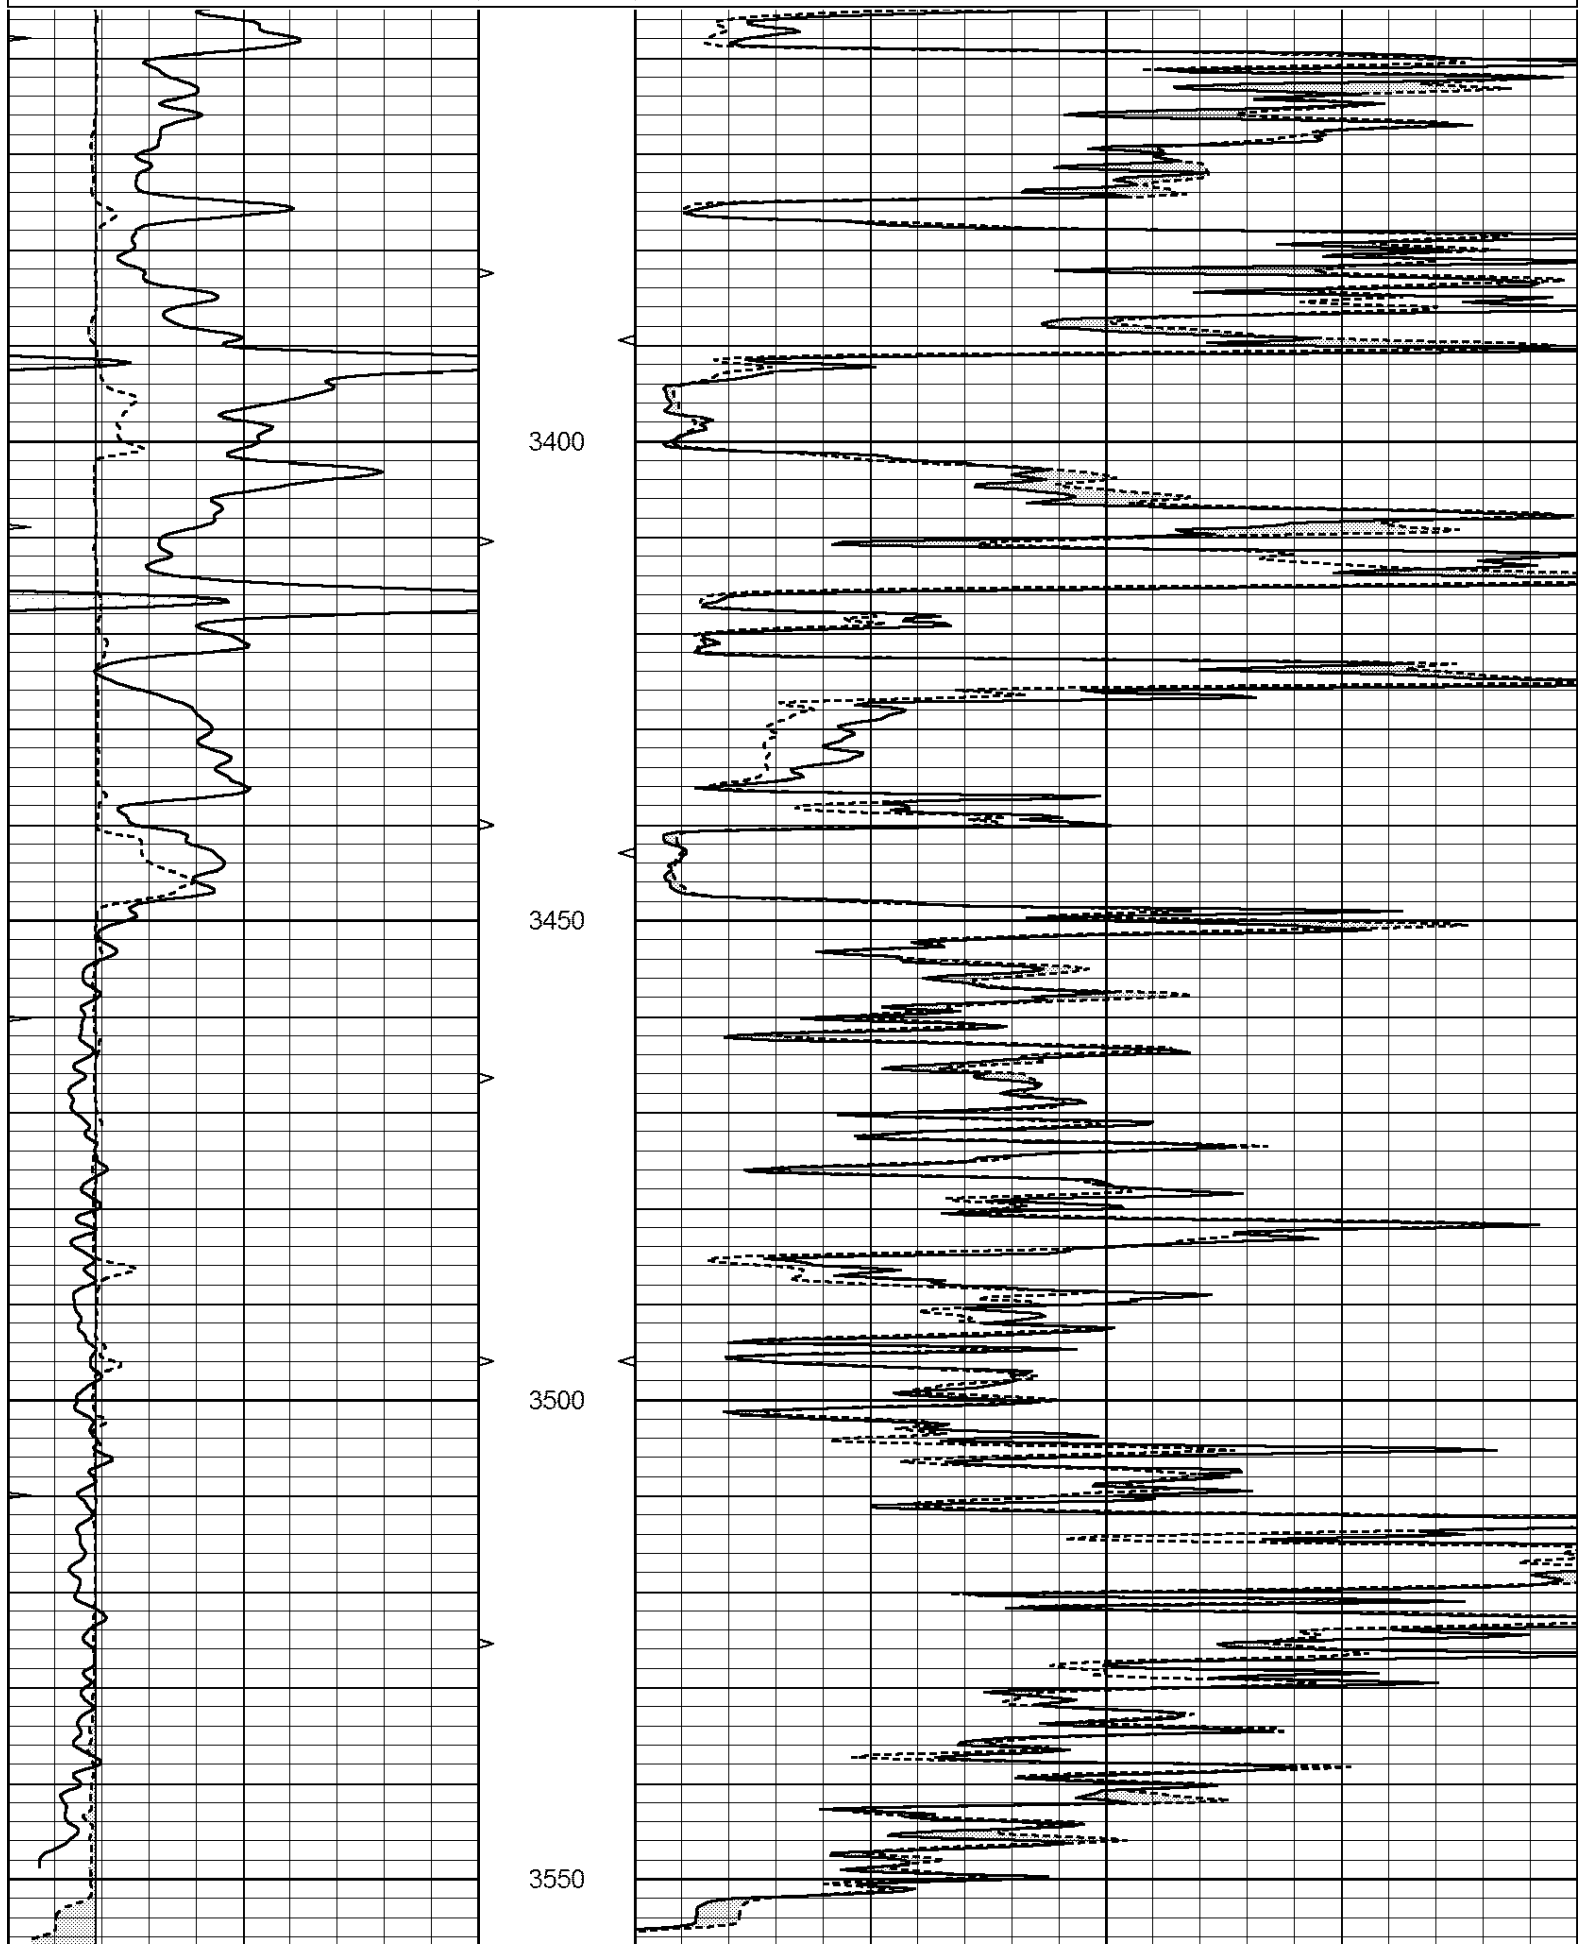

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40

0	MINMK	20	TBHV
		0	(ft3) 10

Calibration Report

Database File: 4457ddn.db
Dataset Pathname: pass5RP
Dataset Creation: Sun Nov 03 14:21:08 2019 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: Micro1
Tool Model: ProbeL
Performed: Sat Oct 26 06:47:35 2019

Caliper Calibration: Gain=2.030 Offset=6.505

	Low Cal	High Cal
References	9.500	13.000
Readings	0.308	2.032

1.5" Calibration: Gain=36.134 Offset=-1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832

2" Calibration: Gain=32.000 Offset=-0.300

	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793

Gamma Ray Calibration Report

Serial Number: GR5
Tool Model: OPEN
Performed: Thu Oct 24 16:06:54 2019

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 1.2000 GAPI/cps