

MICRO LOG

Company	CHARLES N. GRIFFIN	Company	CHARLES N. GRIFFIN
Well	PAISLEE #1	Well	PAISLEE #1
Field	UNKNOWN	Field	UNKNOWN
County	PRATT	County	PRATT
State	KANSAS	State	KANSAS
Location:	API # : 15-151-22505-0000 330' FSL & 2310' FWL	Other Services CDL/CNL/DIL SON	
Permanent Datum Log Measured From Drilling Measured From	SEC 21 TWP 29S RGE 15W GROUND LEVEL Elevation 2017 KELLY BUSHING 11' A.G.L. KELLY BUSHING	Elevation K.B. 2028 D.F. 2026 G.L. 2017	
Date	11/18/19		
Run Number	TWO		
Depth Driller	4900		
Depth Logger	4905		
Bottom Logged Interval	4885		
Top Log Interval	3000		
Casing Driller	8 5/8" @ 268		
Casing Logger	268		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/59		
pH / Fluid Loss	11.5/6.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85 @ 66F		
Rmt @ Meas. Temp	.64 @ 66F		
Rmc @ Meas. Temp	1.02 @ 66F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.45 @ 123F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	123F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	ELI FELTS	BRUCE REED	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


WEST OF PRATT TO CROFT BLACK TOP, SOUTH TO 100 RD
1 1/2 EAST, NORTH INTO.

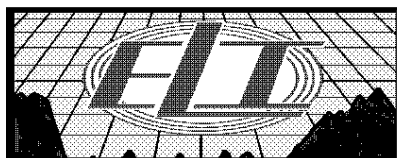



MAIN PASS


Database File: 4459pe.db
 Dataset Pathname: pass9MIC
 Presentation Format: _micro
 Dataset Creation: Mon Nov 18 16:02:19 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

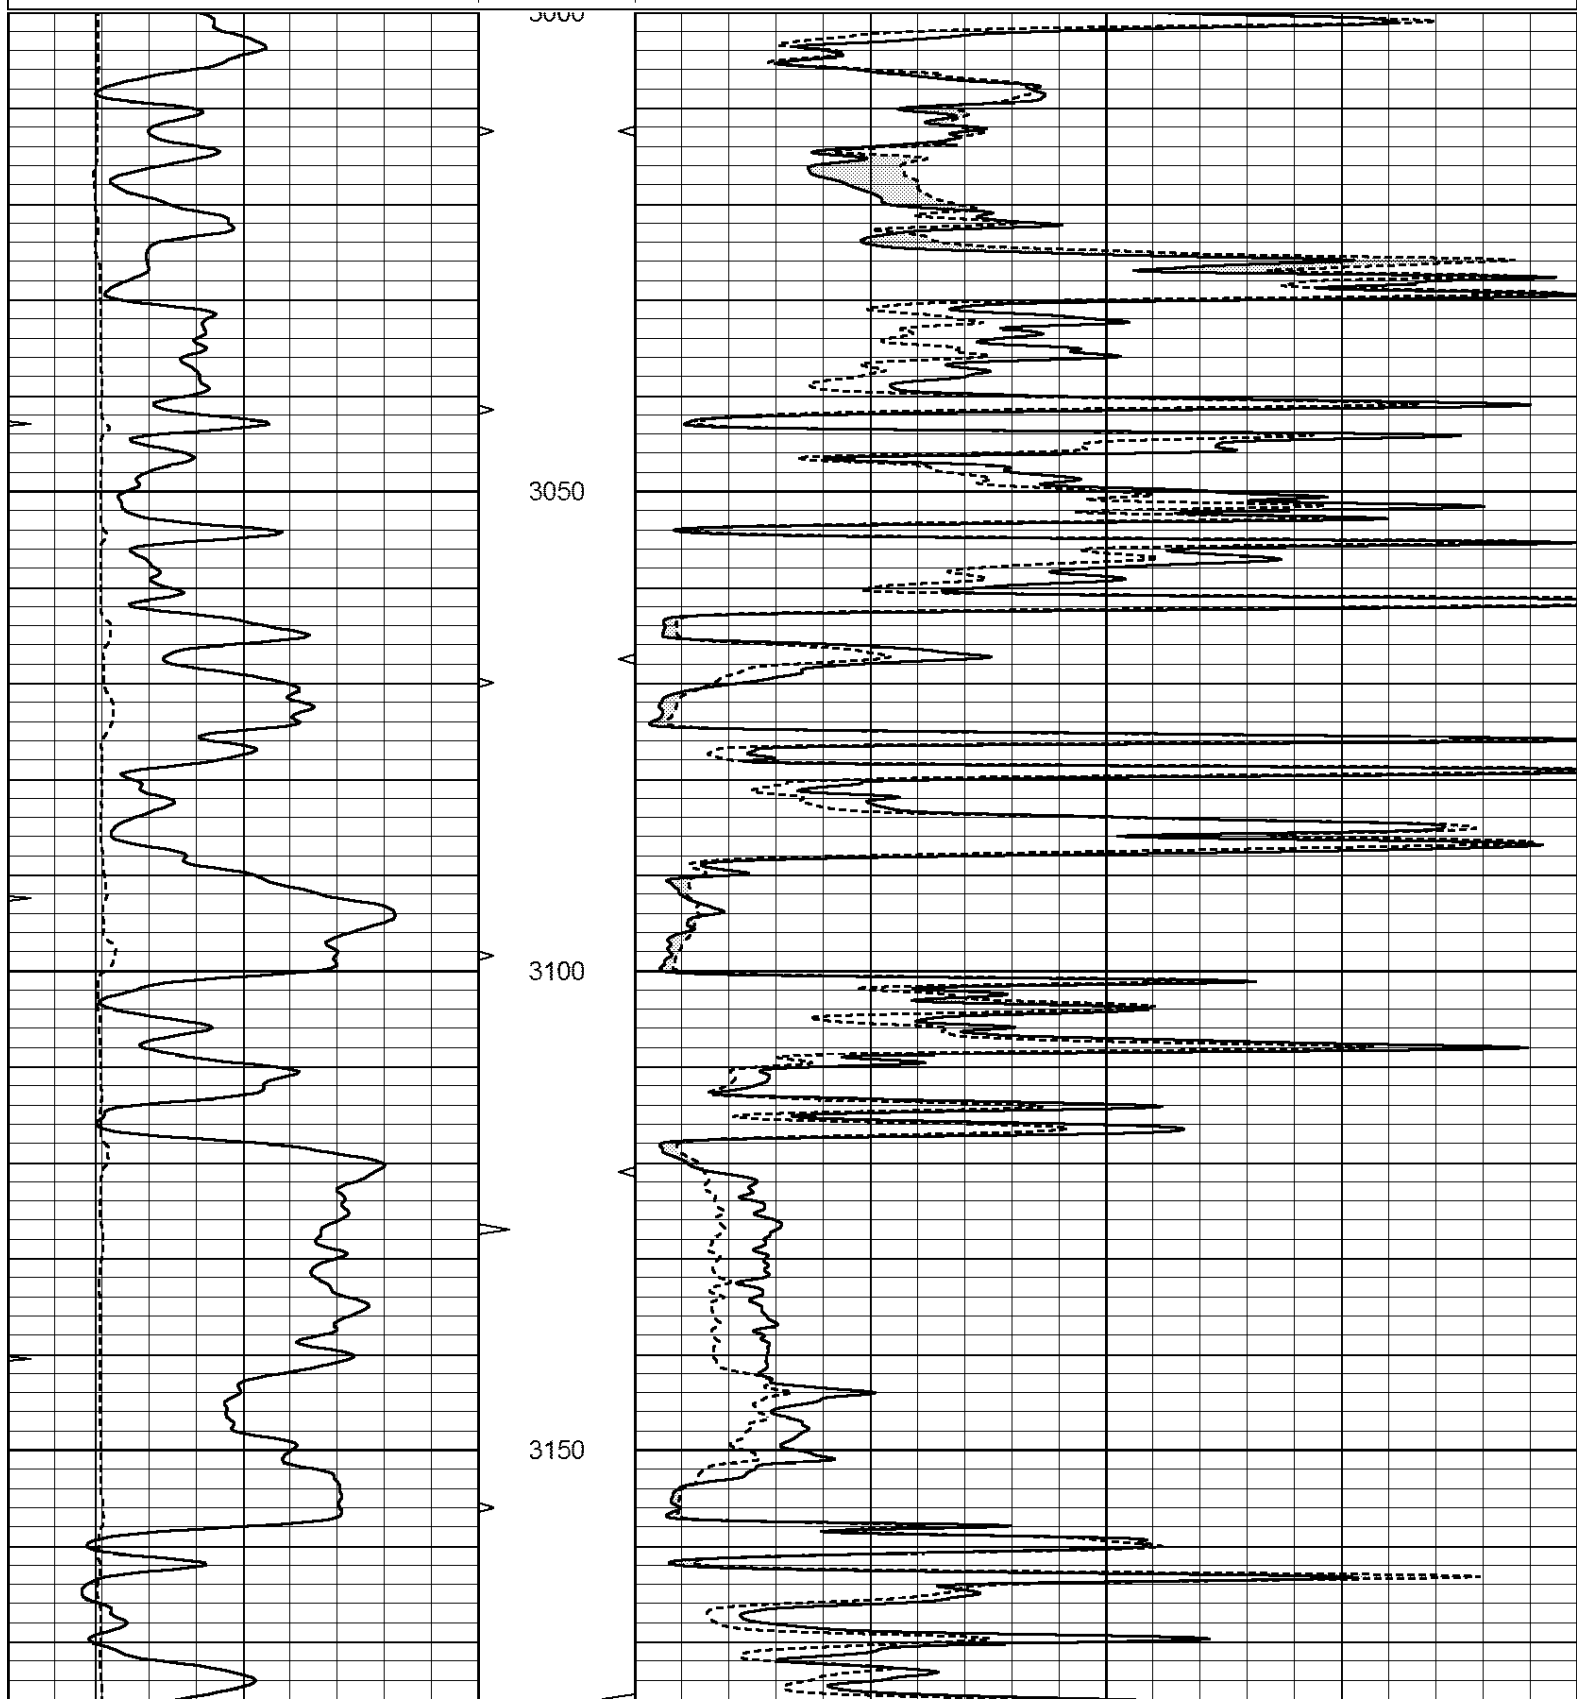

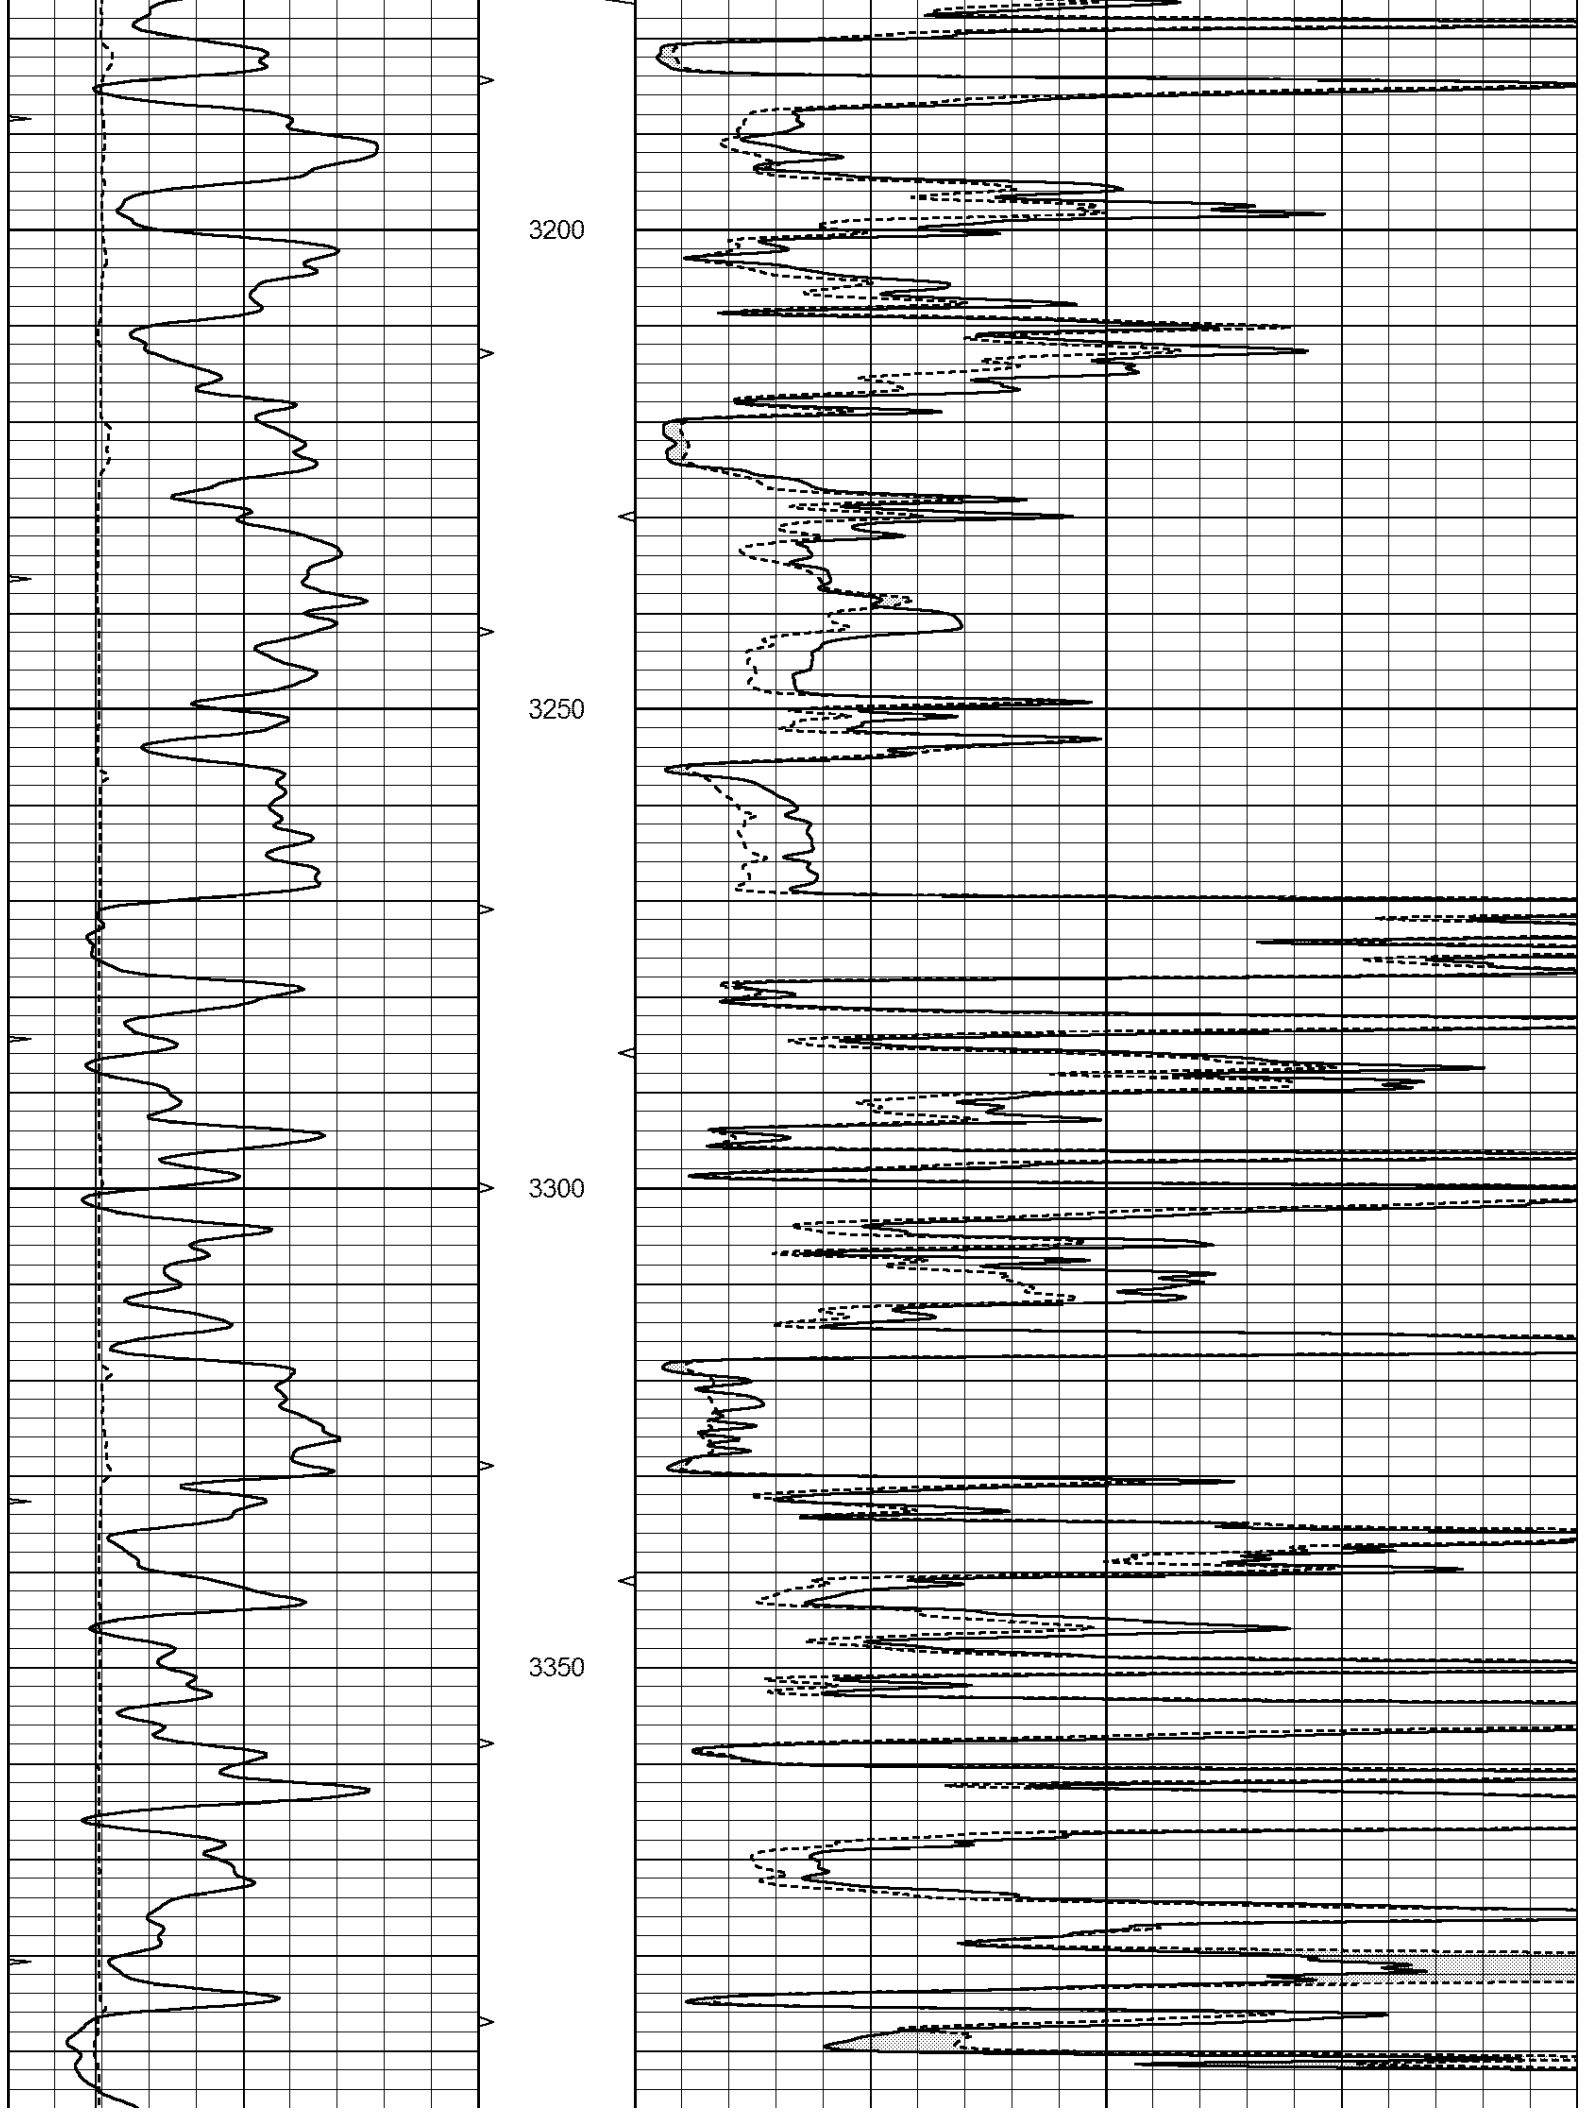

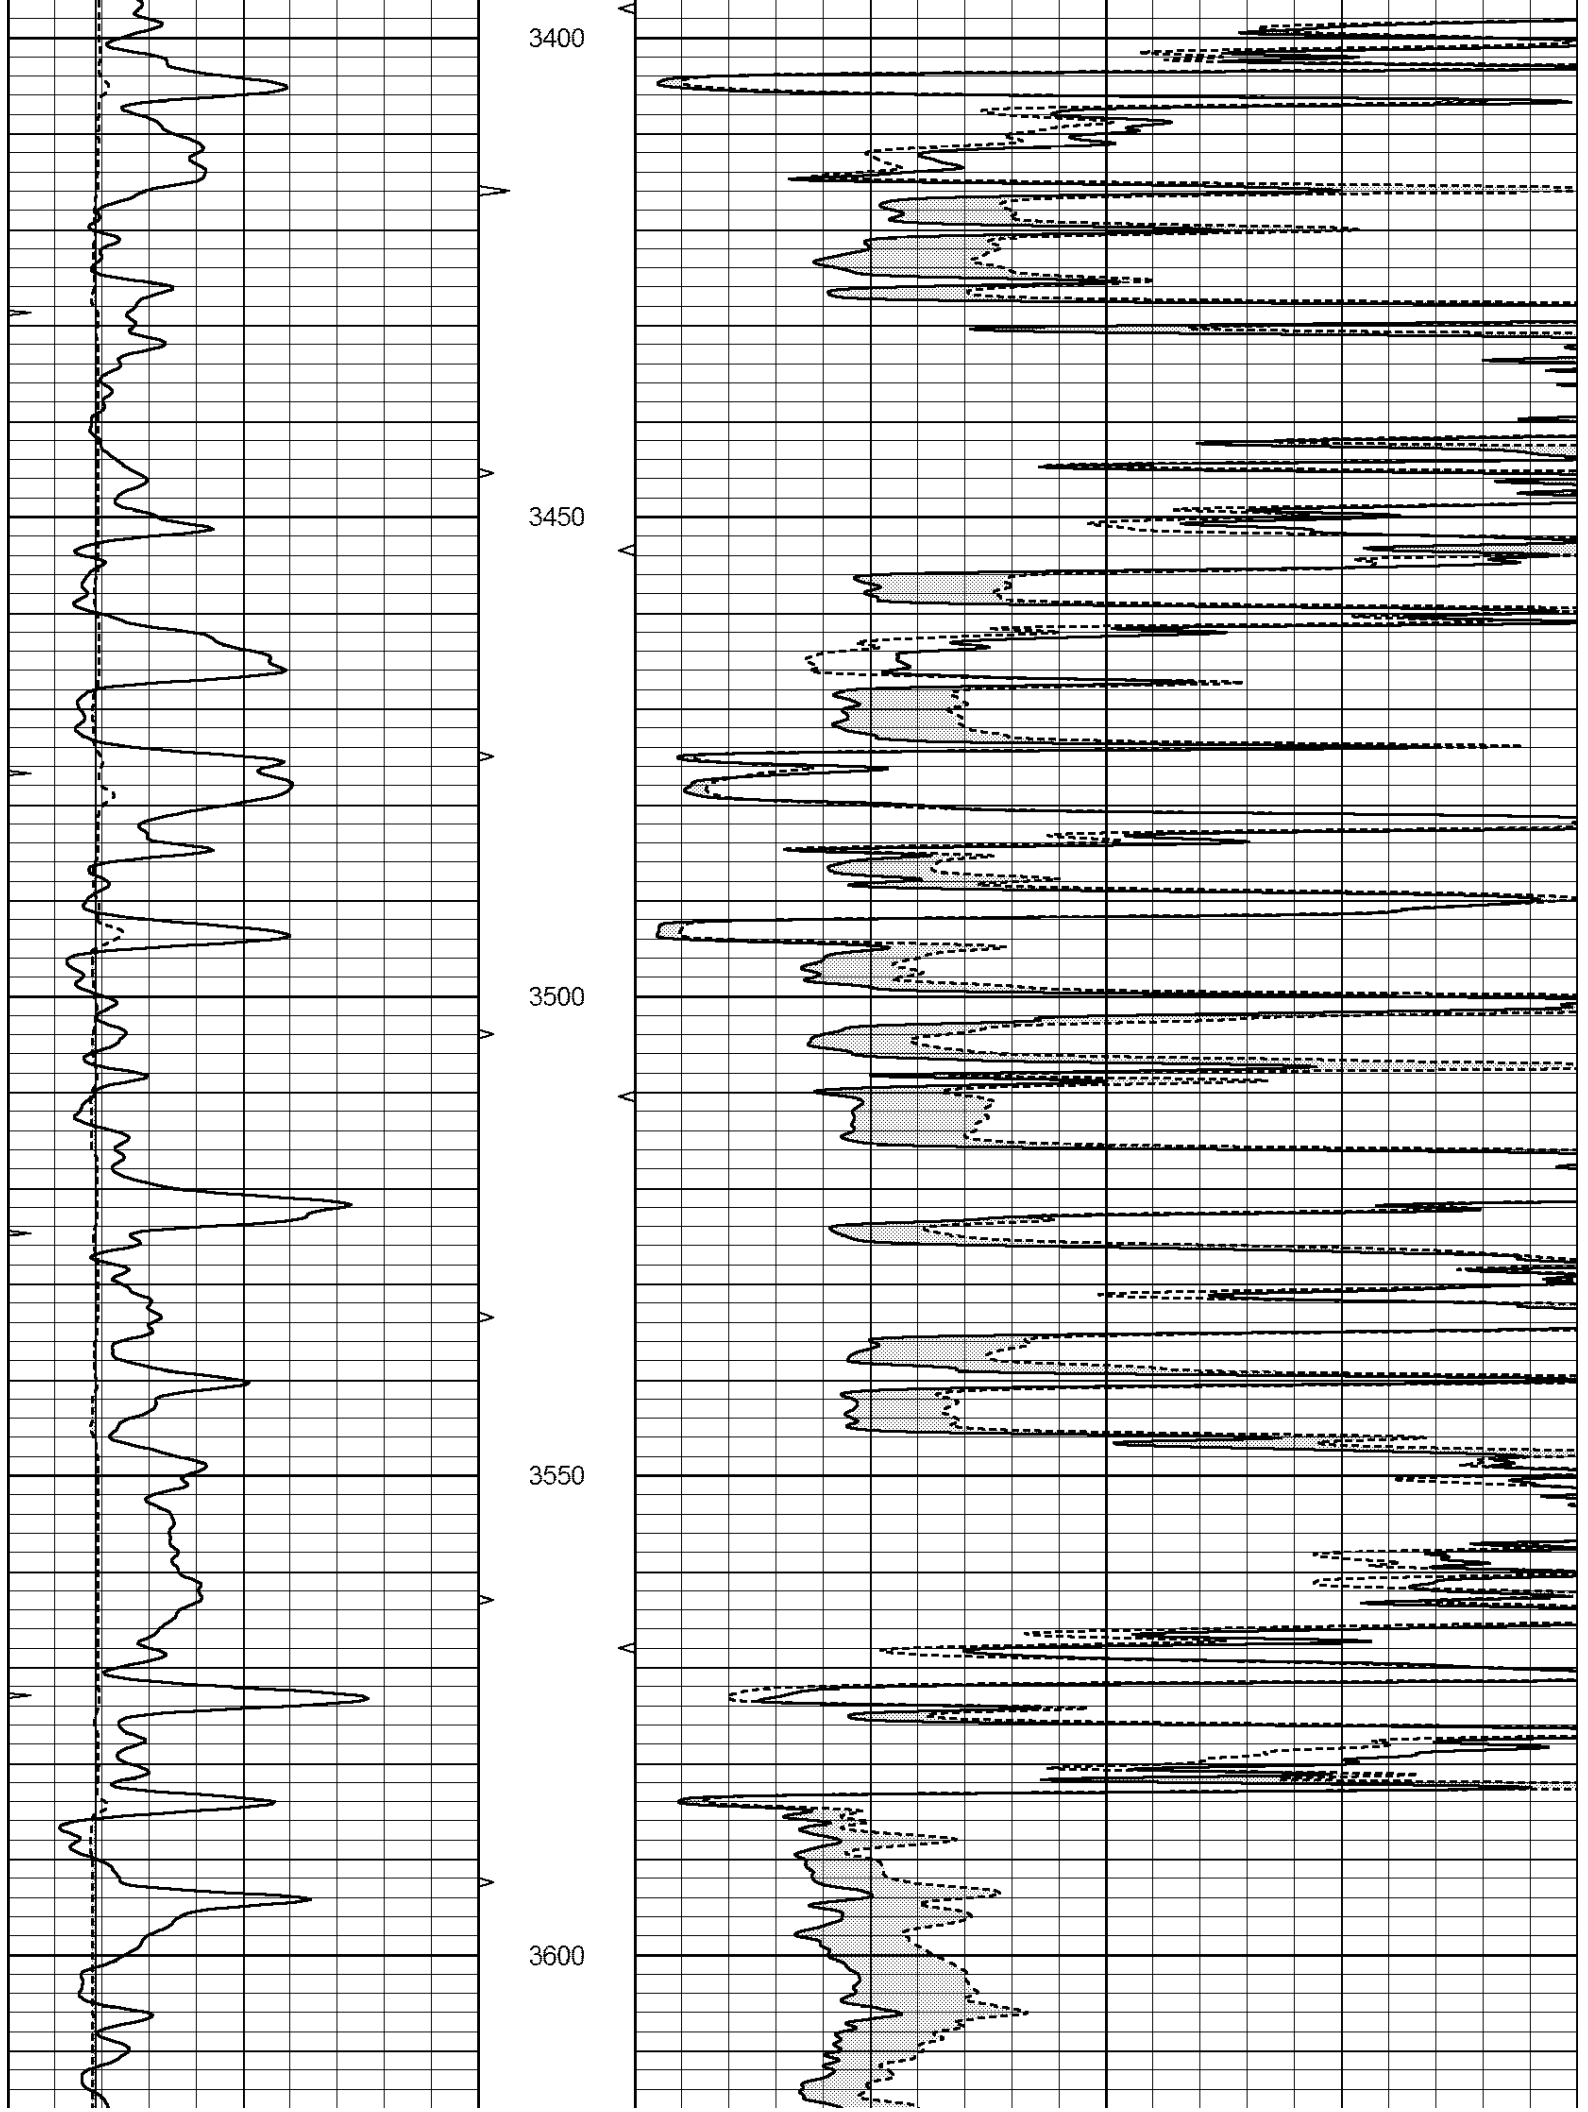

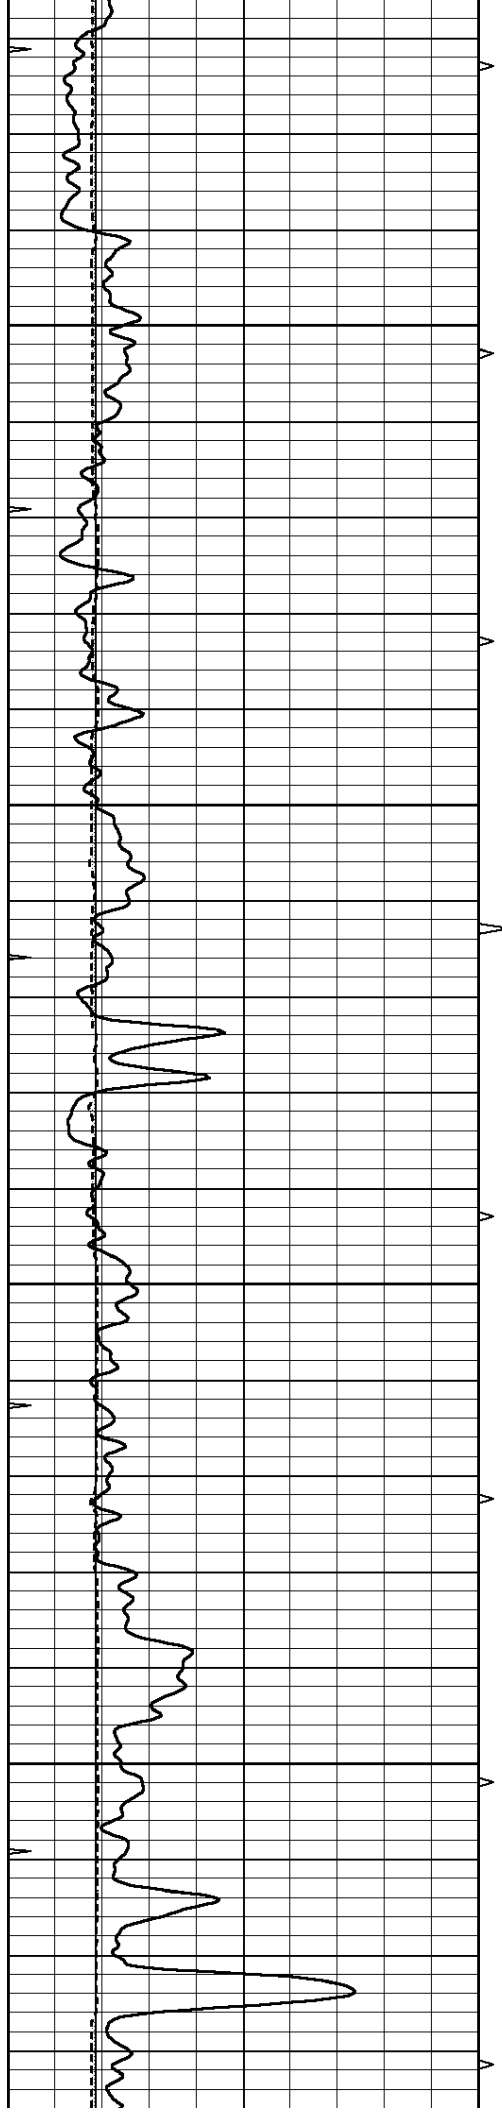




3650


3700

3750

3800

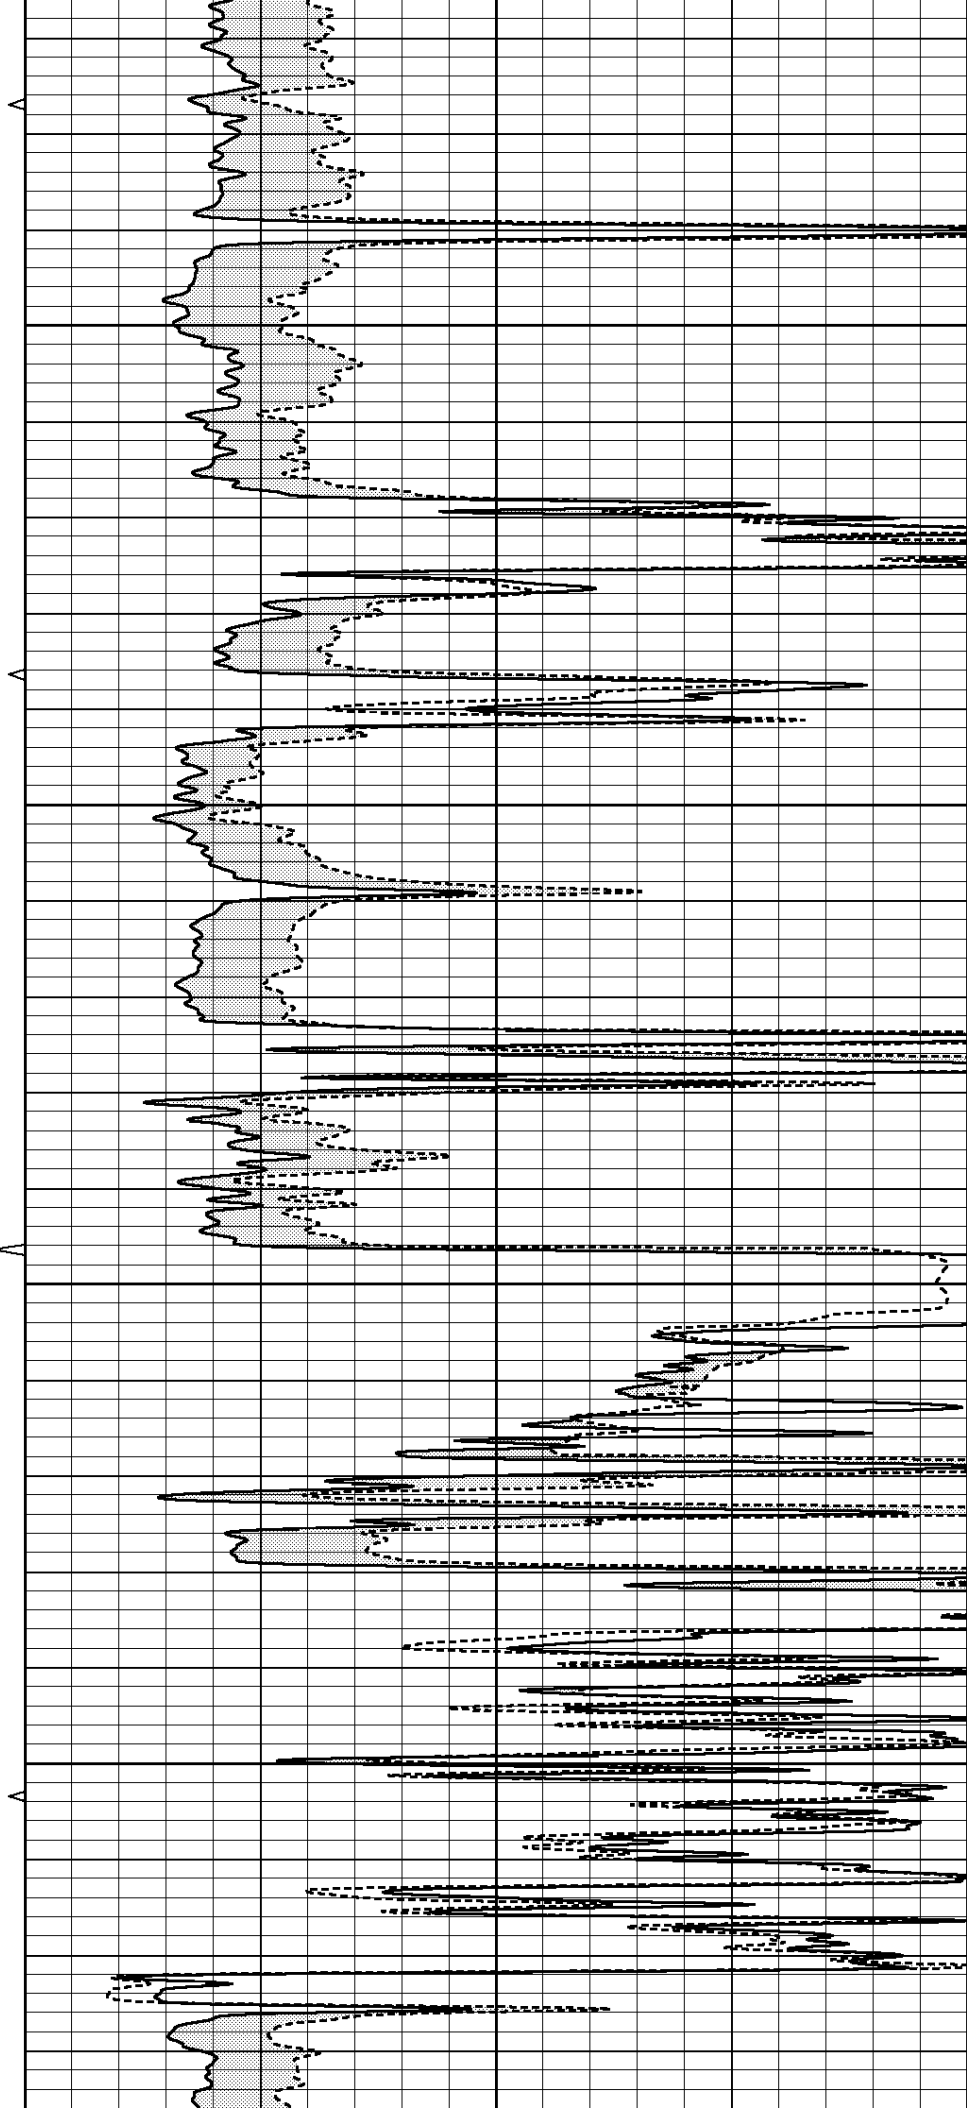

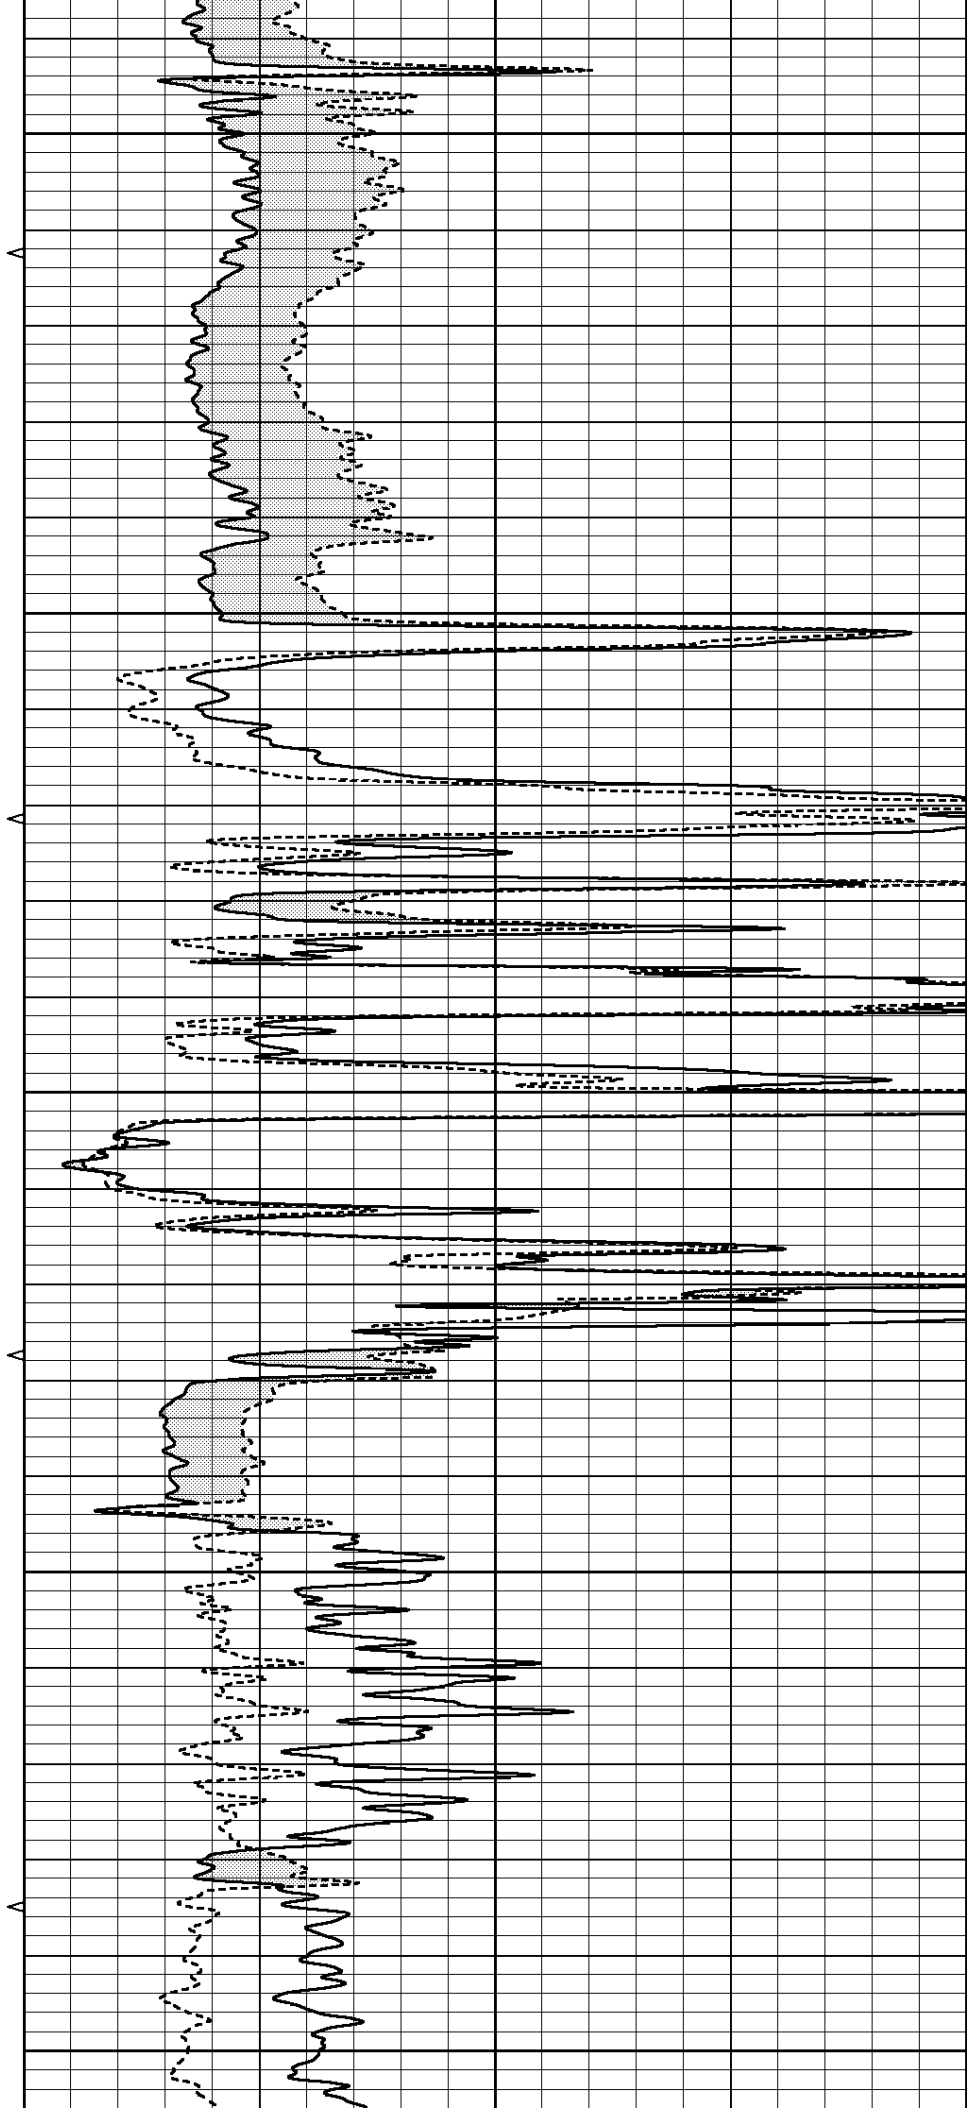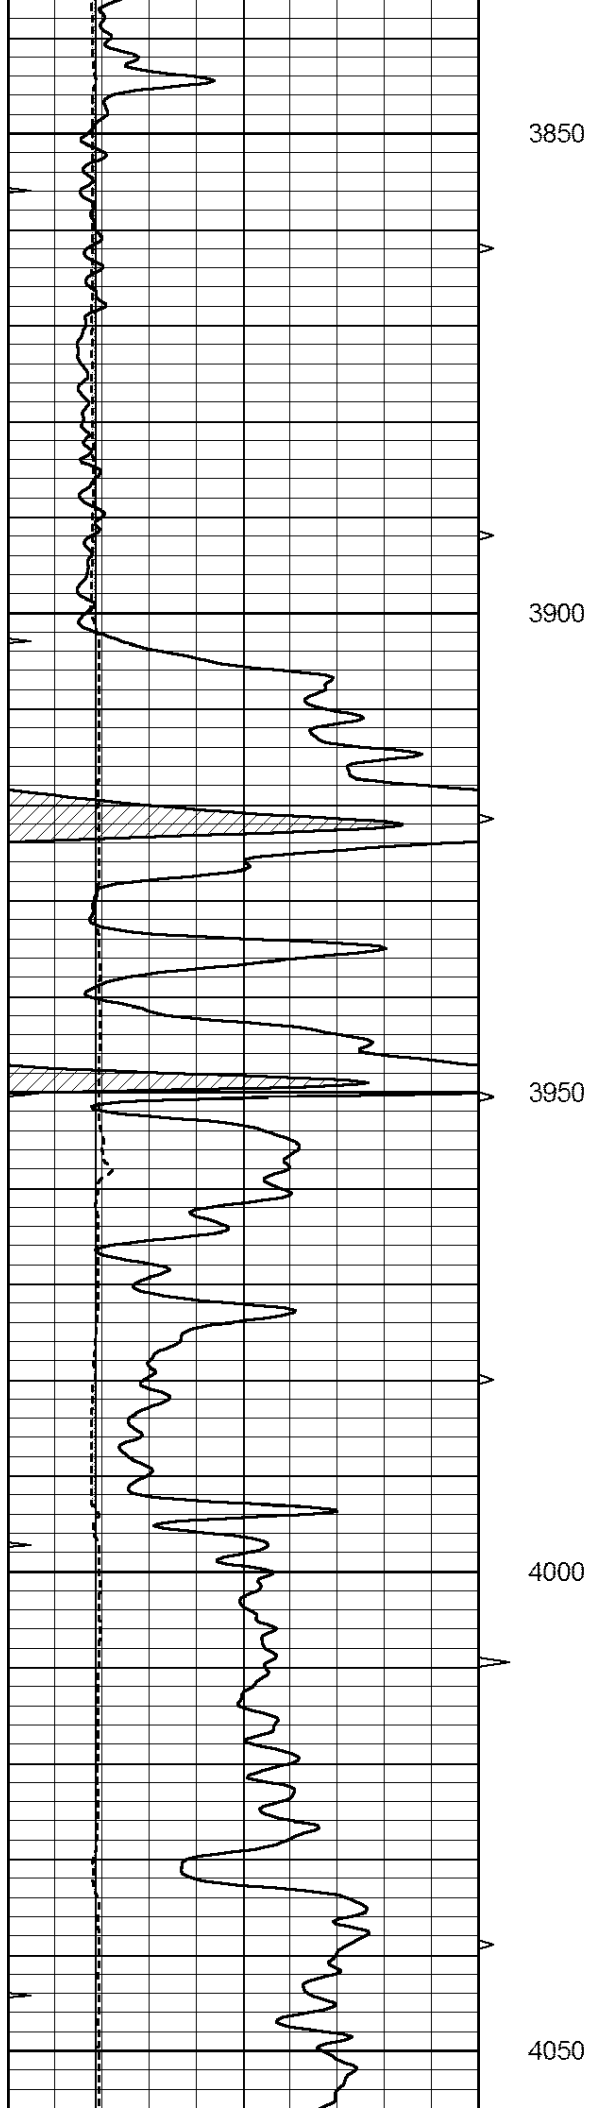

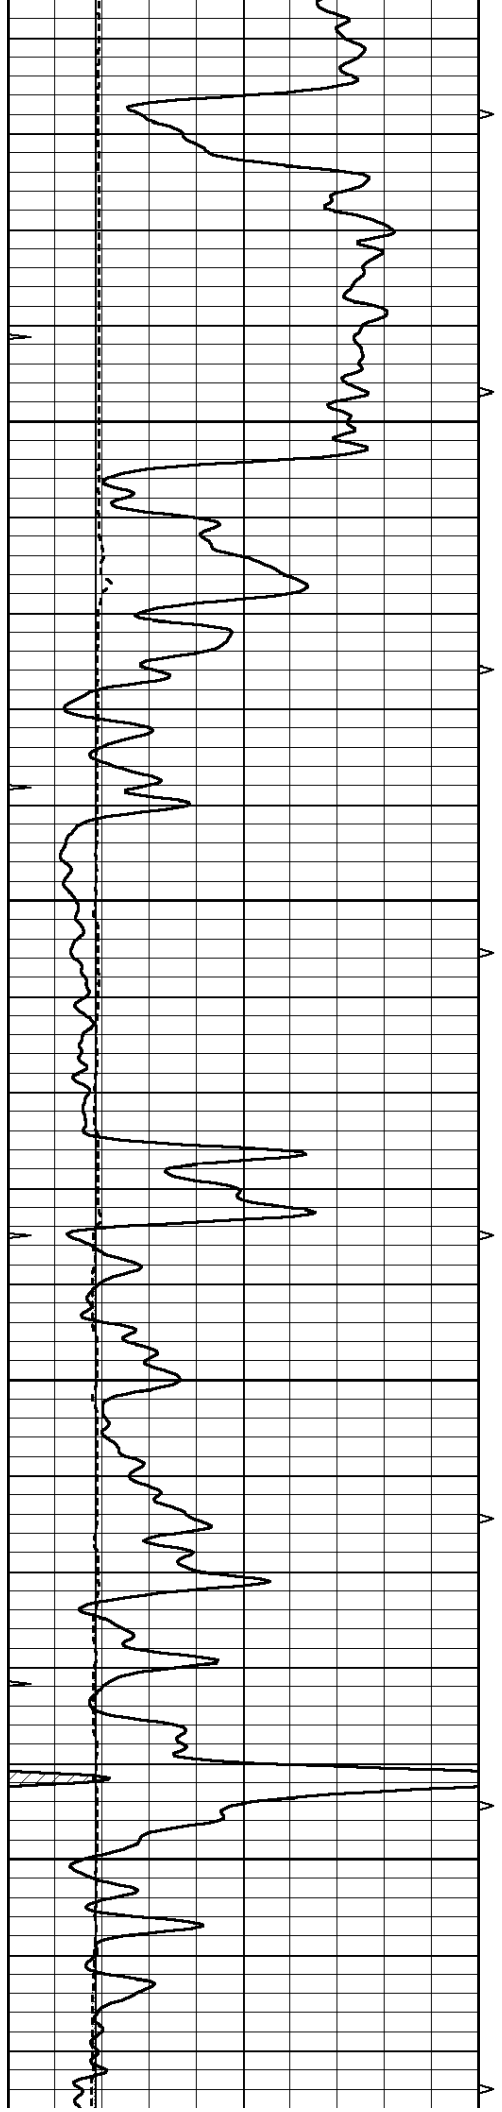



4100


4150

4200

4250

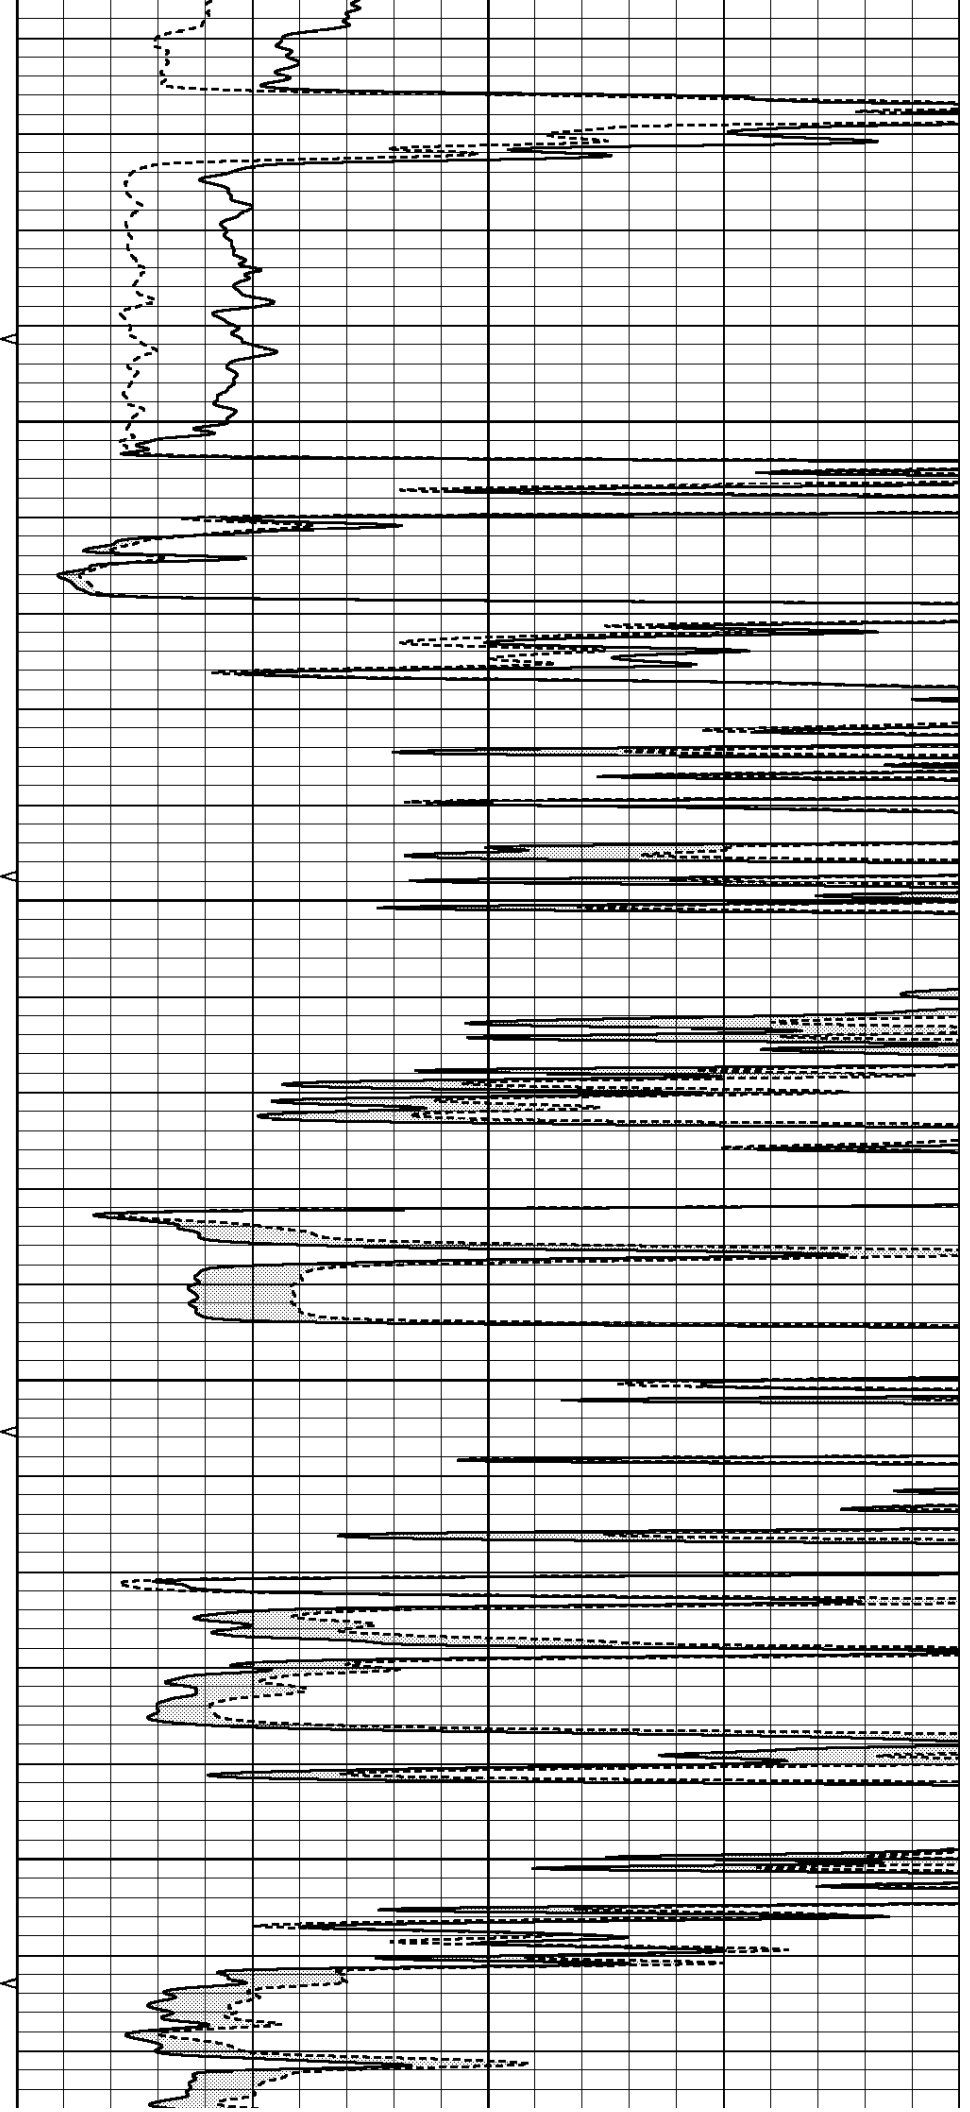

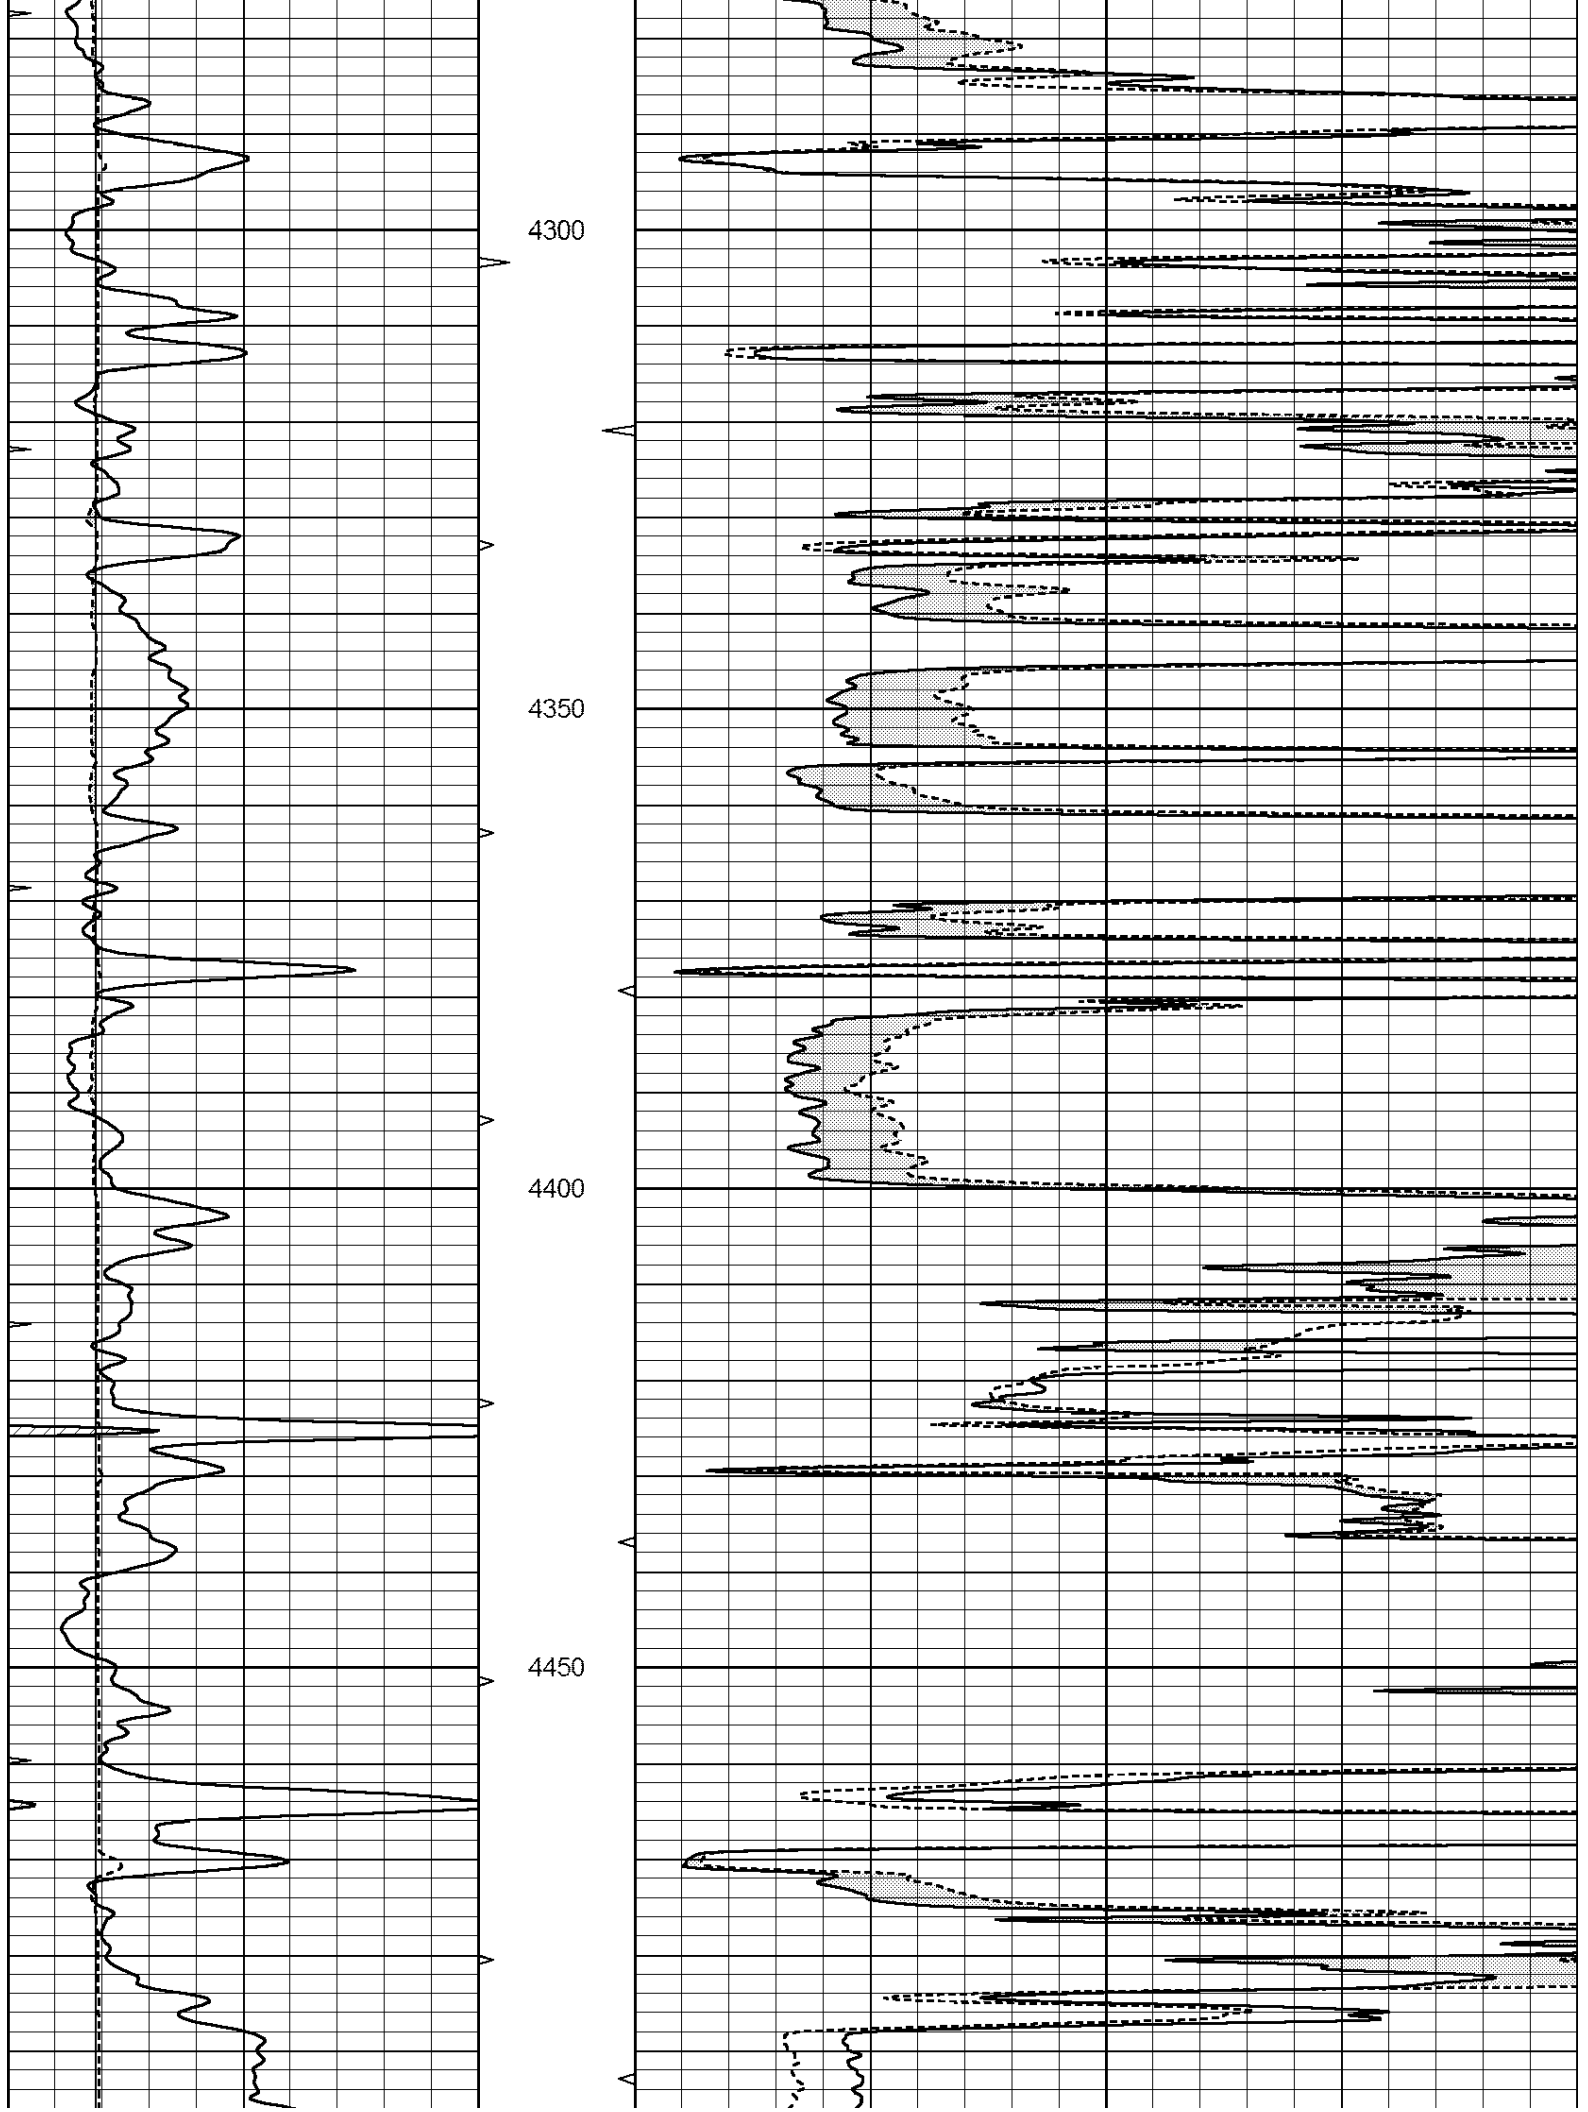

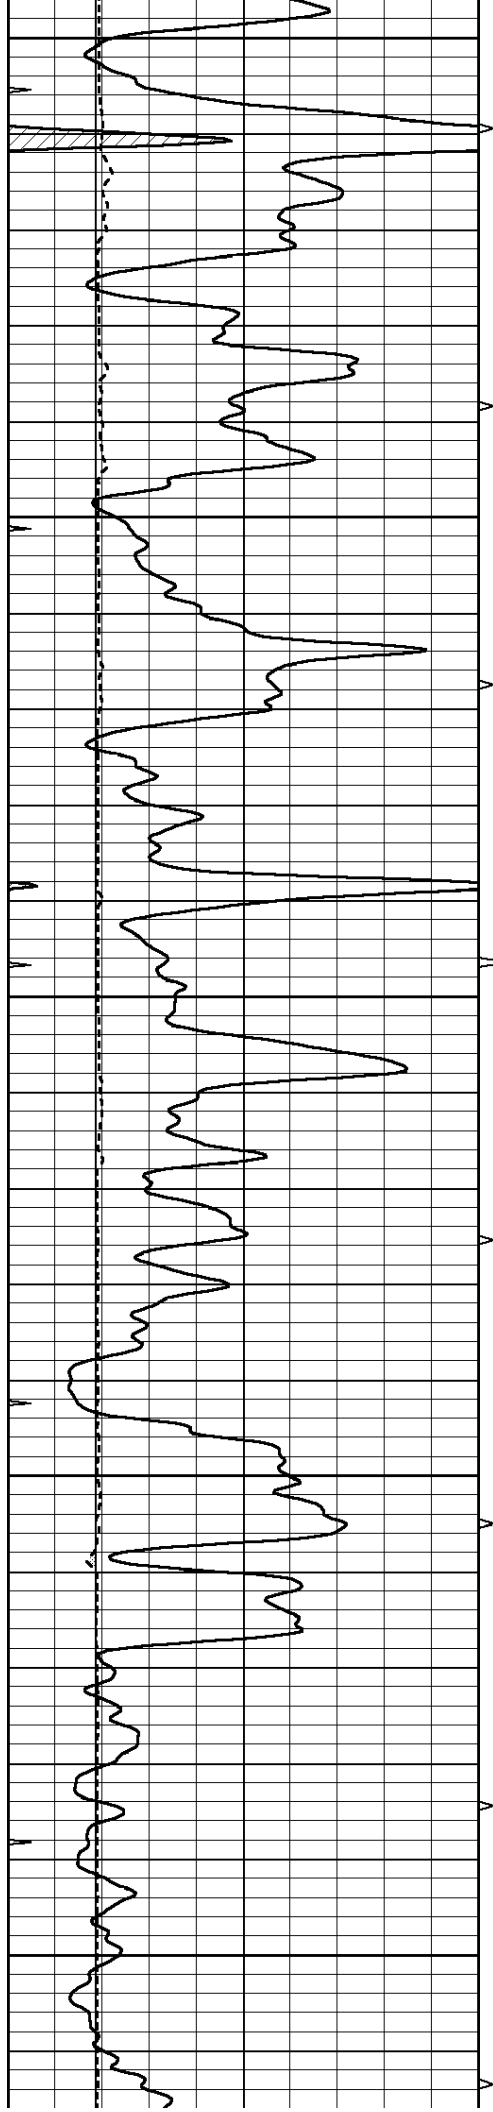


4500


4550


4600

4650

4700

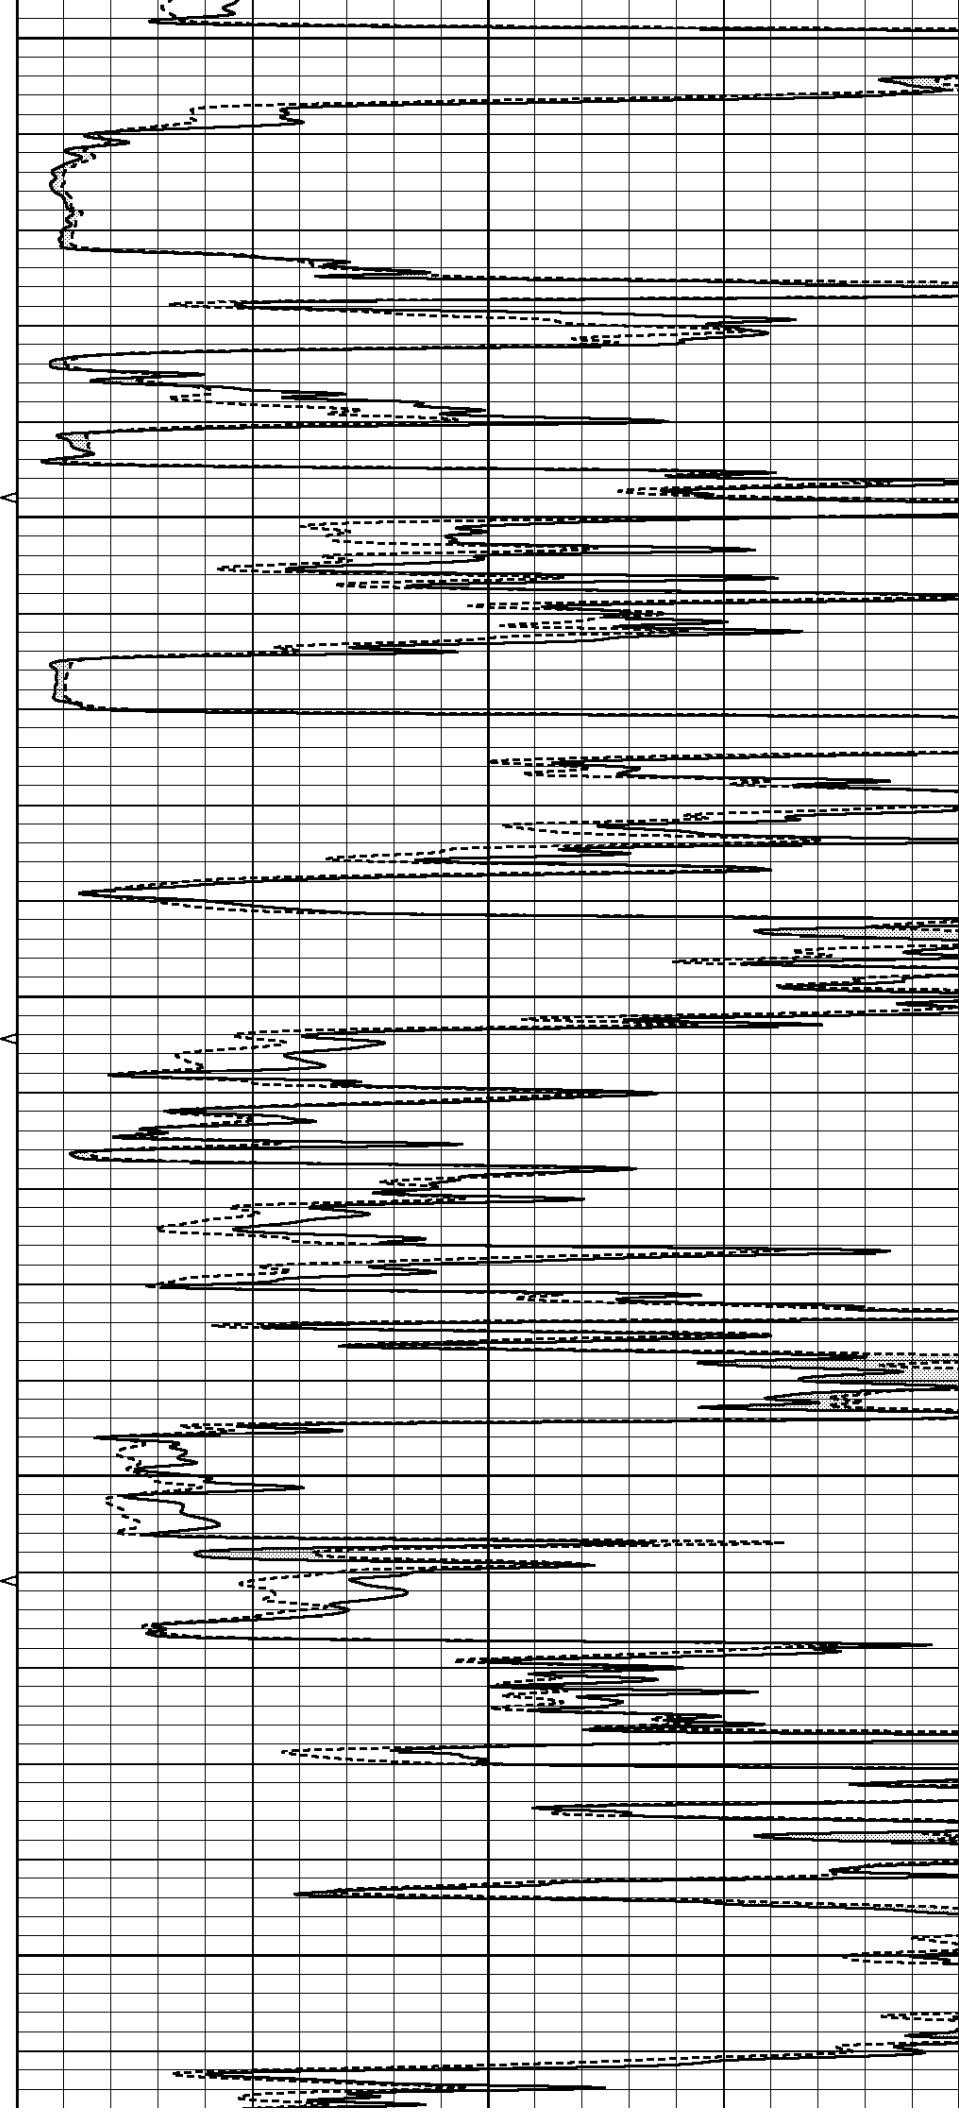

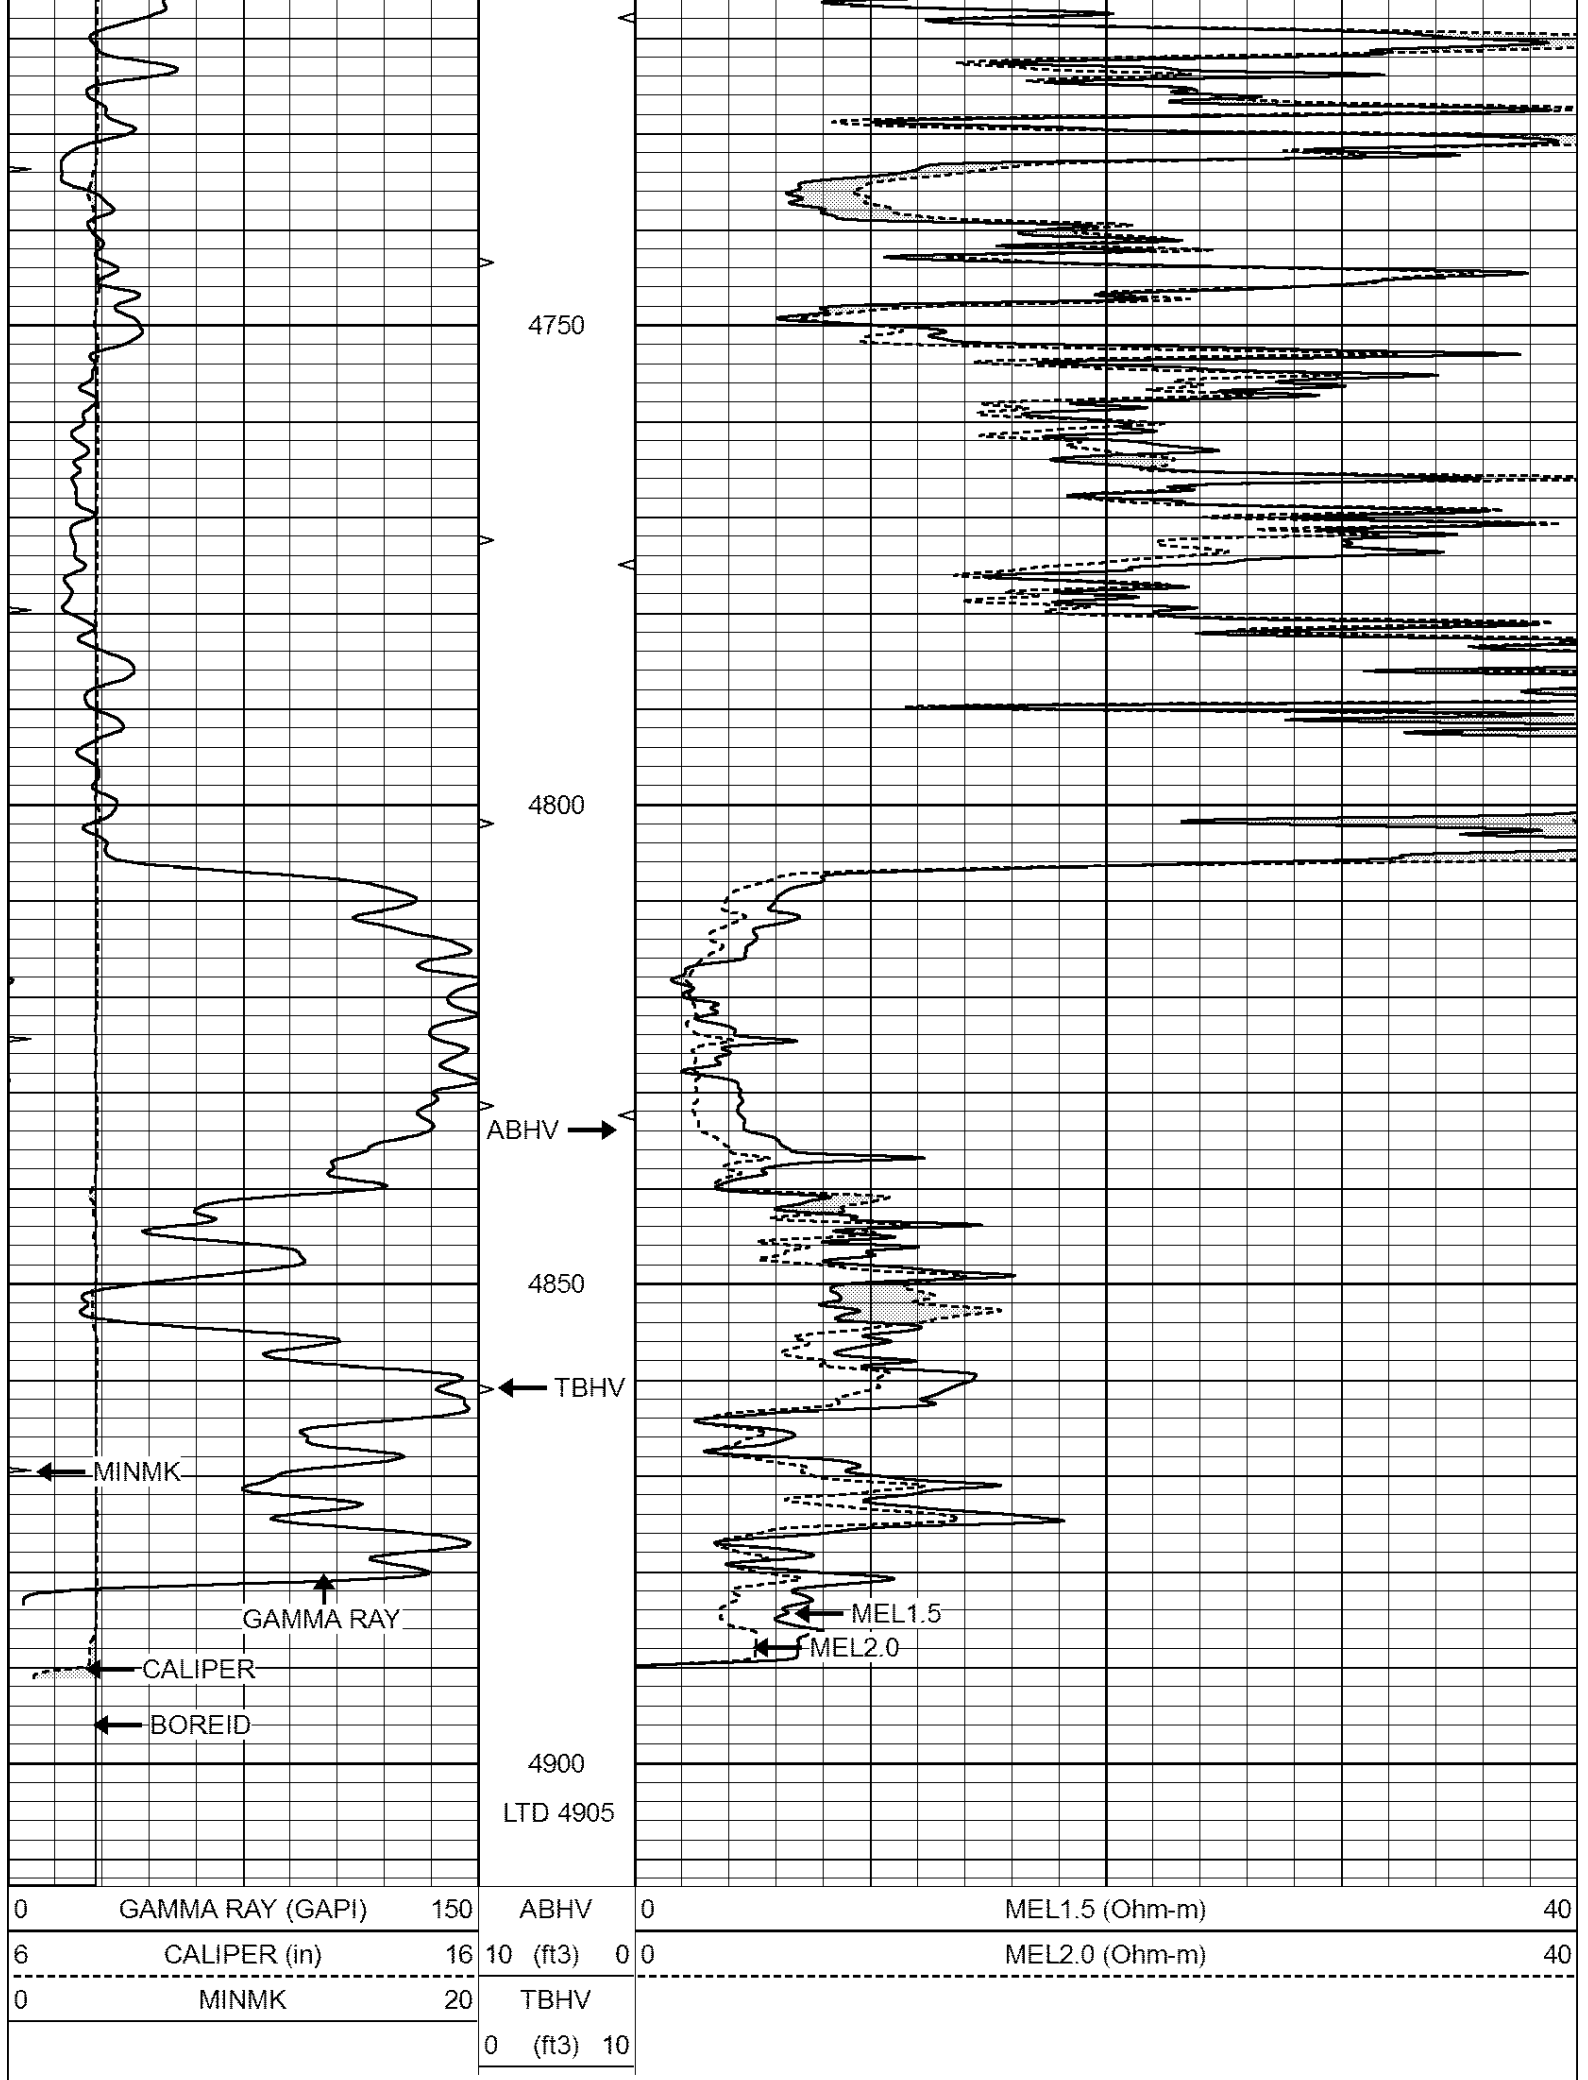


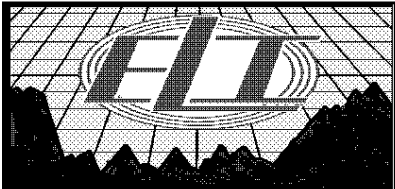


REPEAT SECTION

Database File: 4459pe.db
Dataset Pathname: pass8.1
Presentation Format: _micro
Dataset Creation: Mon Nov 18 15:41:03 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

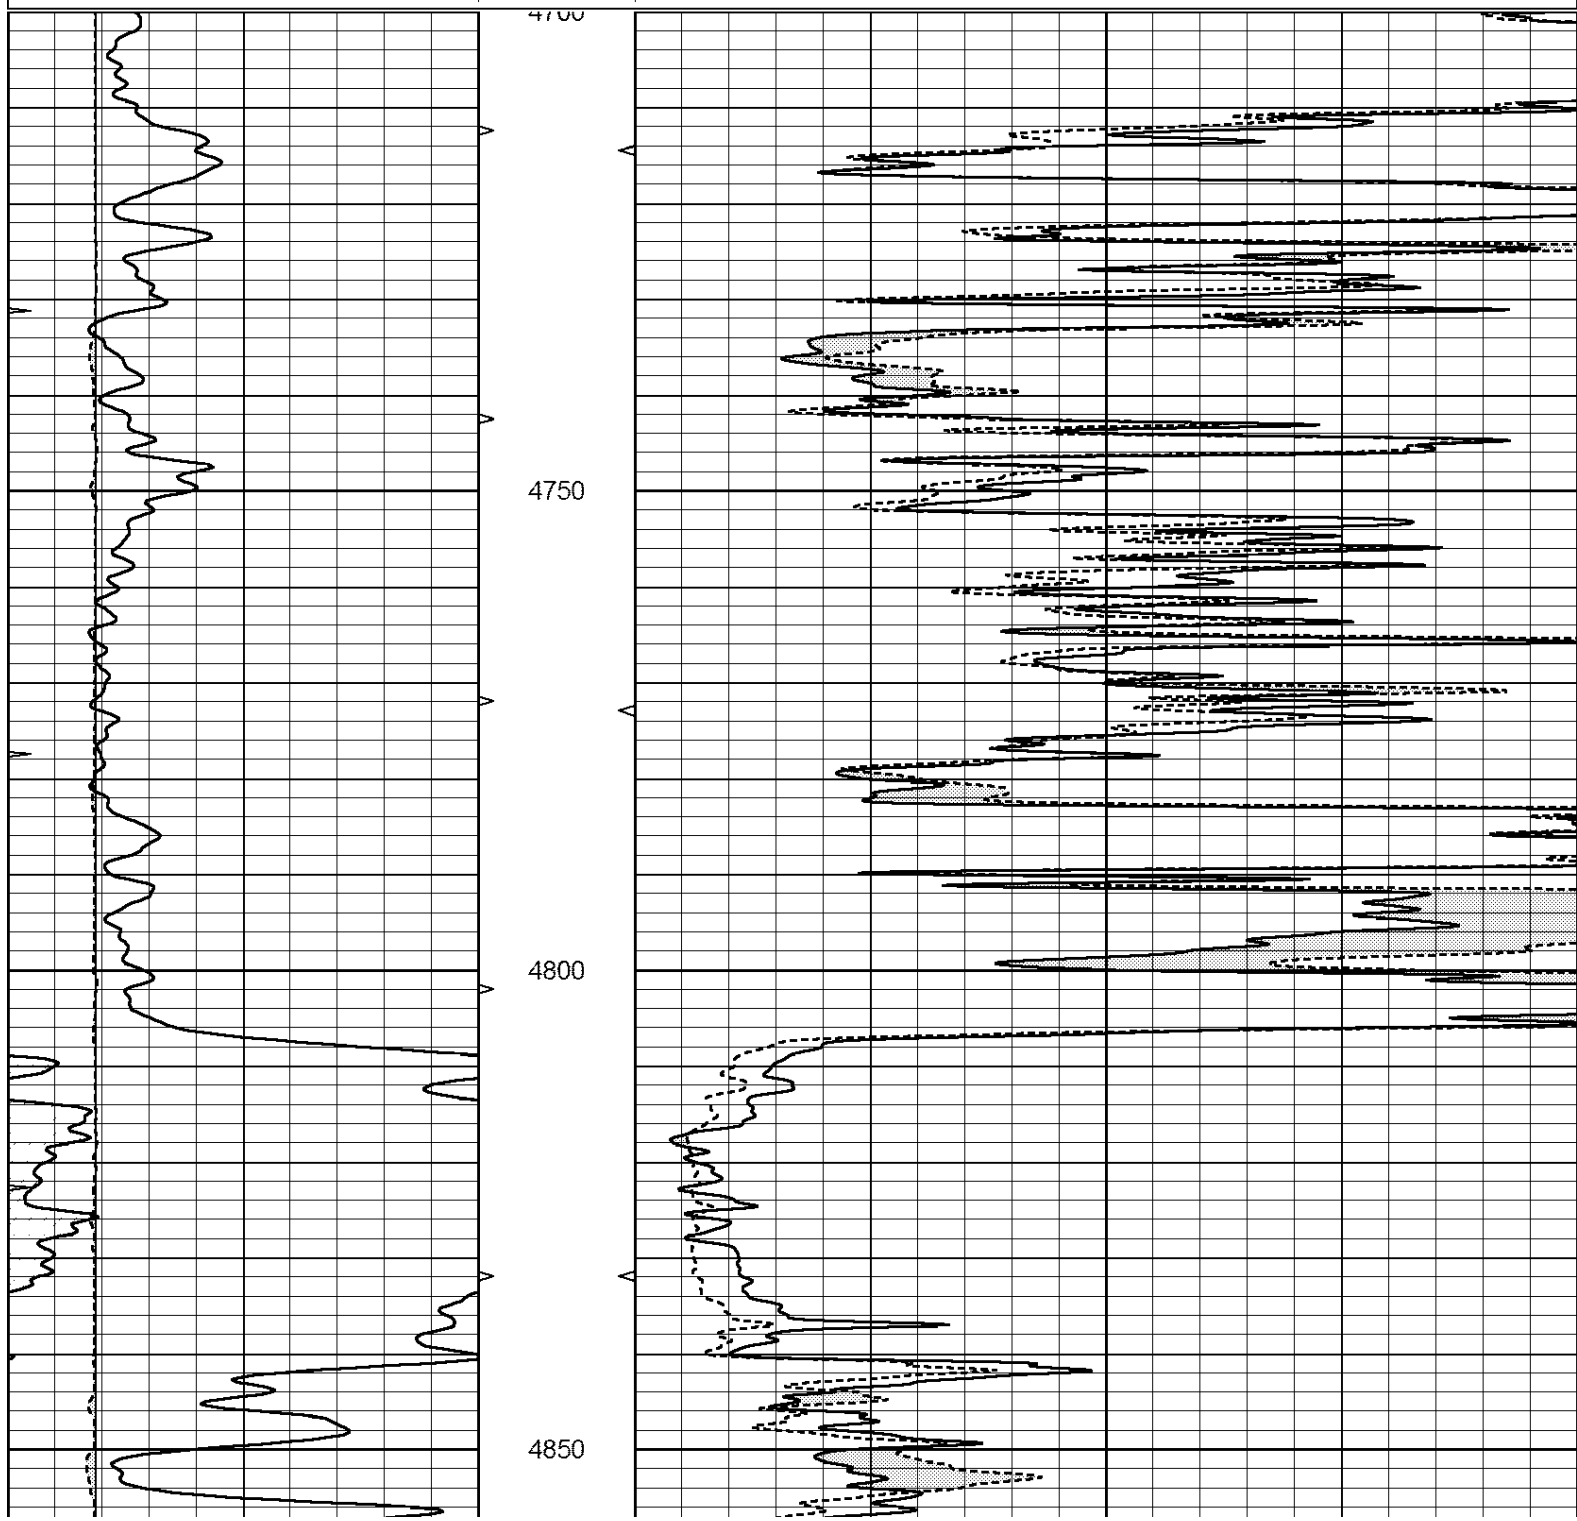

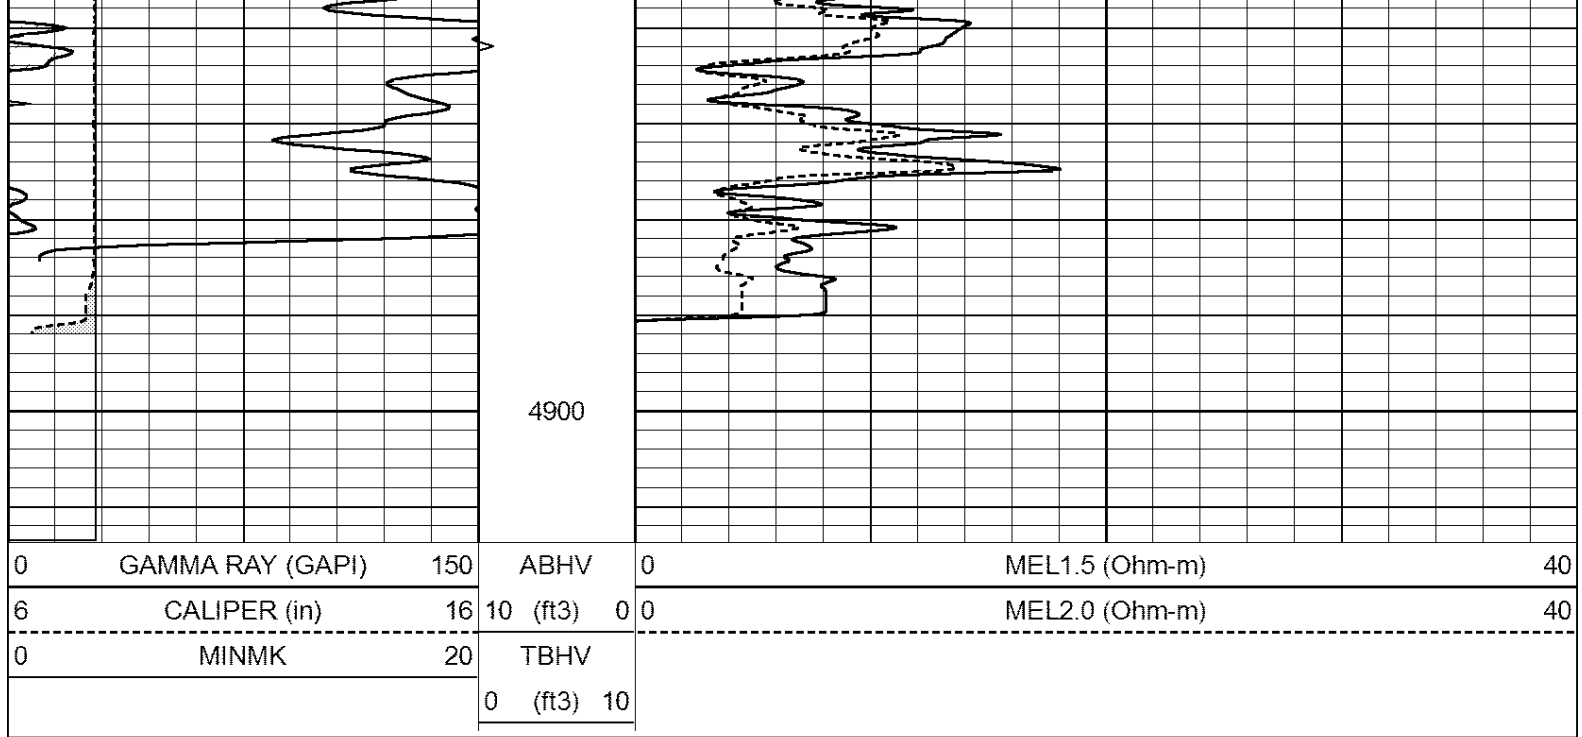

Calibration Report

Database File: 4459pe.db
 Dataset Pathname: pass8.1
 Dataset Creation: Mon Nov 18 15:41:03 2019

MICRO Calibration Report

Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Sat Oct 26 06:47:35 2019	
Caliper Calibration:	Gain=2.030	Offset=6.505
References	Low Cal	High Cal
Readings	9.500	13.000
	0.308	2.032
1.5" Calibration:	Gain=36.134	Offset=-1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	0.832
2" Calibration:	Gain=42.000	Offset=-0.300
References	Low Cal	High Cal
Readings	0.000	20.000
	0.022	0.793

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Thu Oct 24 16:06:54 2019	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5800	GAPI/cps