



MICRO LOG

Company VINCENT OIL CORPORATION

Well FEIKERT FARMS #5-8

Field KINGSDOWN NORTHWEST

County FORD State KANSAS

Location: API #: 15-057-21030-0000

502' FNL & 496' FEL

Other Services
CDL/CNL/PE
DIL/SON

SEC 8 TWP 29S RGE 22W

Elevation

Permanent Datum GROUND LEVEL Elevation 2495
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 2507
D.F. 2505
G.L. 2495

Date 11/11/19

Run Number TWO

Depth Driller 5320

Depth Logger 5322

Bottom Logged Interval 5304

Top Log Interval 4200

Casing Driller 8 5/8" @ 690'

Casing Logger 690'

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/57

pH / Fluid Loss 11.0/8.4

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.5 @ 59F

Rmf @ Meas. Temp 1.1 @ 59F

Rmc @ Meas. Temp 1.8 @ 59F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .69 @ 128F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 1111

Maximum Recorded Temperature 128F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By JIM HALL

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. - 1 NORTH TO WILDFIRE RD. - 1 EAST - SOUTH INTO





MAIN SECTION

Database File	4431pe.db
Dataset Pathname	pass7.2
Presentation Format	_micro
Dataset Creation	Mon Nov 11 12:04:33 2019
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

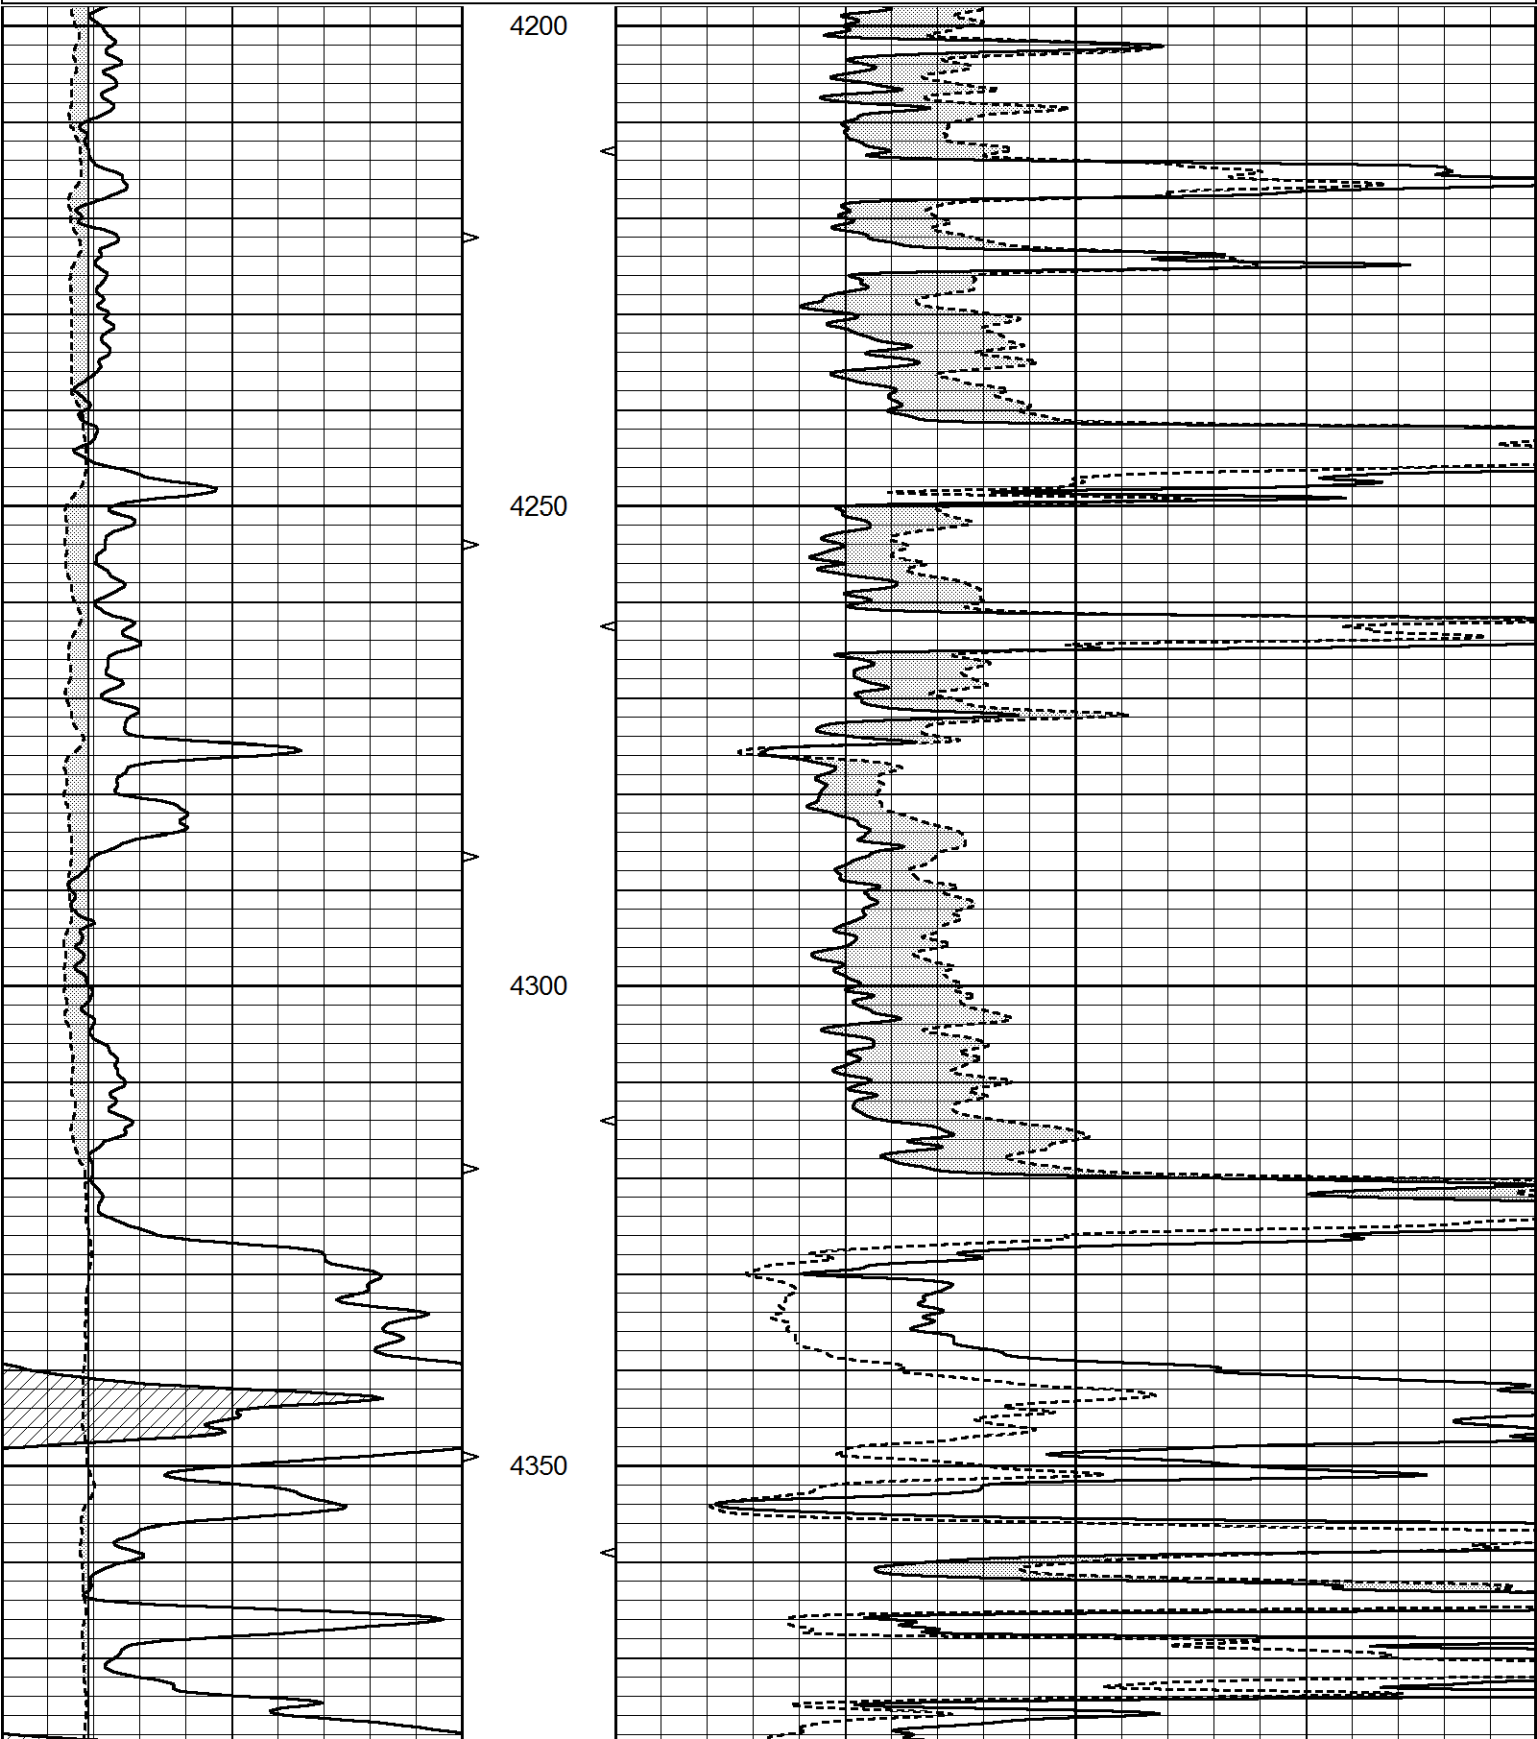

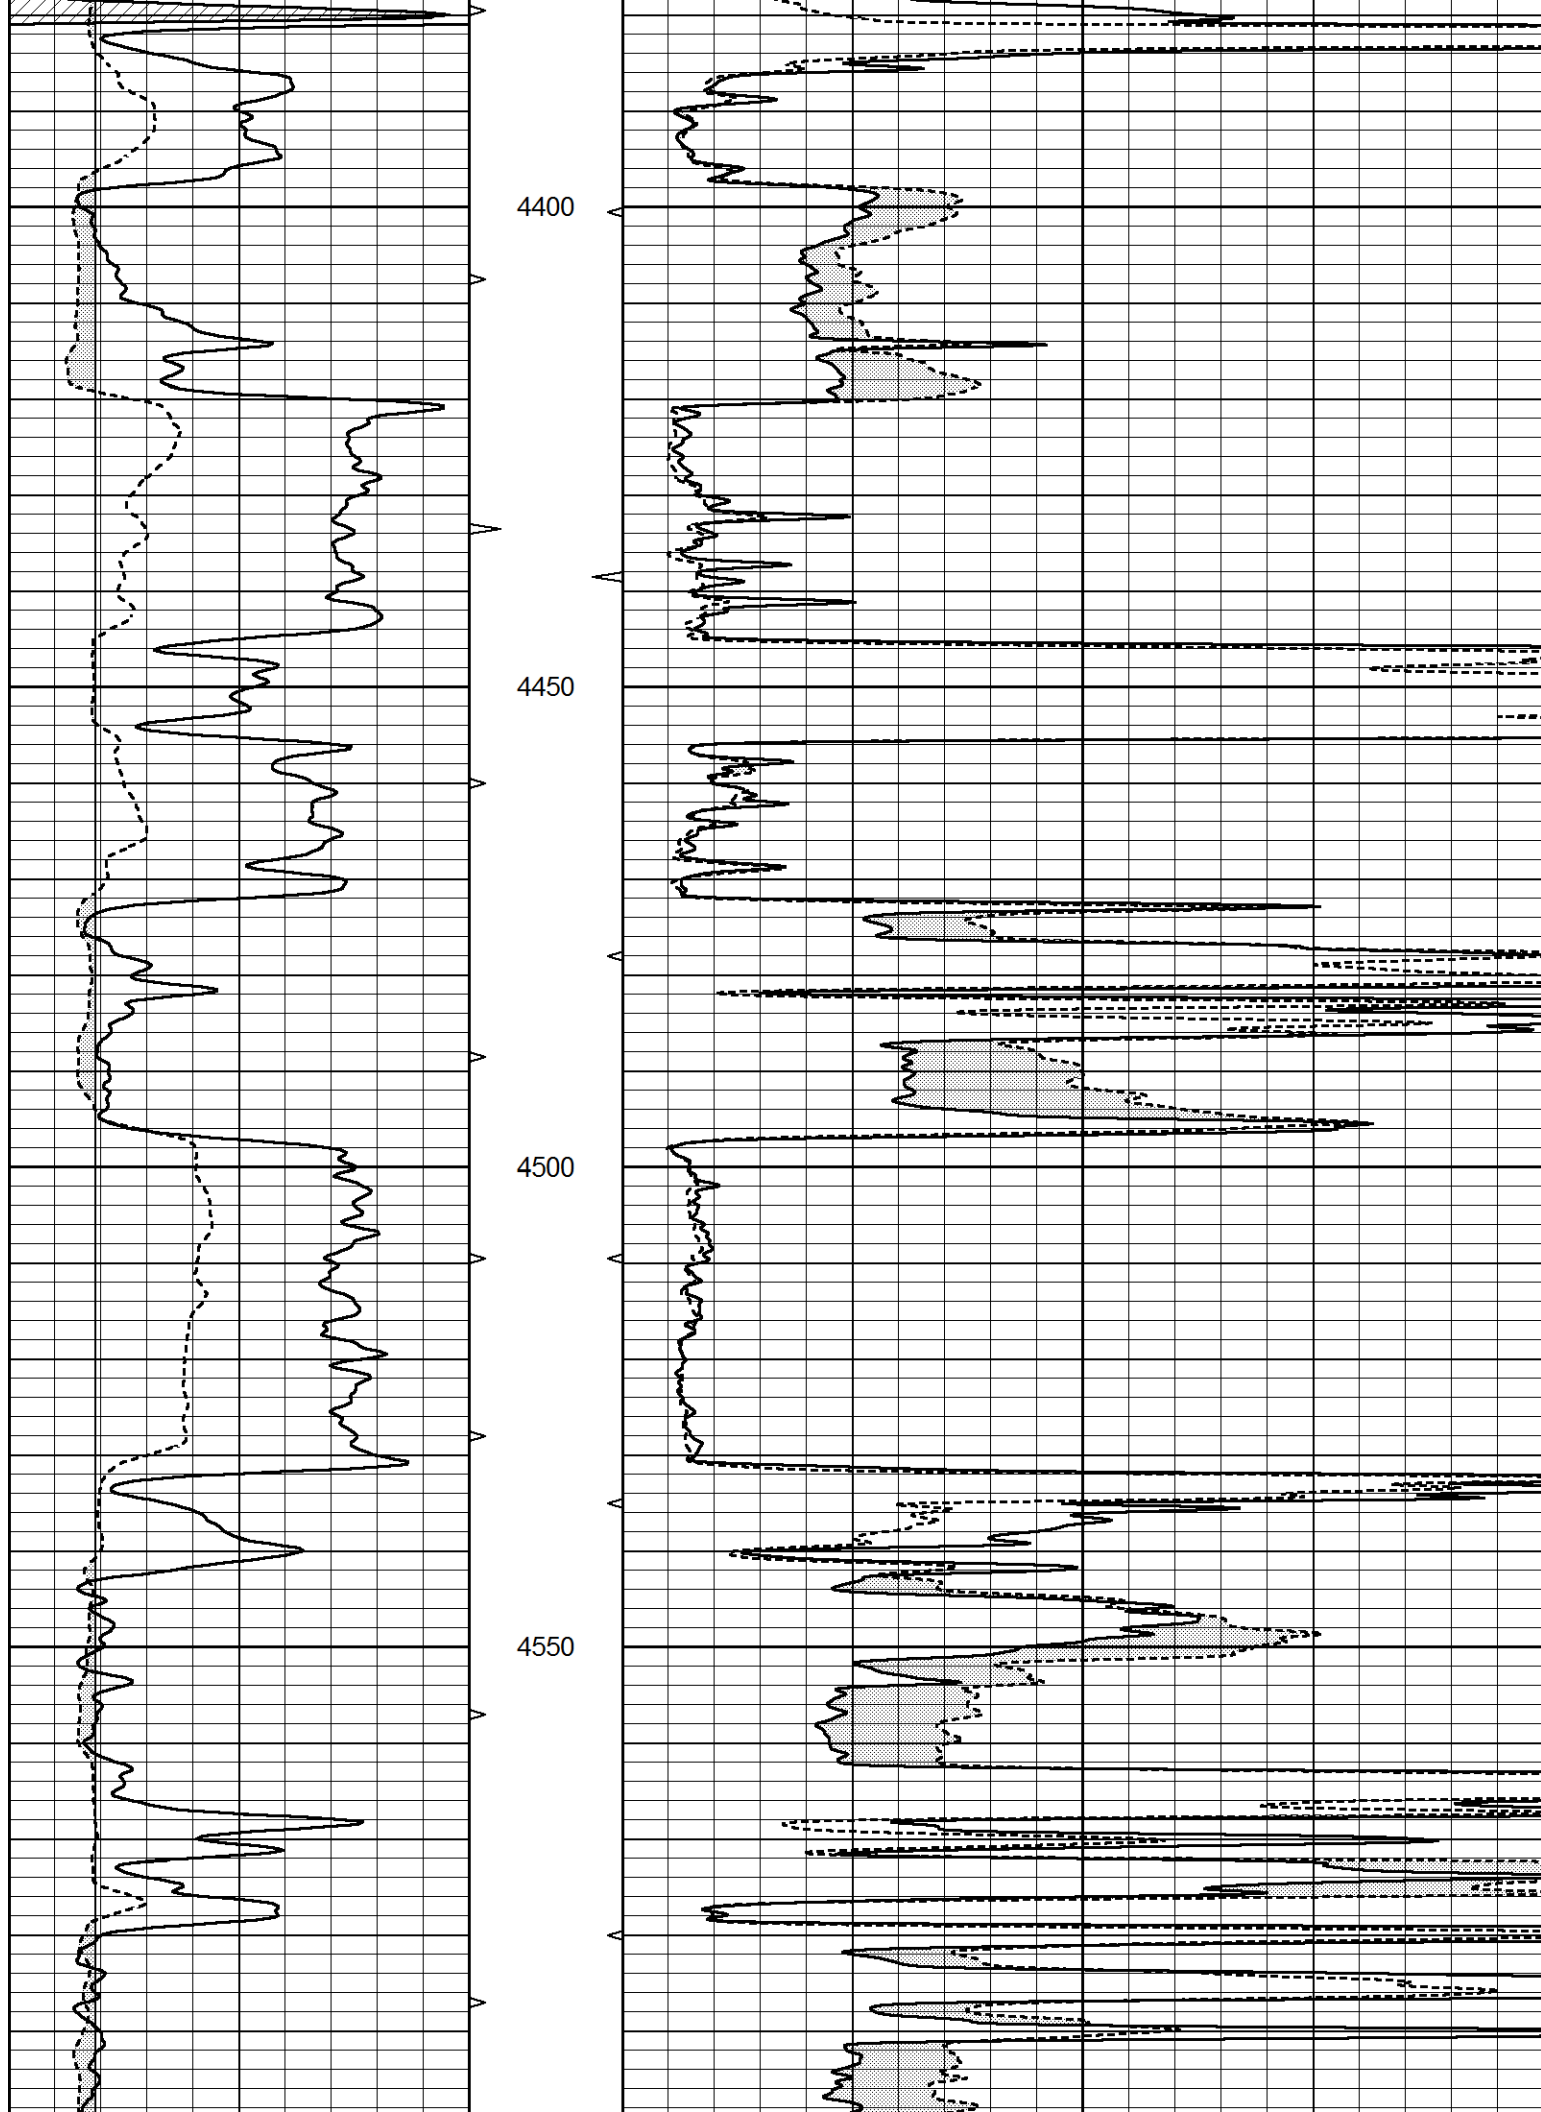

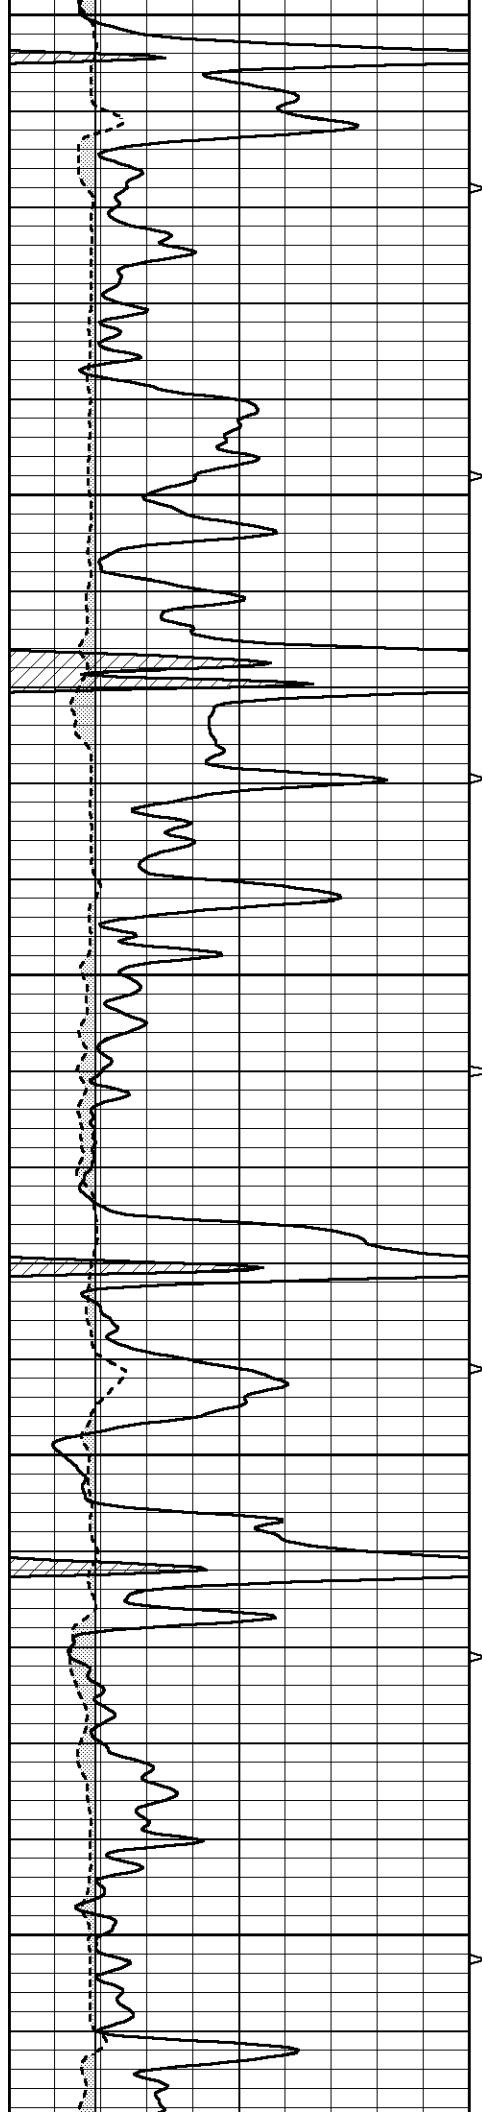


4600


4650

4700

4750

4800

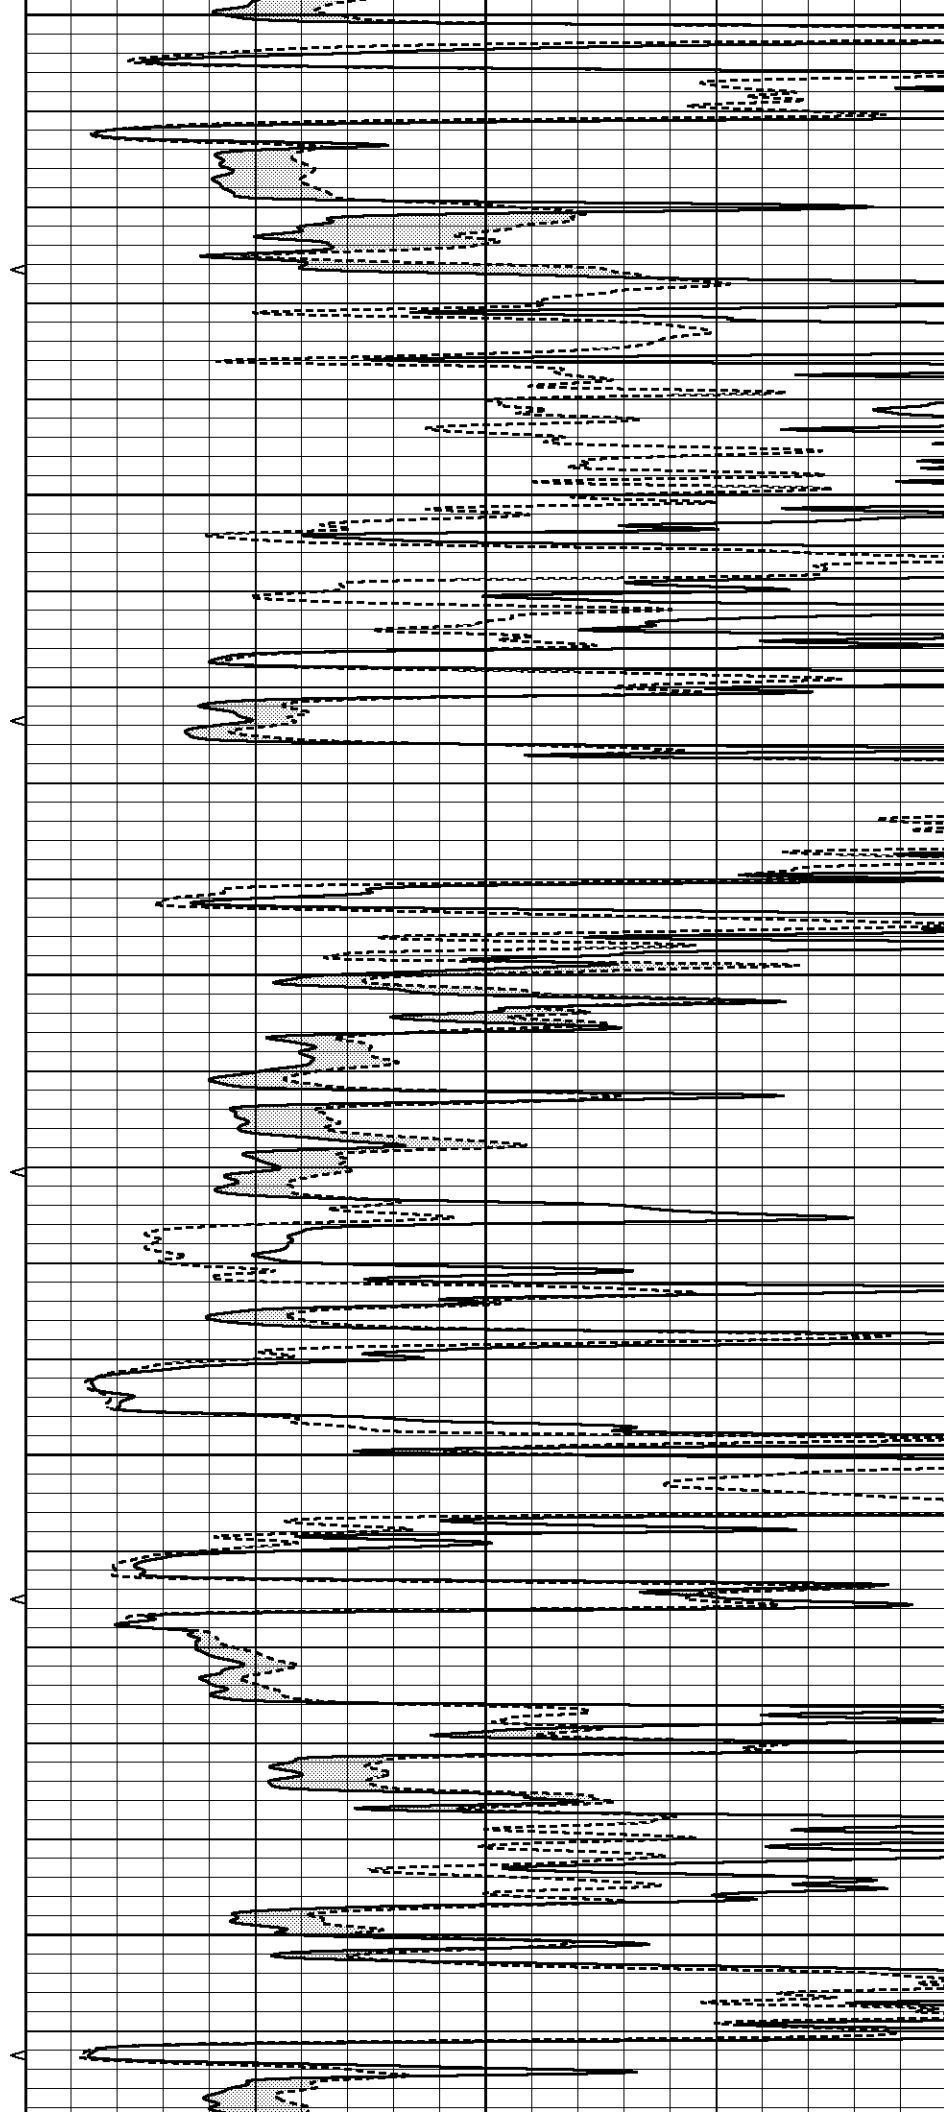

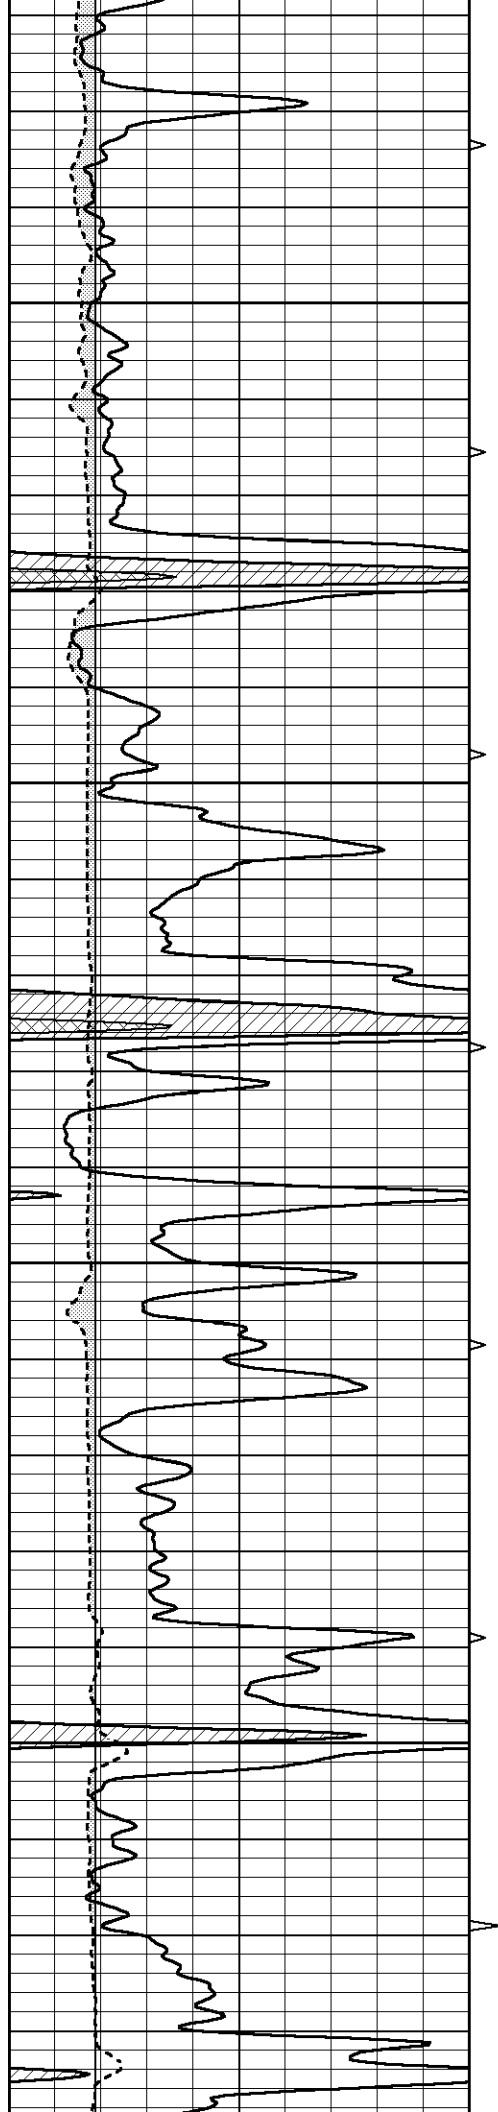



4850

4900

4950

5000

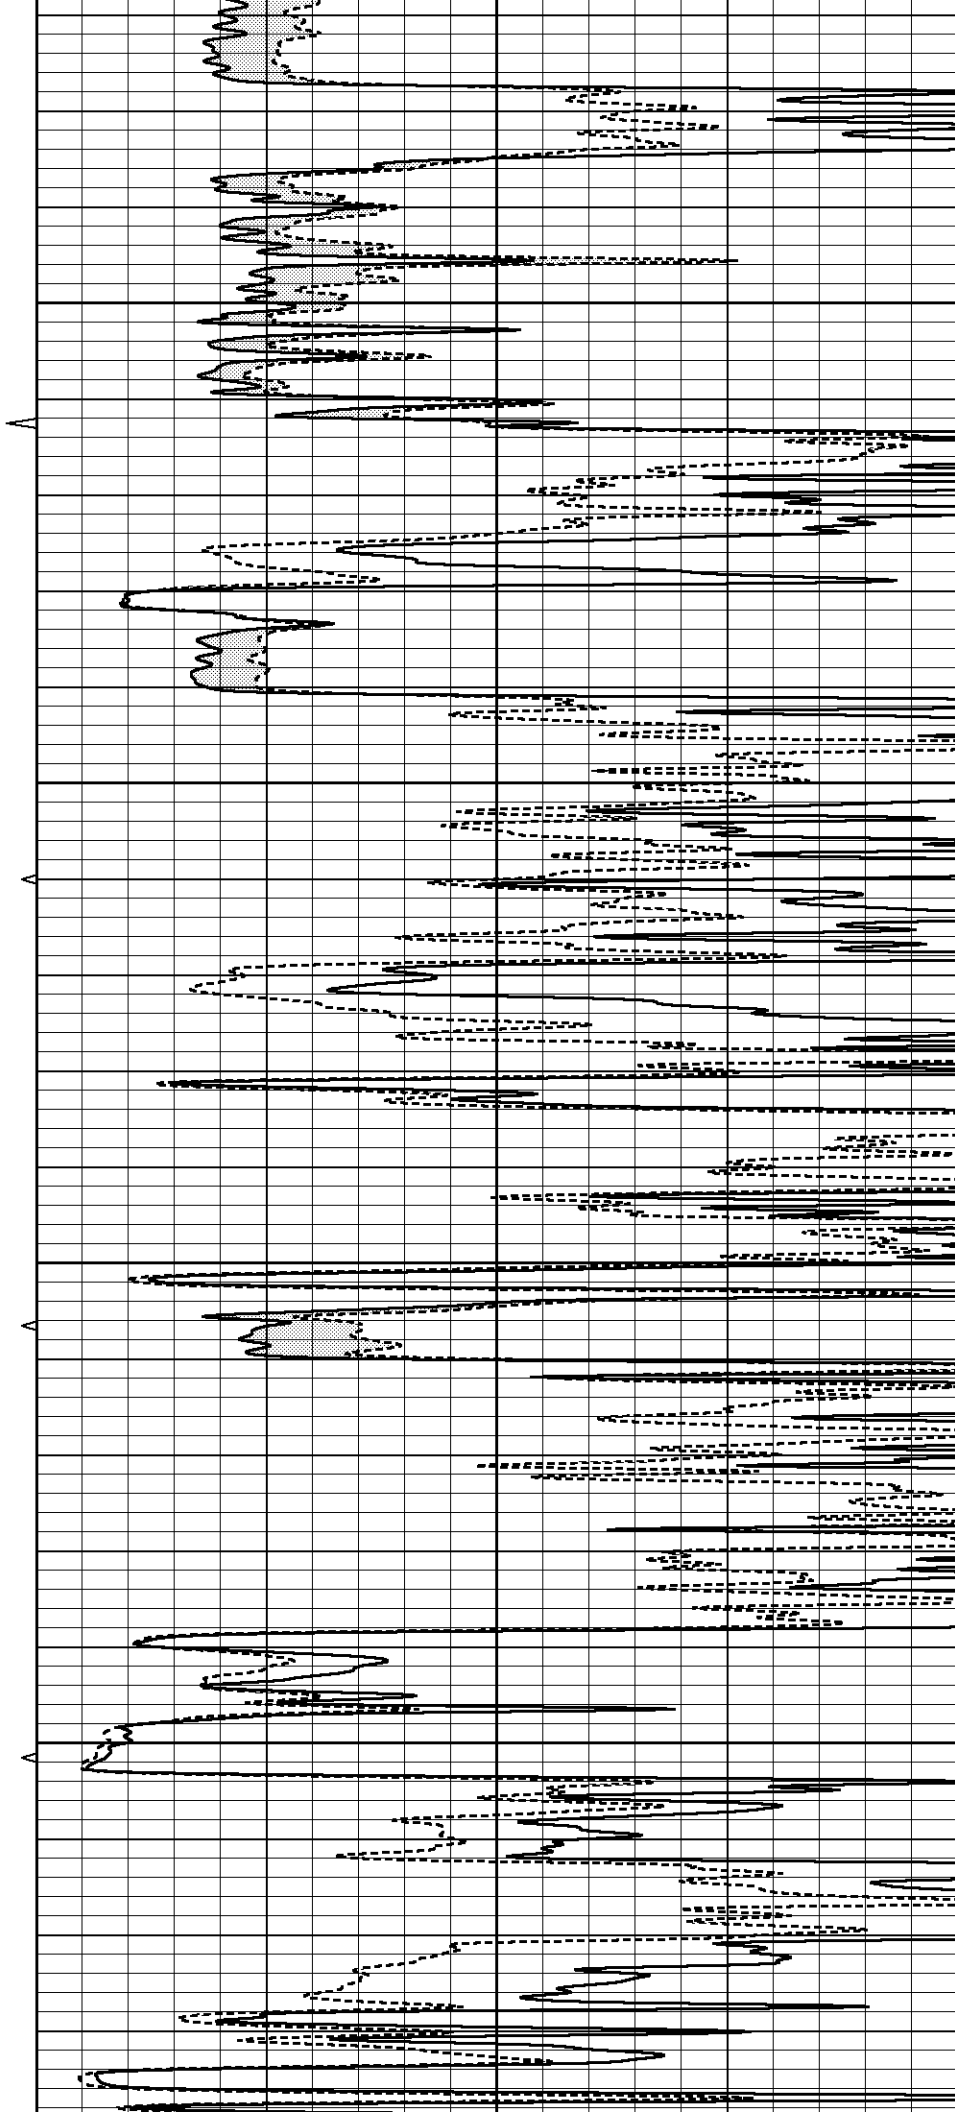

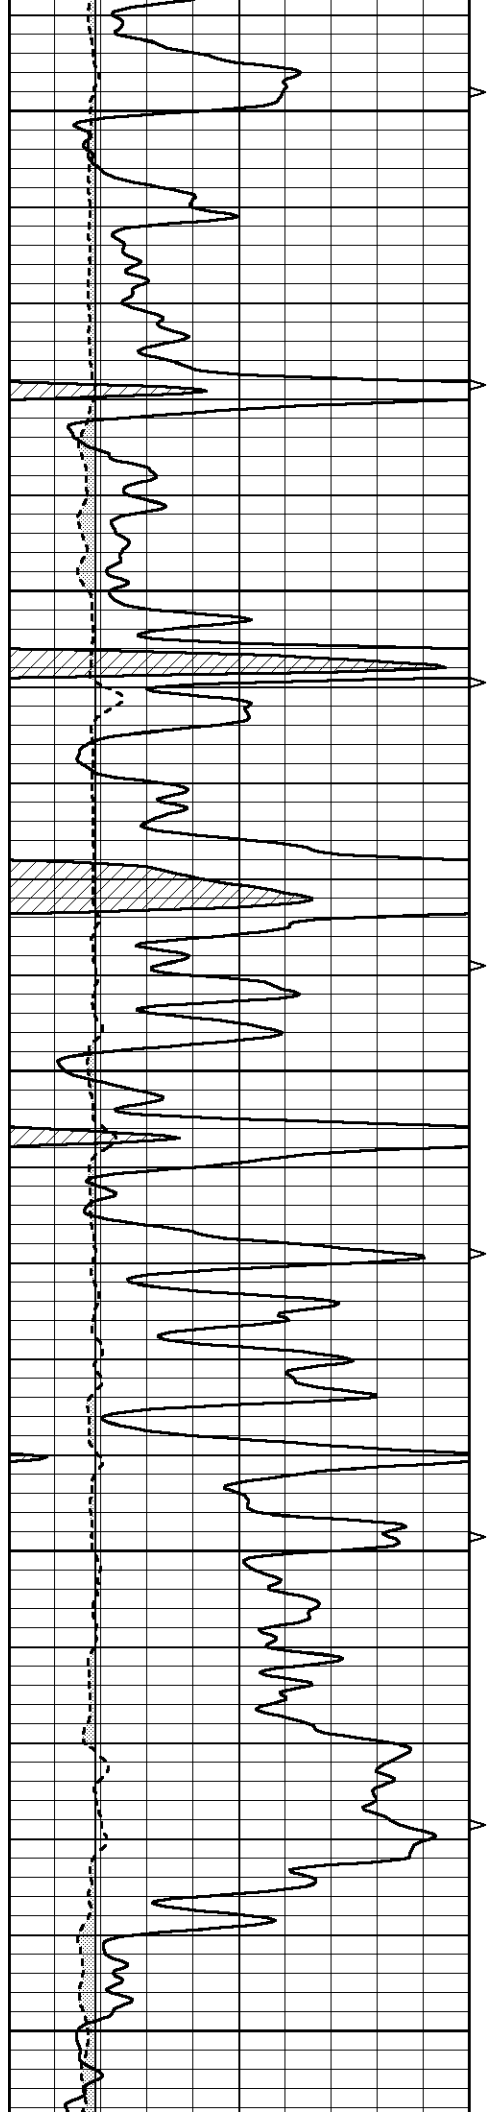


5050


5100

5150

5200


5250

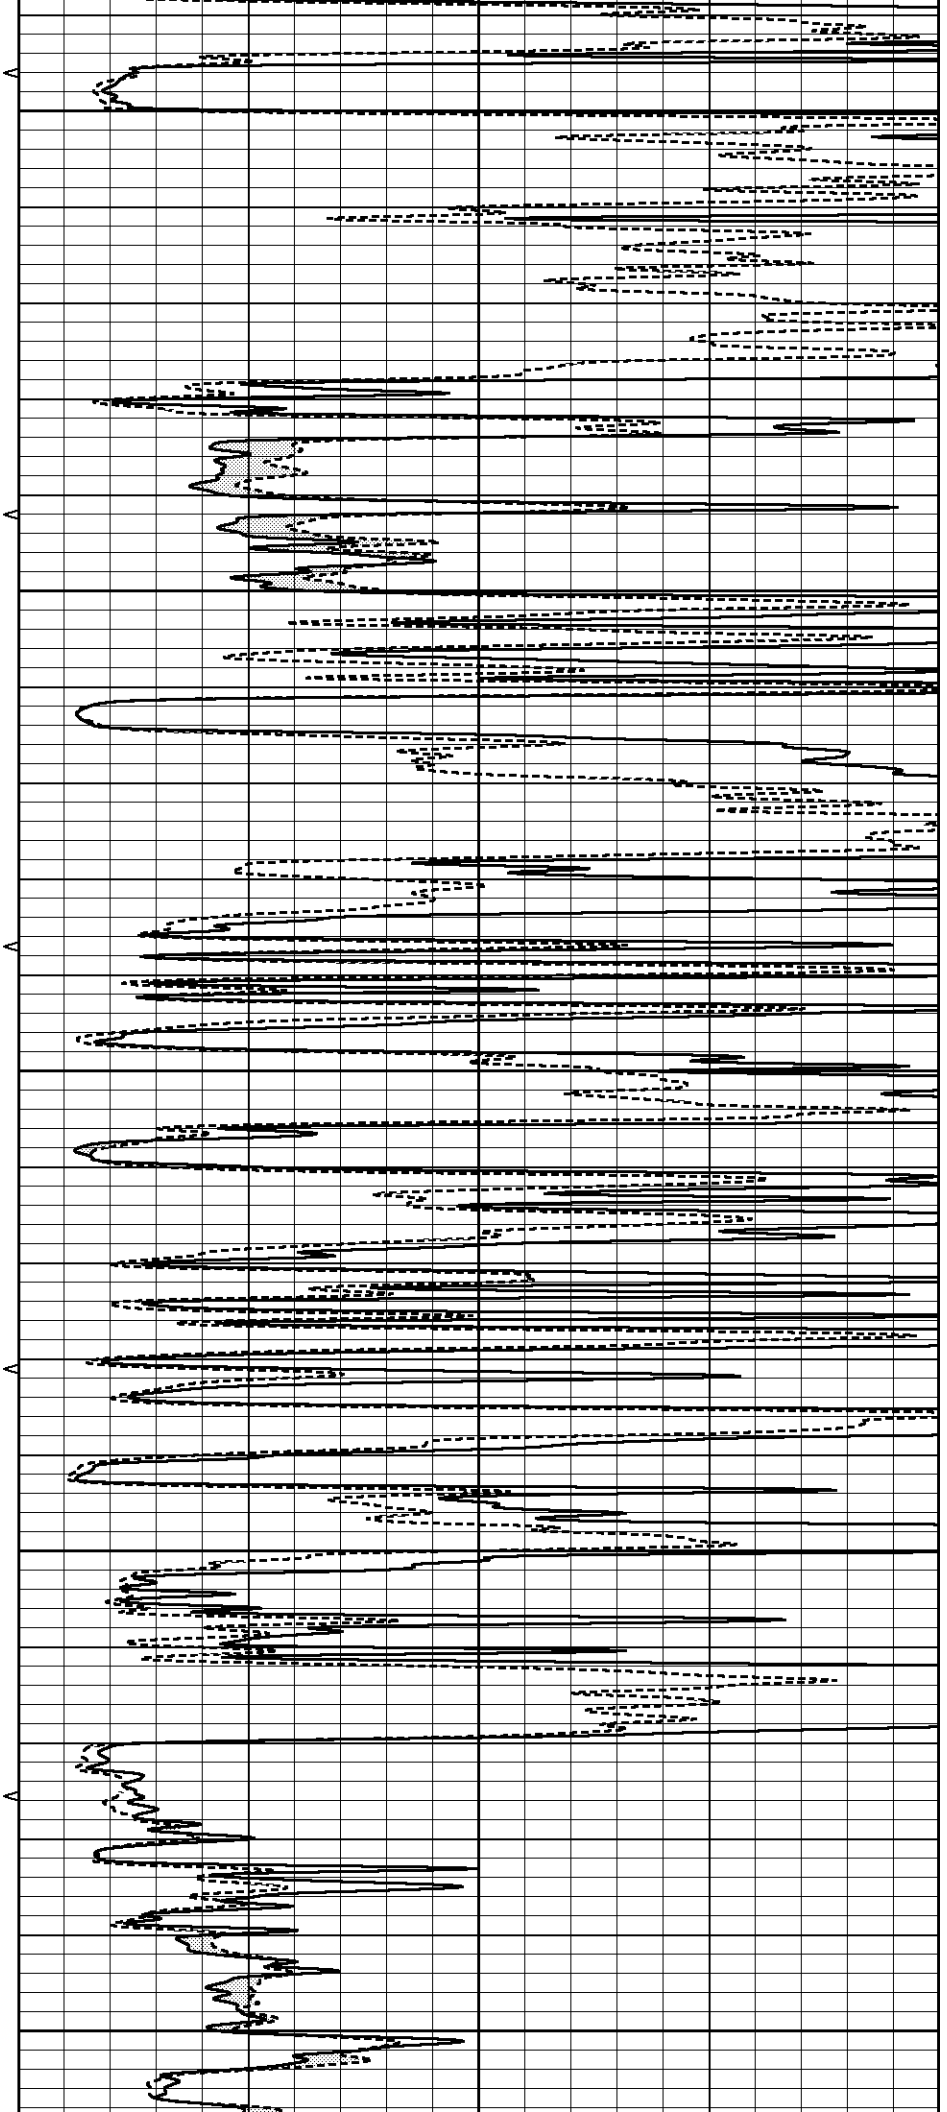


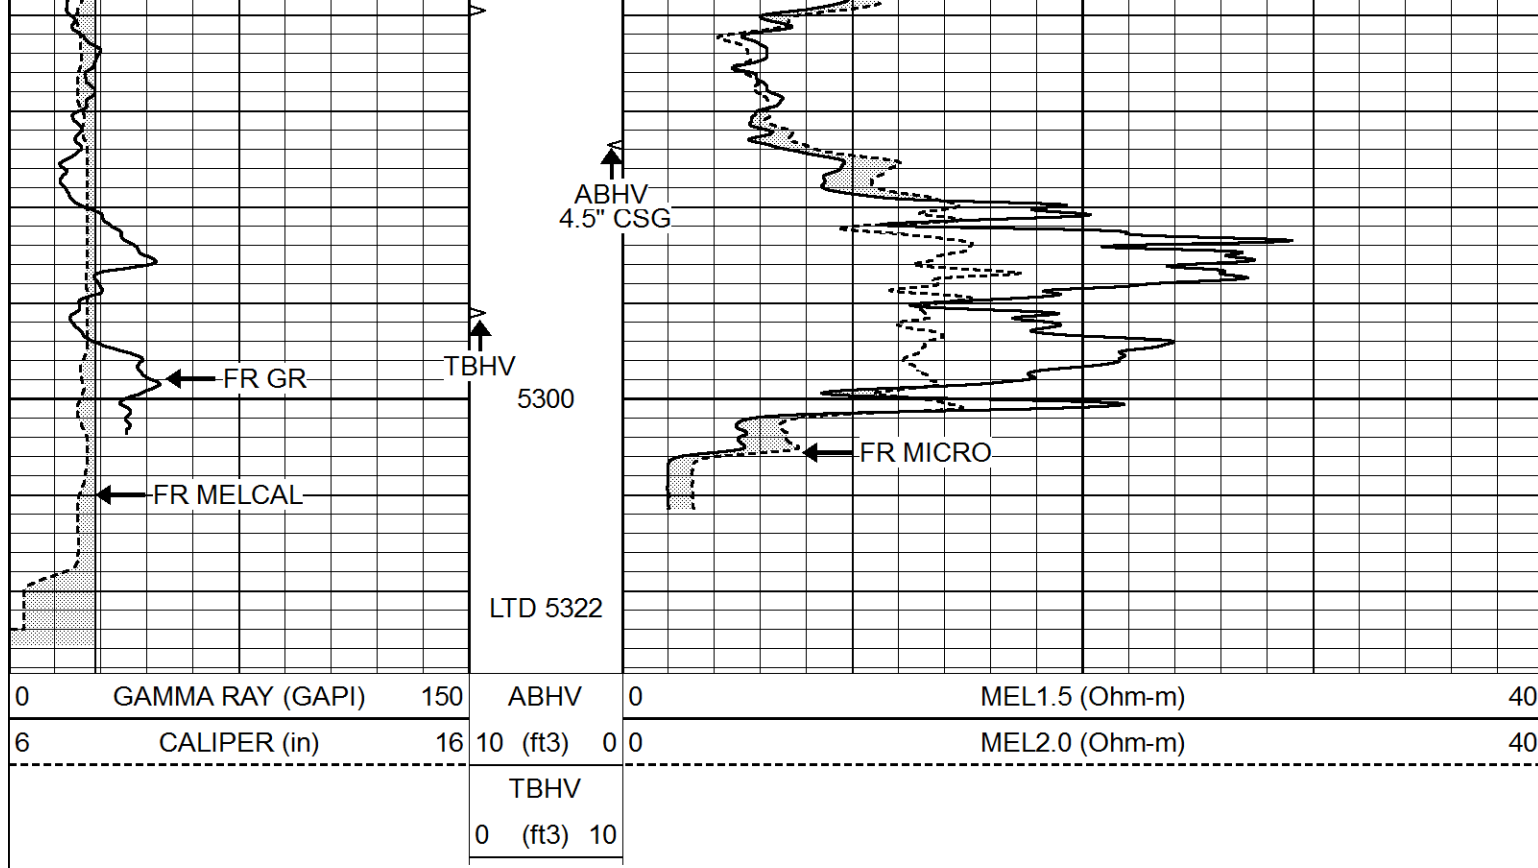

Database File 4431pe.db
Dataset Pathname pass6.2
Presentation Format _micro
Dataset Creation Mon Nov 11 12:02:00 2019
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

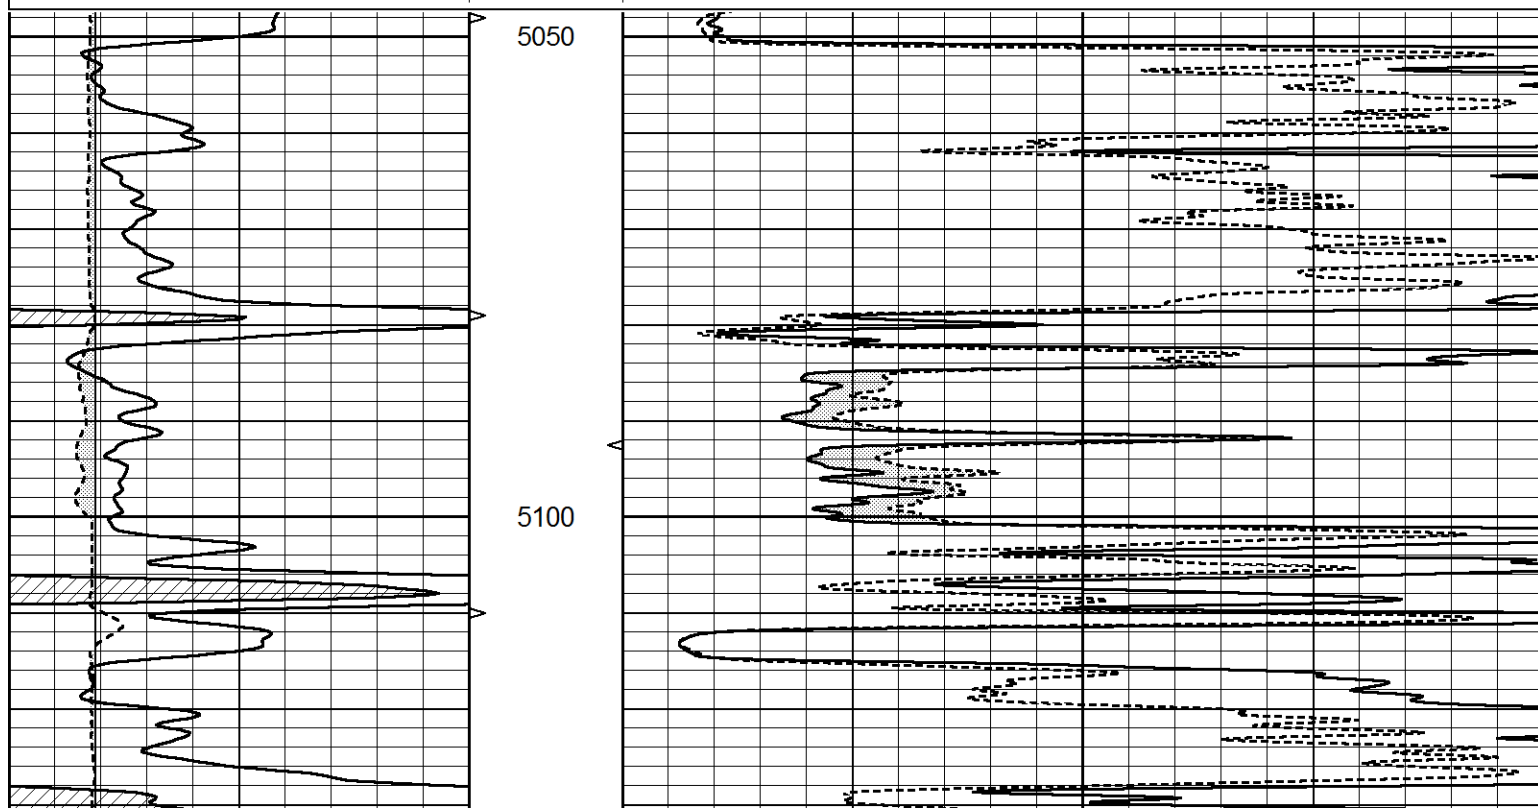

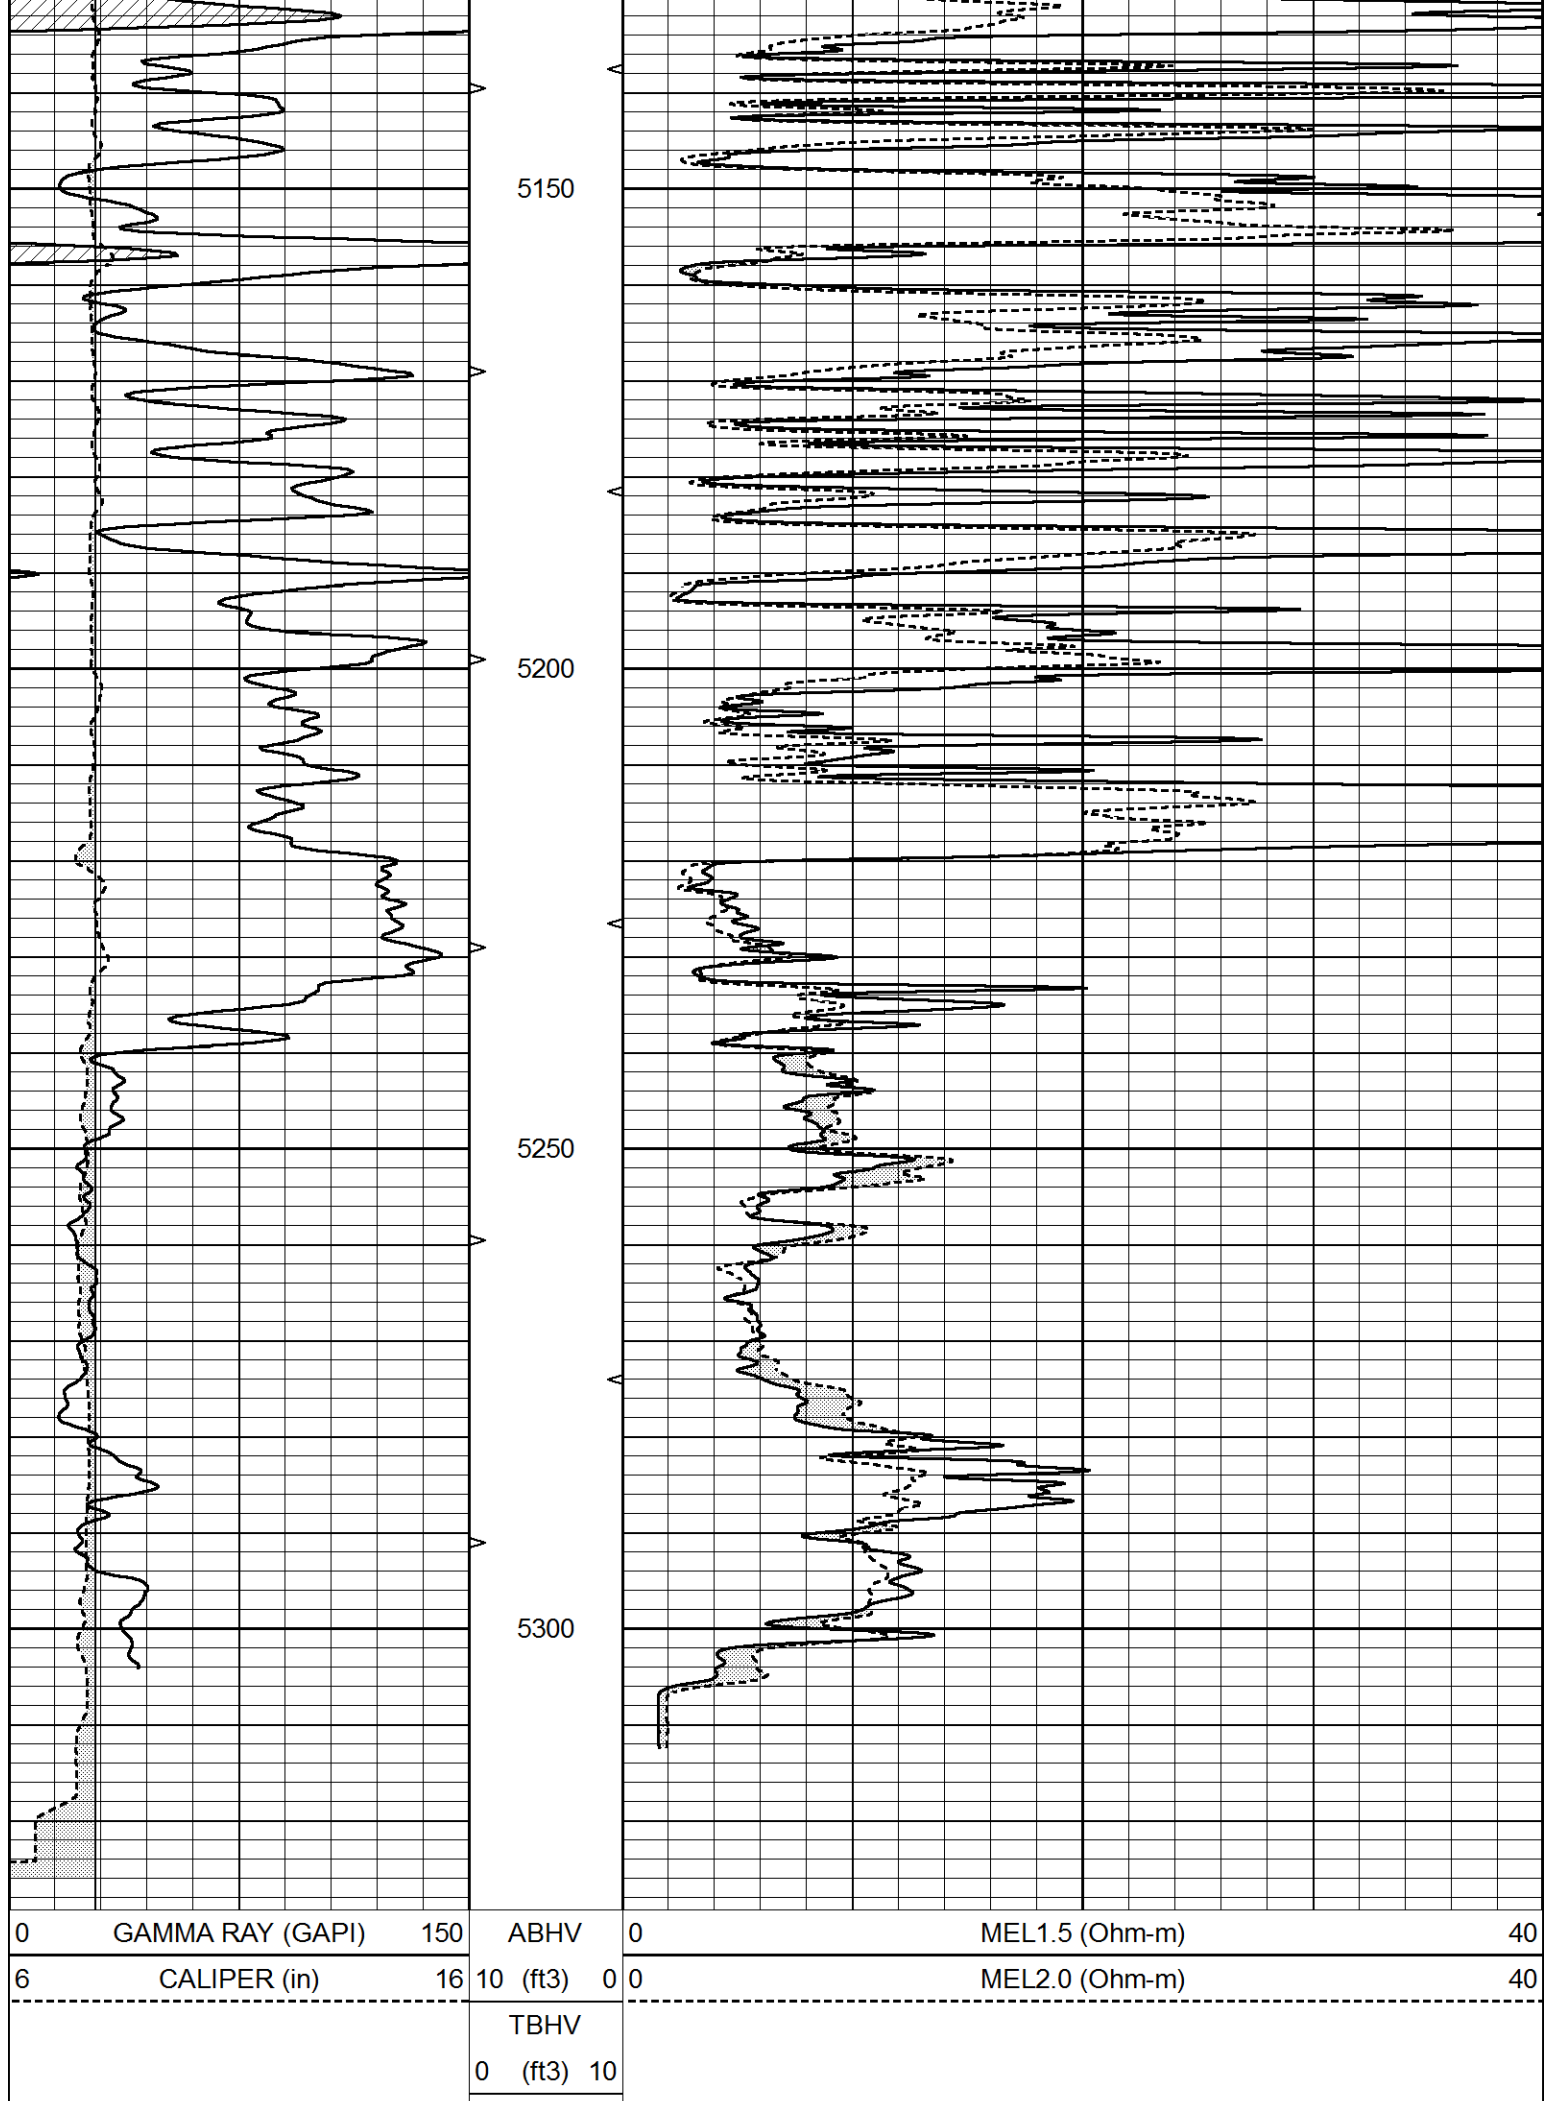

Database File		4431pe.db		Calibration Report				
Dataset Pathname		pass6.1						
Dataset Creation		Mon Nov 11 09:54:21 2019						
MICRO_USR Calibration Report								
Serial Number:		070910						
Tool Model:		ProbeL						
Performed:		Fri Aug 03 23:13:00 2018						
Caliper Calibration:		Gain=7.336		Offset=3.017				
References		Low Cal		High Cal				
Readings		8.000		14.000				
		0.652		1.470				
1.5" Calibration:		Gain=55.000		Offset=-0.067				
References		Low Cal		High Cal				
Readings		0.000		20.000				
		0.004		1.335				
2" Calibration:		Gain=75.000		Offset=-0.779				
References		Low Cal		High Cal				
Readings		0.000		20.000				
		0.004		1.029				
Microlog Calibration Report								
Serial-Model:		070910-ProbeL						
Performed:		(Not Performed)						
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:		070558						
Tool Model:		Probe1						
Performed:		Mon Jan 21 19:38:56 2019						
Calibrator Value:		1.0		GAPI				
Background Reading:		0.0		cps				
Calibrator Reading:		1.0		cps				
Sensitivity:		0.2500		GAPI/cps				