



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company		FALCON EXPLORATION, INC.	
Well		CIRCLE "N" TRUST #1-6 (SE)	
Field		COLUSA SOUTH	
County		GRAY	
State		KANSAS	
Location:		APL # : 15-069-20481-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		1850' FSL & 2175' FEL	
Drilling Measured From		NE - SW - NW - SE	
SEC 6		TWP 28S	
RGE 30W		Elevation	
K.B. 2839		D.F. 2837	
G.L. 2828			
Date	9/3/14		
Run Number	TWO		
Depth Driller	5450		
Depth Logger	5450		
Bottom Logged Interval	5434		
Top Log Interval	2600		
Casing Driller	8 5/8" @ 1840'		
Casing Logger	1840		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,500 PPM	
Density / Viscosity	9.0/42		
pH / Fluid Loss	10.5/8.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.800 @ 100F		
Rmf @ Meas. Temp	.600 @ 100F		
Rmc @ Meas. Temp	.960 @ 100F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.620 @ 129F		
Time Circulation Stopped	6 HOURS		
Time Logger on Bottom	1:30 P.M.		
Maximum Recorded Temperature	129F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEITH REAVIS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
COPELAND, KS., 7N. ON BLKTOP, 1/2W., S. INTO



**COMPLETION
& PRODUCTION**

MAIN SECTION

Database File:

25875pe.db

Dataset Pathname:

pass6.1

Presentation Format:

micro


Dataset Creation:



Wed Sep 03 18:13:37 2014 by Calc SOC 120430



Charted by:


Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

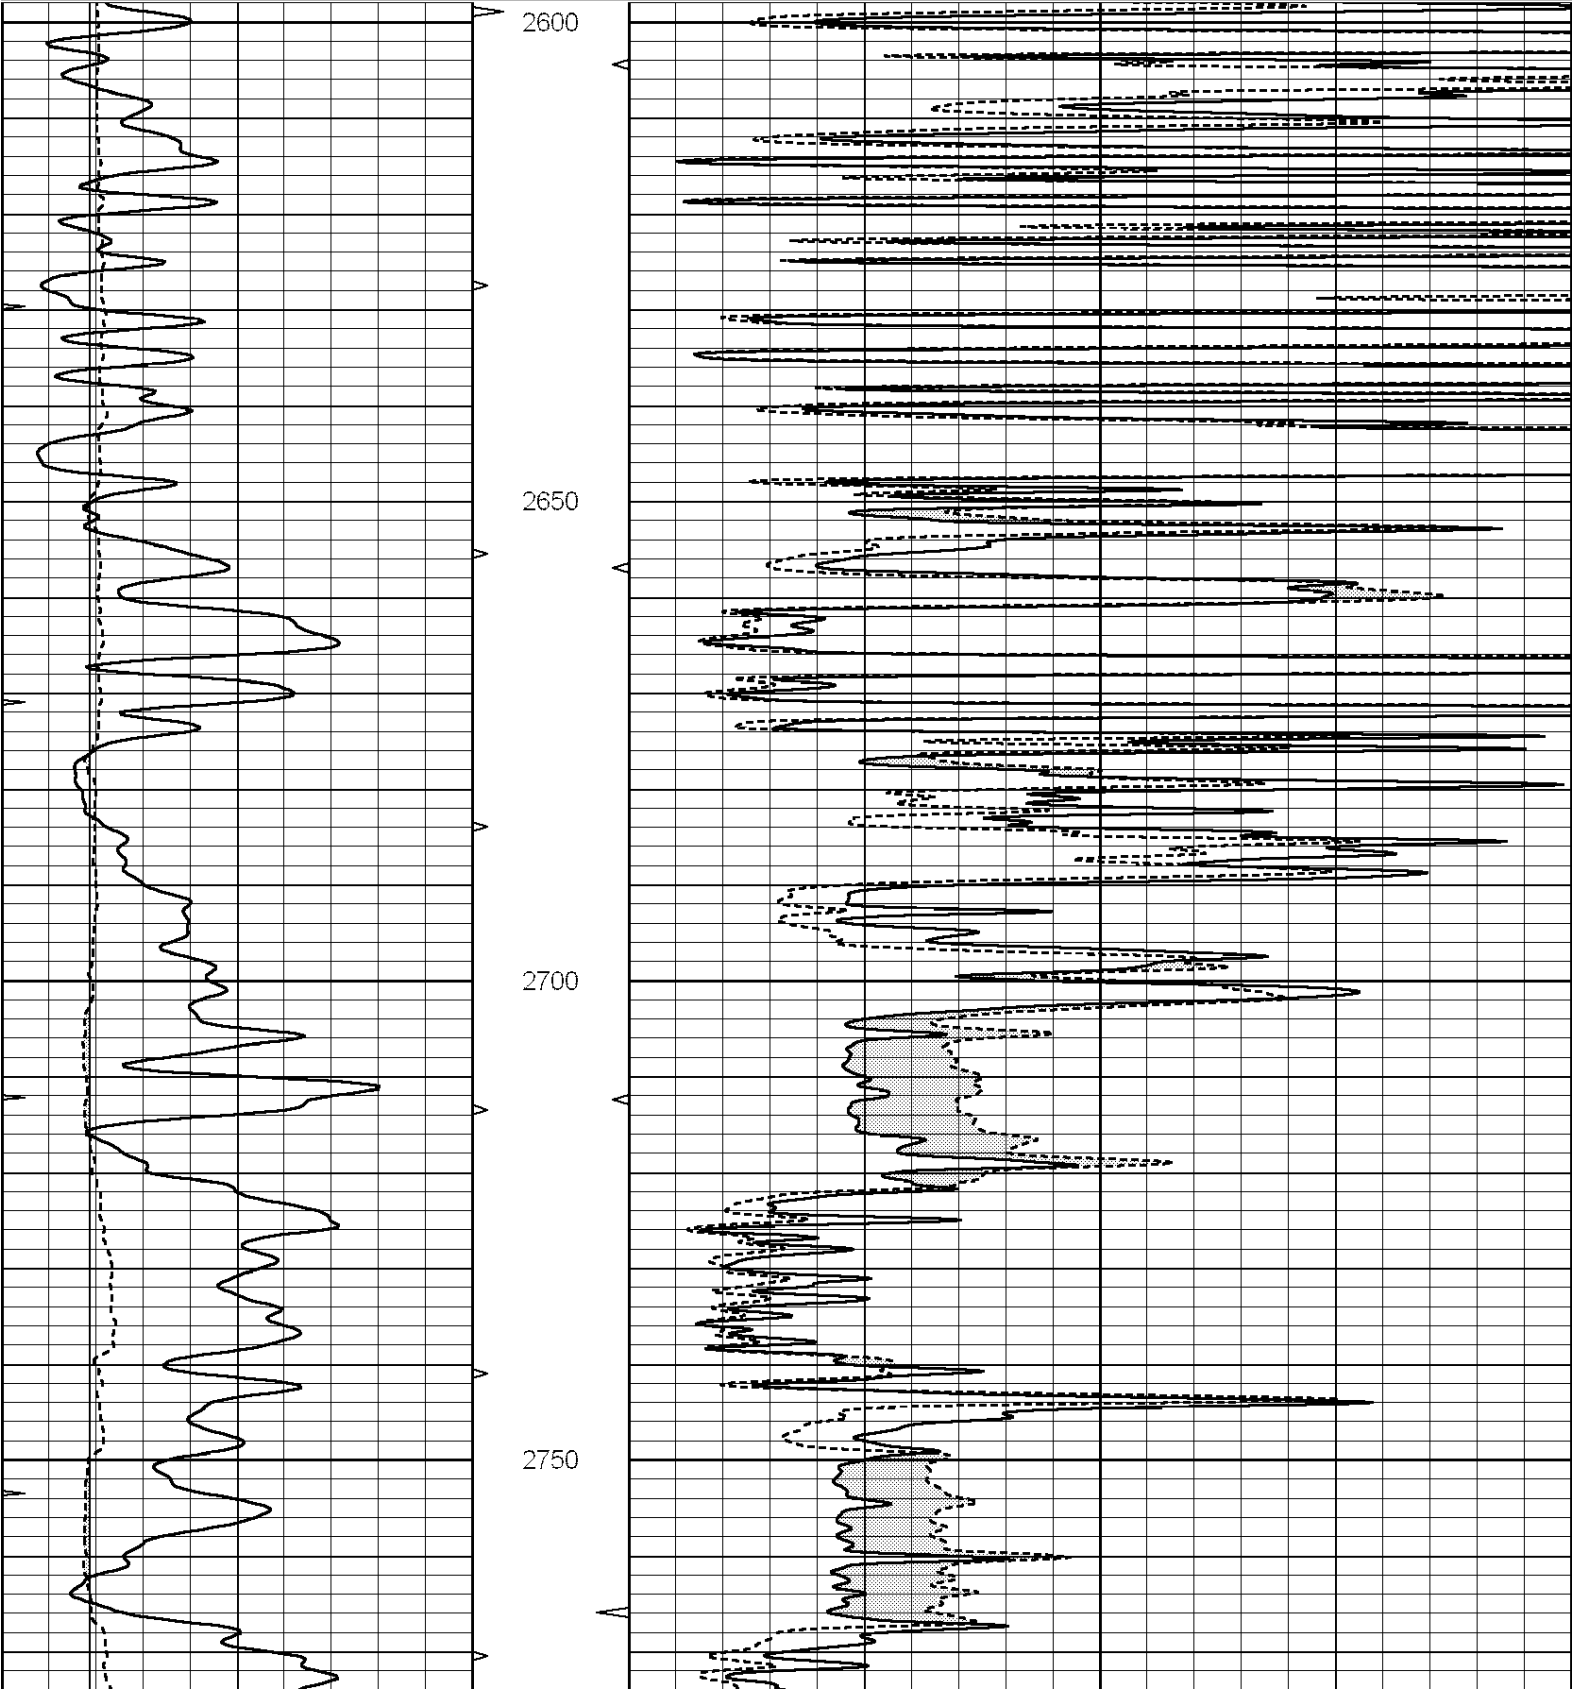

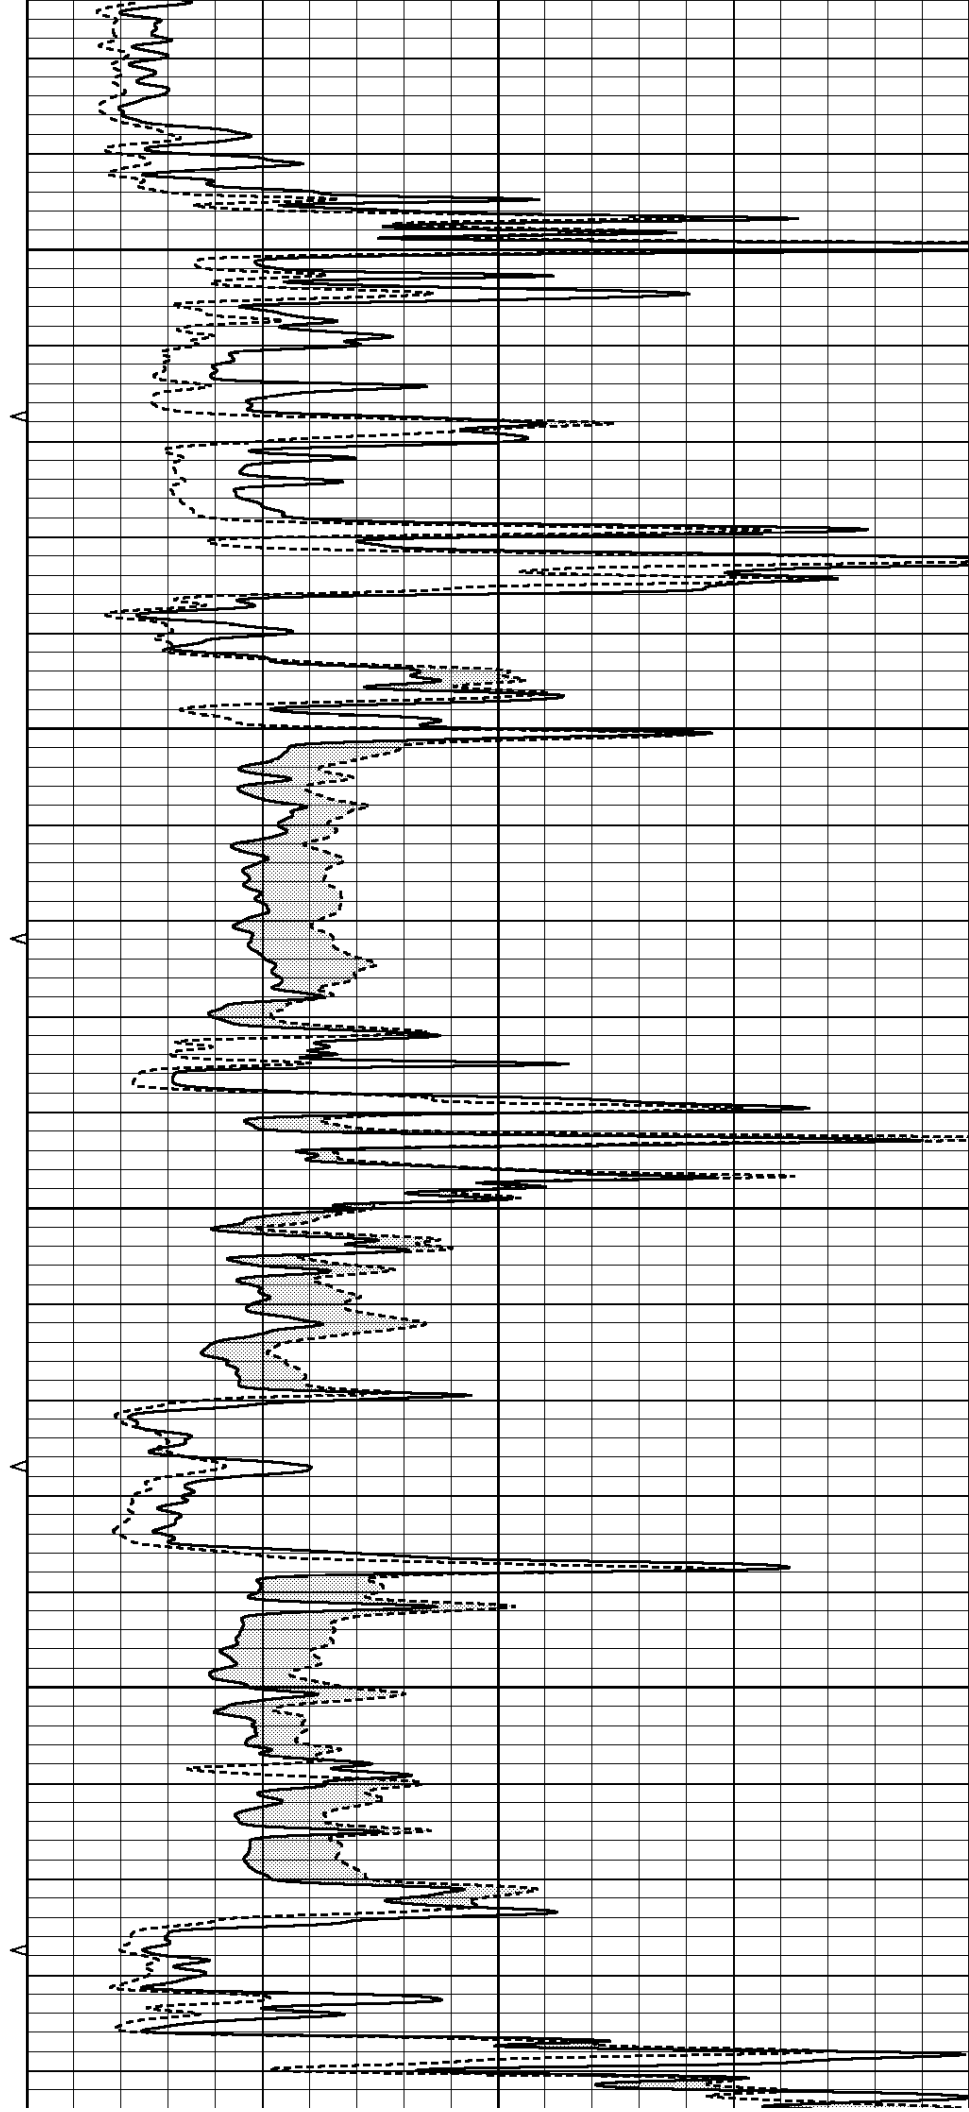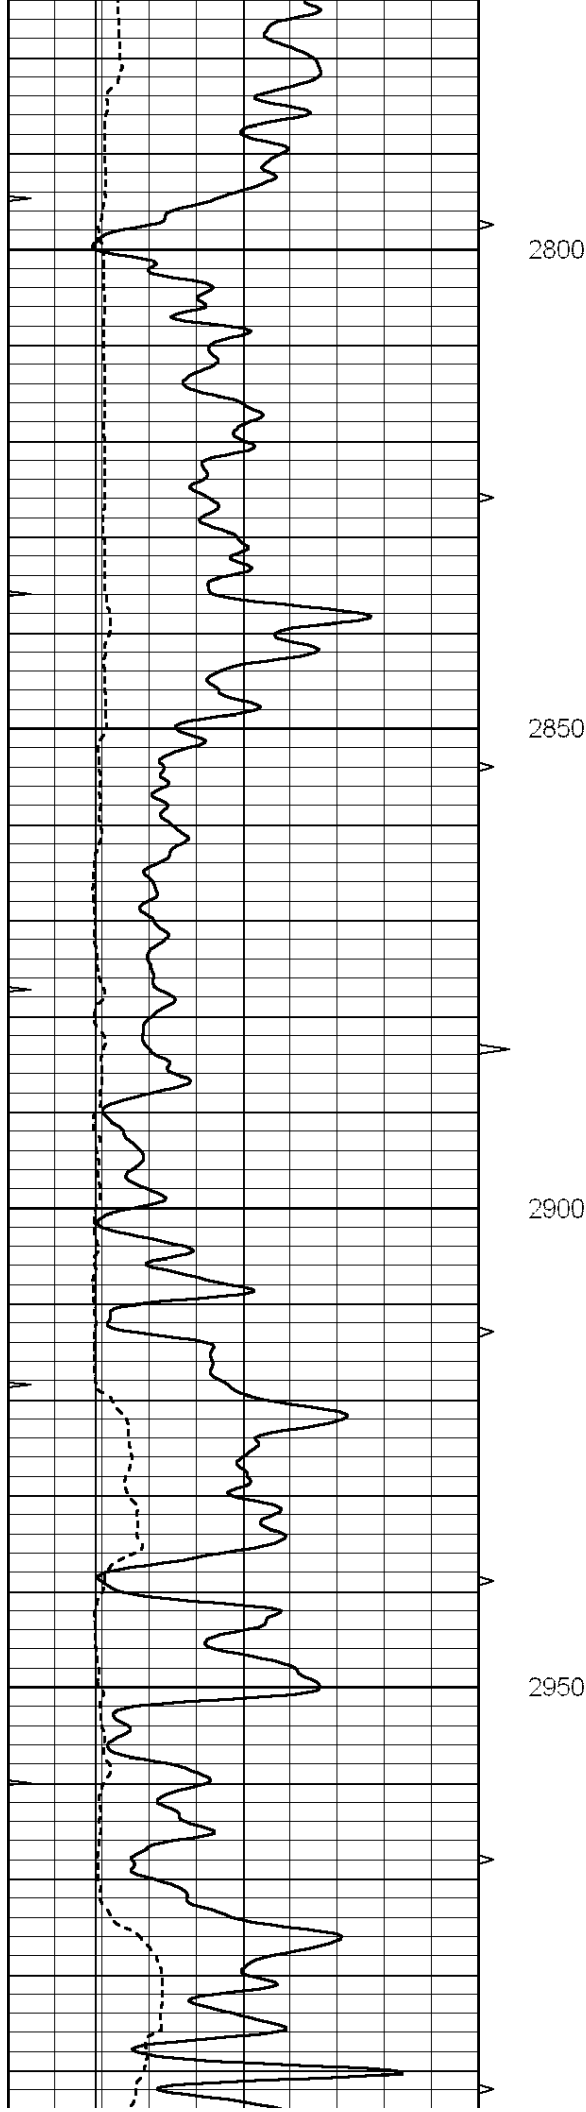

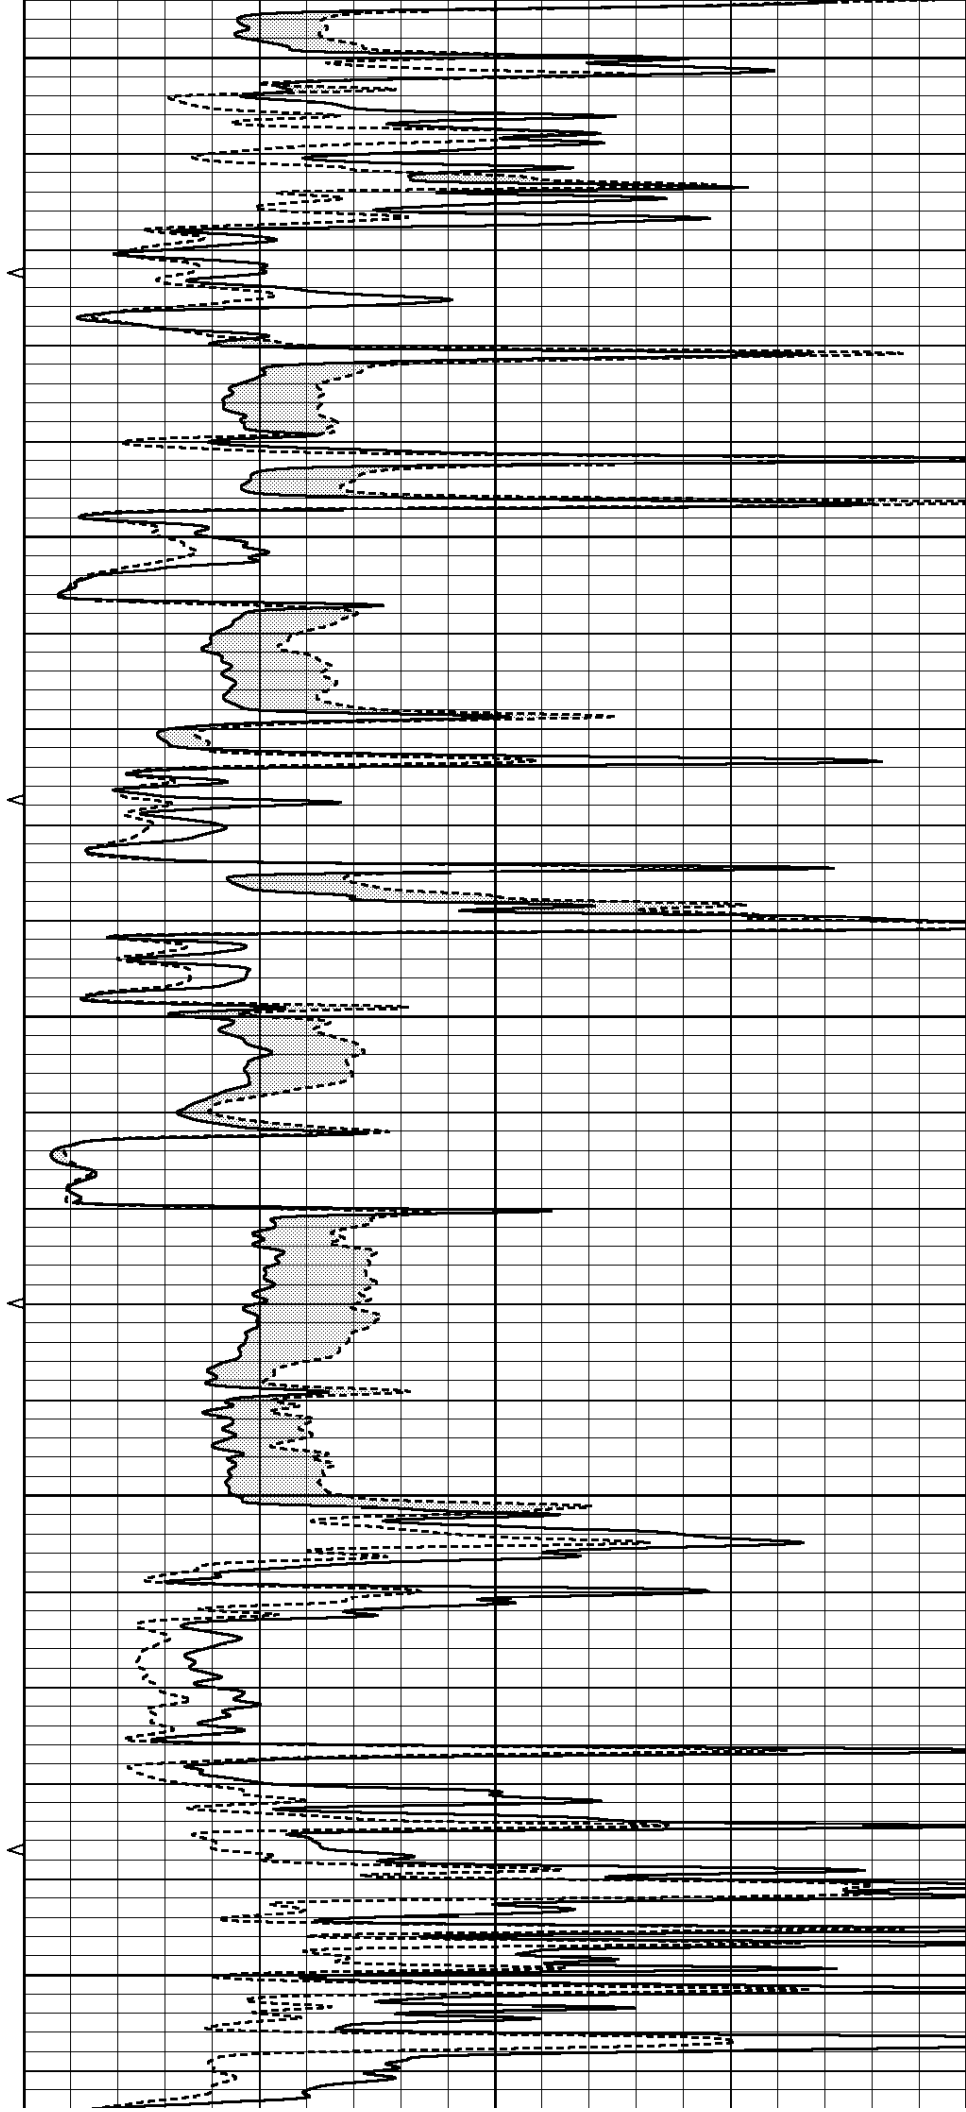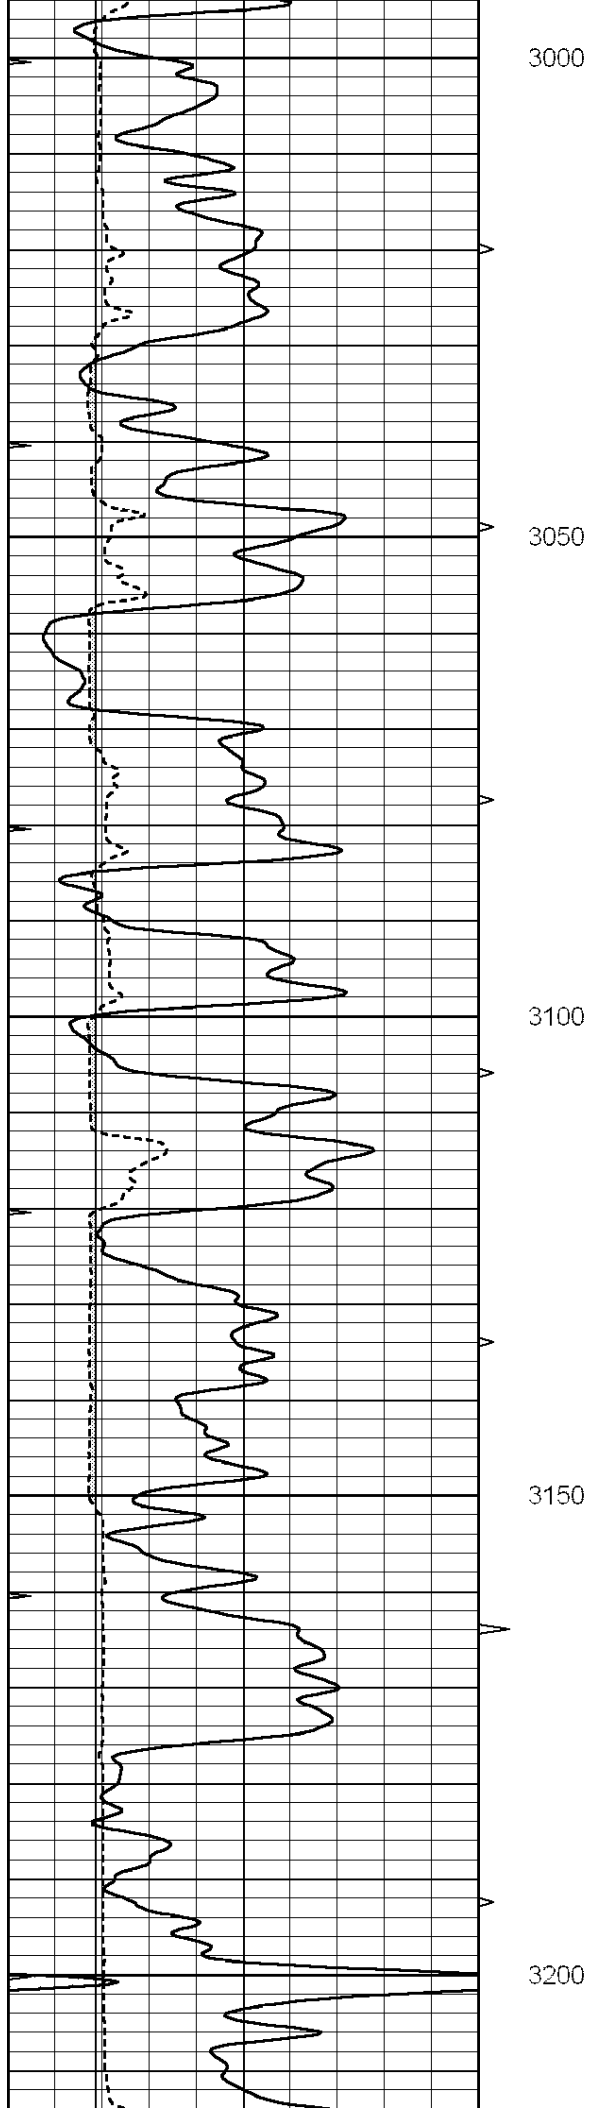

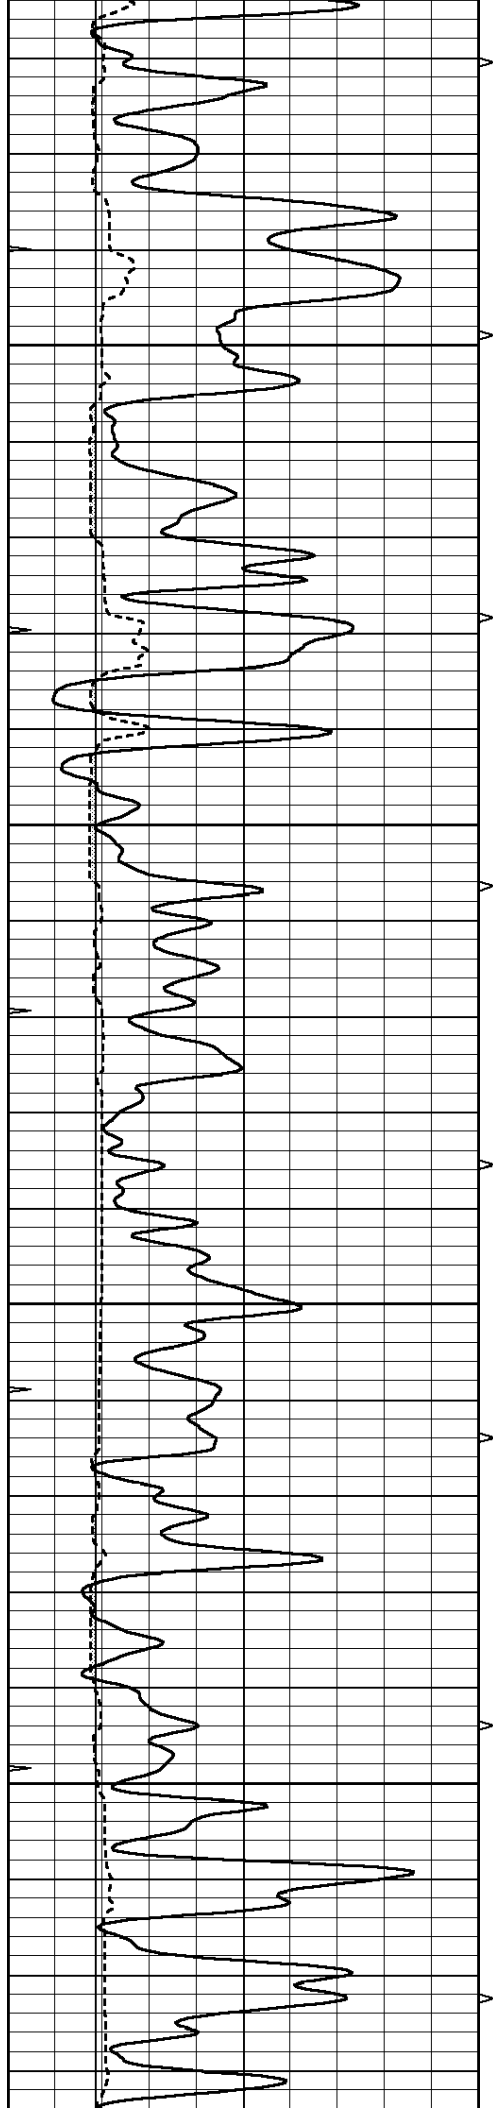




3250



3300



3350


3400

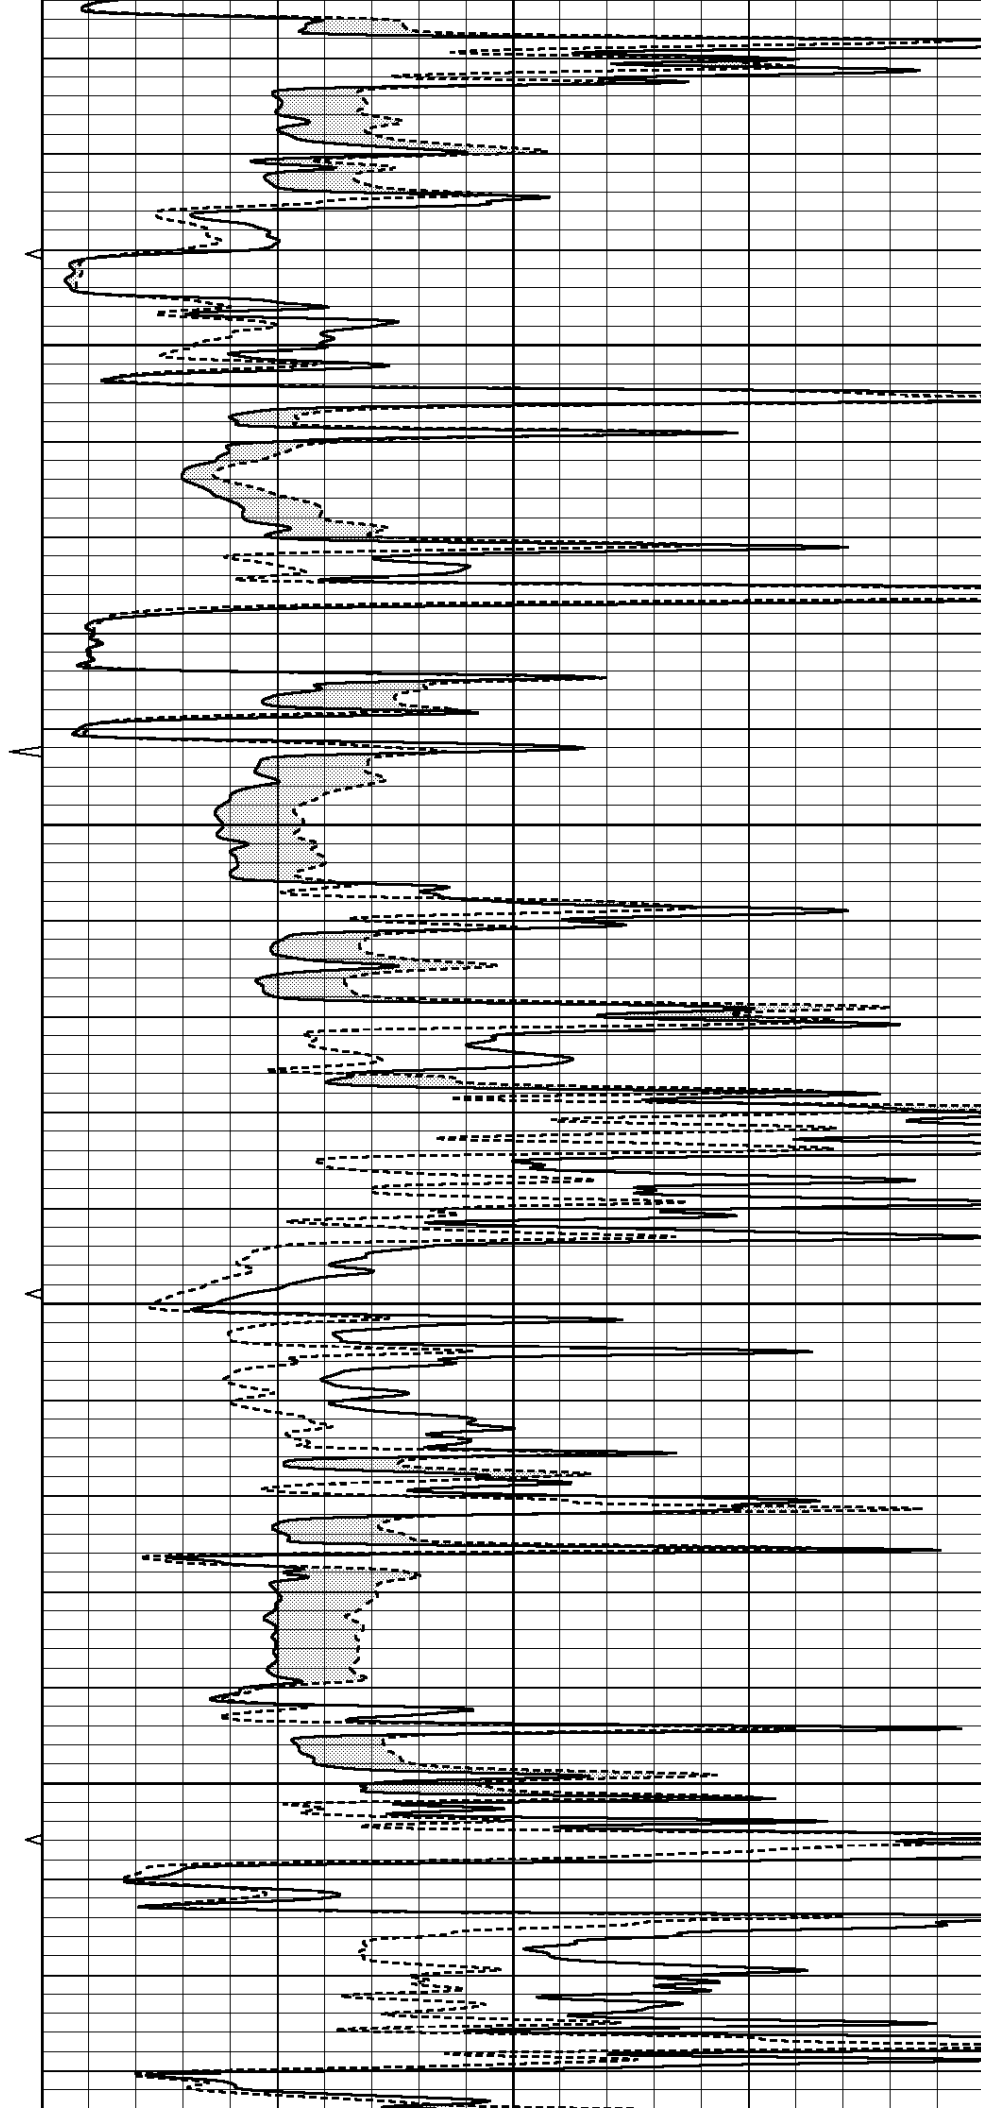

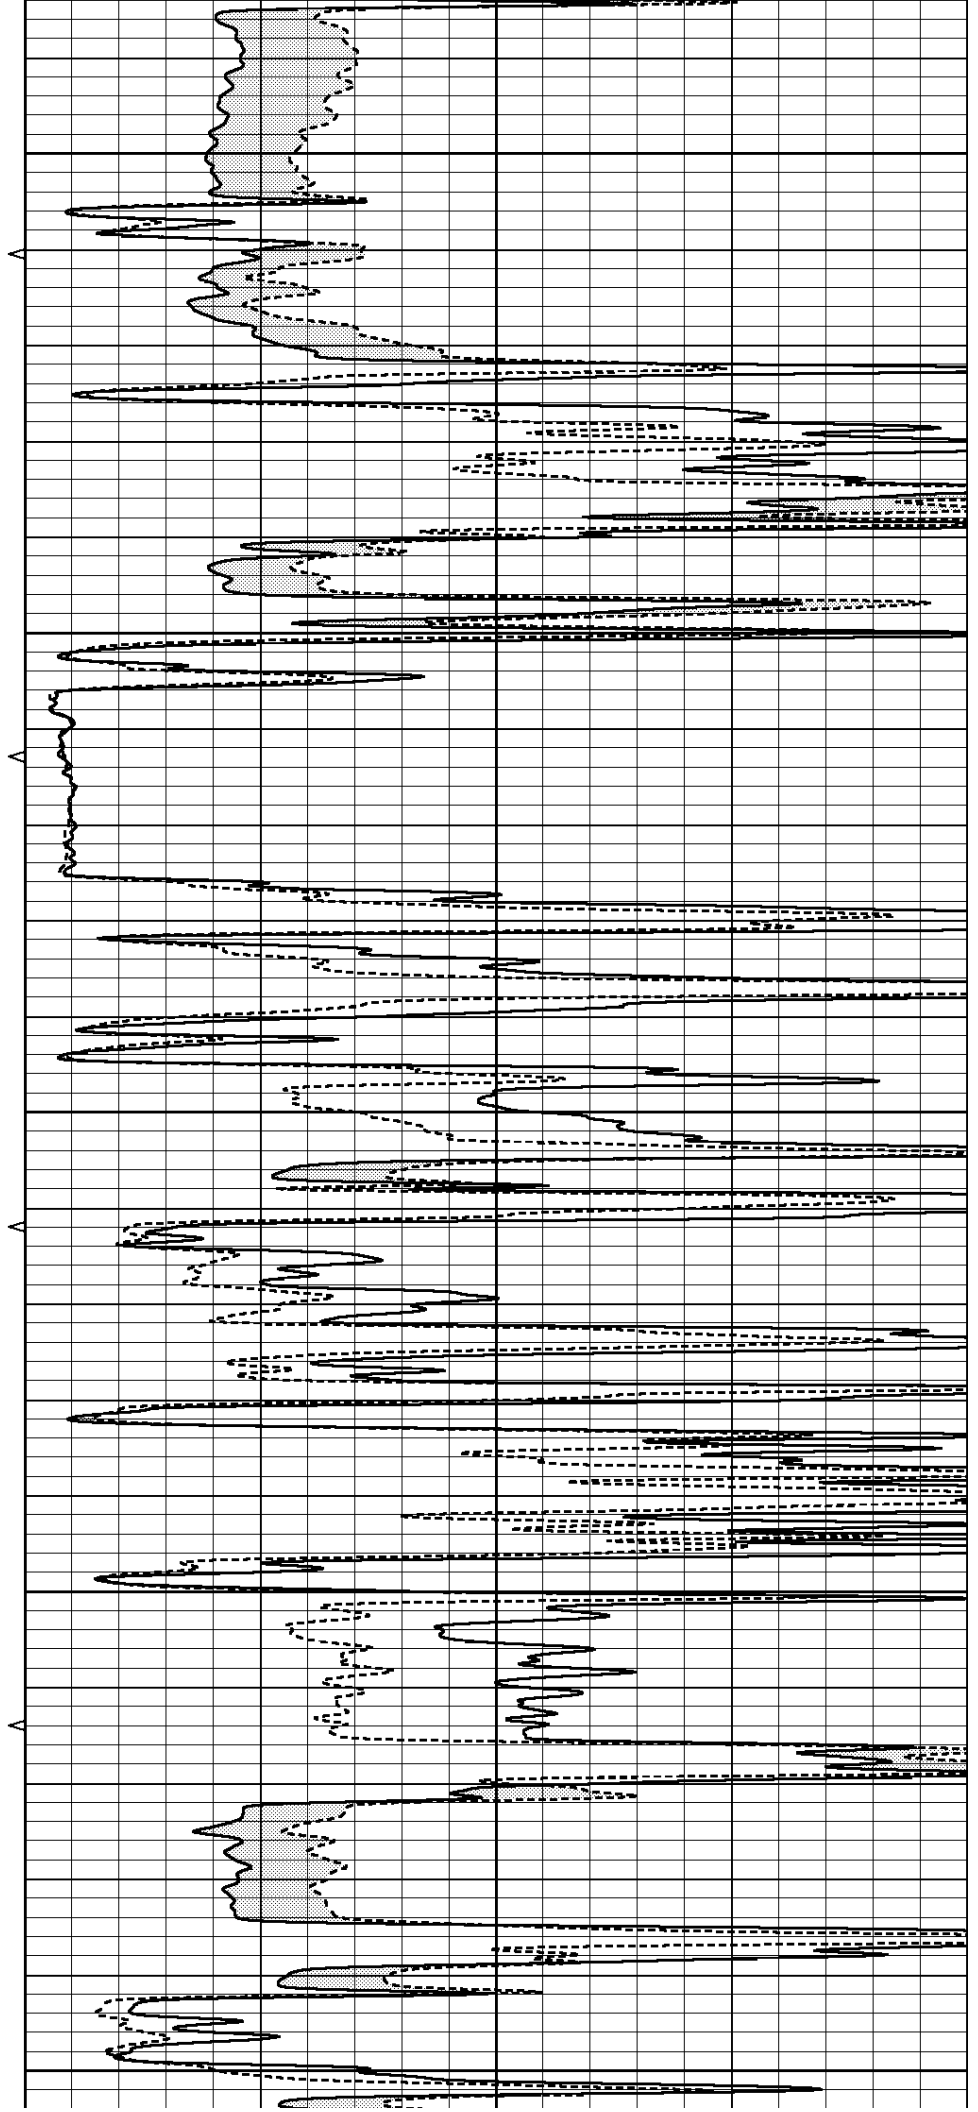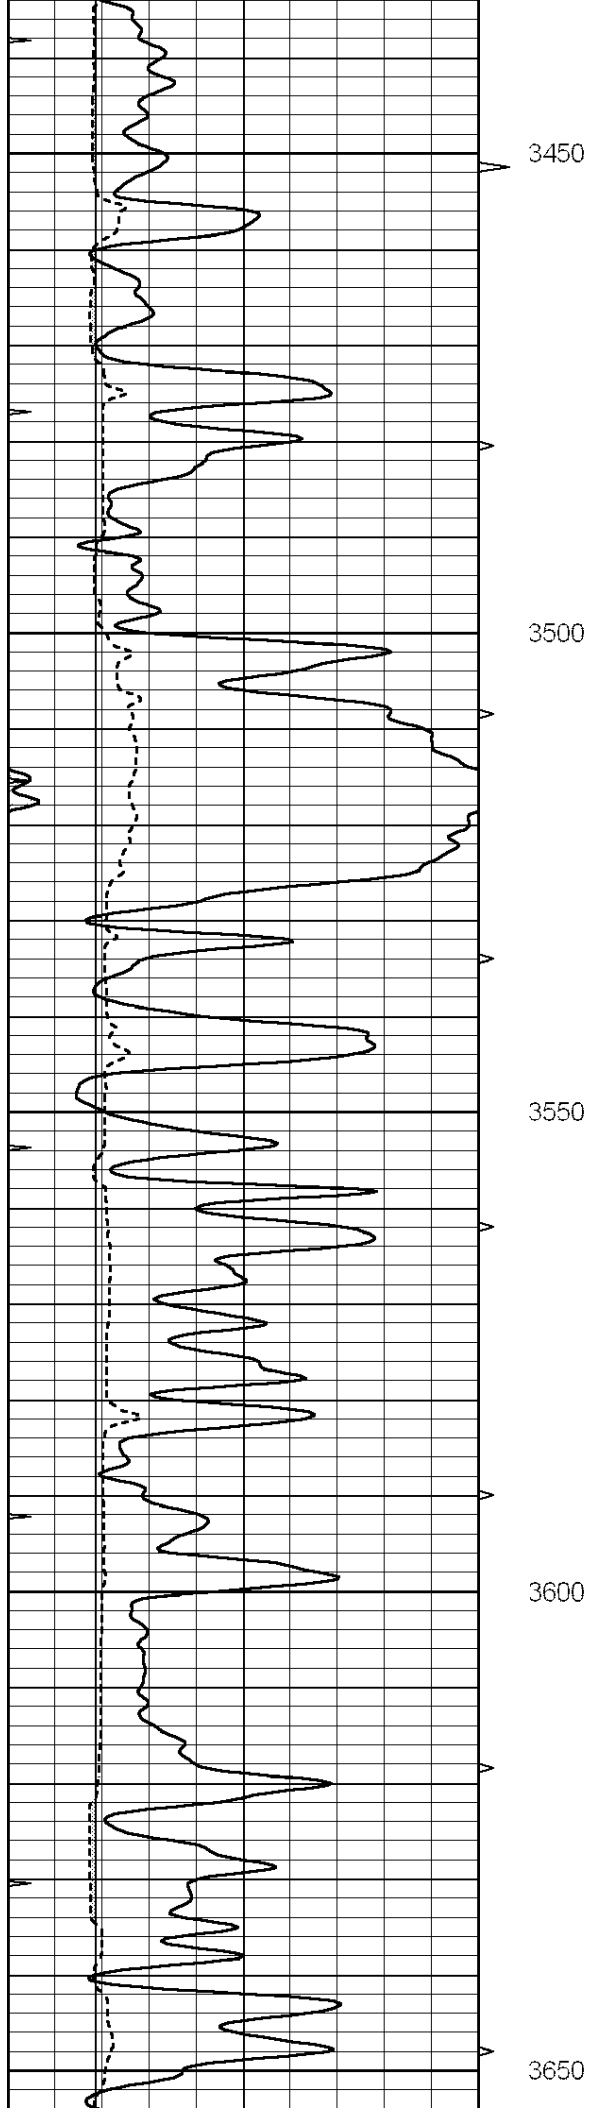

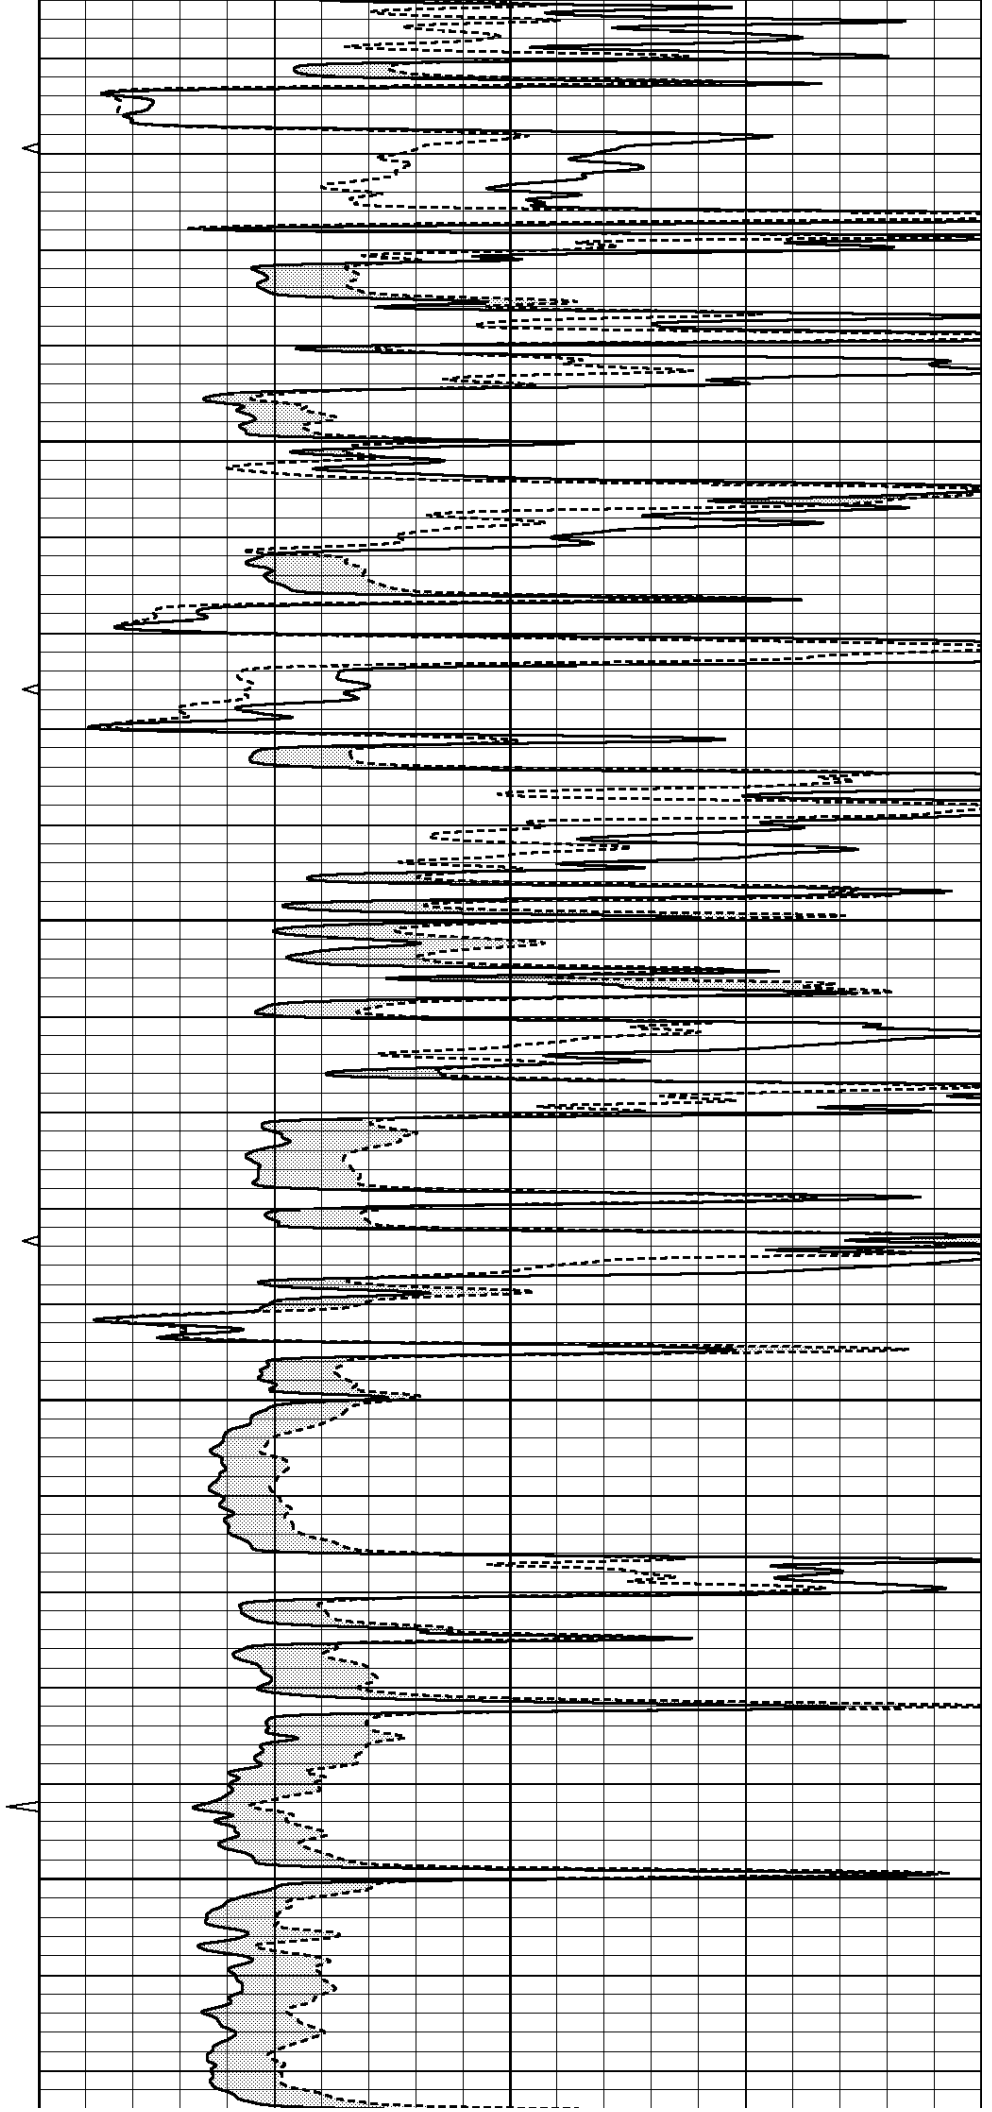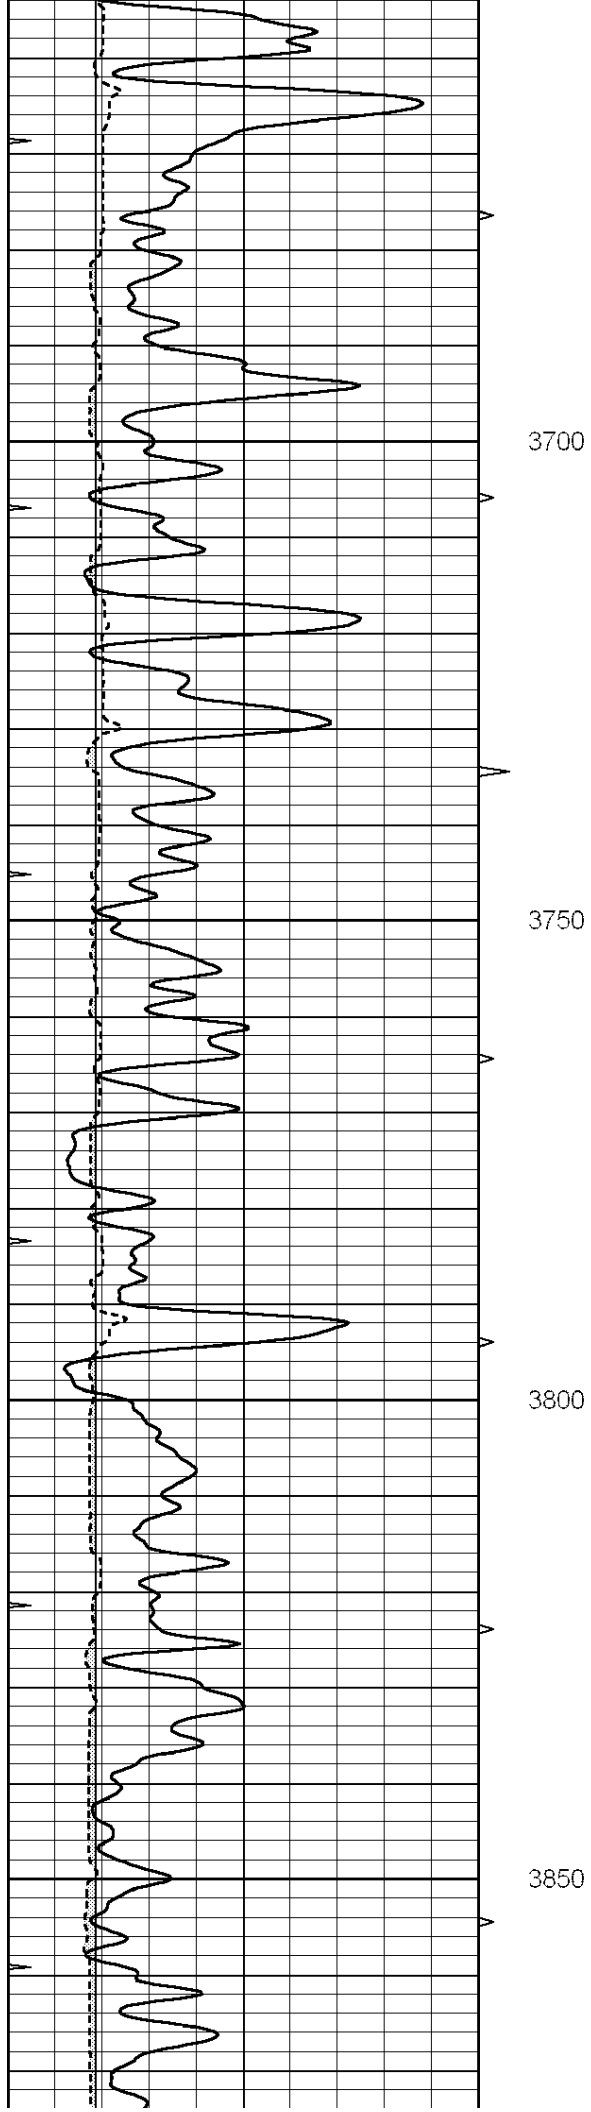

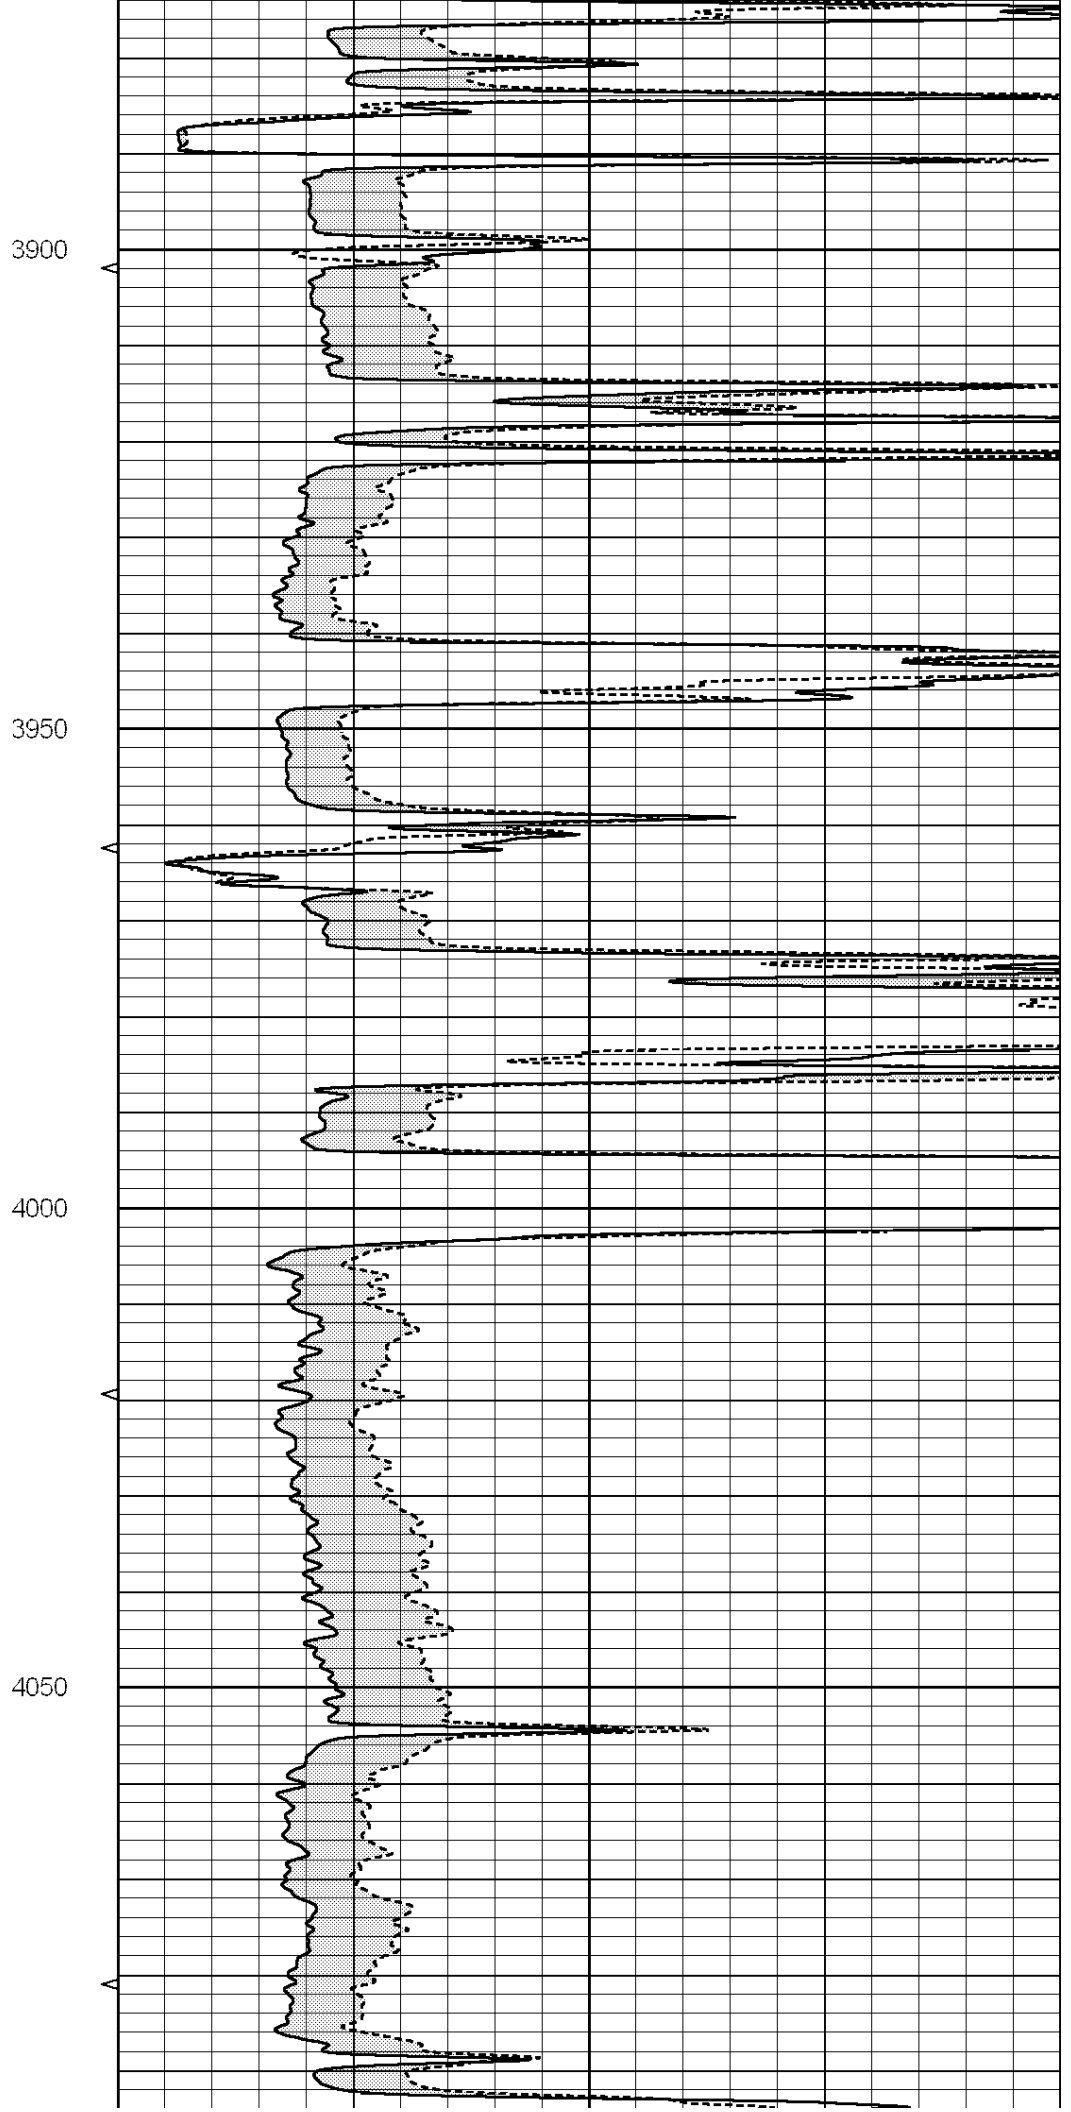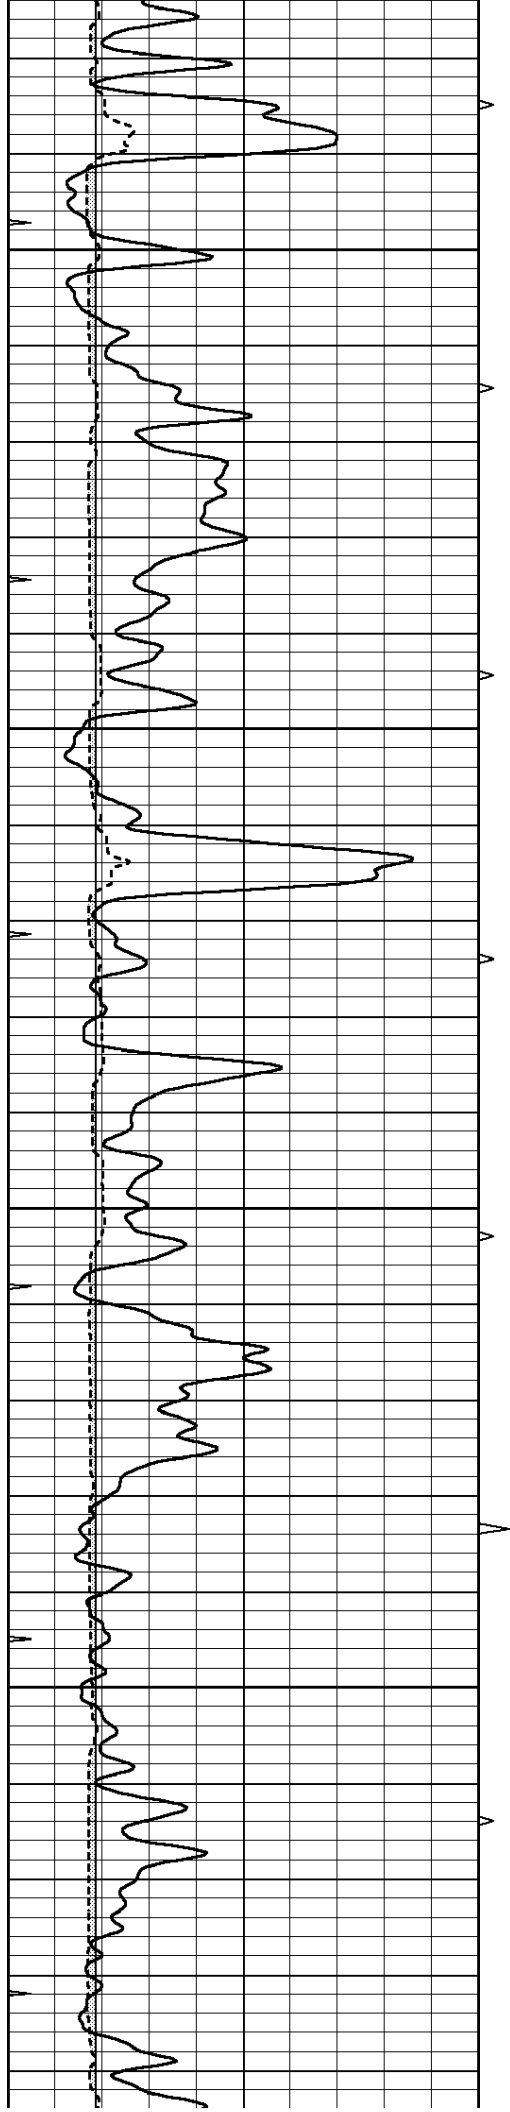

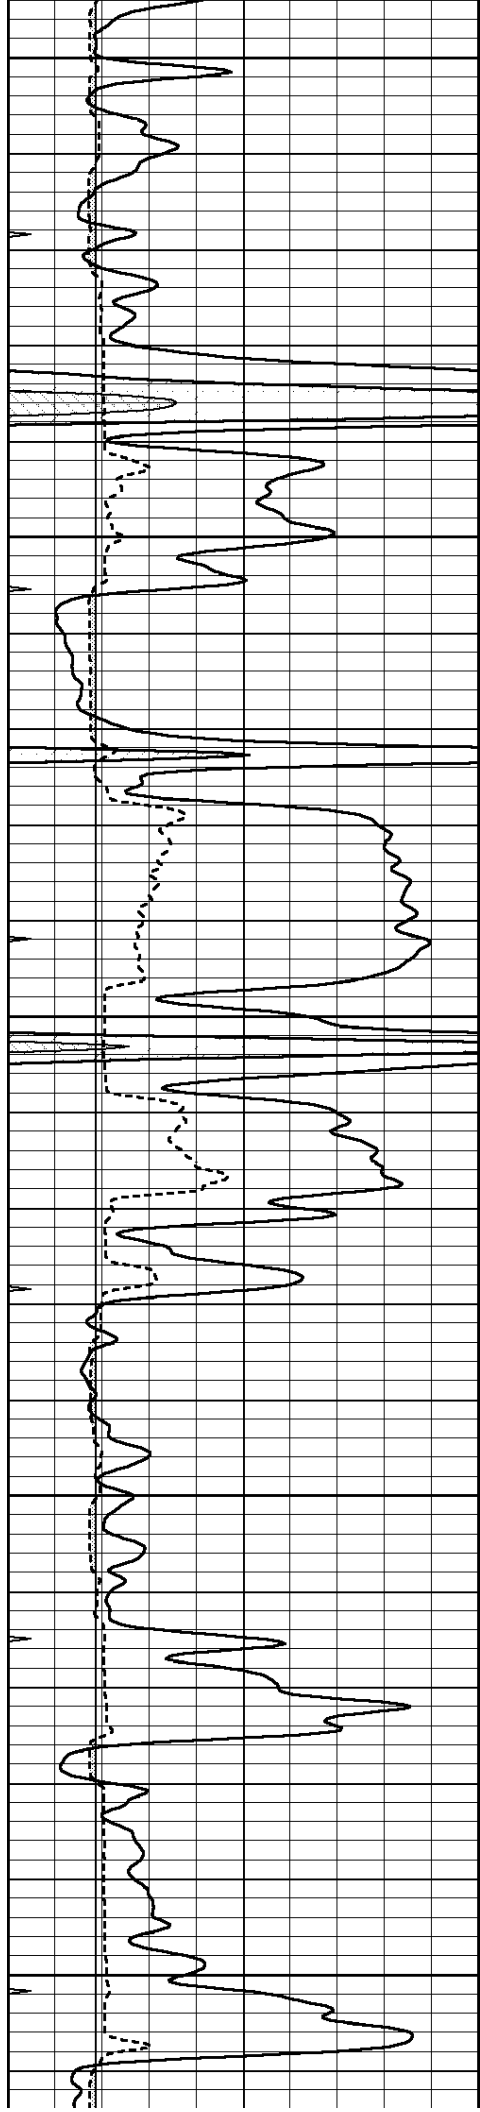


4100


4150

4200

4250

4300

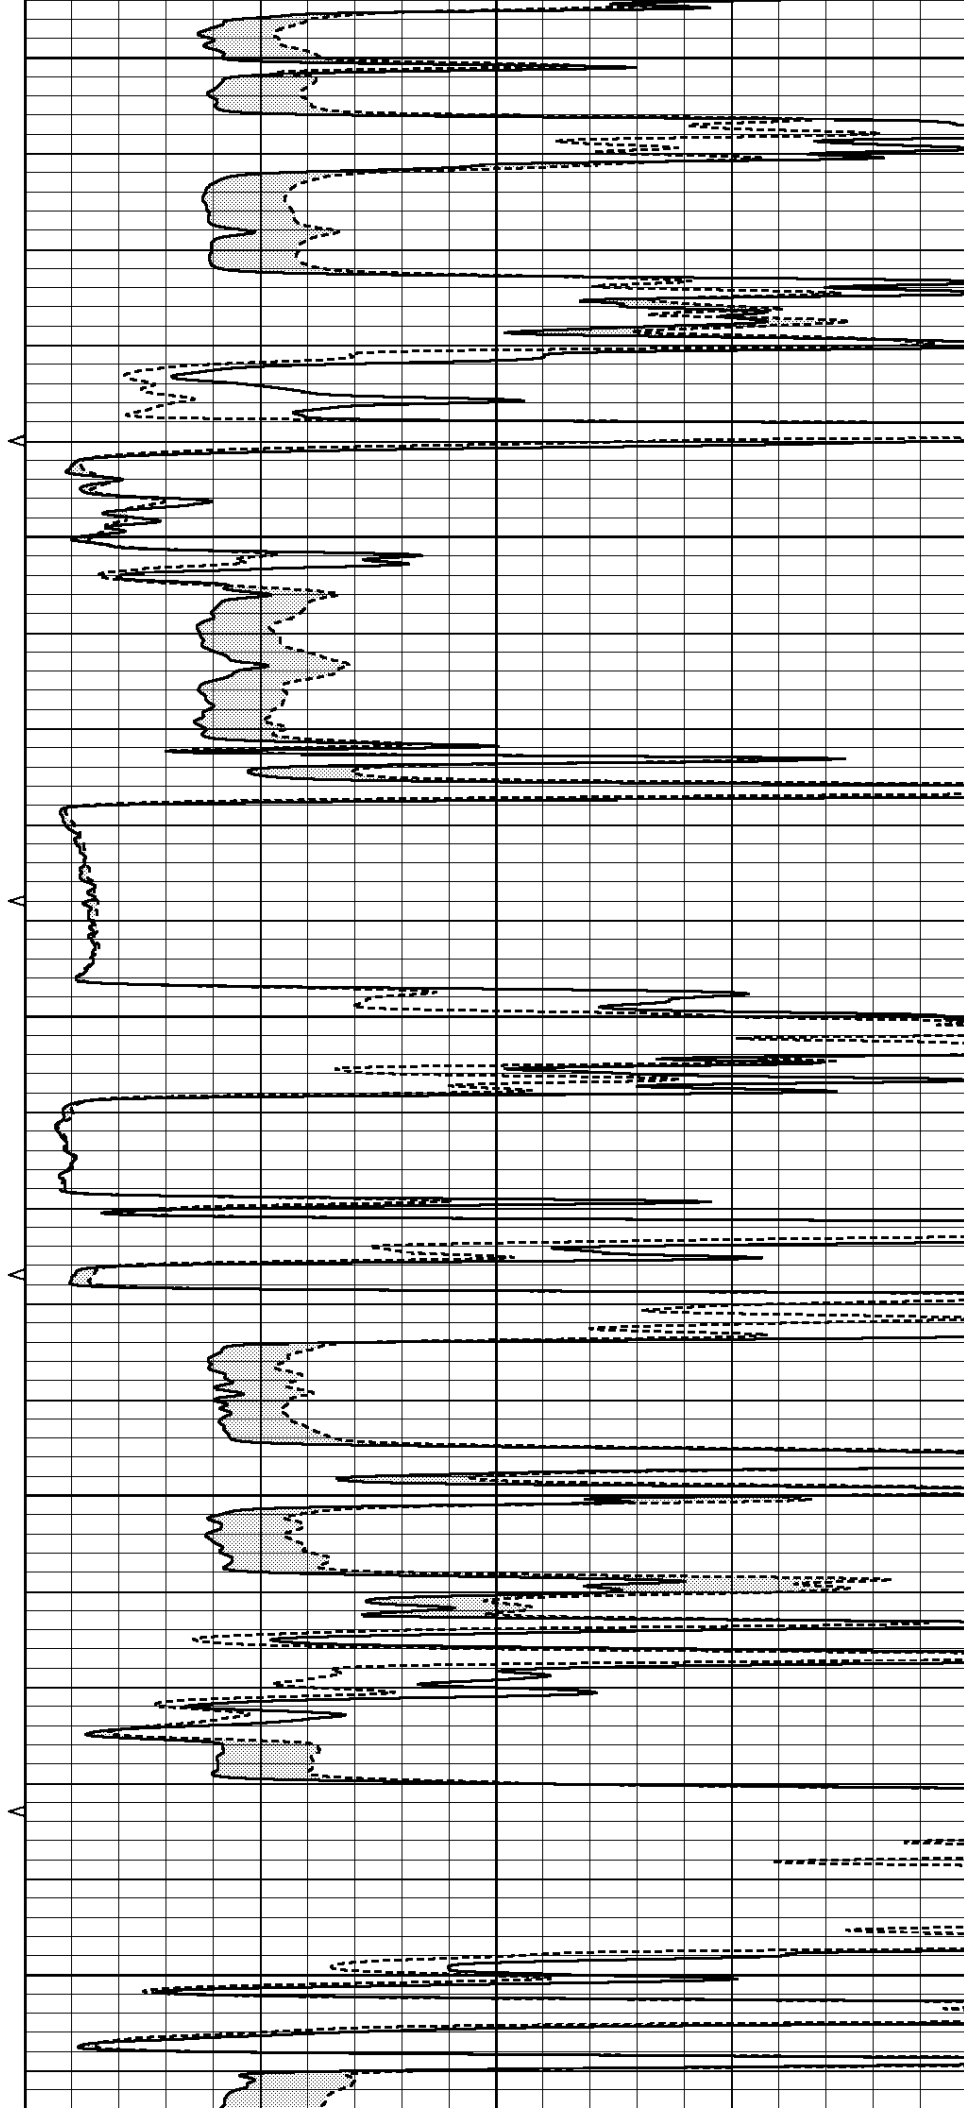

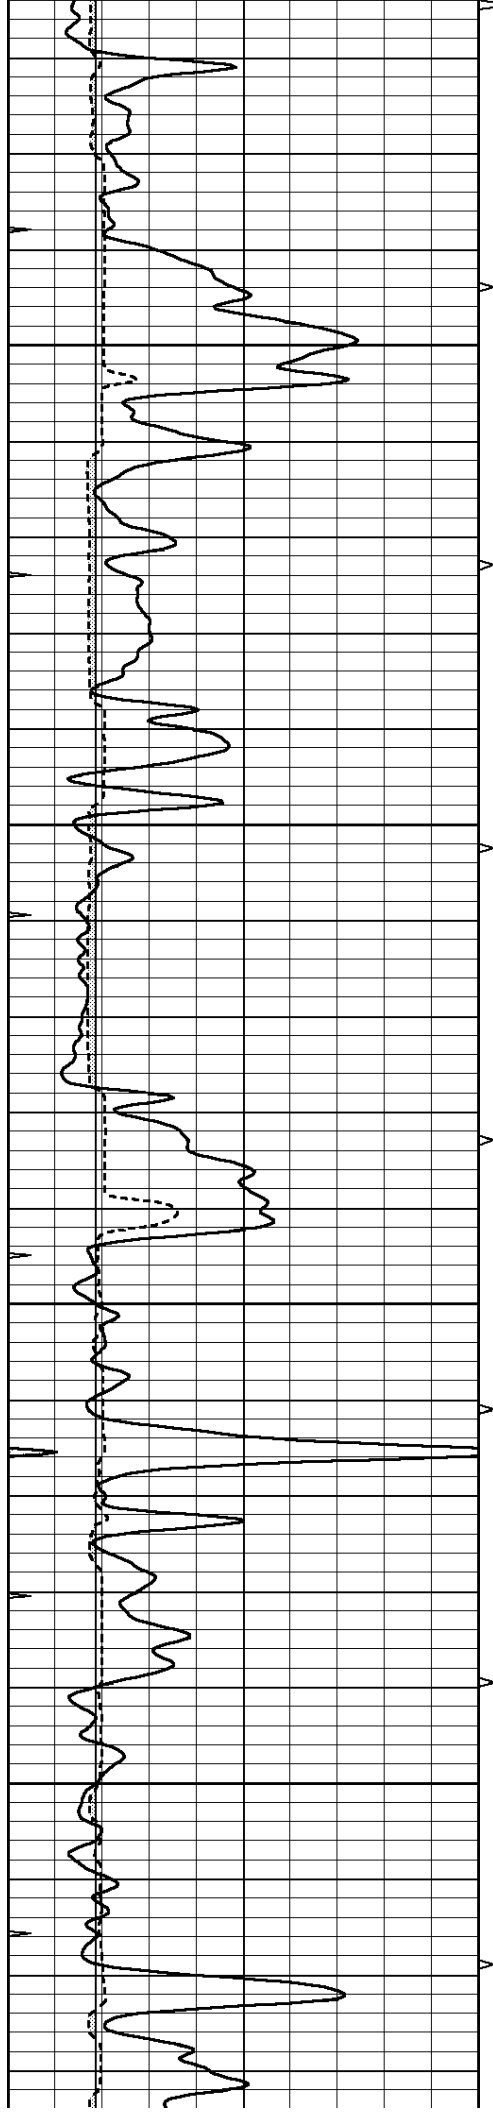




4350


4400

4450

4500

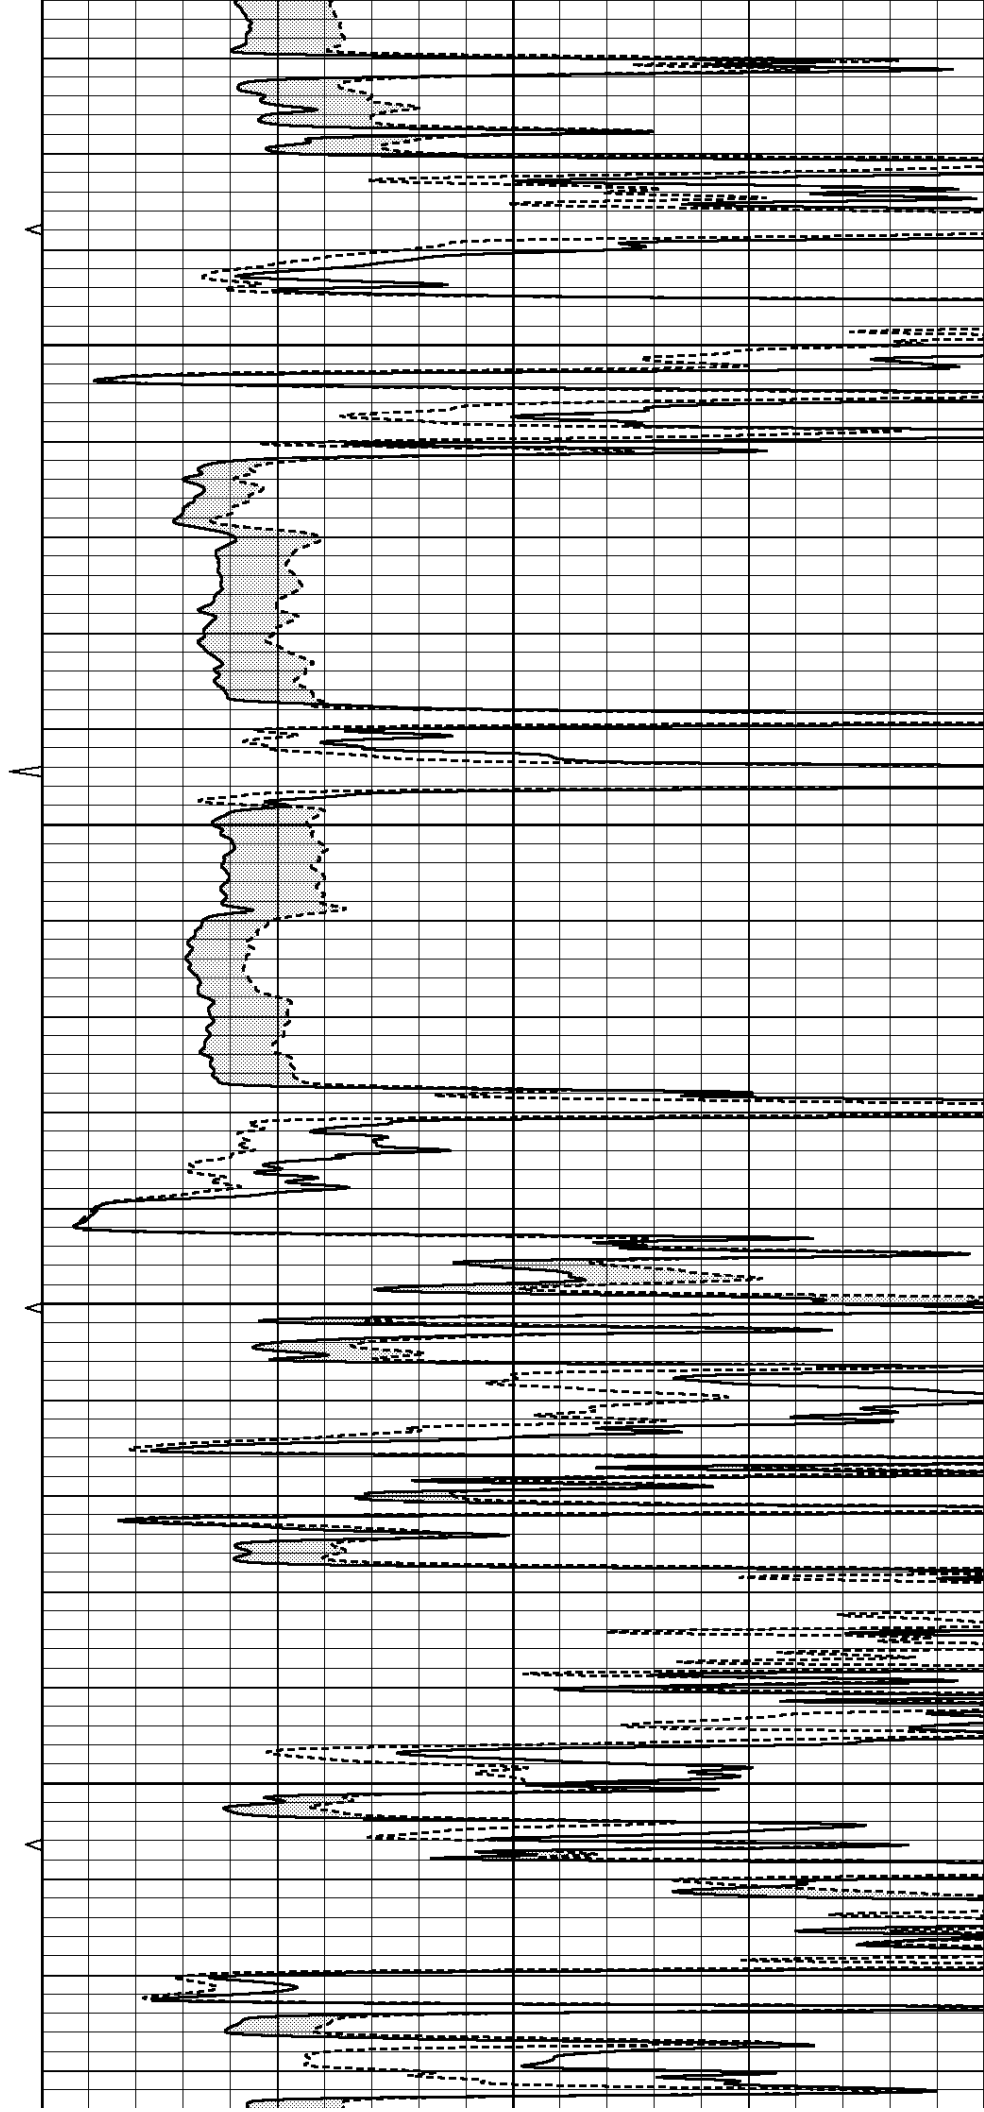

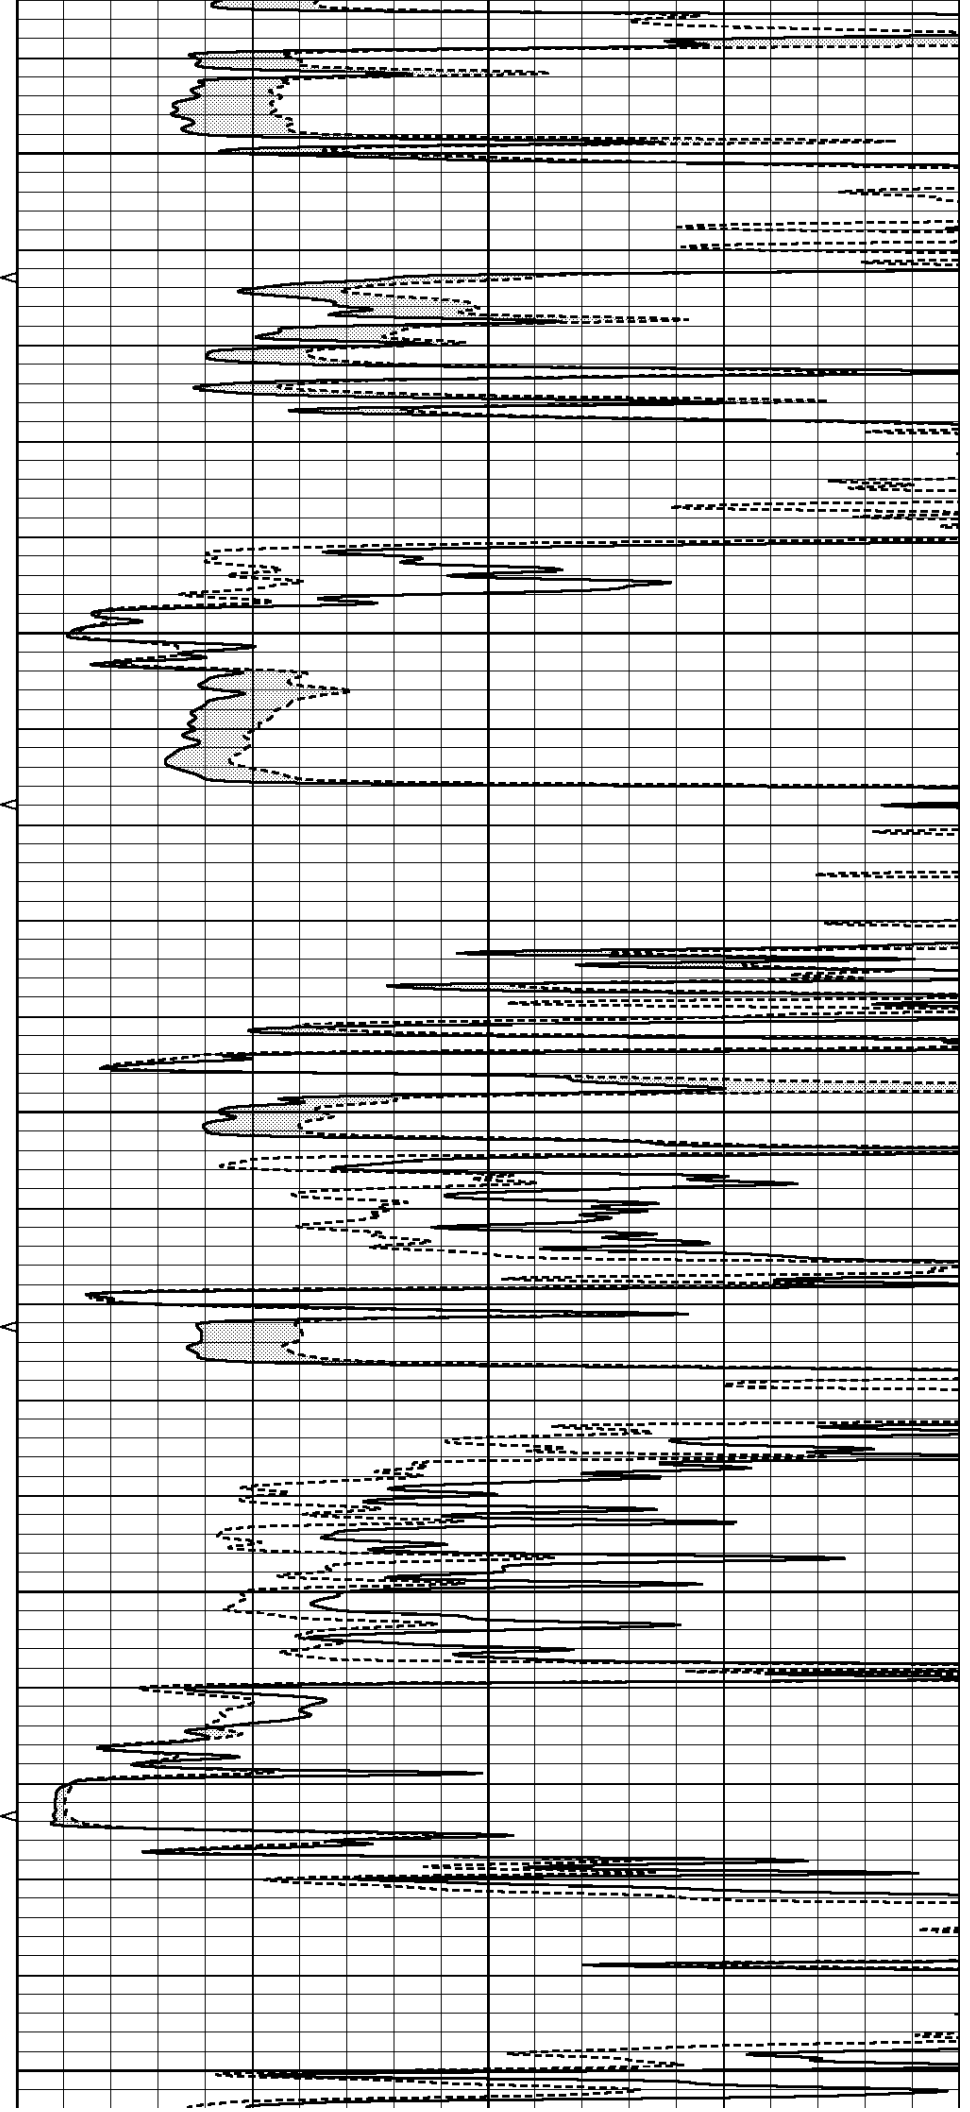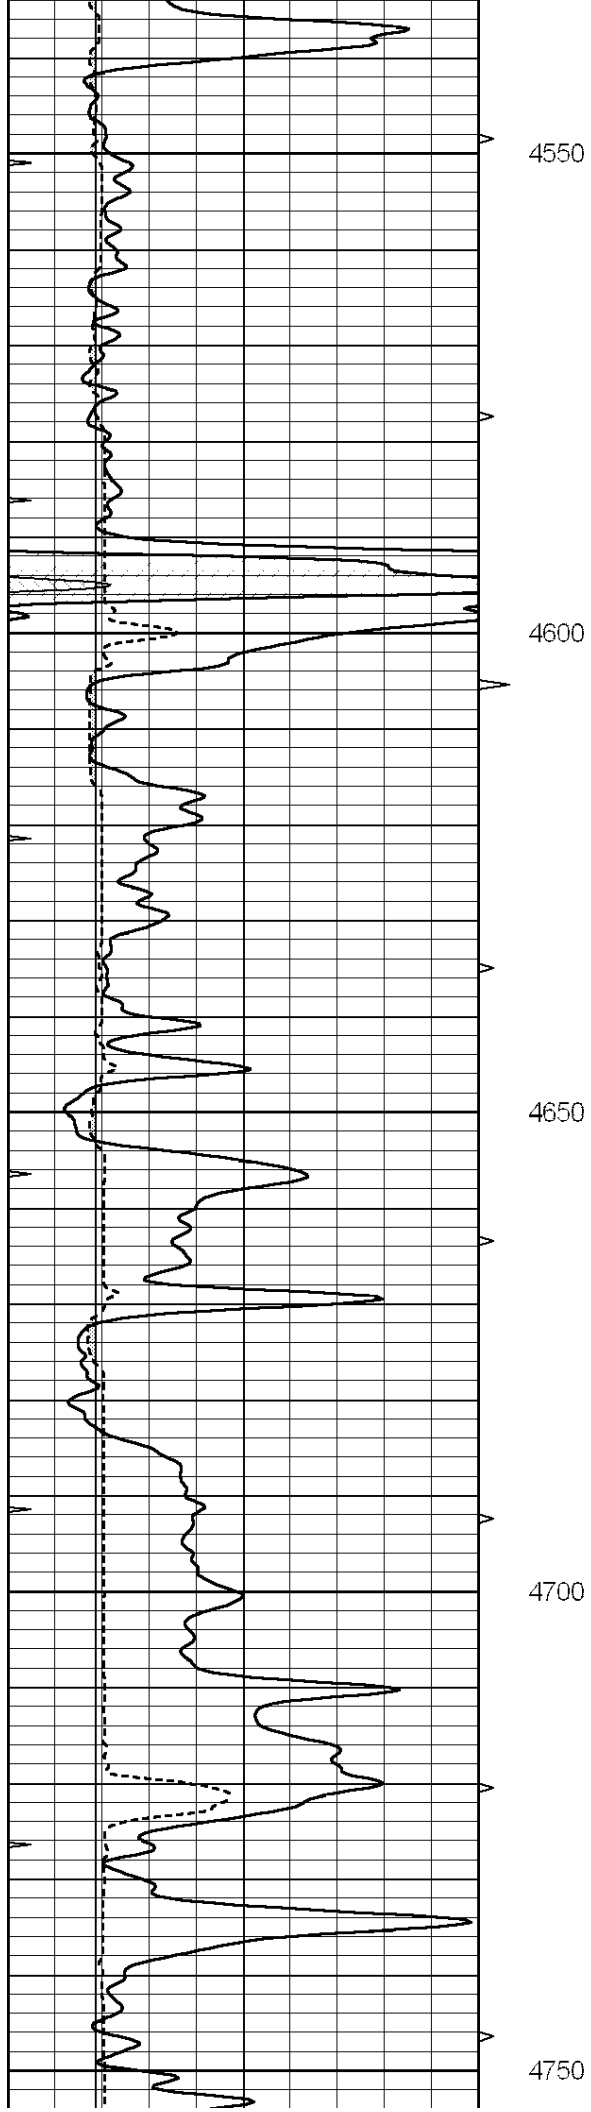

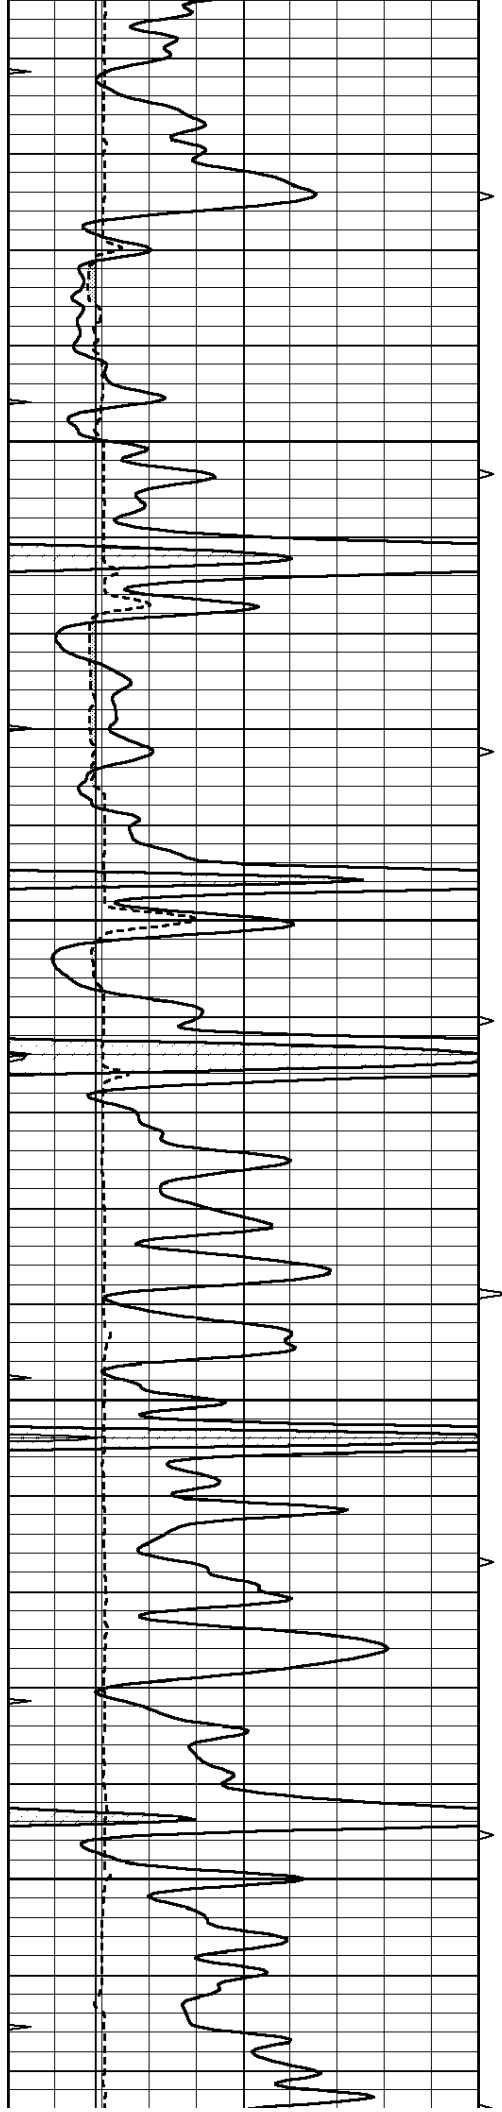




4800


4850


4900

4950

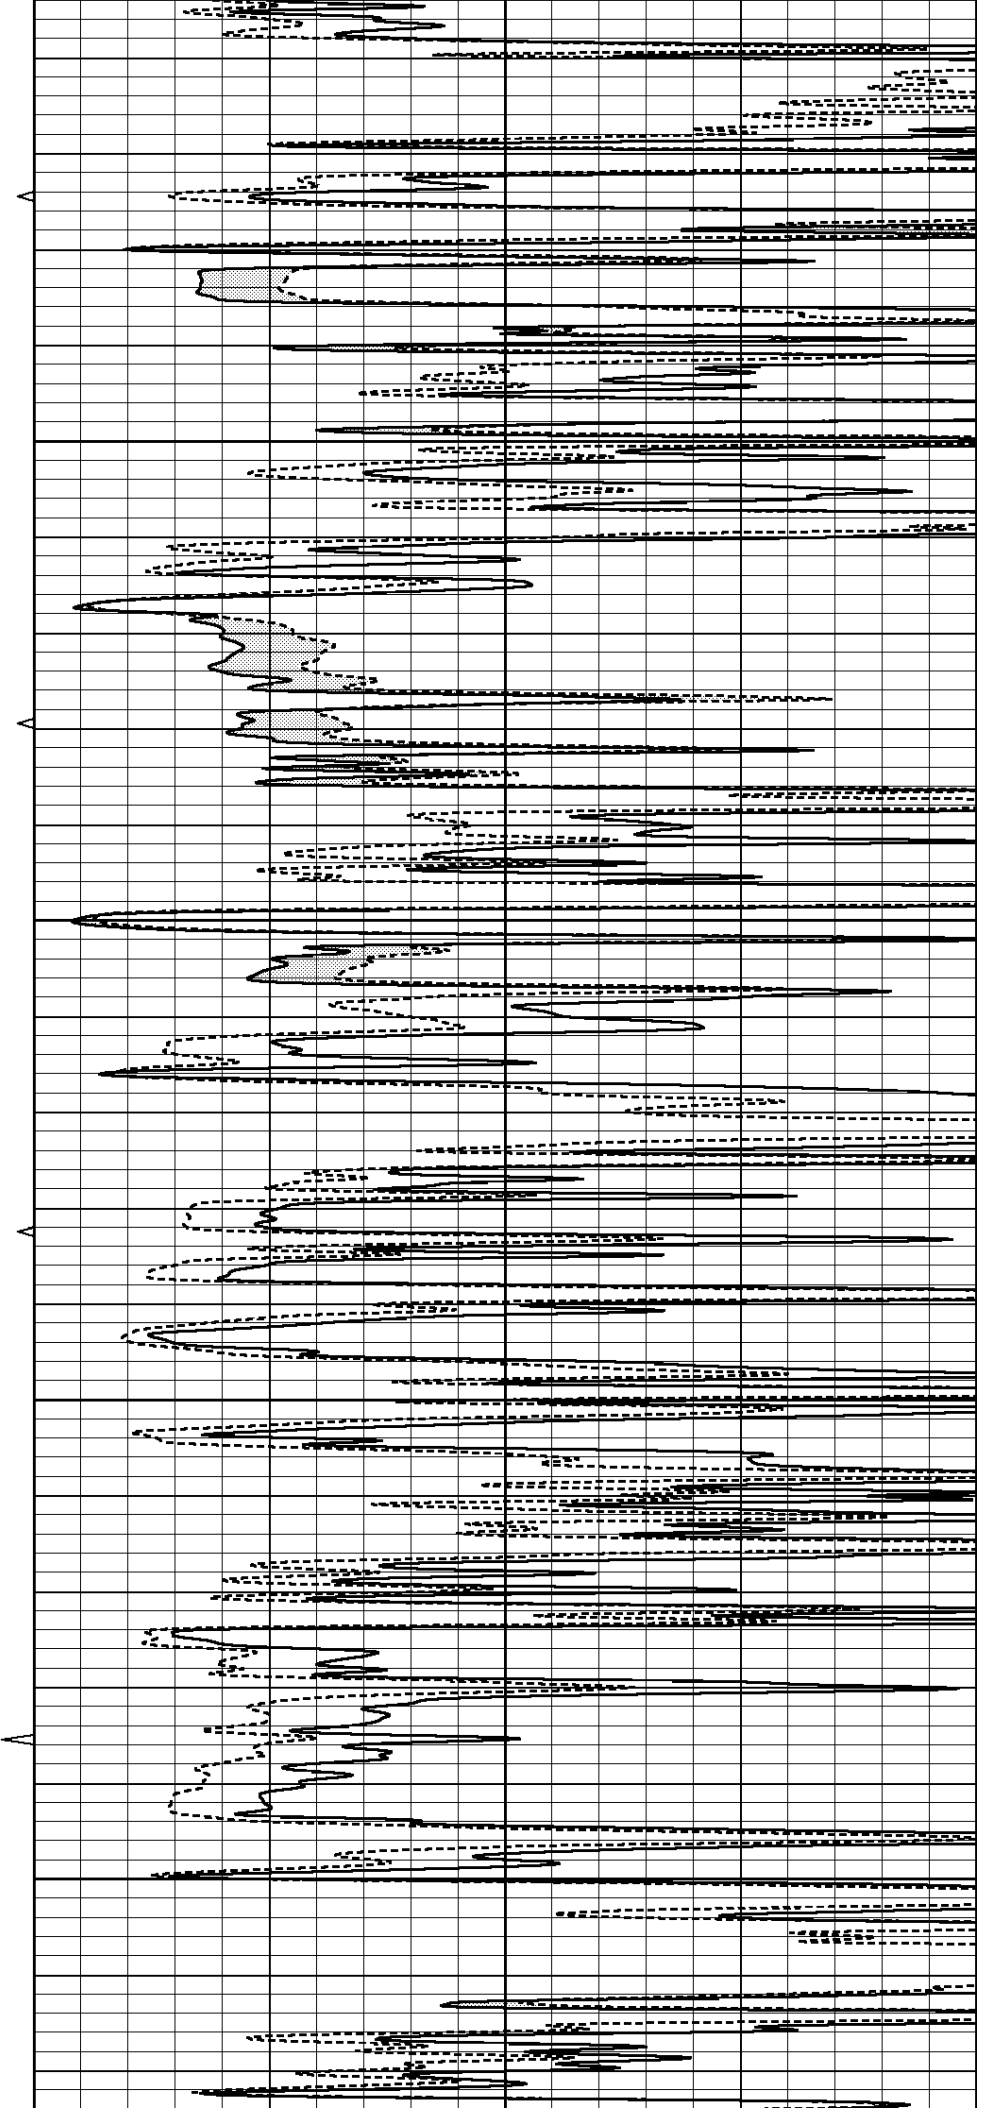

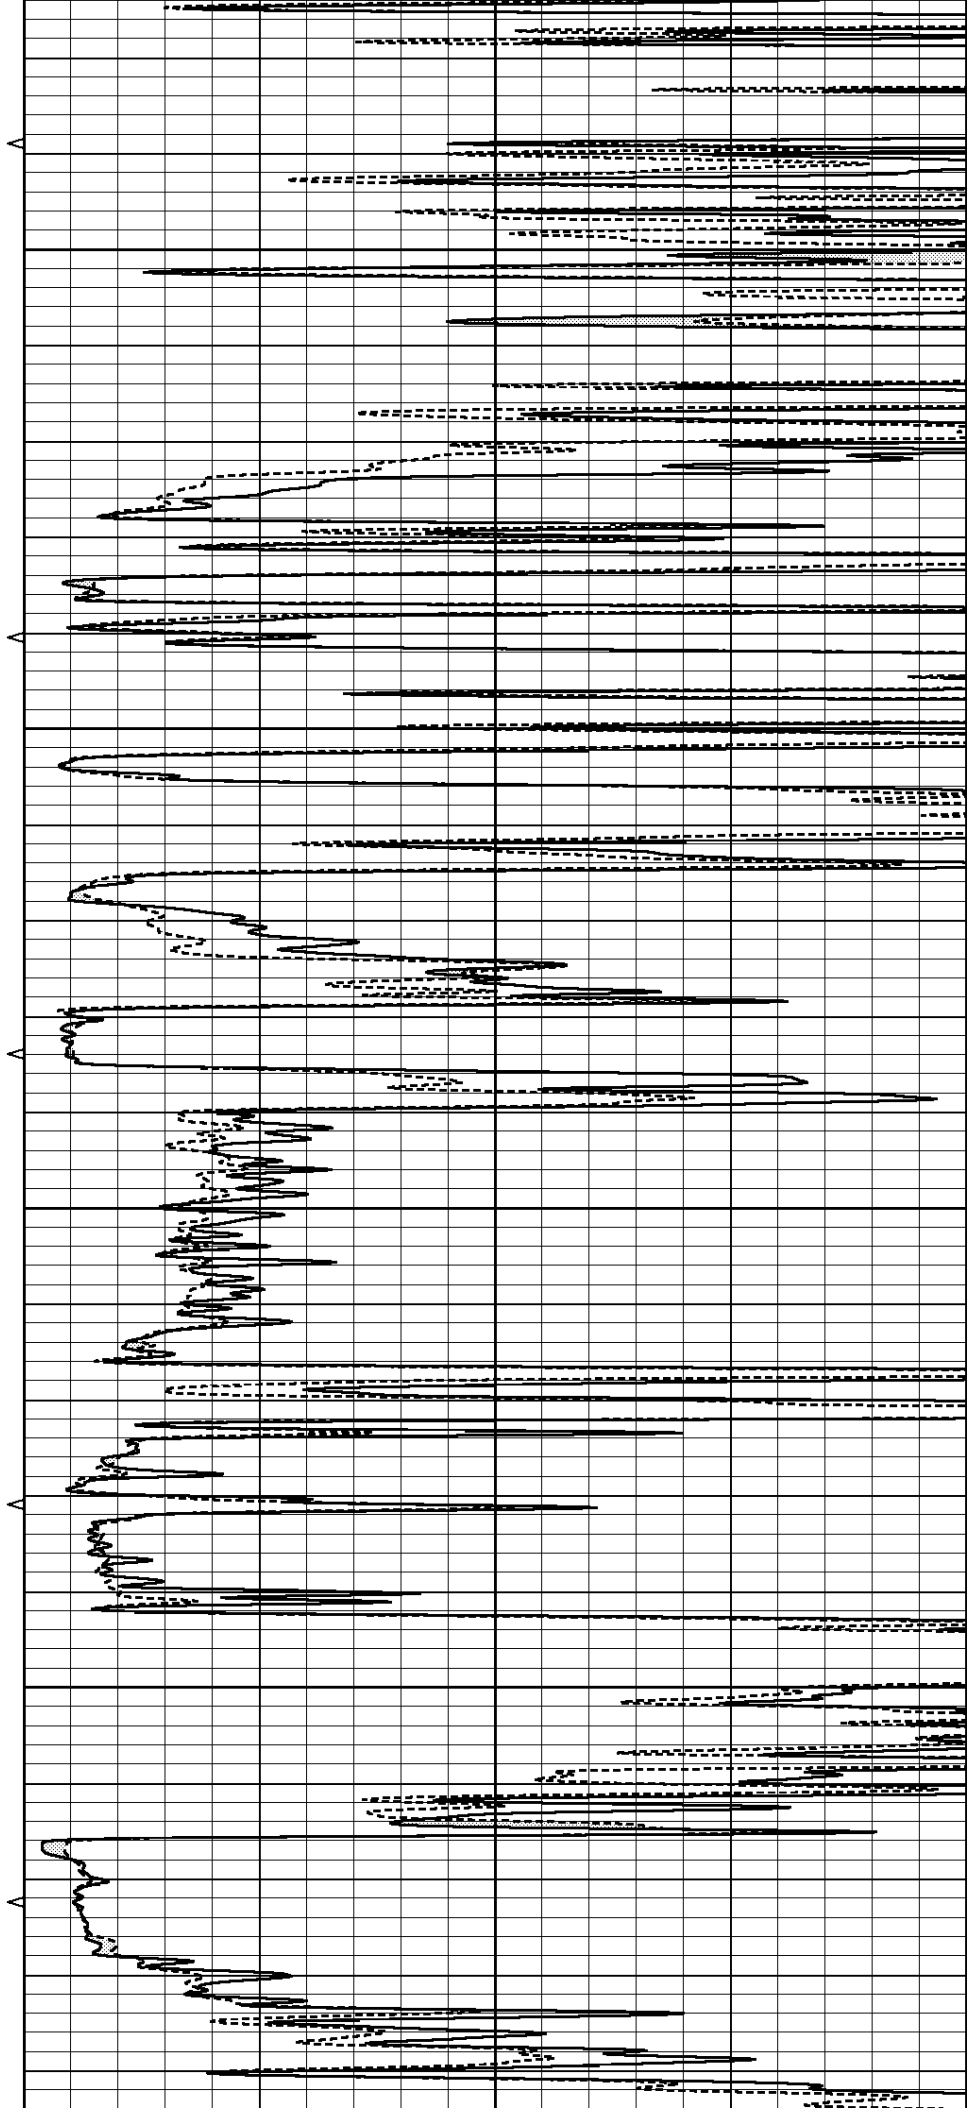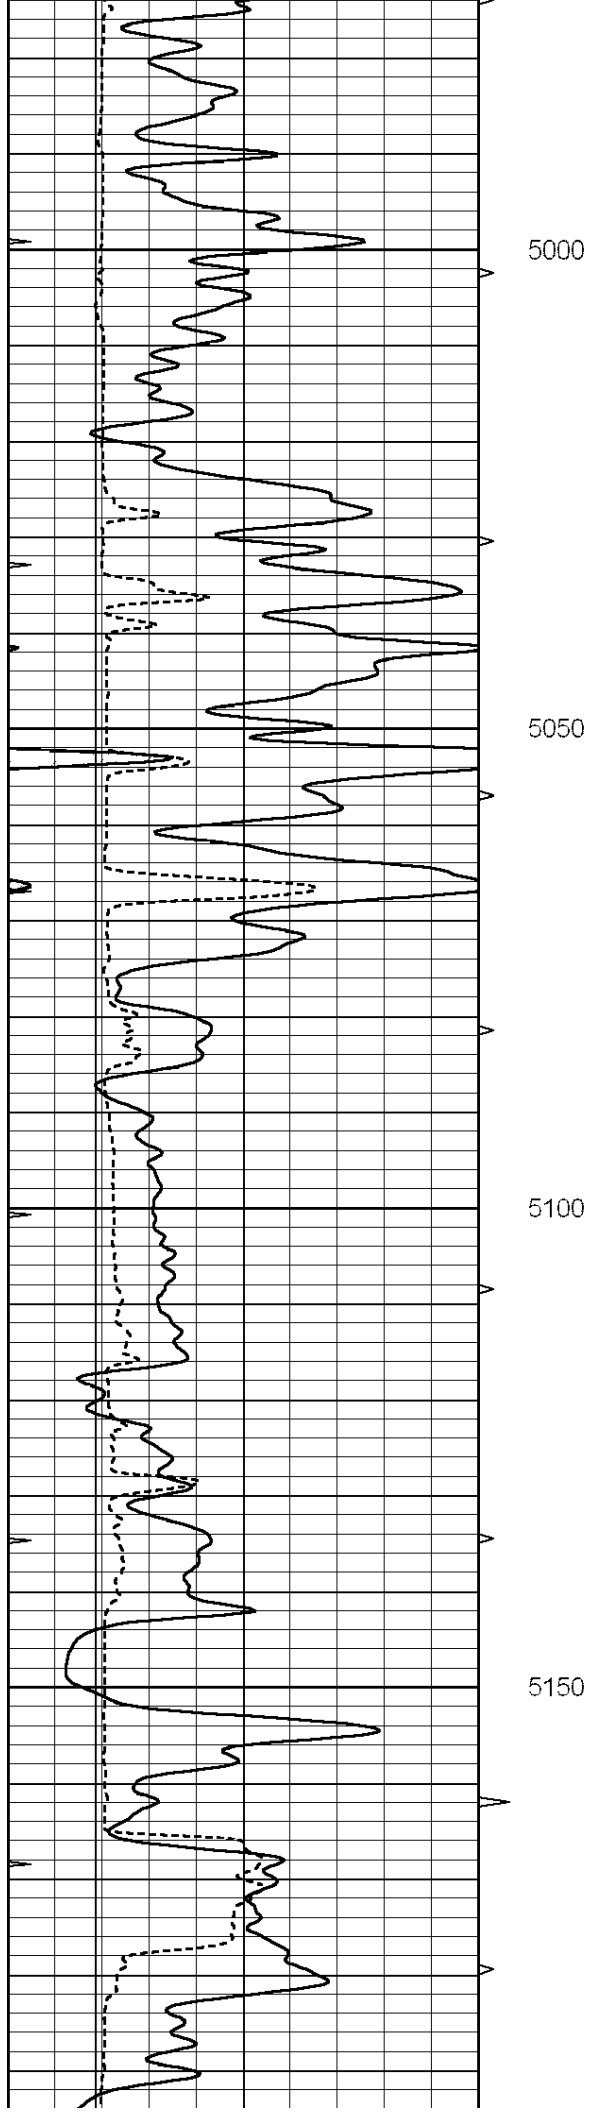

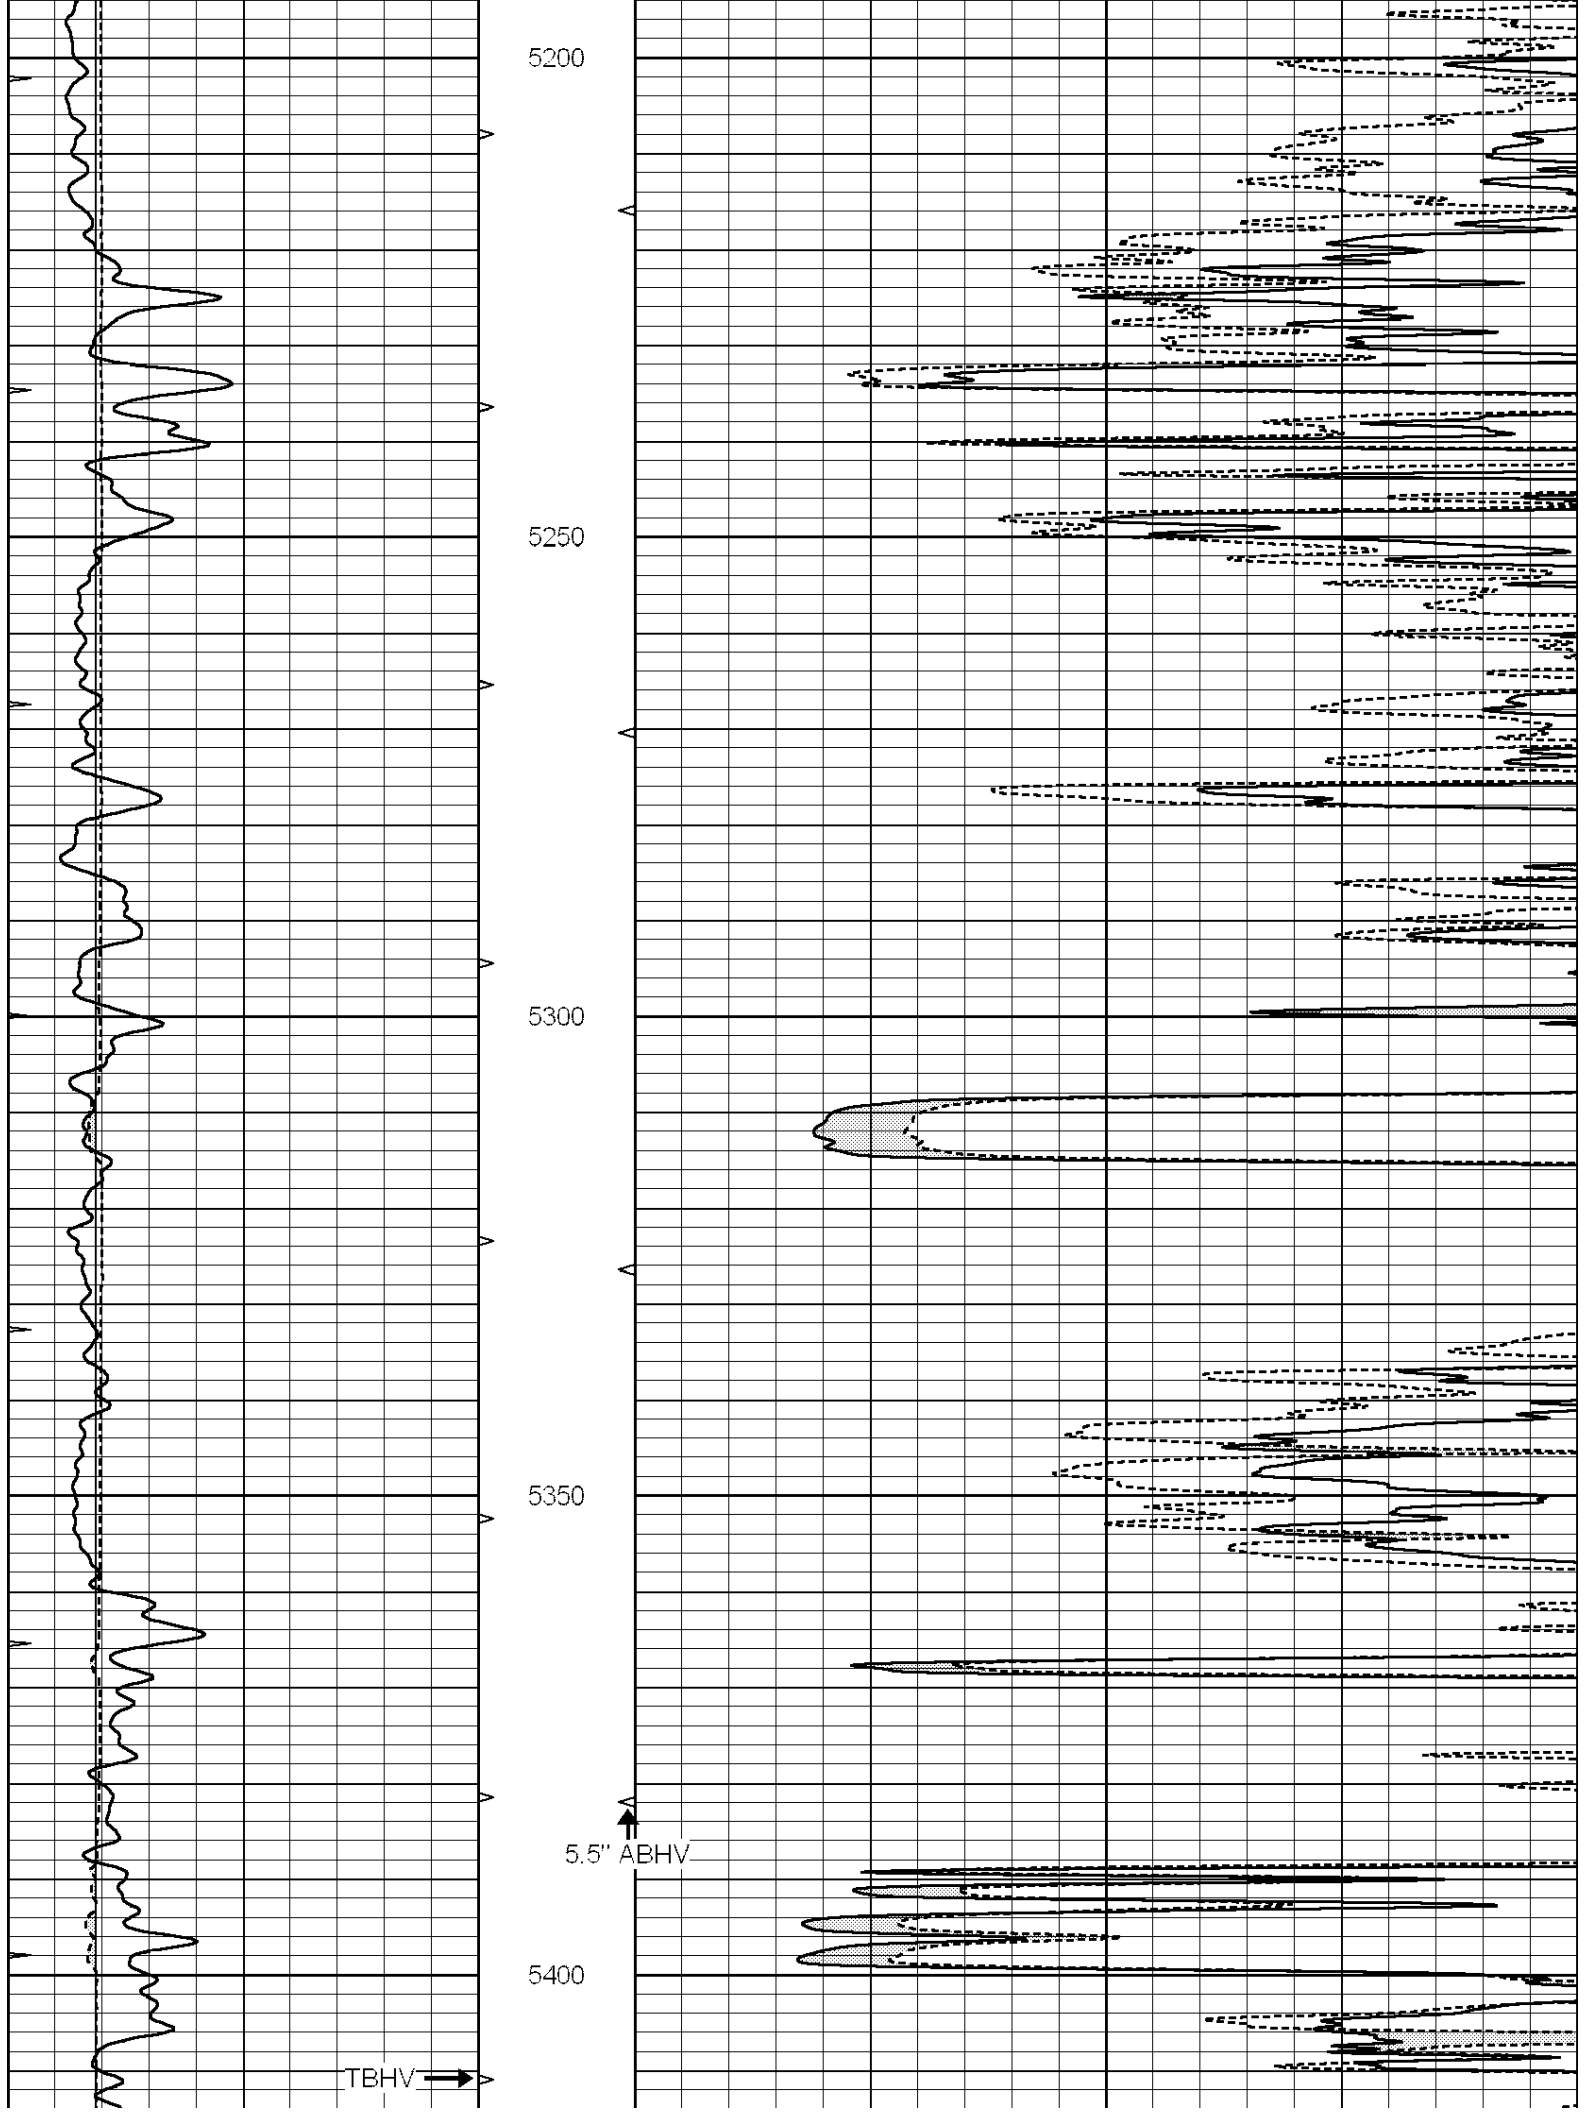

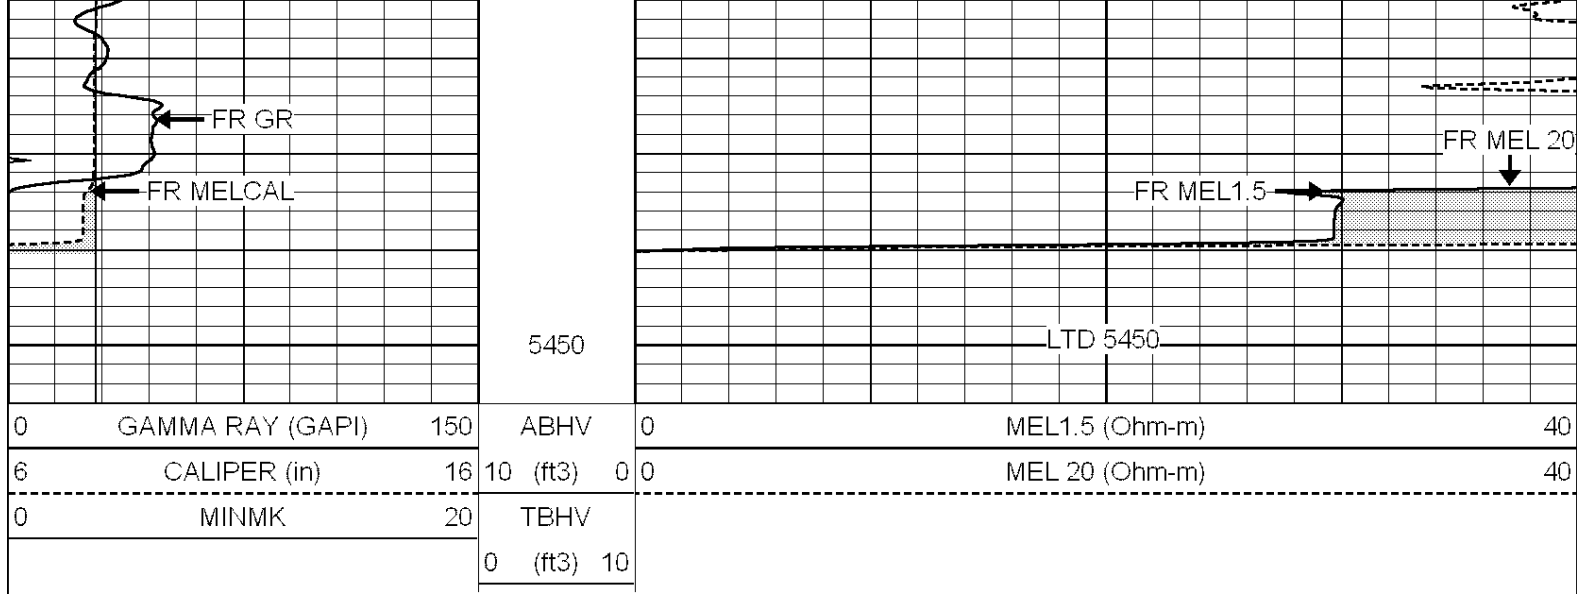



NABORS COMPLETION & PRODUCTION SERVICES CO.

REPEAT SECTION

Database File: 25875pe.db
 Dataset Pathname: pass5.1
 Presentation Format: micro
 Dataset Creation: Wed Sep 03 16:49:26 2014 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

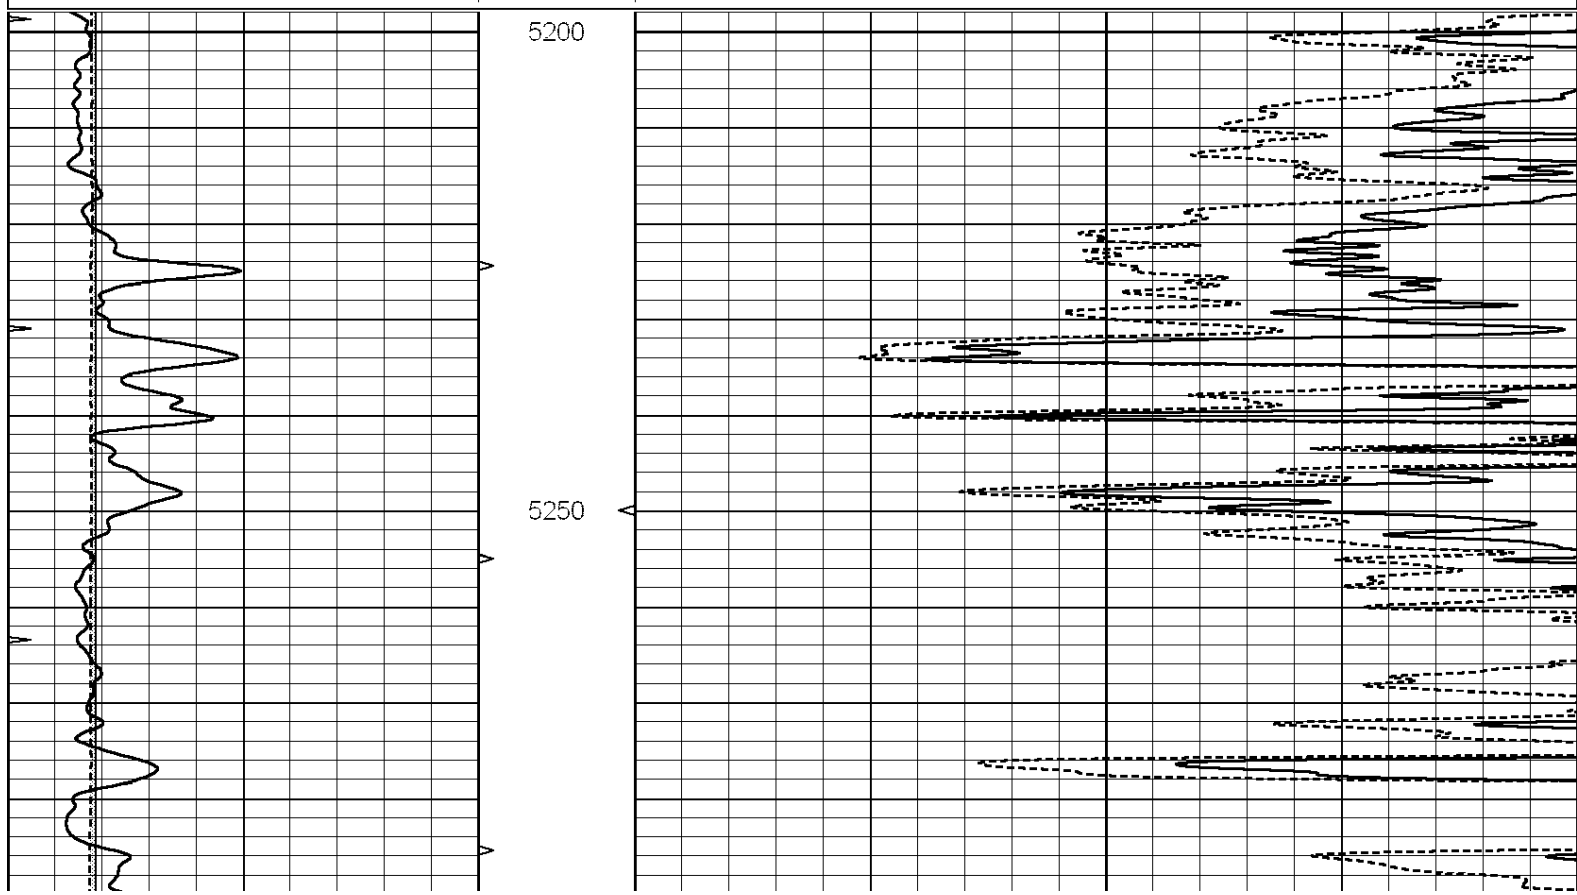

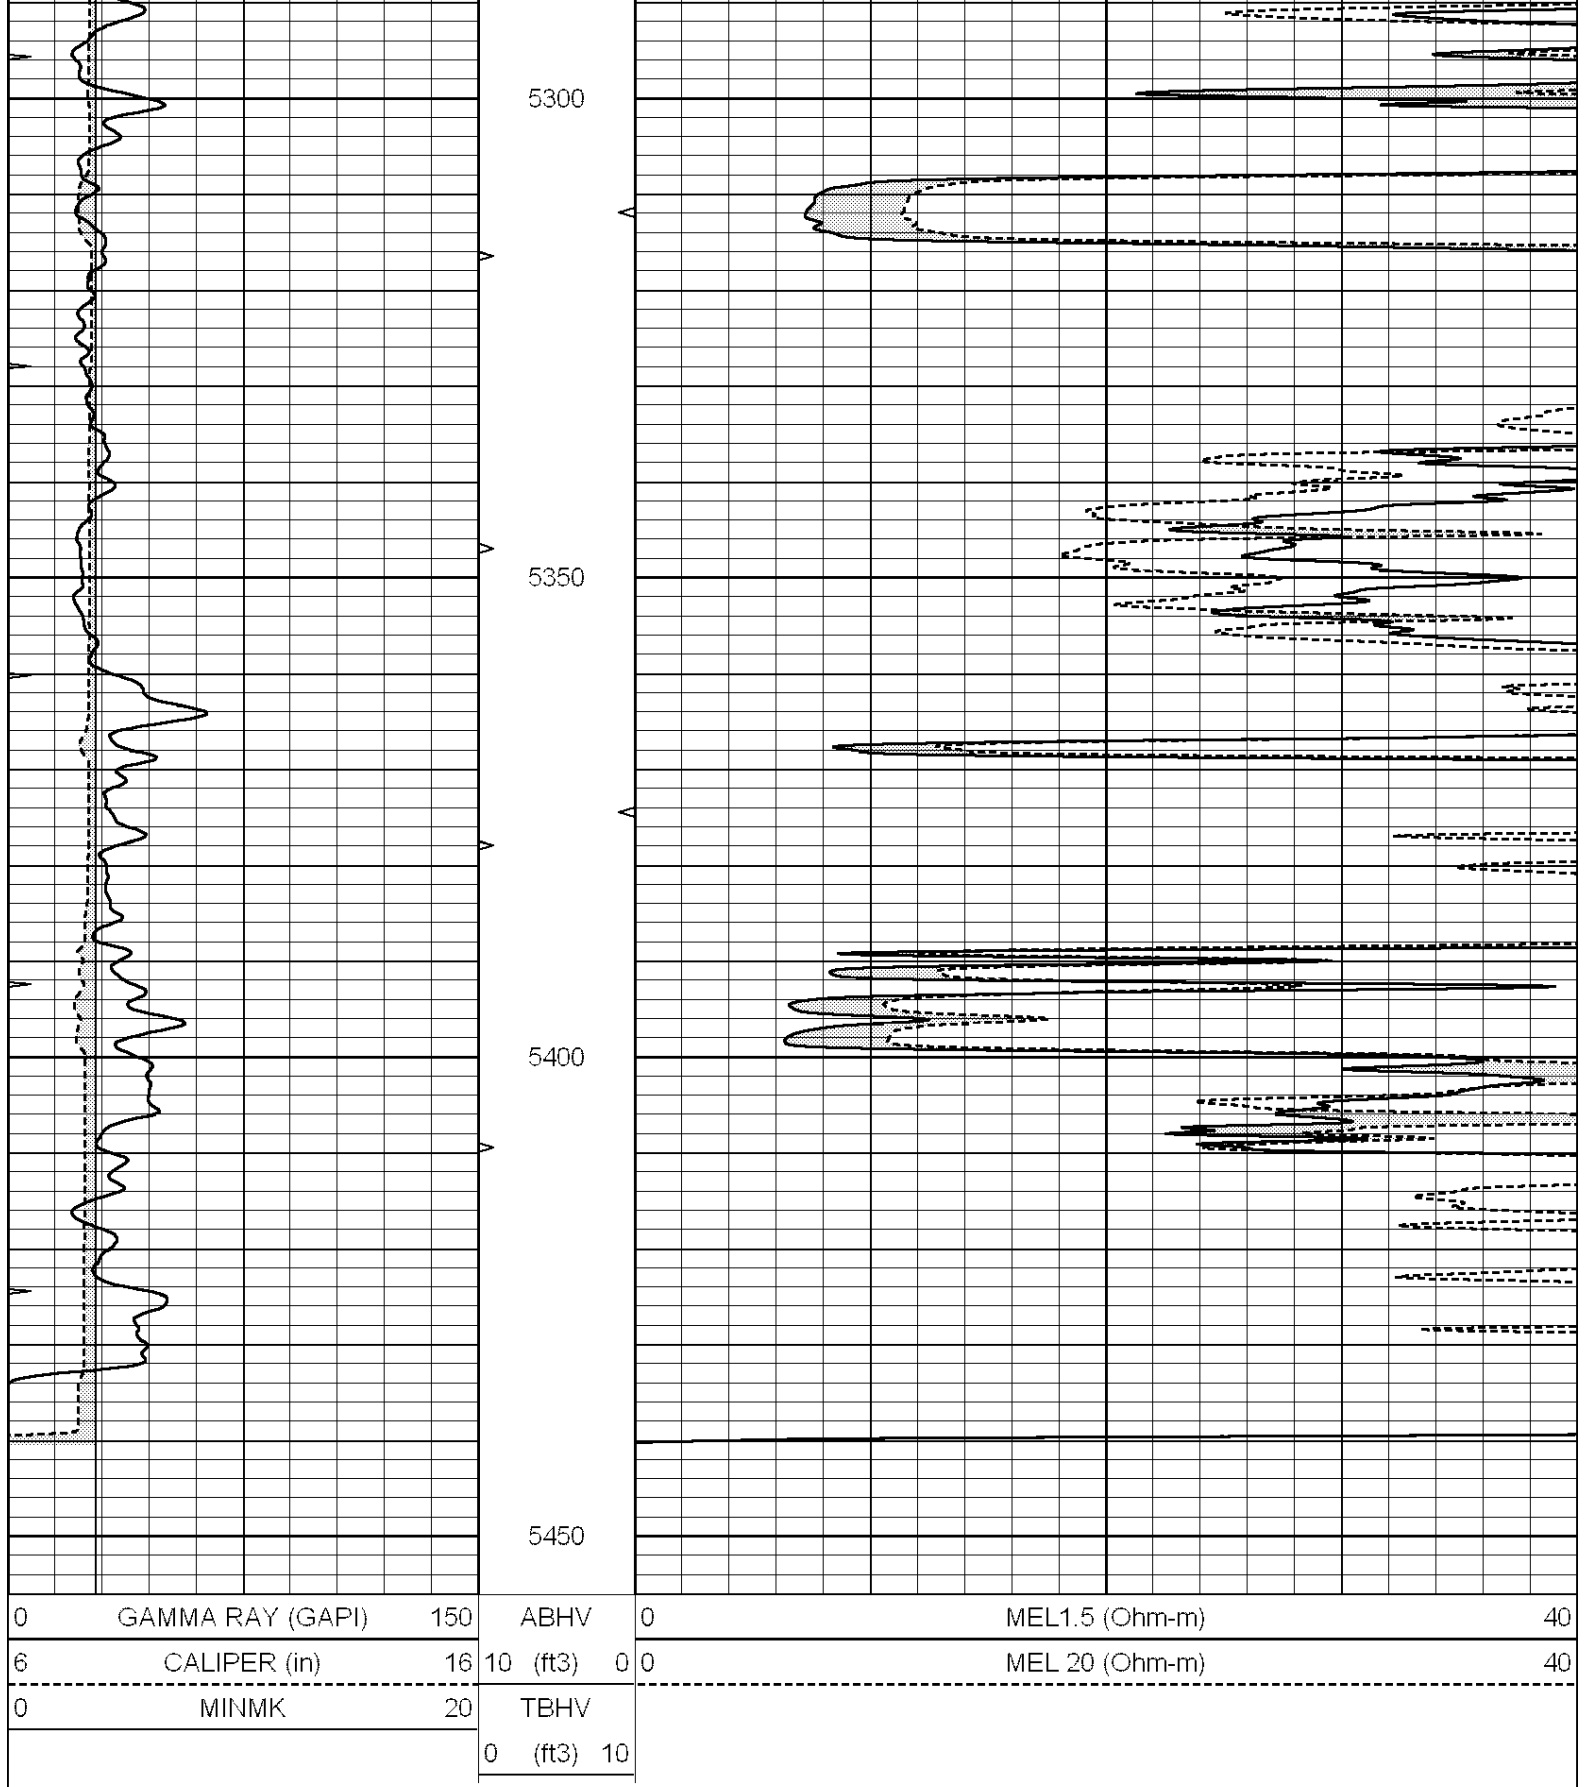

Calibration Report

Database File: 25875pe.db
Dataset Pathname: pass6.1
Dataset Creation: Wed Sep 03 18:13:37 2014 by Calc SOC 120430

MICRO Calibration Report

Serial Number: 070911

Tool Model: Performed:	ProbeN Wed Sep 03 16:51:01 2014	
Caliper Calibration:	Gain=3.517	Offset=3.213
References	Low Cal 8.000	High Cal 15.000
Readings	1.361	3.352
1.5" Calibration:	Gain=35.000	Offset=-0.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.001	1.269
2" Calibration:	Gain=50.000	Offset=-0.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.002	1.101
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Wed Sep 03 16:50:58 2014	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2200	GAPI/cps