



MICRO LOG

Company	BLUERIDGE PETROLEUM CORP.		
Well	SCHLEGEL-FRENCH#1-30		
Field	UNNAMED		
County	NESS		
State	KANSAS		
Location:	AP1 # : 15-135-26085-0000 NE-SE-SE-SE 465' FSL & 135' FEL		
Permanent Datum	GROUND LEVEL	Elevation	2566
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC	30	TWP	19S
RGE	25W		
Date	10/24/19		
Run Number	TWO		
Depth Driller	4655		
Depth Logger	4658		
Bottom Logged Interval	4628		
Top Log Interval	3500		
Casing Driller	8 5/8" @ 877		
Casing Logger	677		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.467		
pH / Fluid Loss	10.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.1 @ 55F		
Rmt @ Meas. Temp	.83 @ 55F		
Rmc @ Meas. Temp	1.32 @ 55F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.50 @ 122F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	122F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
WEST OF NESS CITY TO J RD. SOUTH 7,
1 WEST, 1 NORTH, 1 1/2 WEST







MAIN PASS


Database File: 4100pe.db
Dataset Pathname: pass51
Presentation Format: _micro
Dataset Creation: Thu Oct 24 16:39:10 2019 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

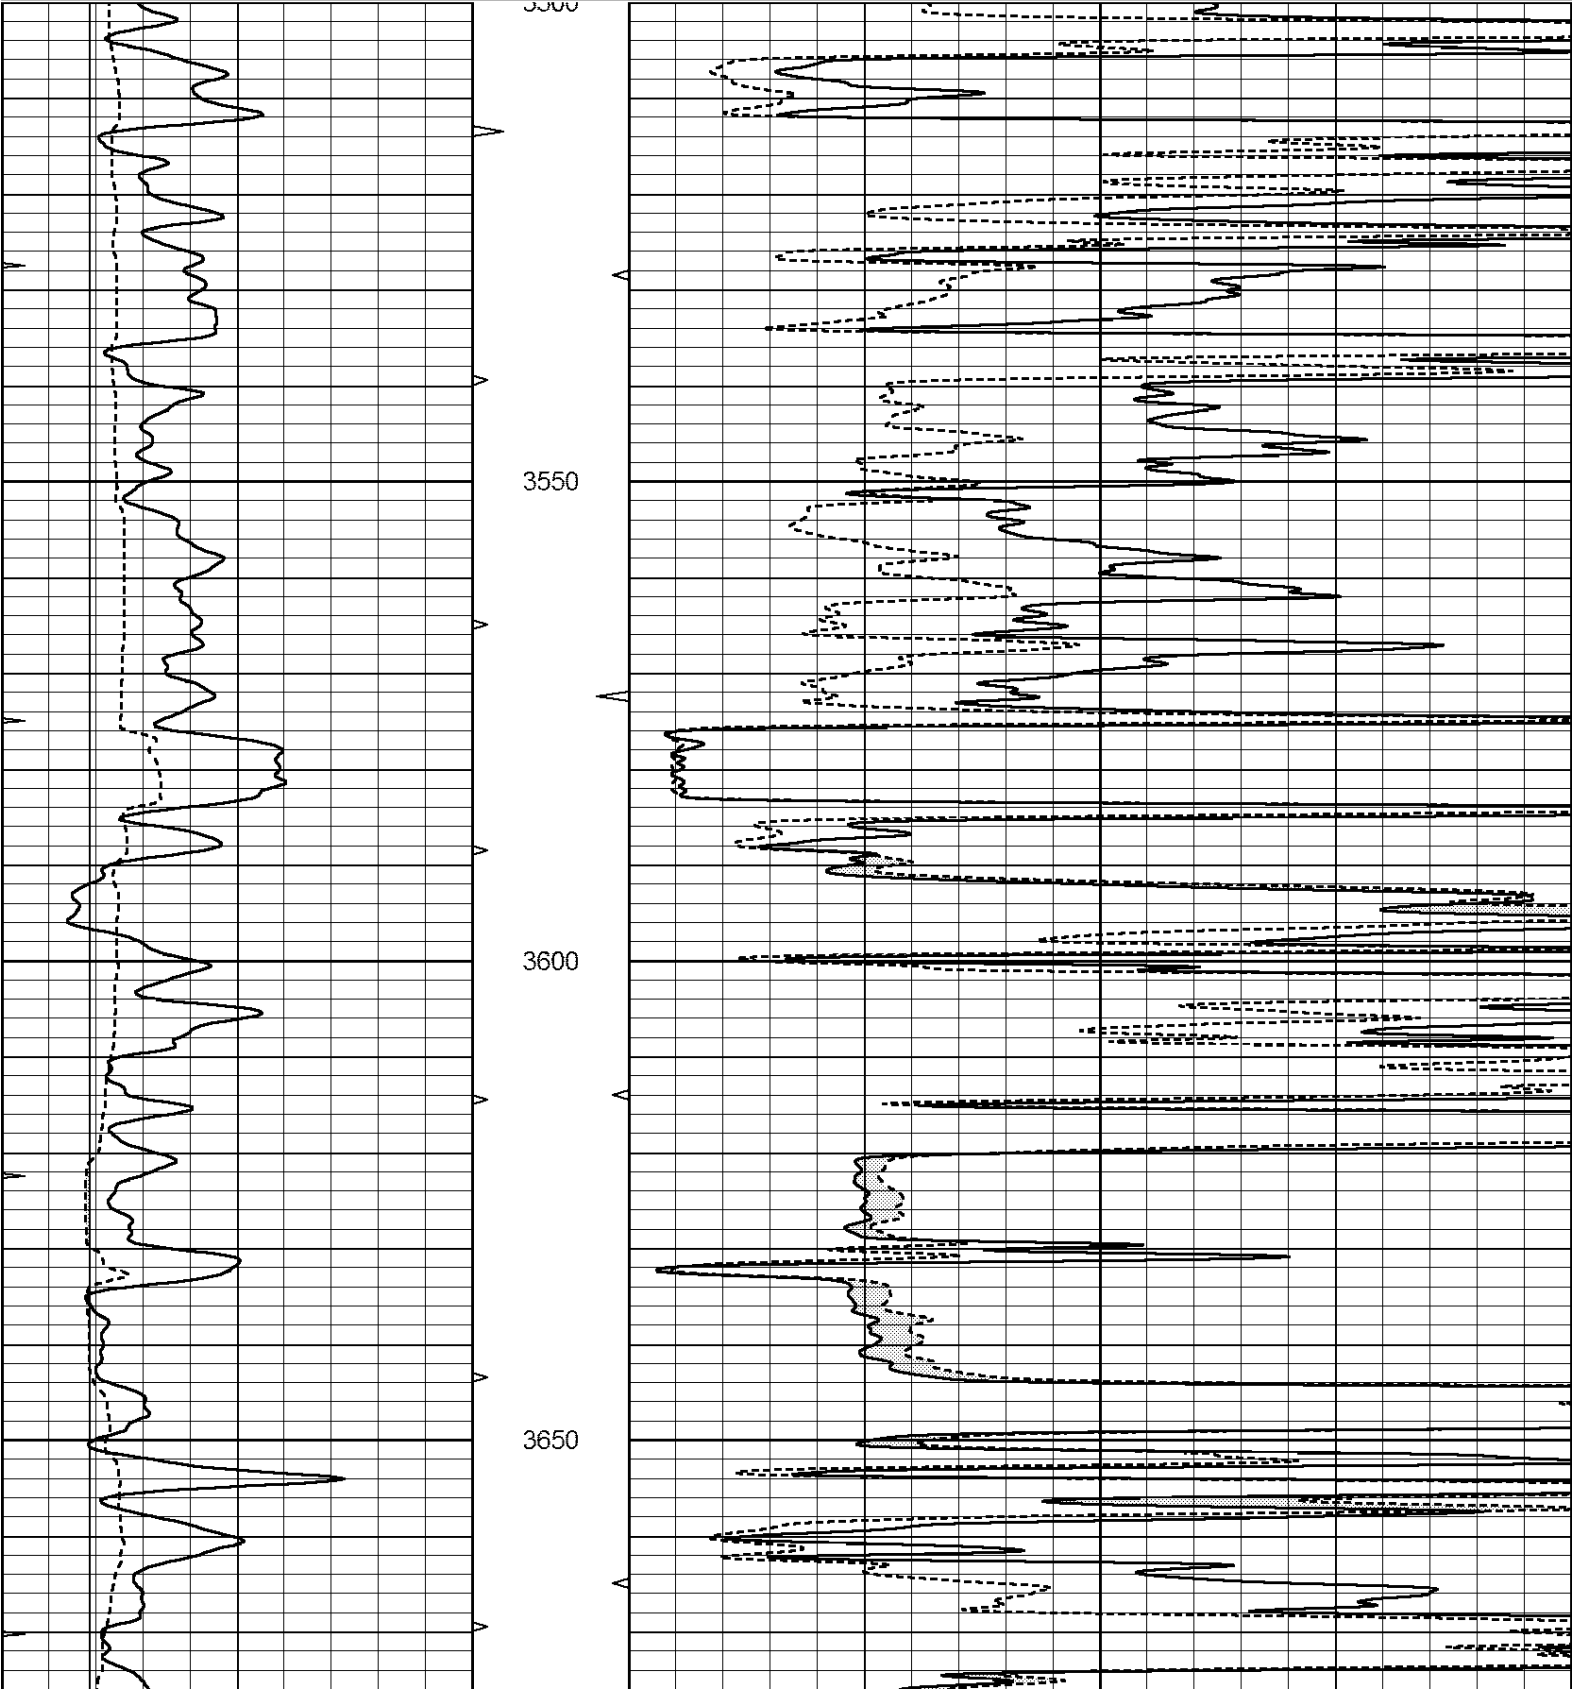

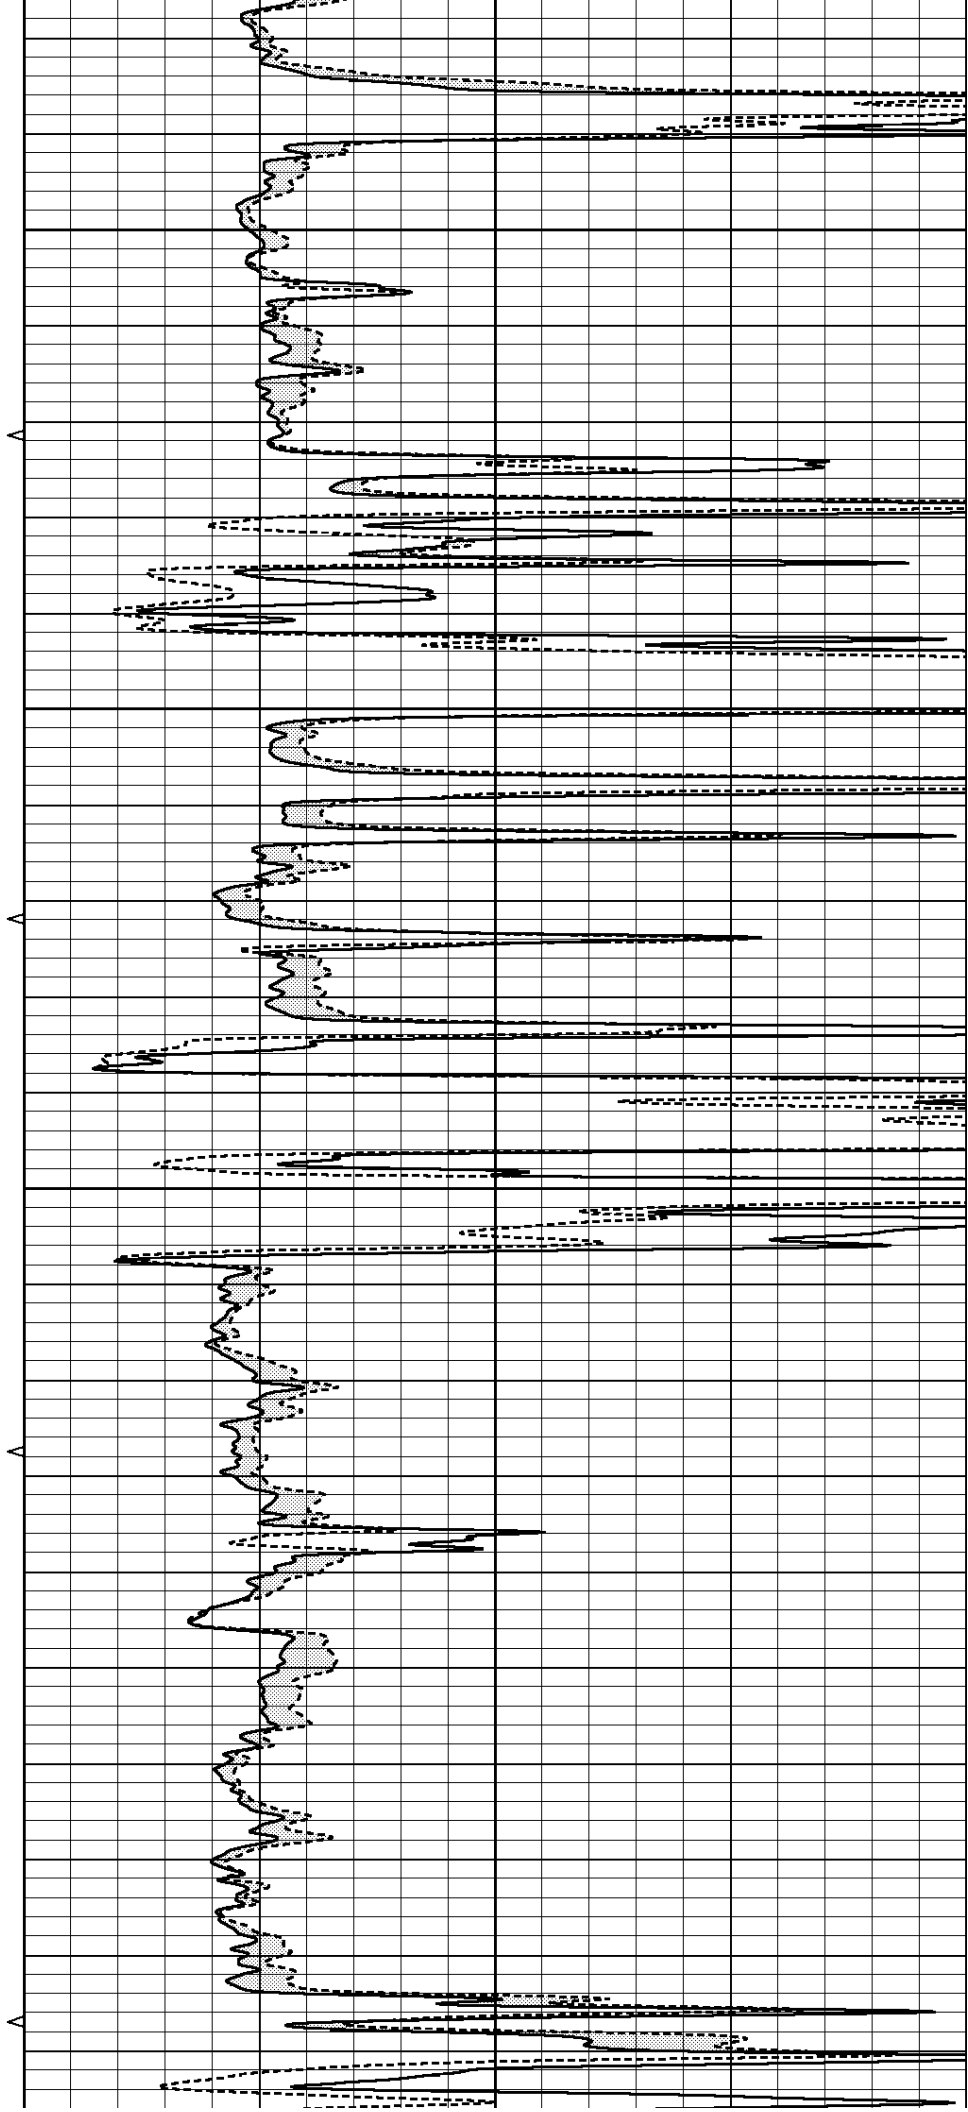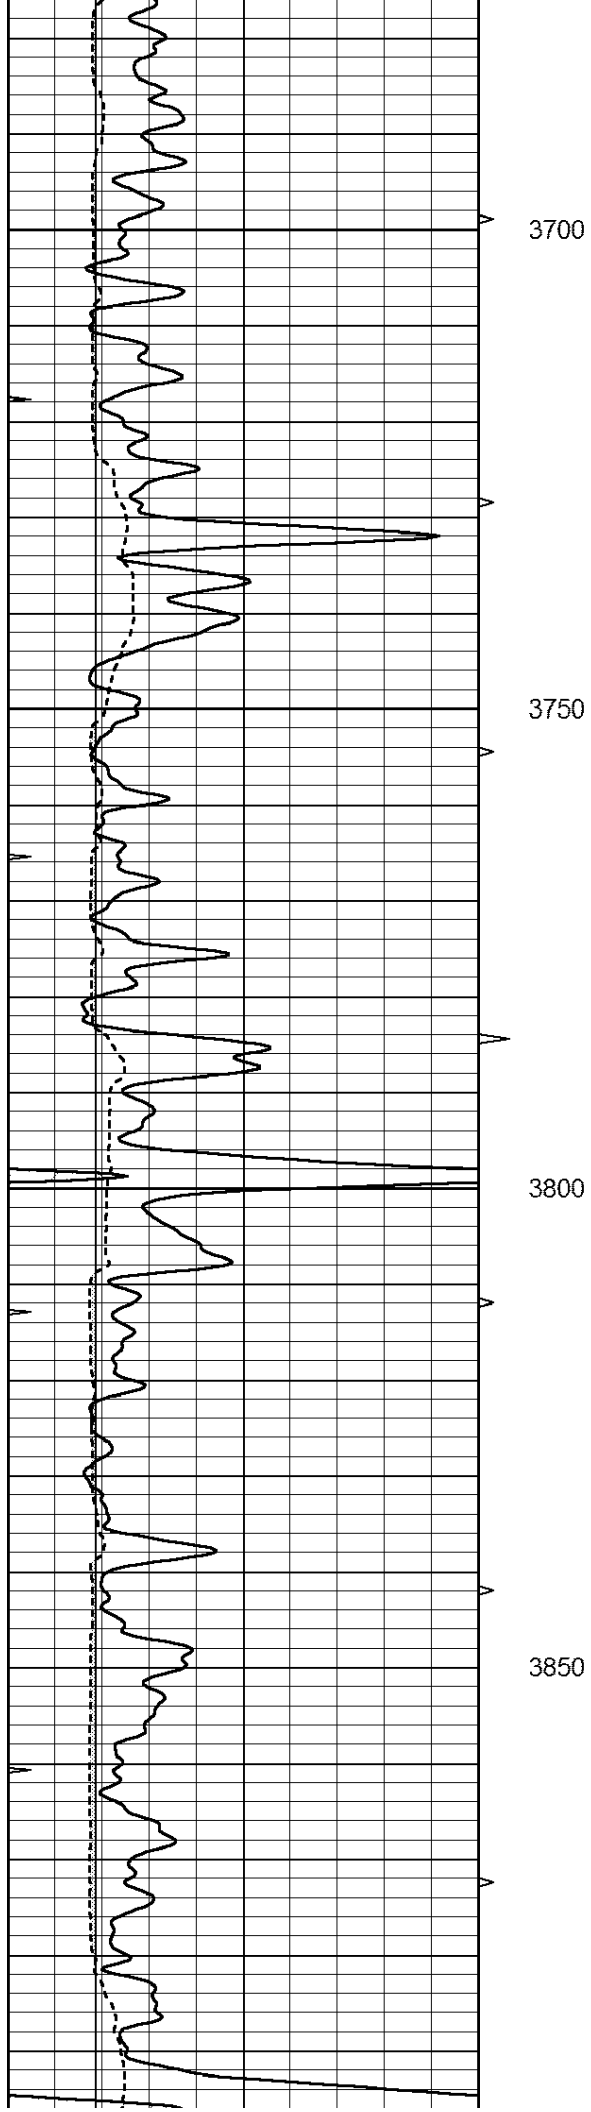

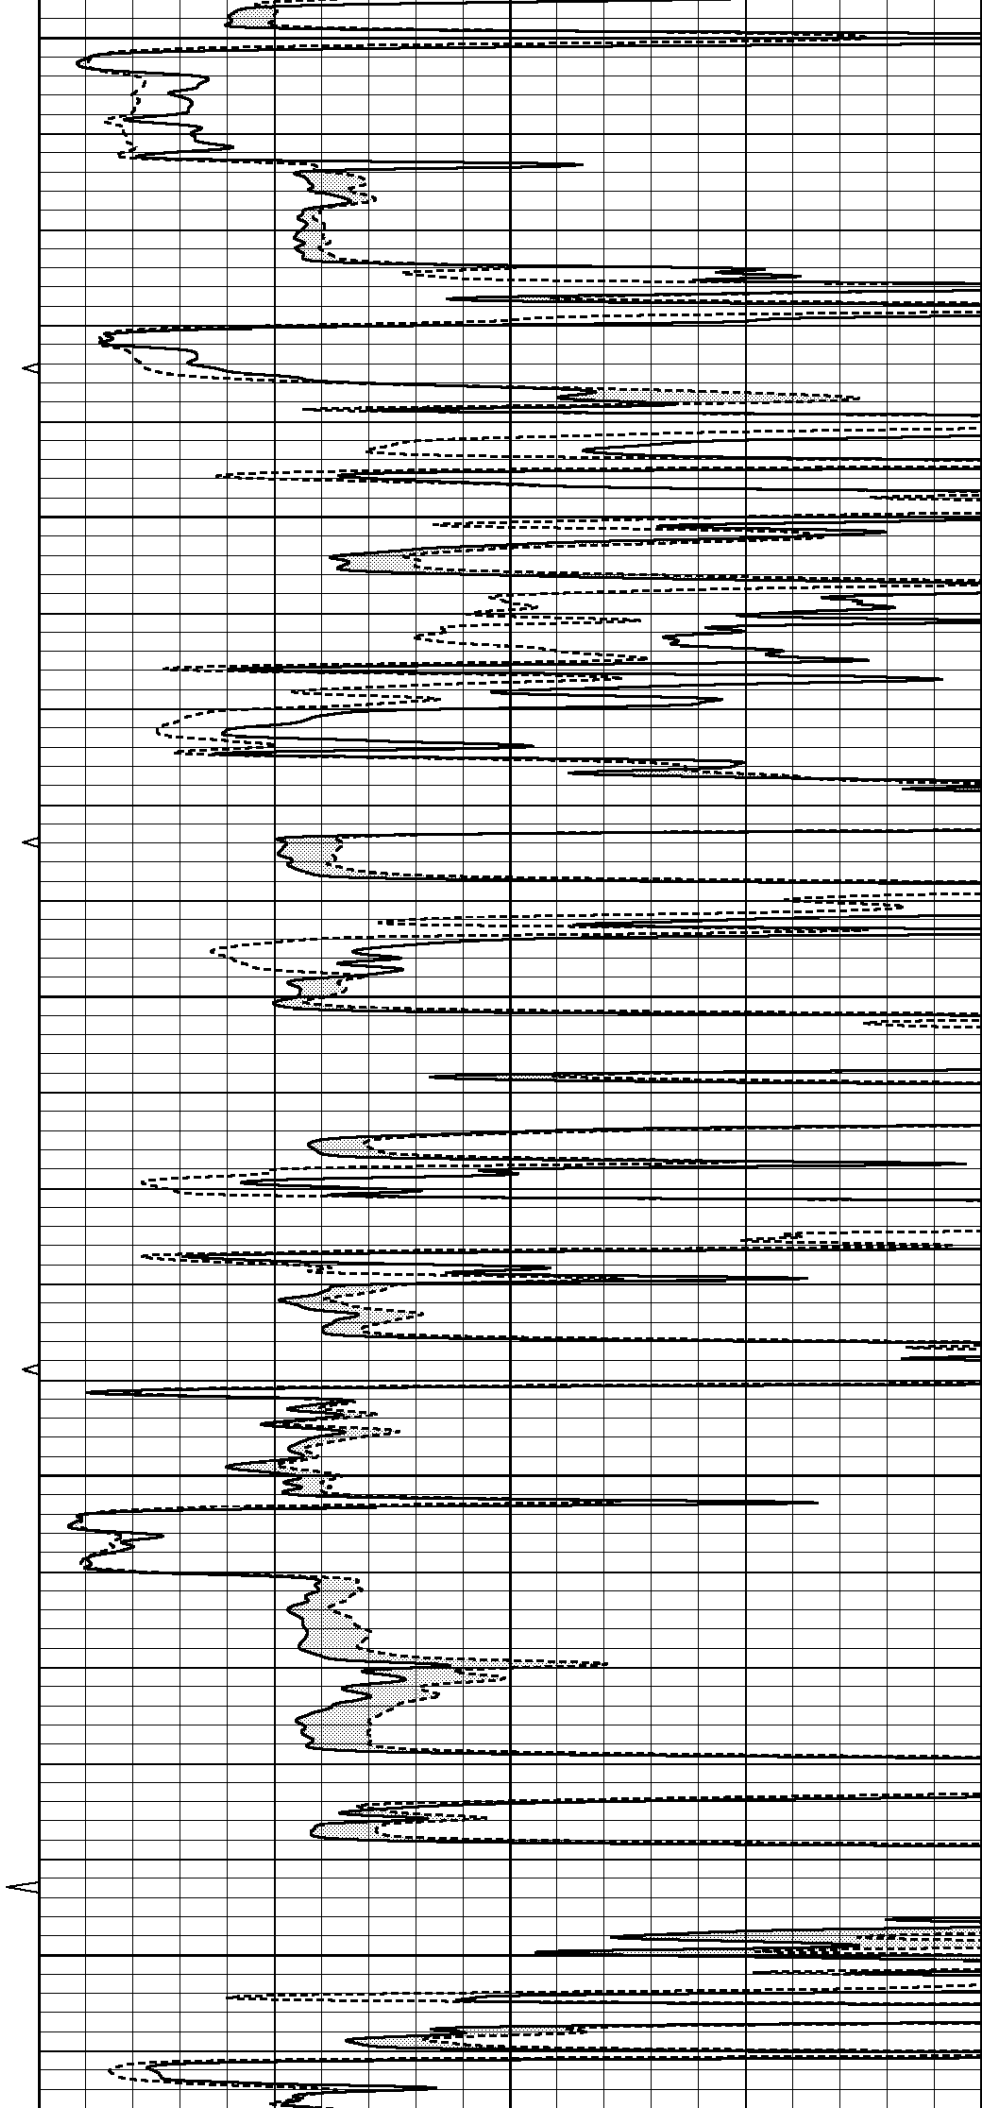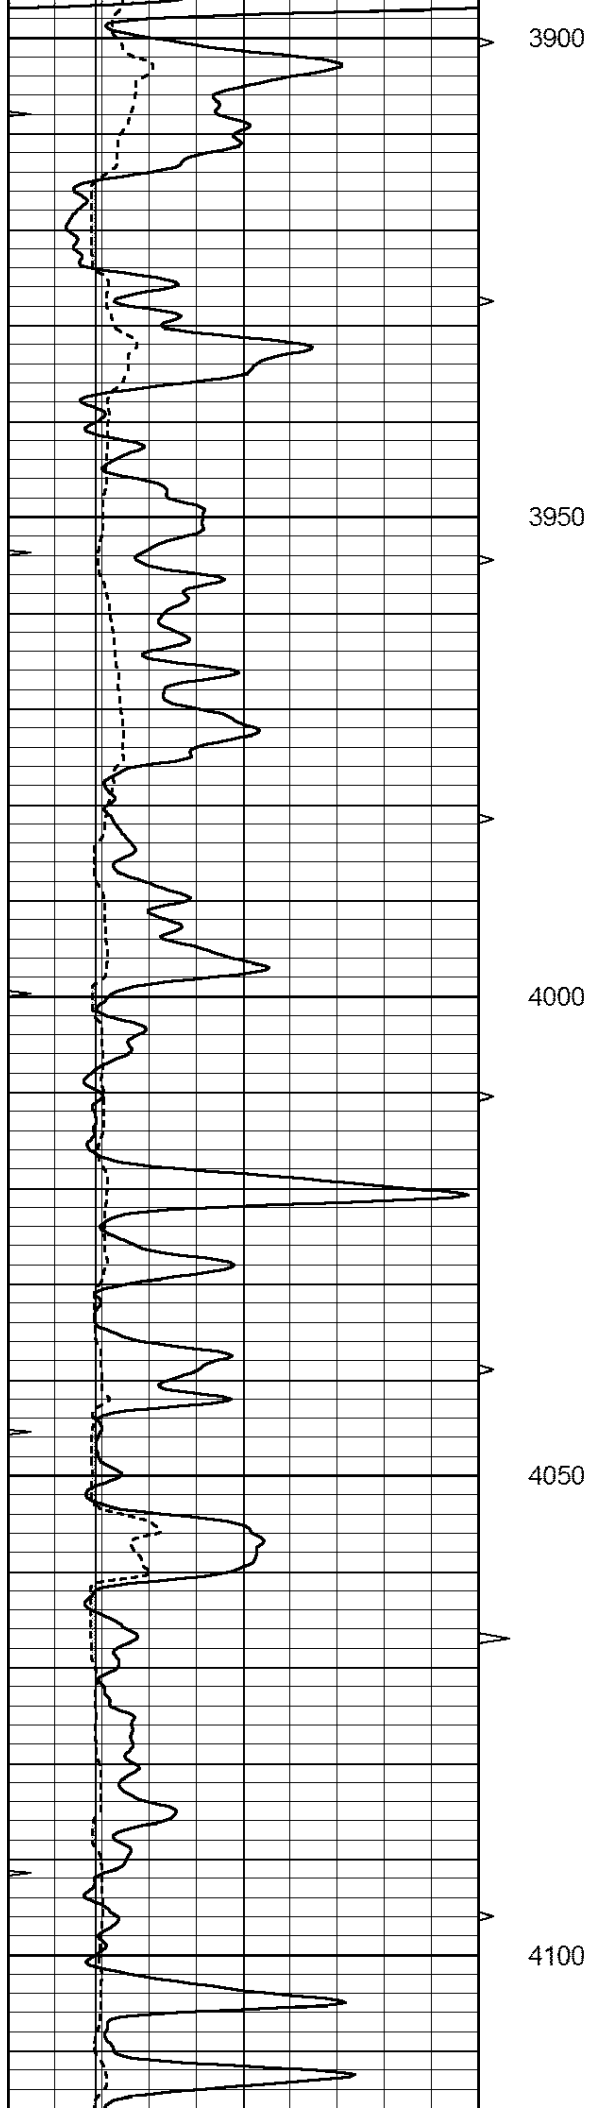

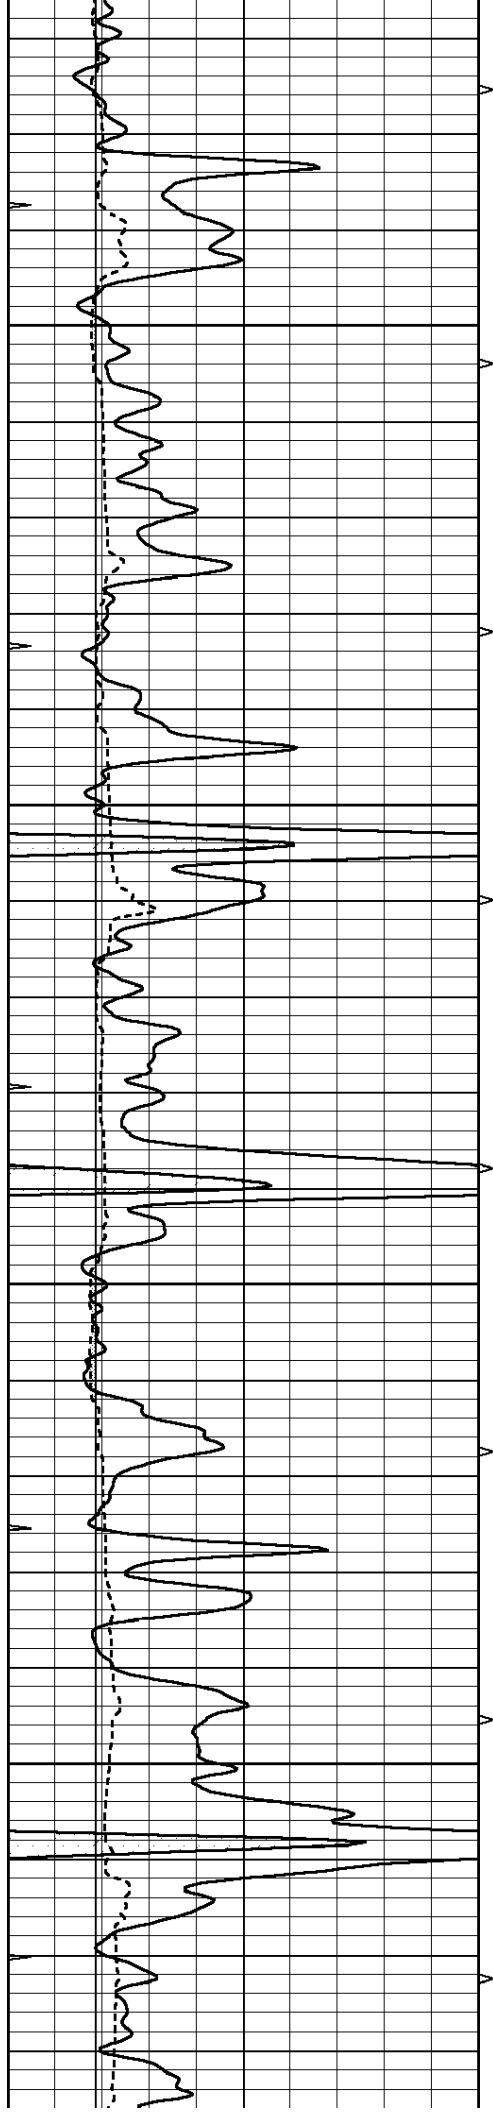




4150



4200

4250

4300

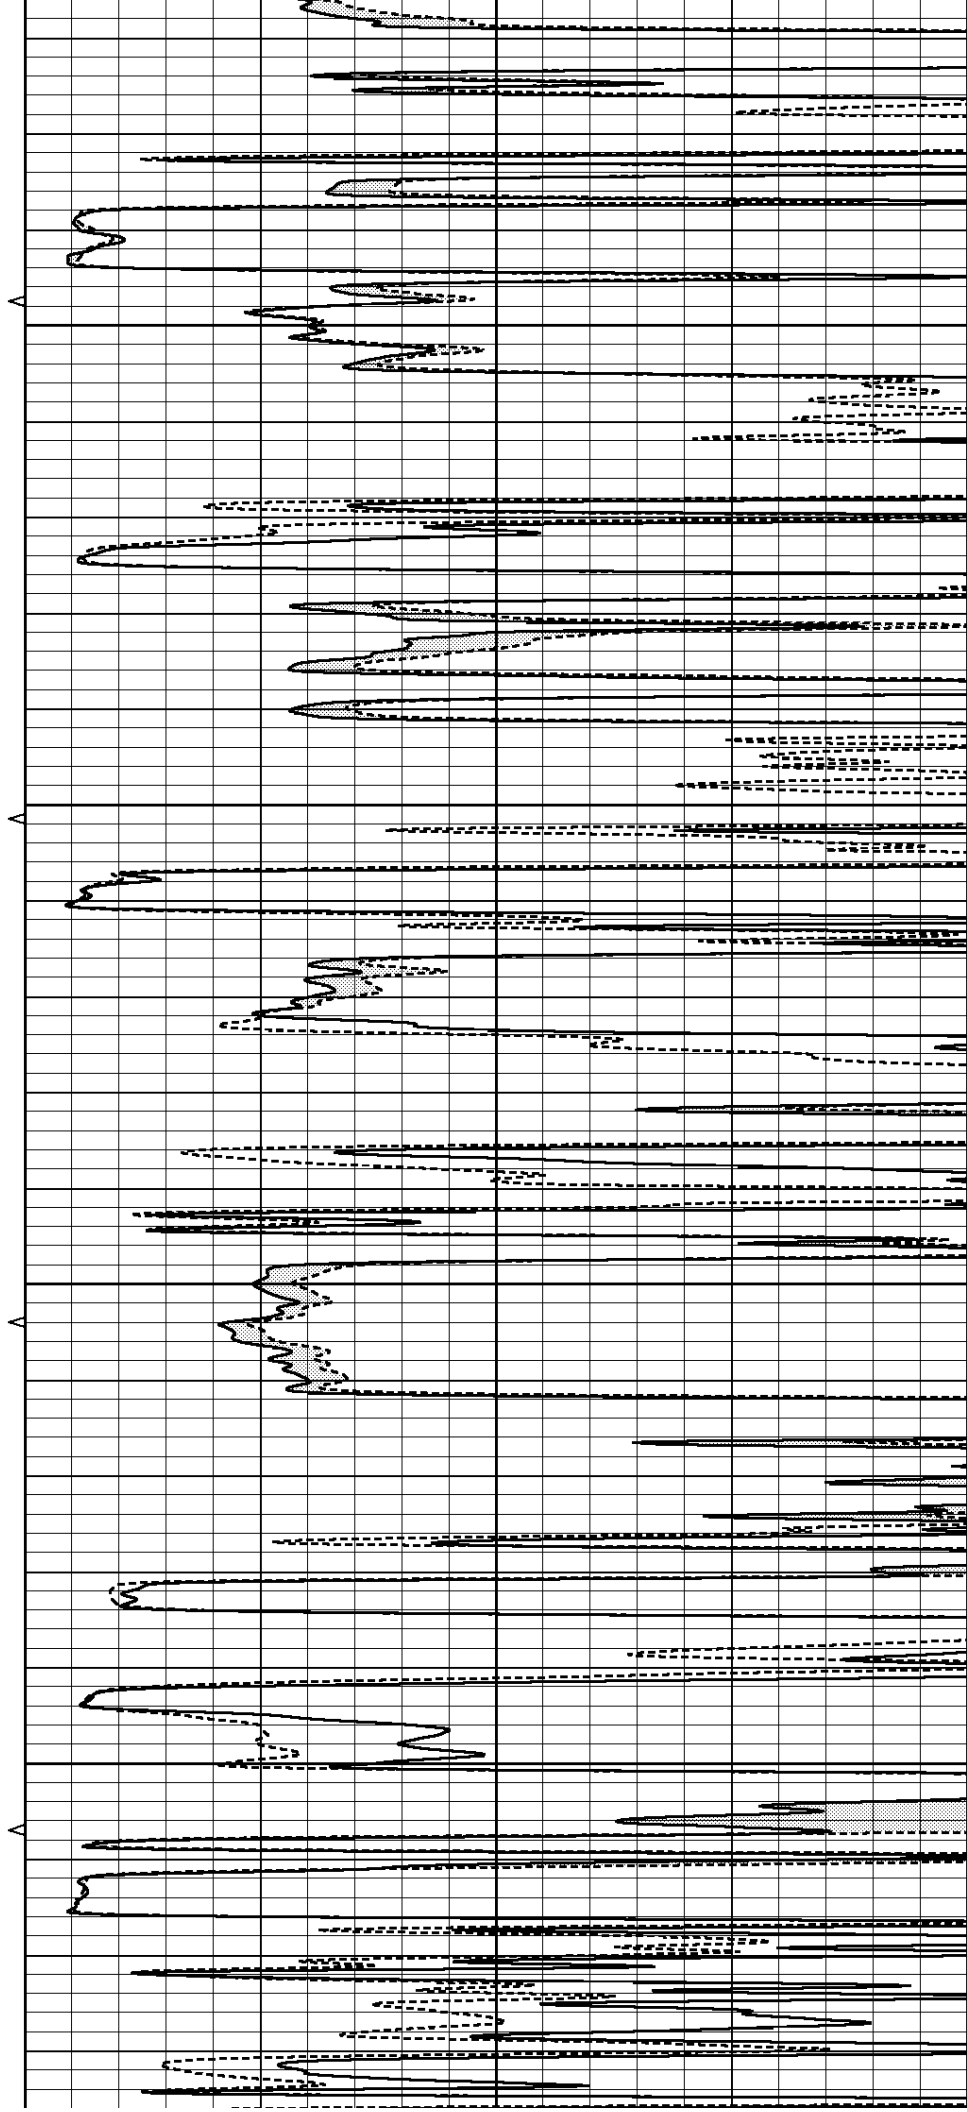

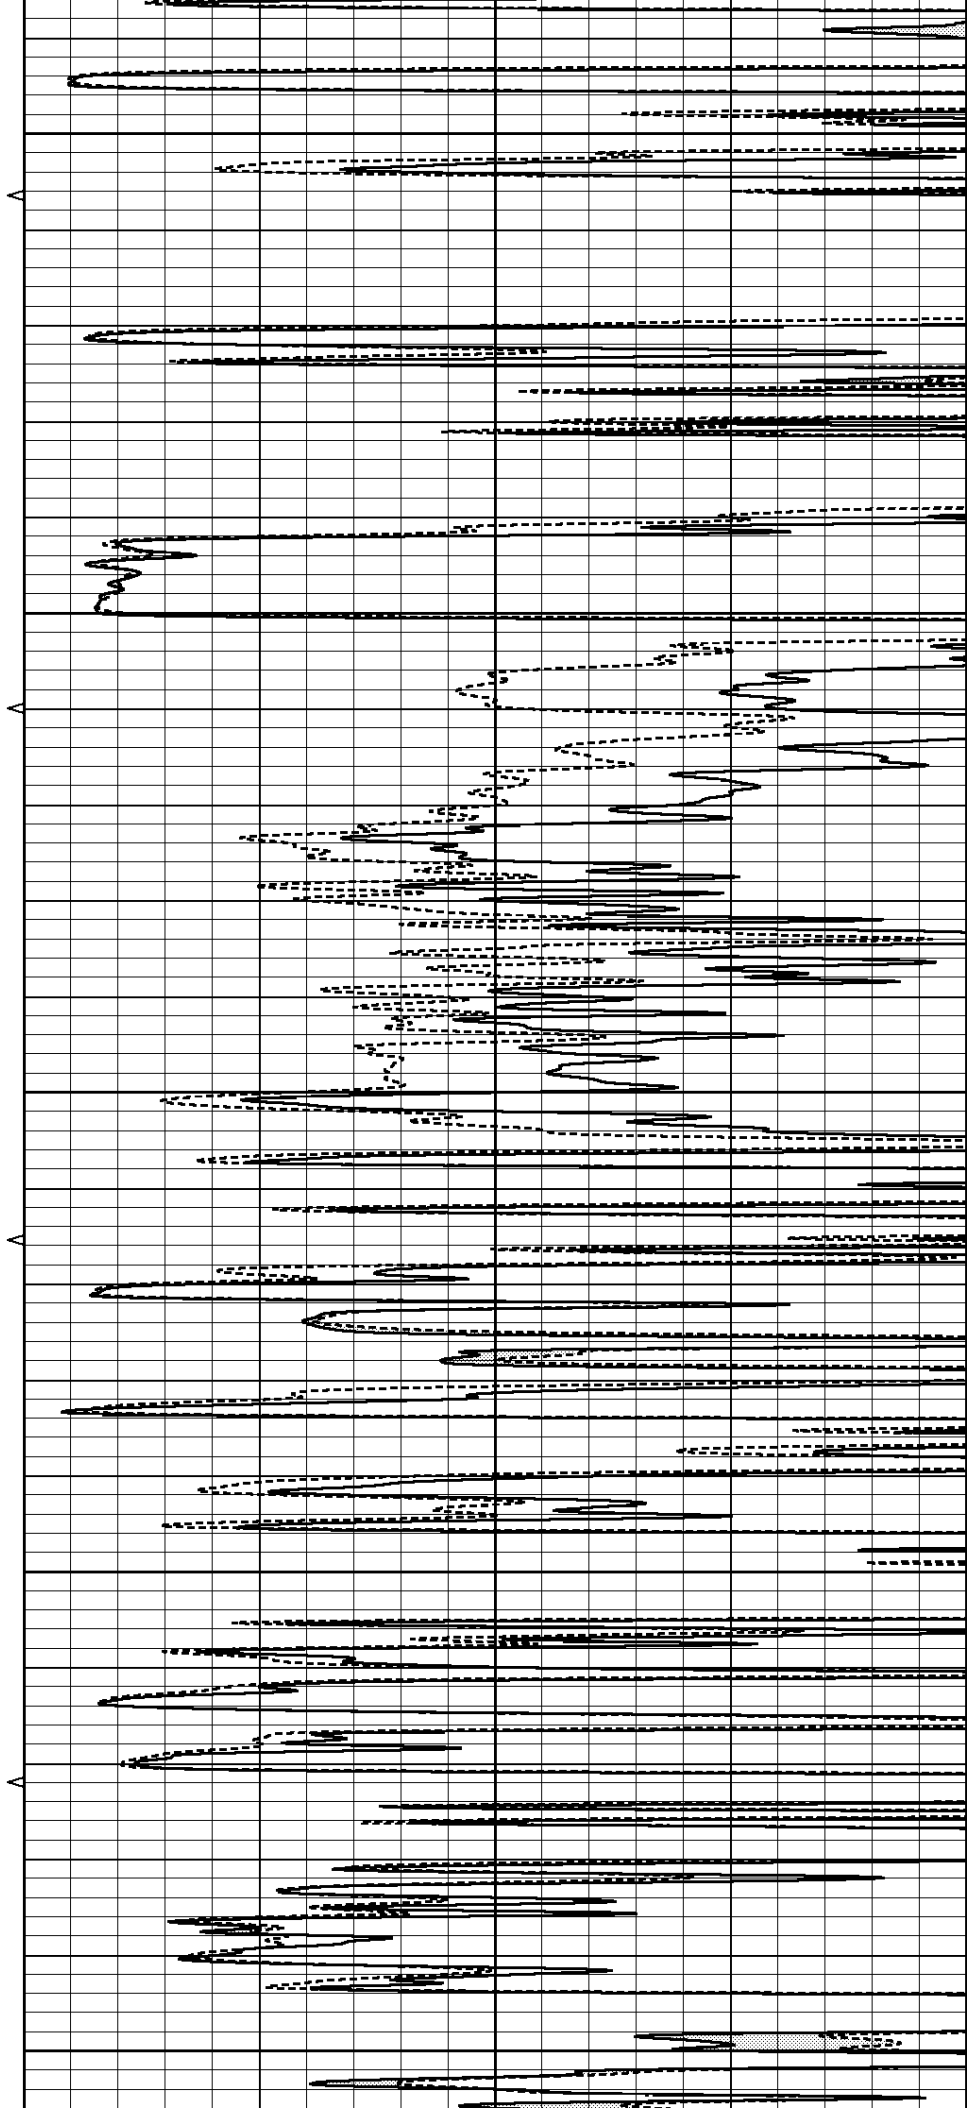
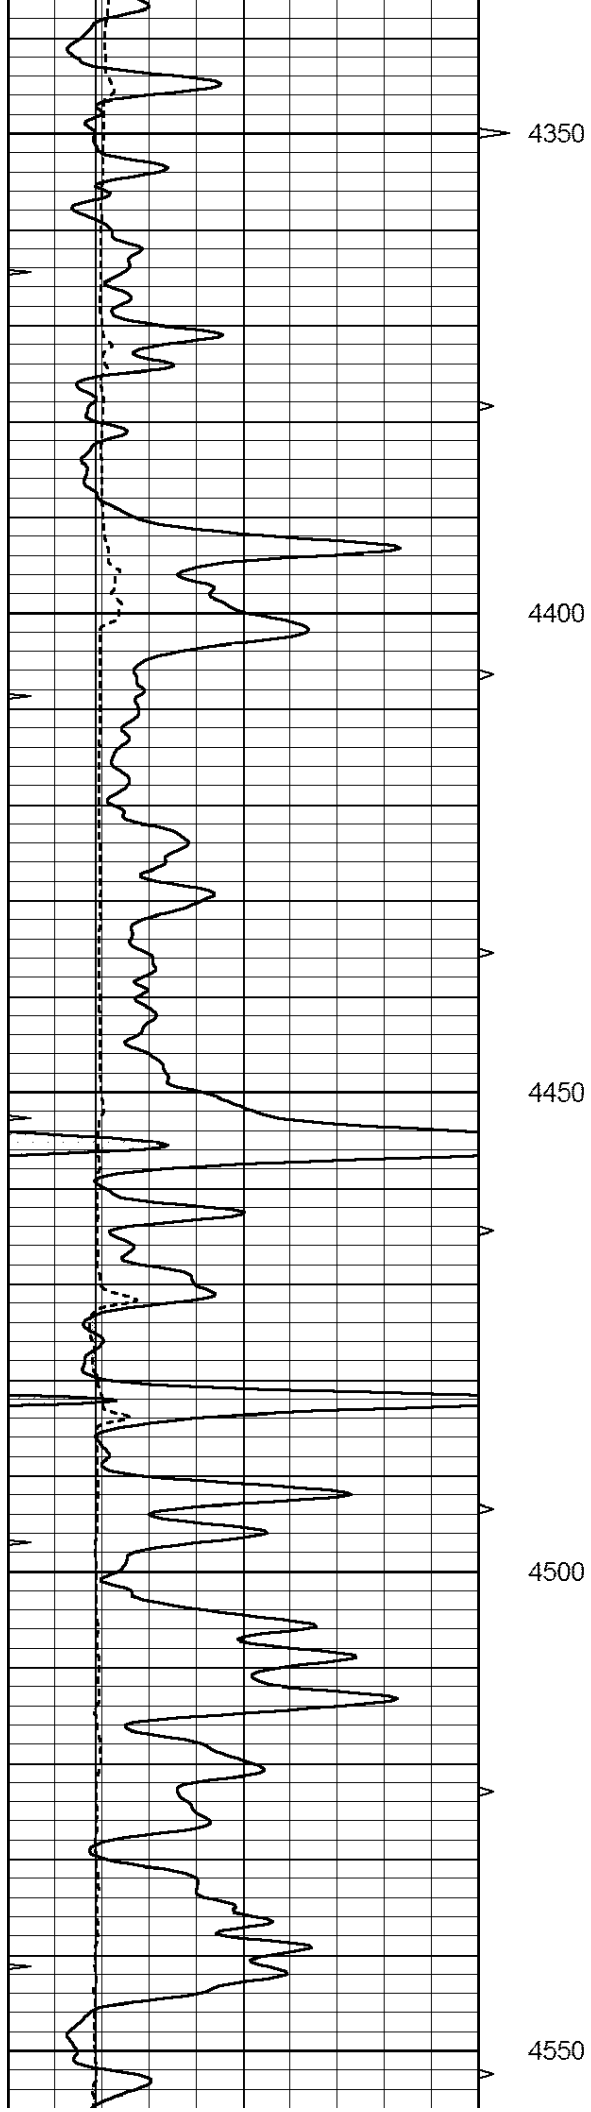


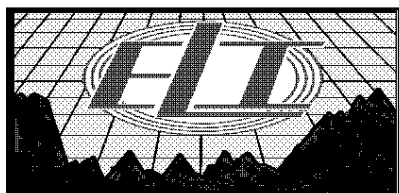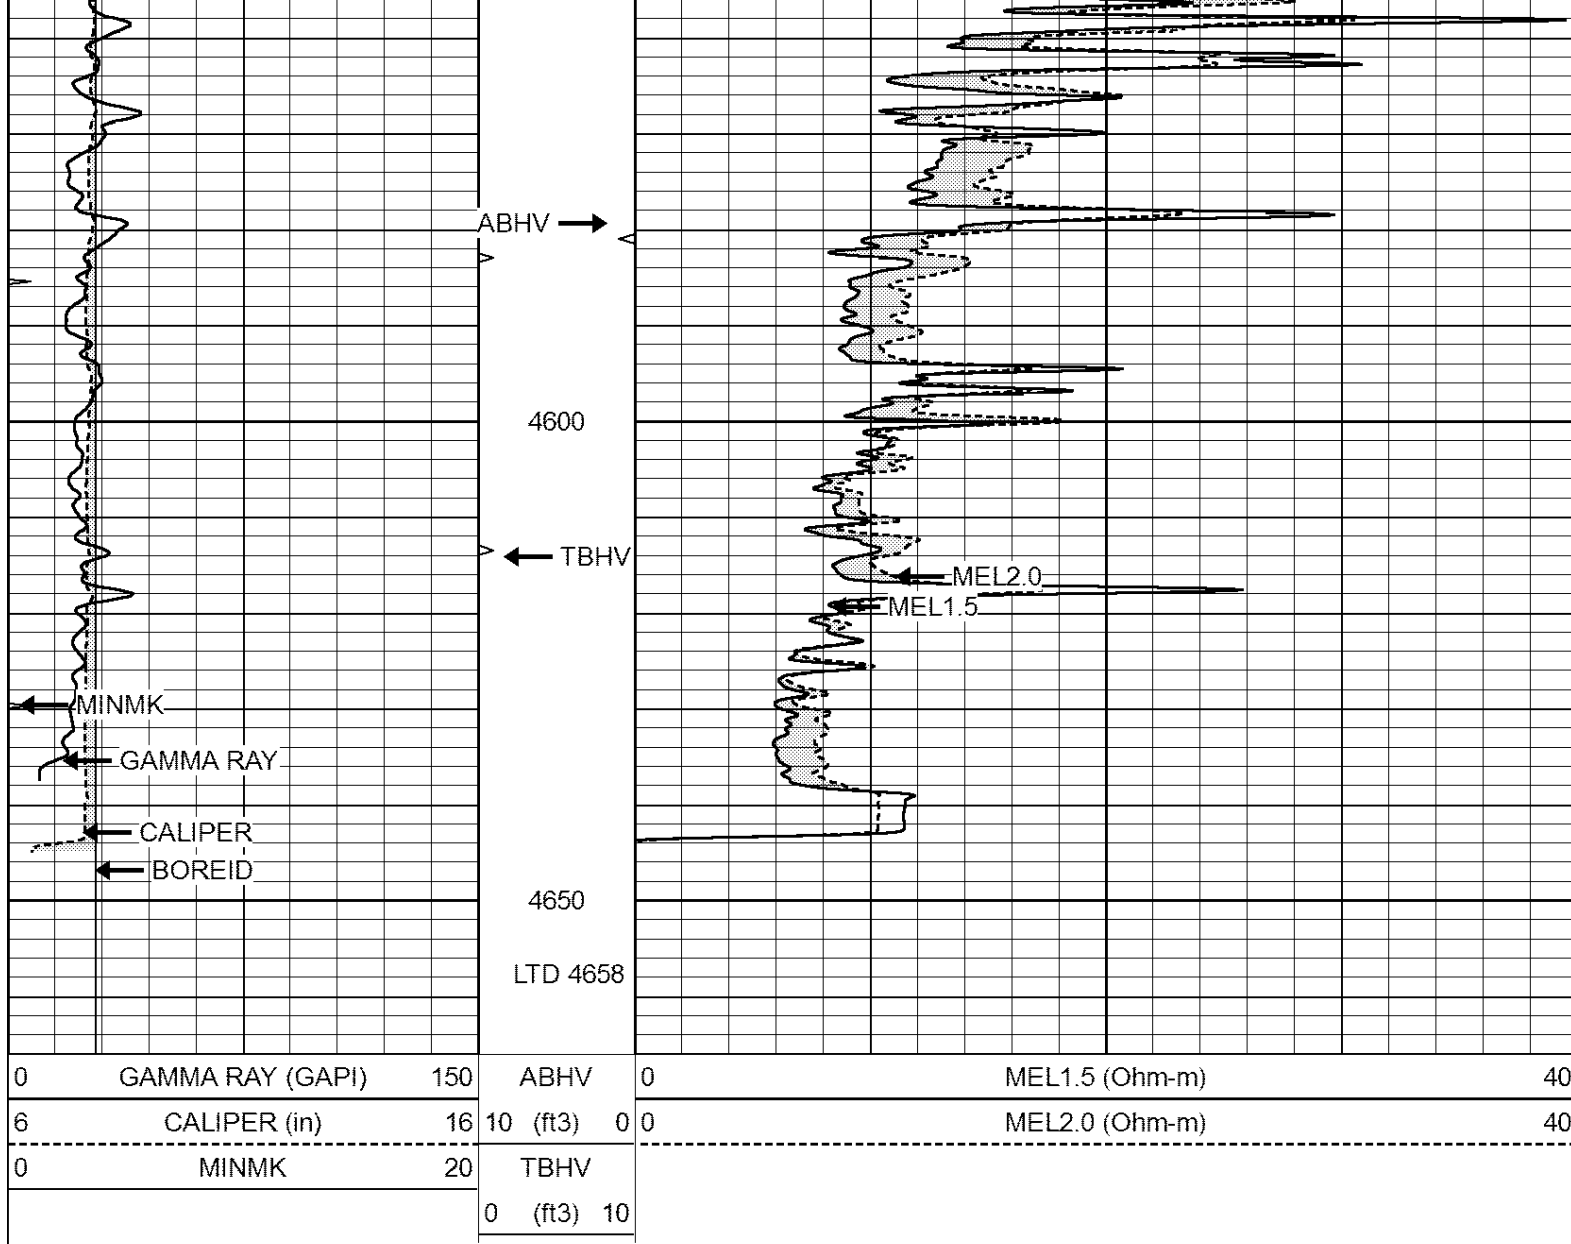


REPEATS SECTION

Database File: 4100pe.db
 Dataset Pathname: pass4.1
 Presentation Format: _micro
 Dataset Creation: Thu Oct 24 16:15:08 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

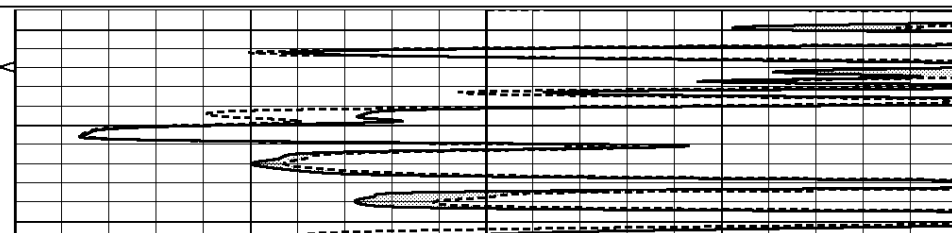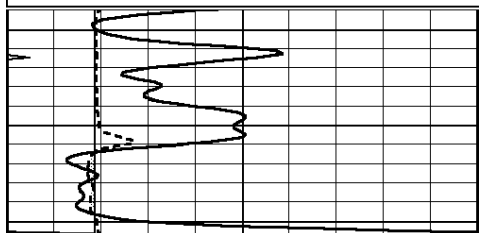

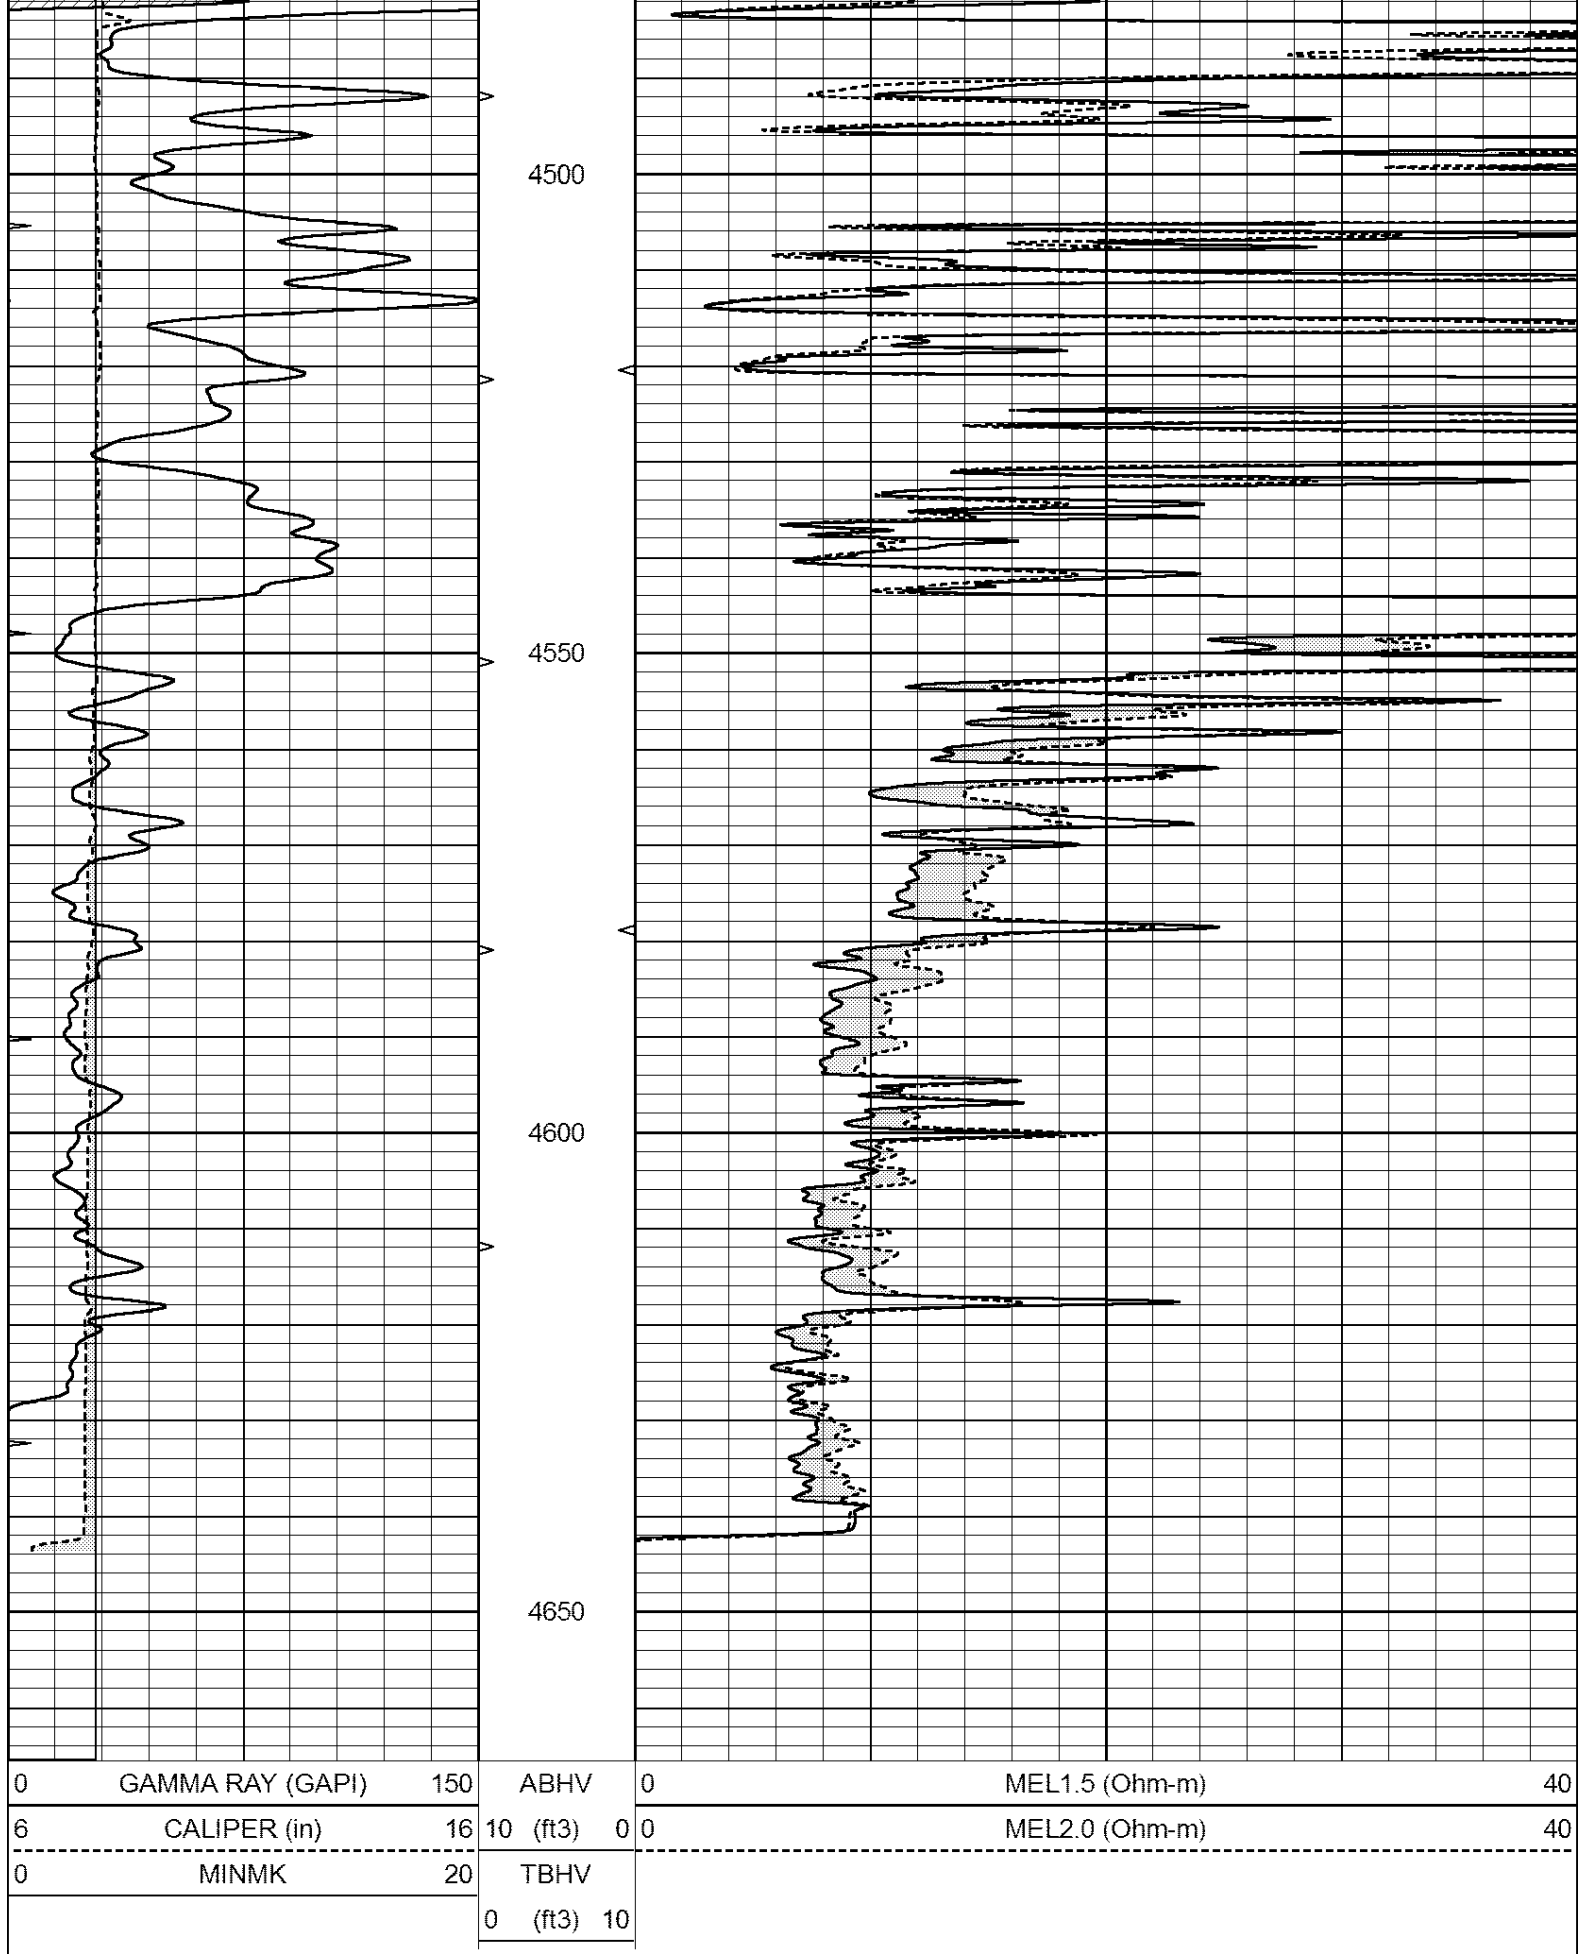

Calibration Report

Database File: 4100pe.db
Dataset Pathname: pass4.1

MICRO Calibration Report		
Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Thu Sep 12 10:50:26 2019	
Caliper Calibration:	Gain=2.030	Offset=6.505
	Low Cal	High Cal
References	9.500	13.000
Readings	0.308	2.032
1.5" Calibration:	Gain=46.134	Offset=-1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832
2" Calibration:	Gain=42.000	Offset=-0.300
	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Thu Sep 12 10:48:02 2019	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5800	GAPI/cps