



MICRO LOG

Company	PICKRELL DRILLING COMPANY, INC.	Company	PICKRELL DRILLING COMPANY, INC.
Well	YOUNG "RR" #2	Well	YOUNG "RR" #2
Field	BROADWAY	Field	BROADWAY
County	KINGMAN	County	KINGMAN
State	KANSAS	State	KANSAS
Location:	API # : 15-095-22339-0000	Other Services CDL/CNL DIL/SON	
Permanent Datum	GROUND LEVEL	Elevation	1436
Log Measured From	KELLY BUSHING	Elevation	1443
Drilling Measured From	KELLY BUSHING	Elevation	1441
		Elevation	G.L. 1436
Date	3/23/21		
Run Number	TWO		
Depth Driller	3915		
Depth Logger	3914		
Bottom Logged Interval	3898		
Top Log Interval	2400		
Casing Driller	8 5/8"@214'		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES	9,500 PPM
Density / Viscosity	9.2/50		
pH / Fluid Loss	10.0/11.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.470@78F		
Rmf @ Meas. Temp	.353@78F		
Rmc @ Meas. Temp	.564@78F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.319@115F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	9:30 P.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	AARON YOUNG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-095-22339-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
(HWY 54 & MT. VERNON EXIT,) 1 1/2S., W. INTO




MAIN SECTION

Database File	5264ddn.db
Dataset Pathname	pass6.1M
Presentation Format	micro
Dataset Creation	Tue Mar 23 22:53:37 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

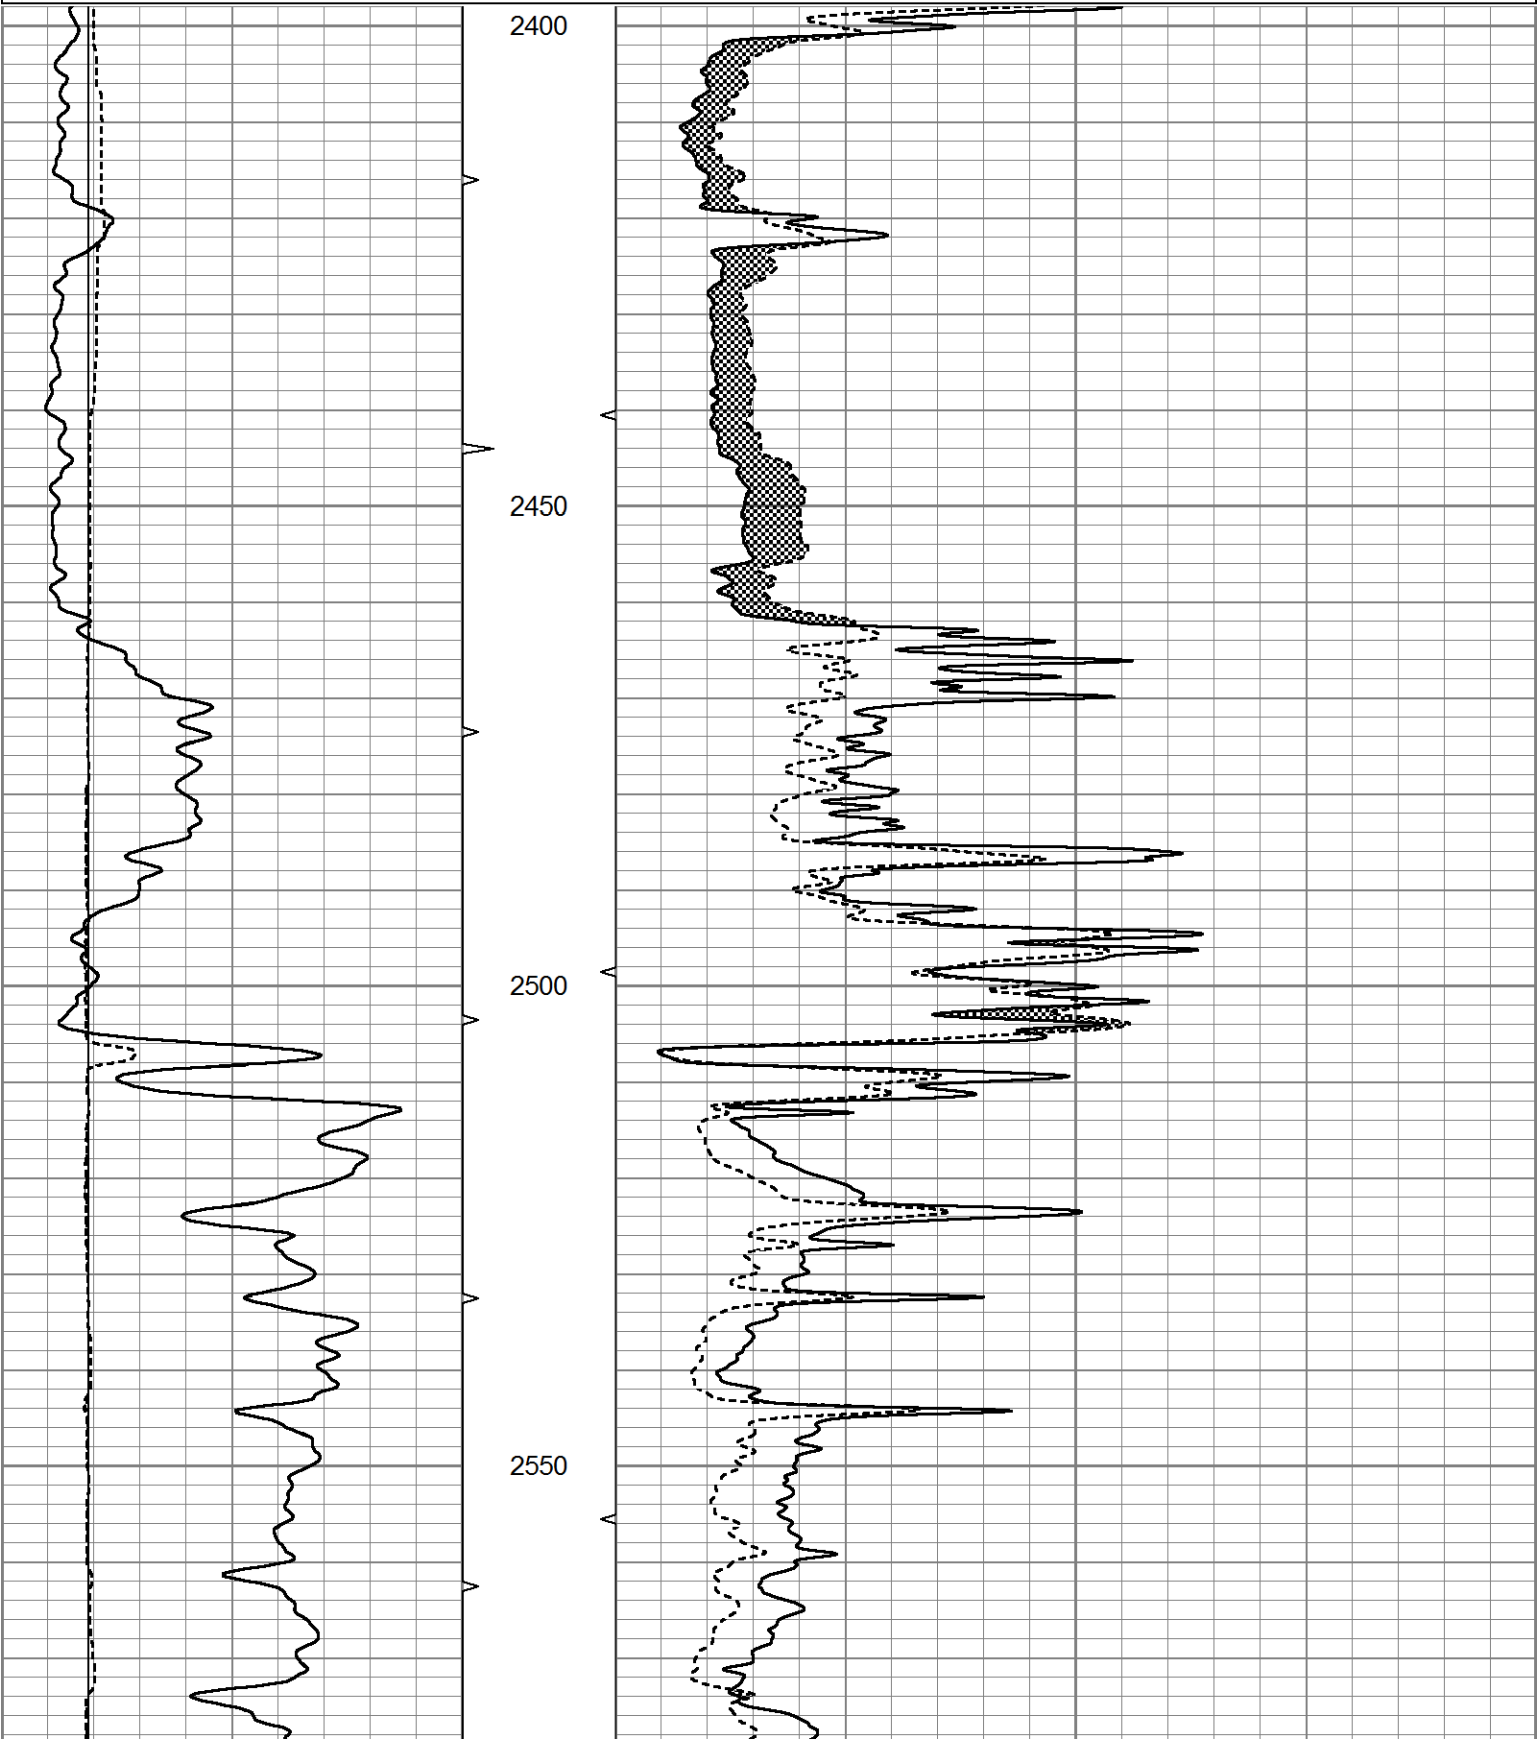

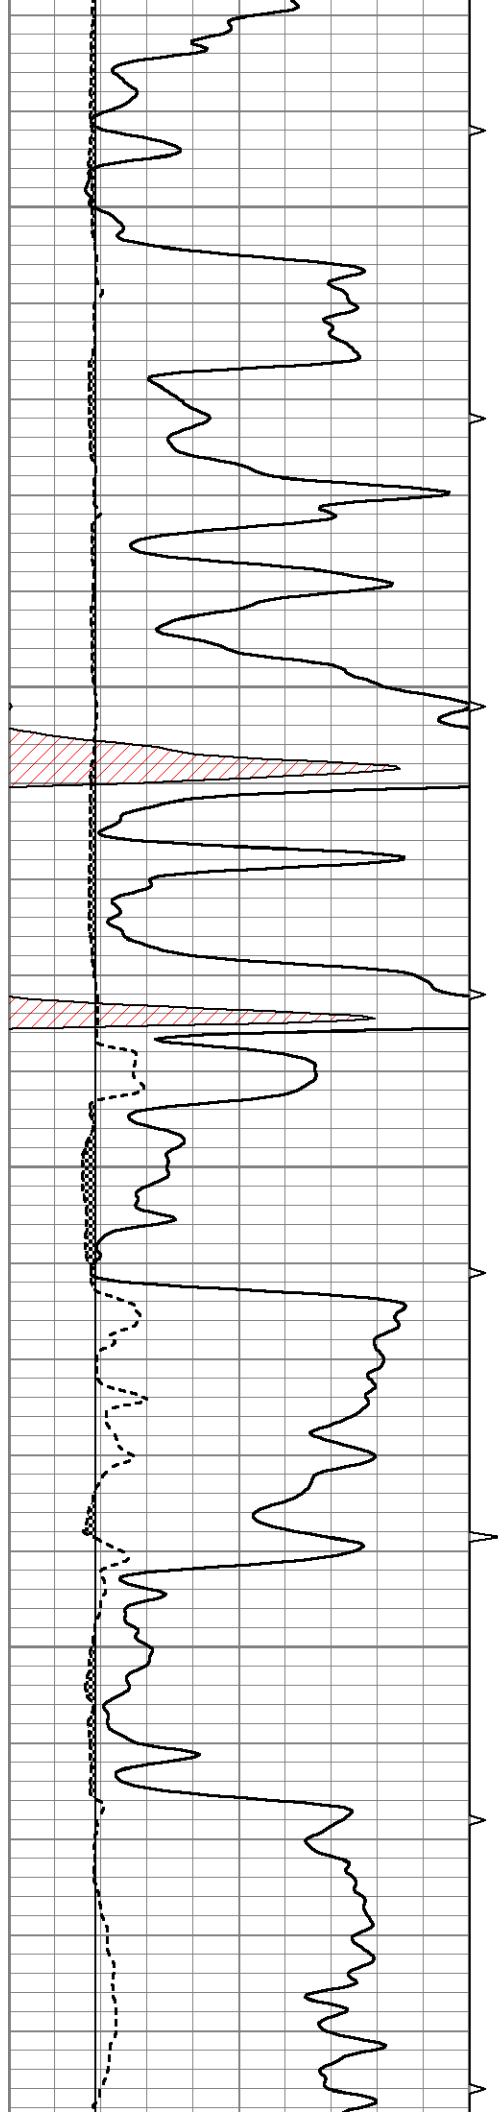




2600


2650

2700

2750

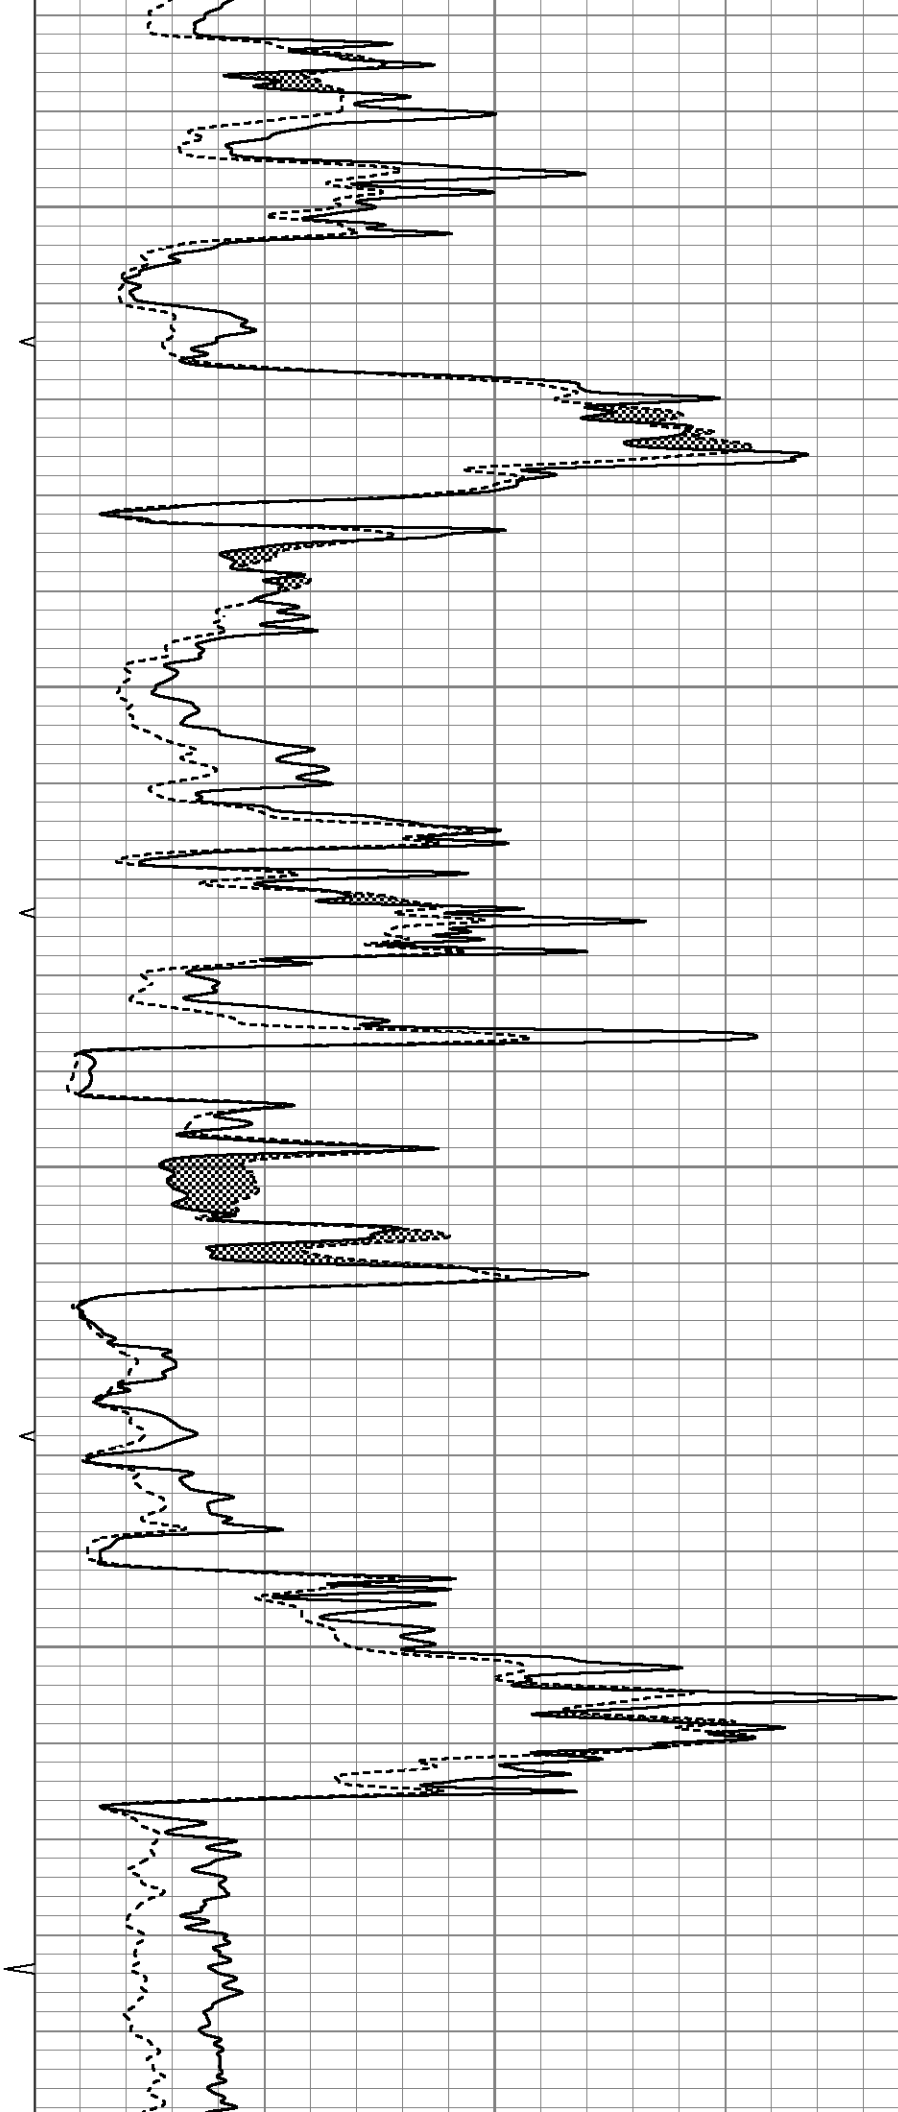

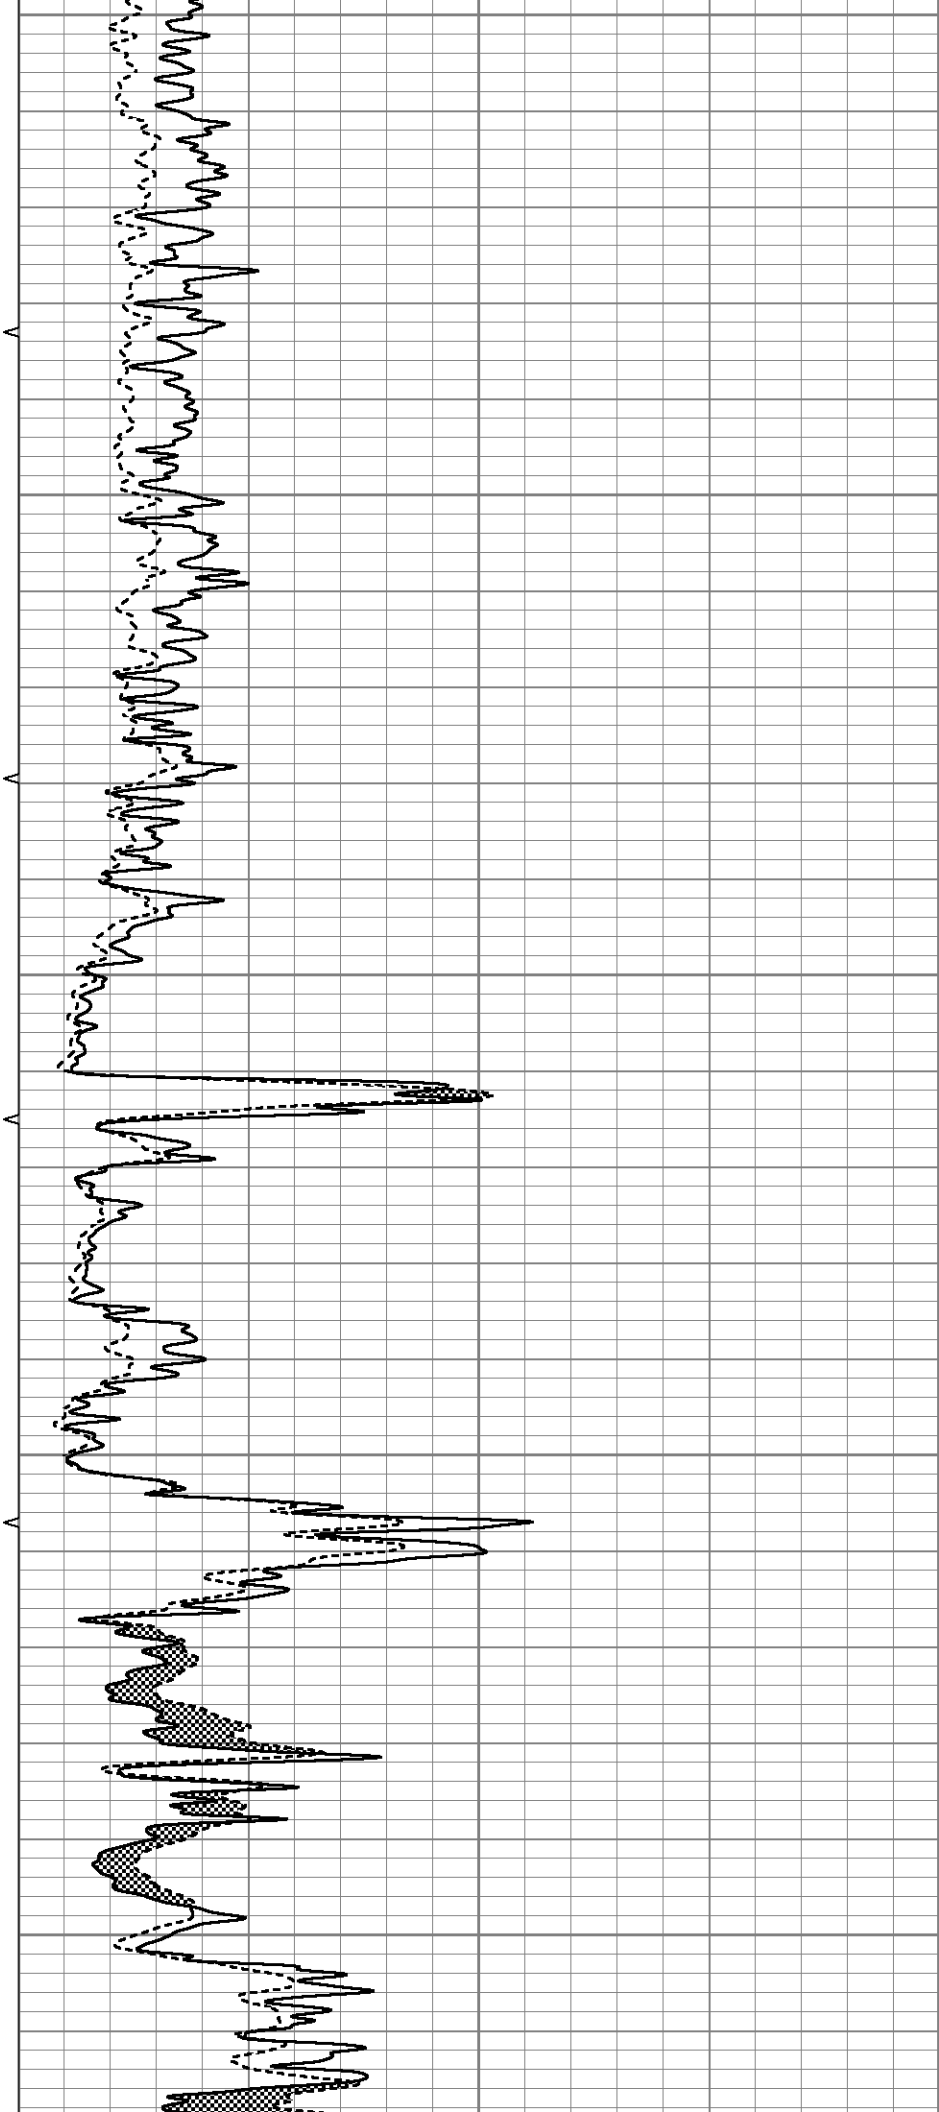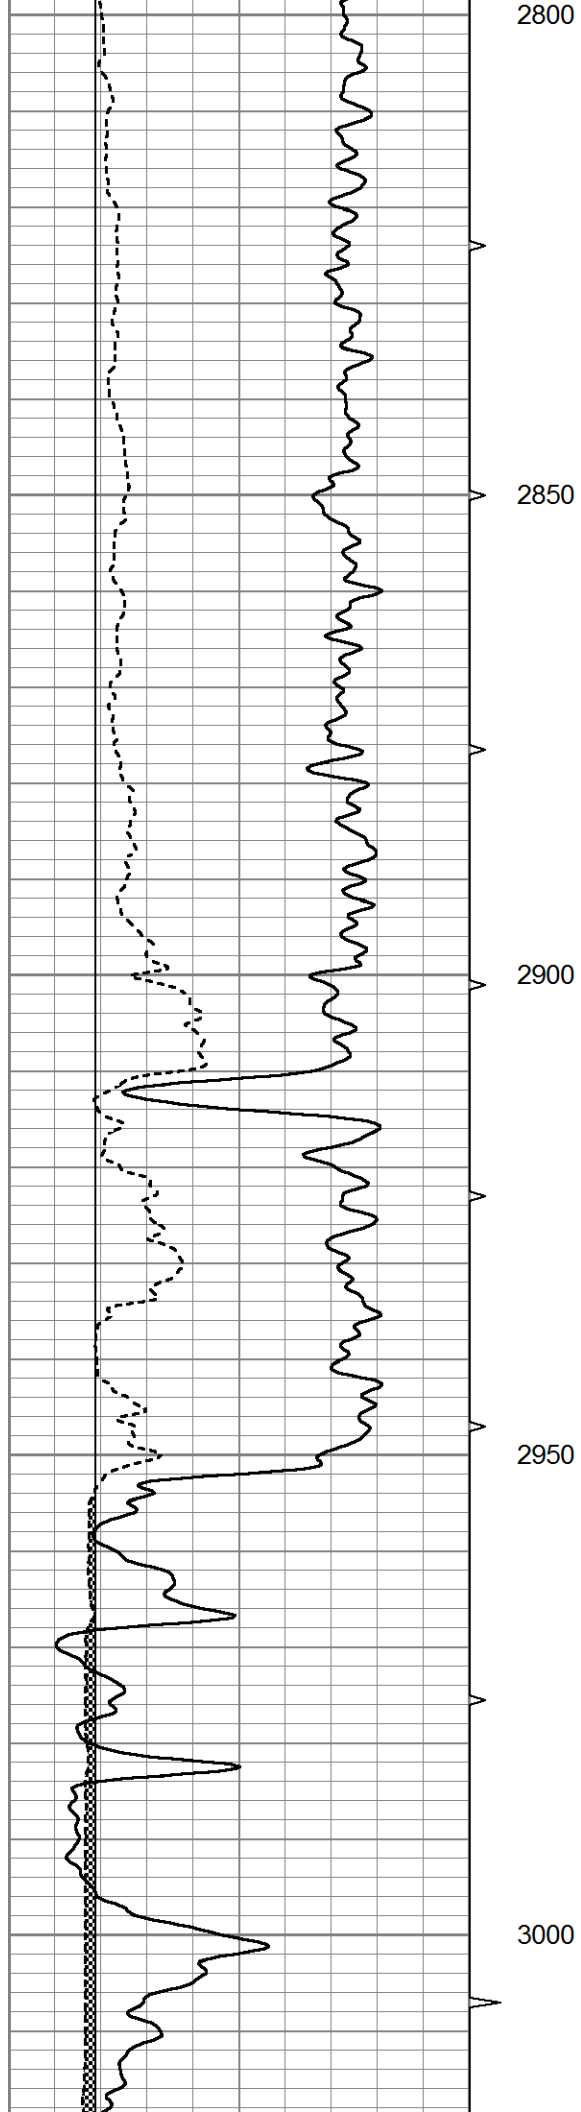

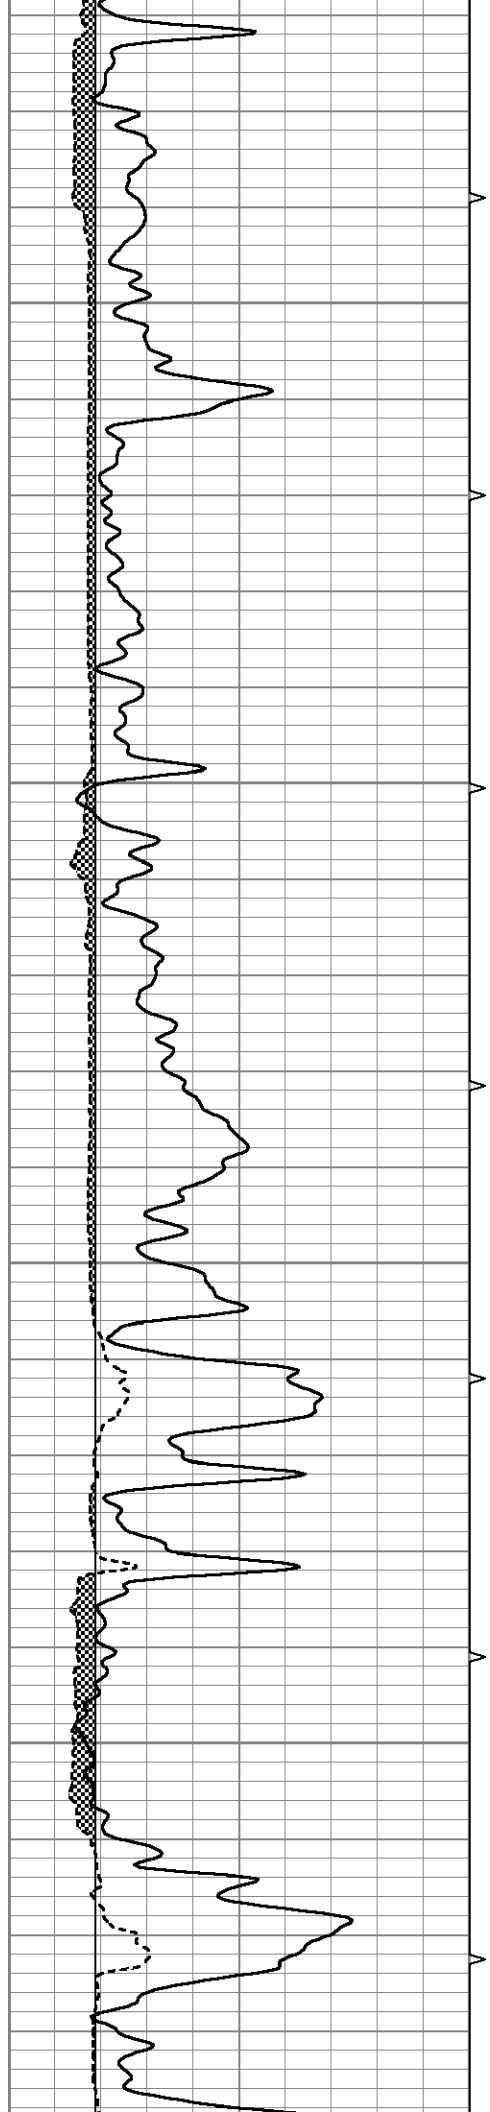



3050

3100

3150

3200

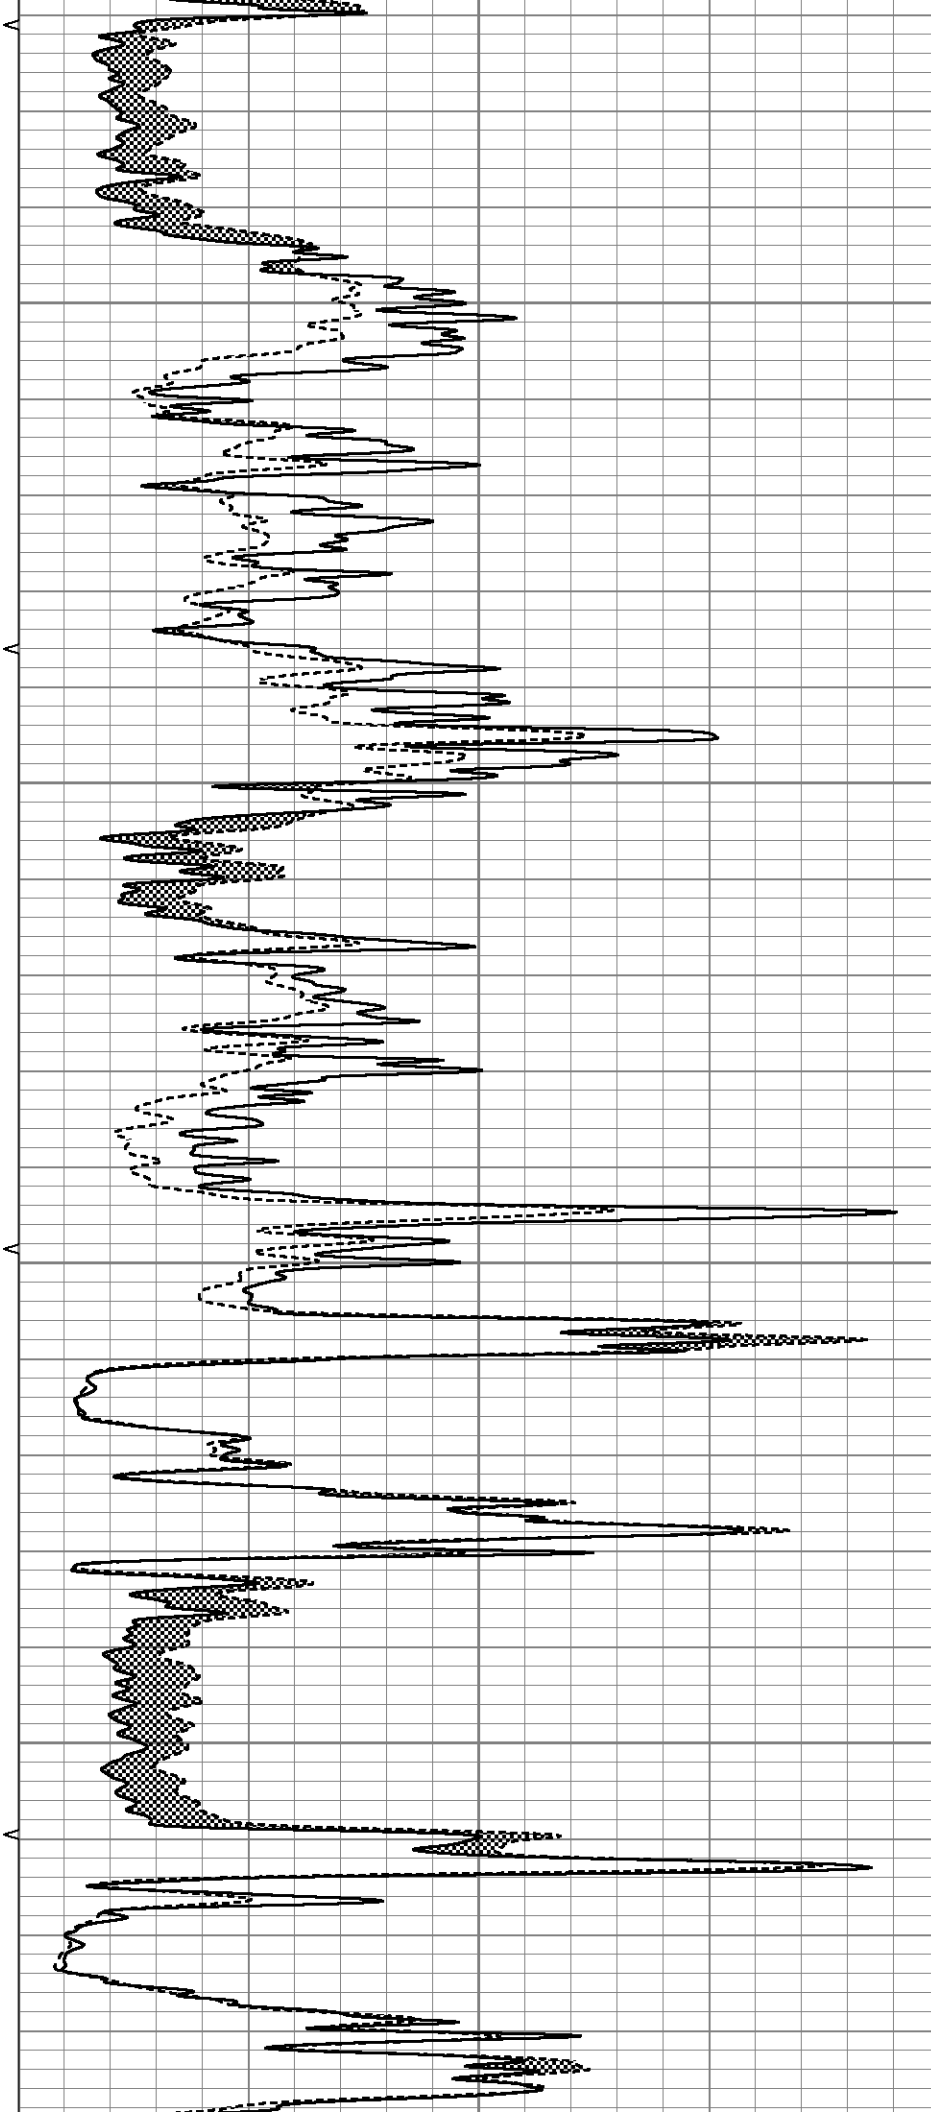

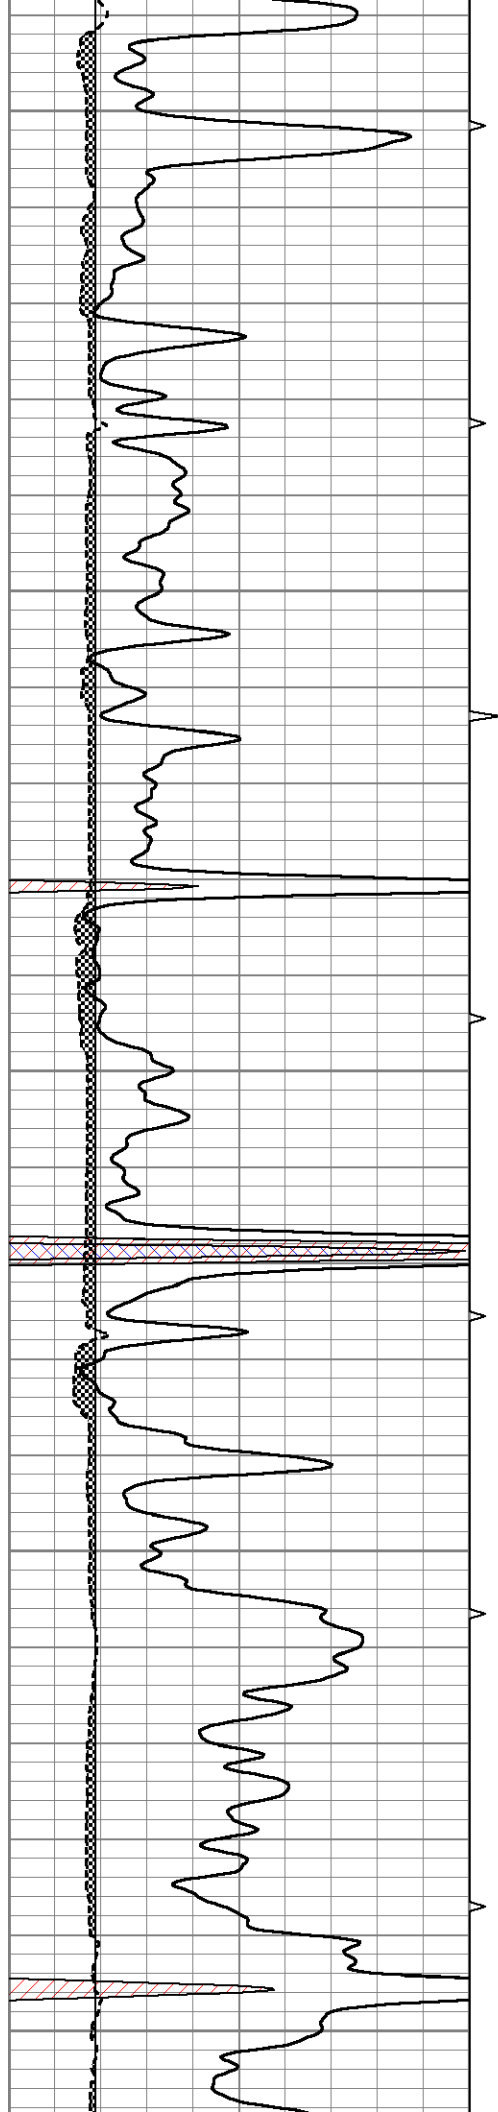


3250


3300

3350

3400

3450

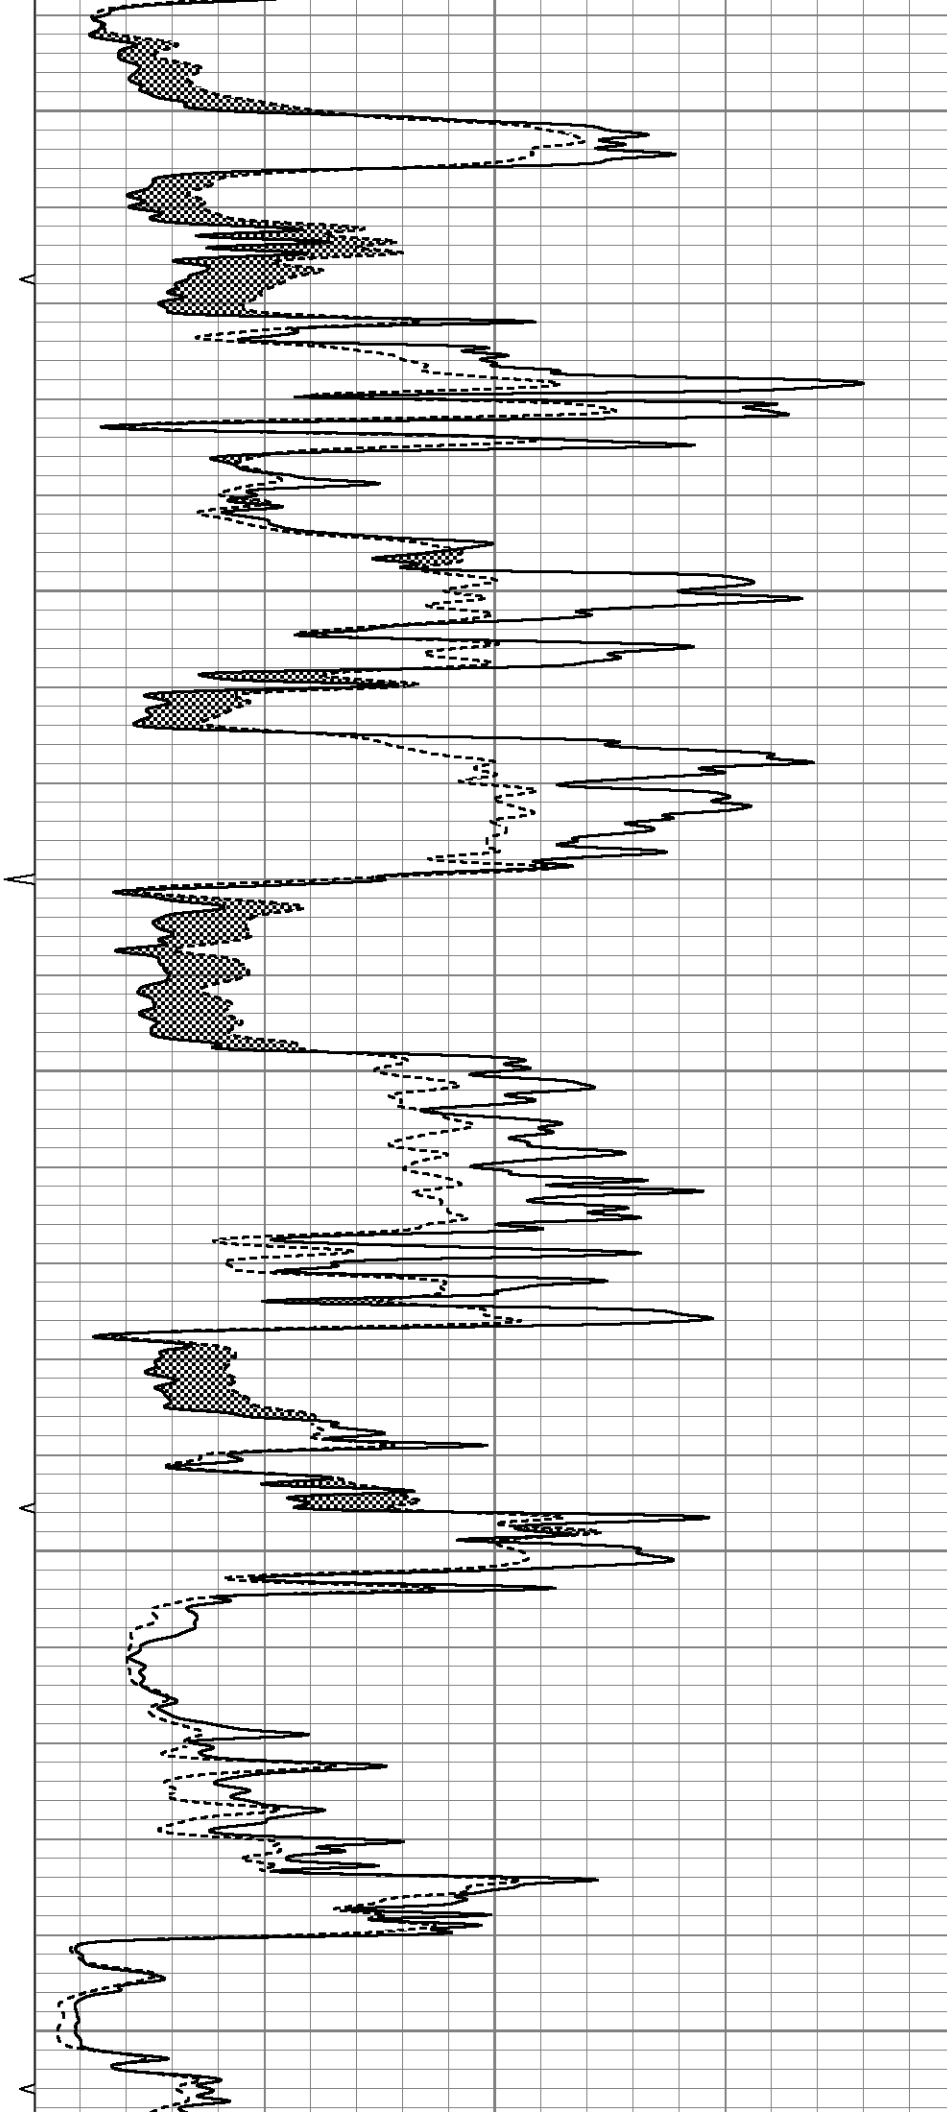

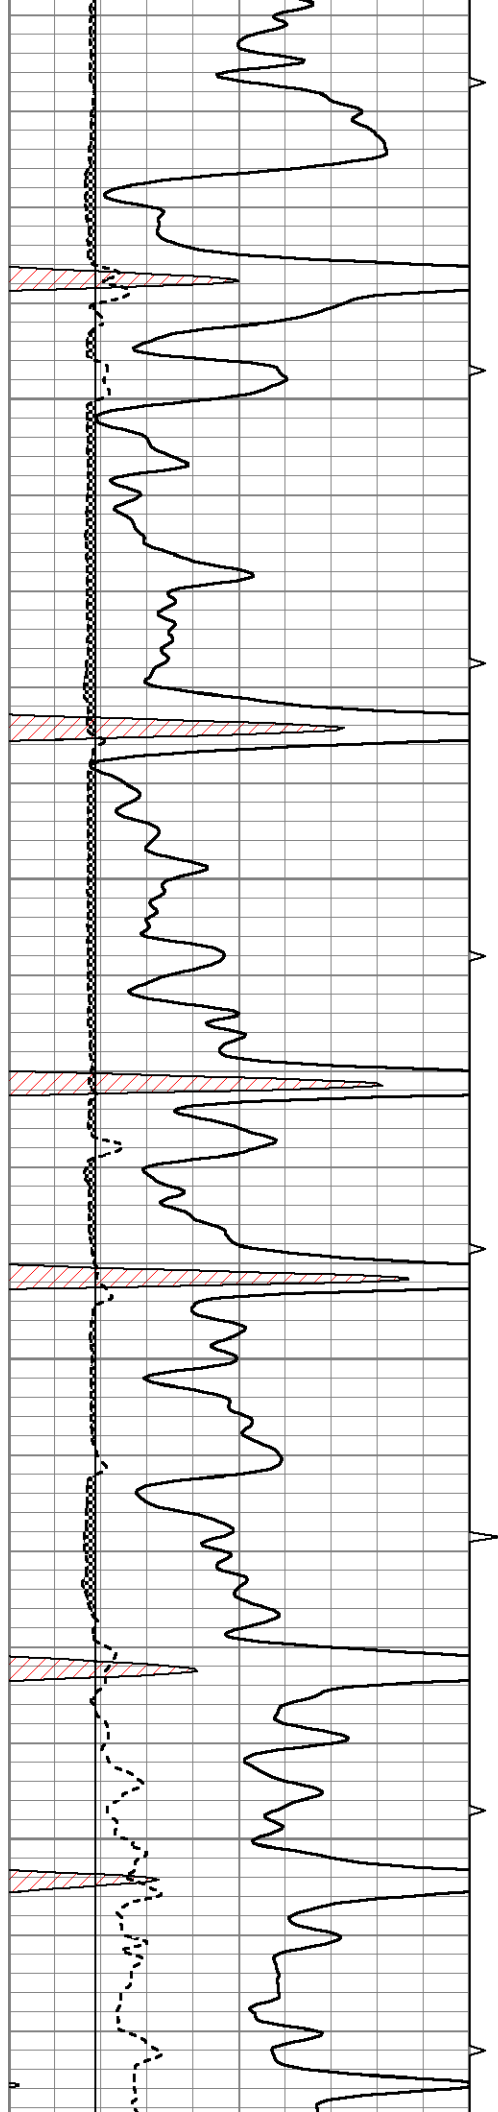



3500

3550

3600

3650

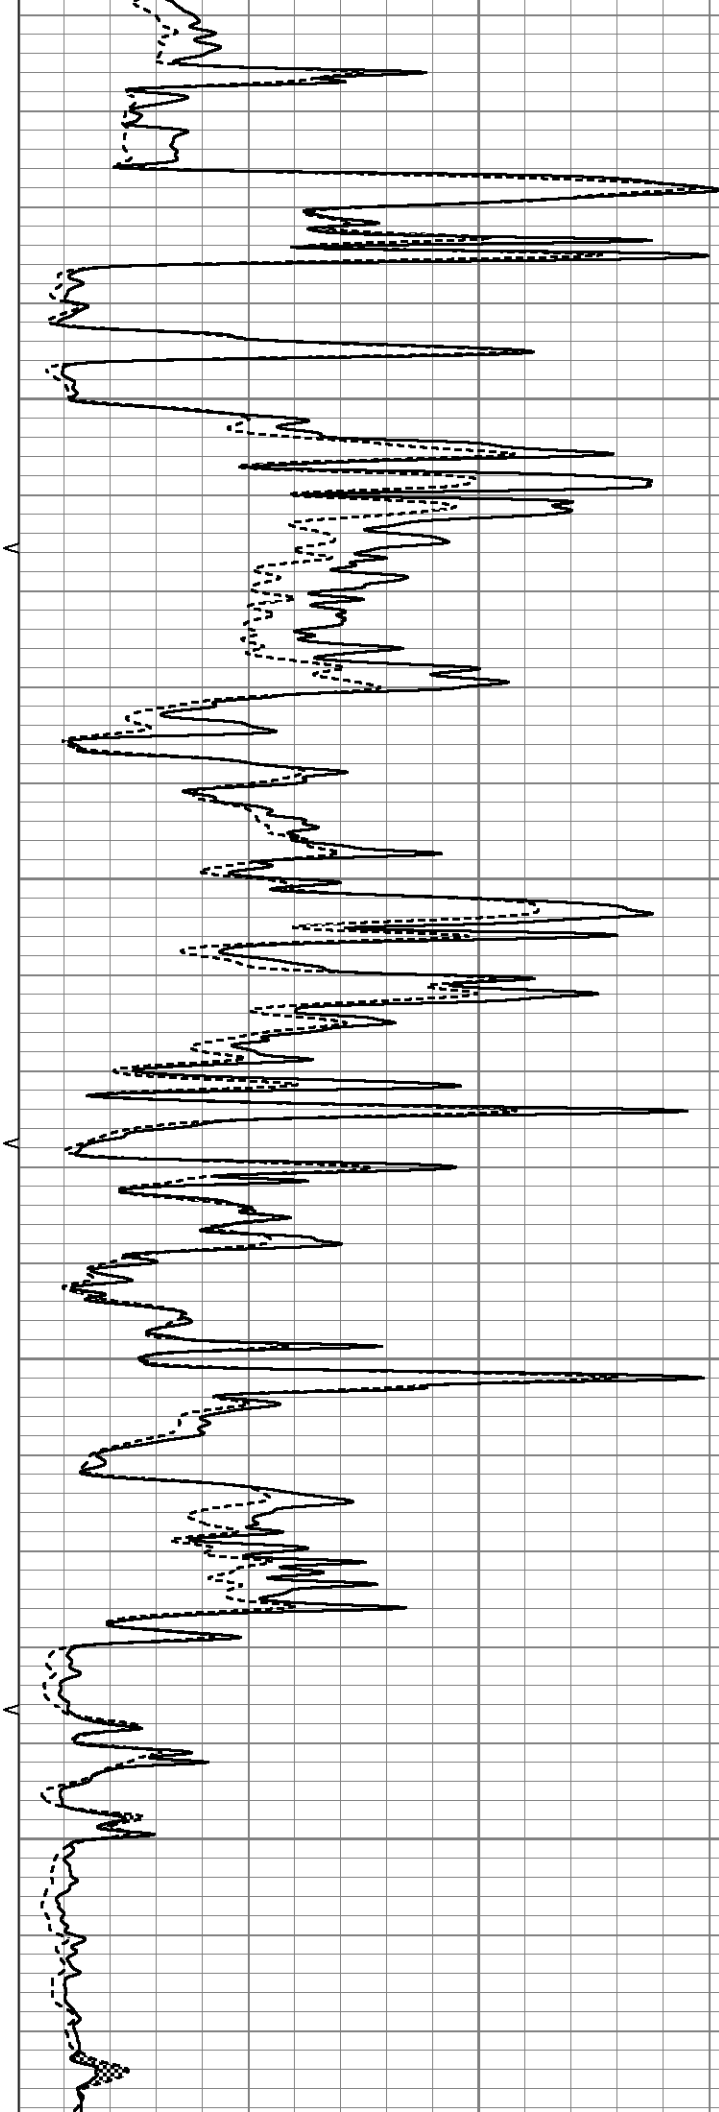

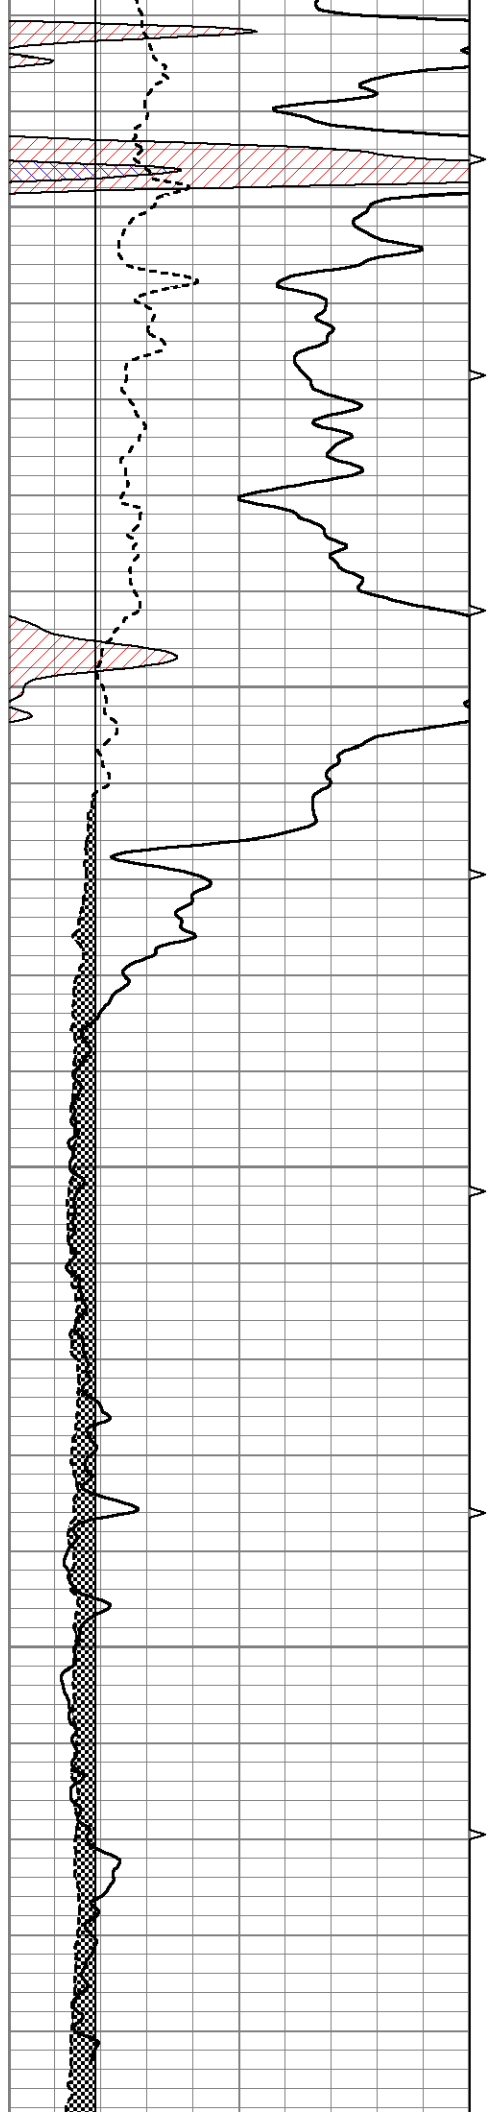


3700

3750

3800

3850

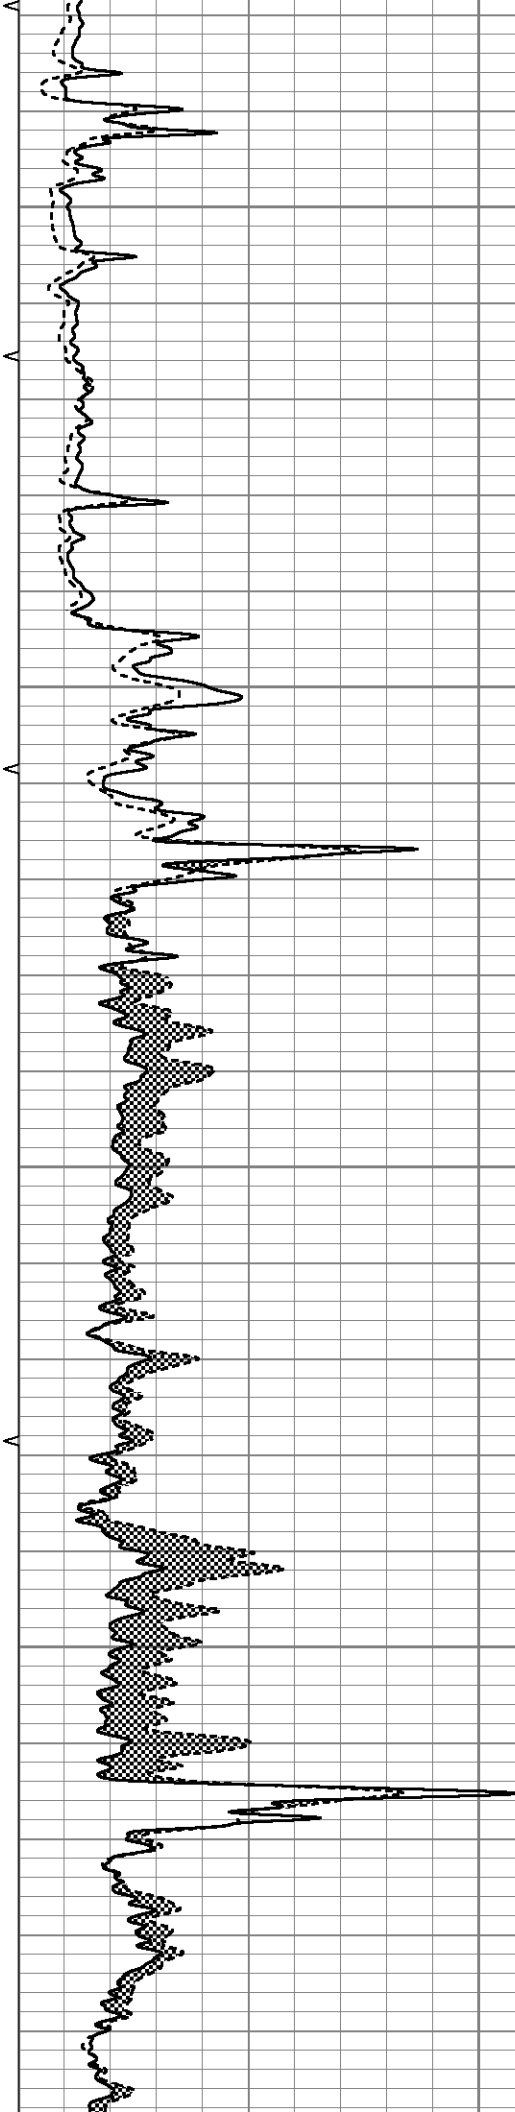


			3900											
0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)							40		
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)							40		
			ABHV											
			0 (ft3)	10										




REPEAT SECTION

Database File 5264ddn.db
 Dataset Pathname pass5.1R
 Presentation Format micro
 Dataset Creation Tue Mar 23 22:58:23 2021
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)							40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)							40
			ABHV									
			0 (ft3) 10									

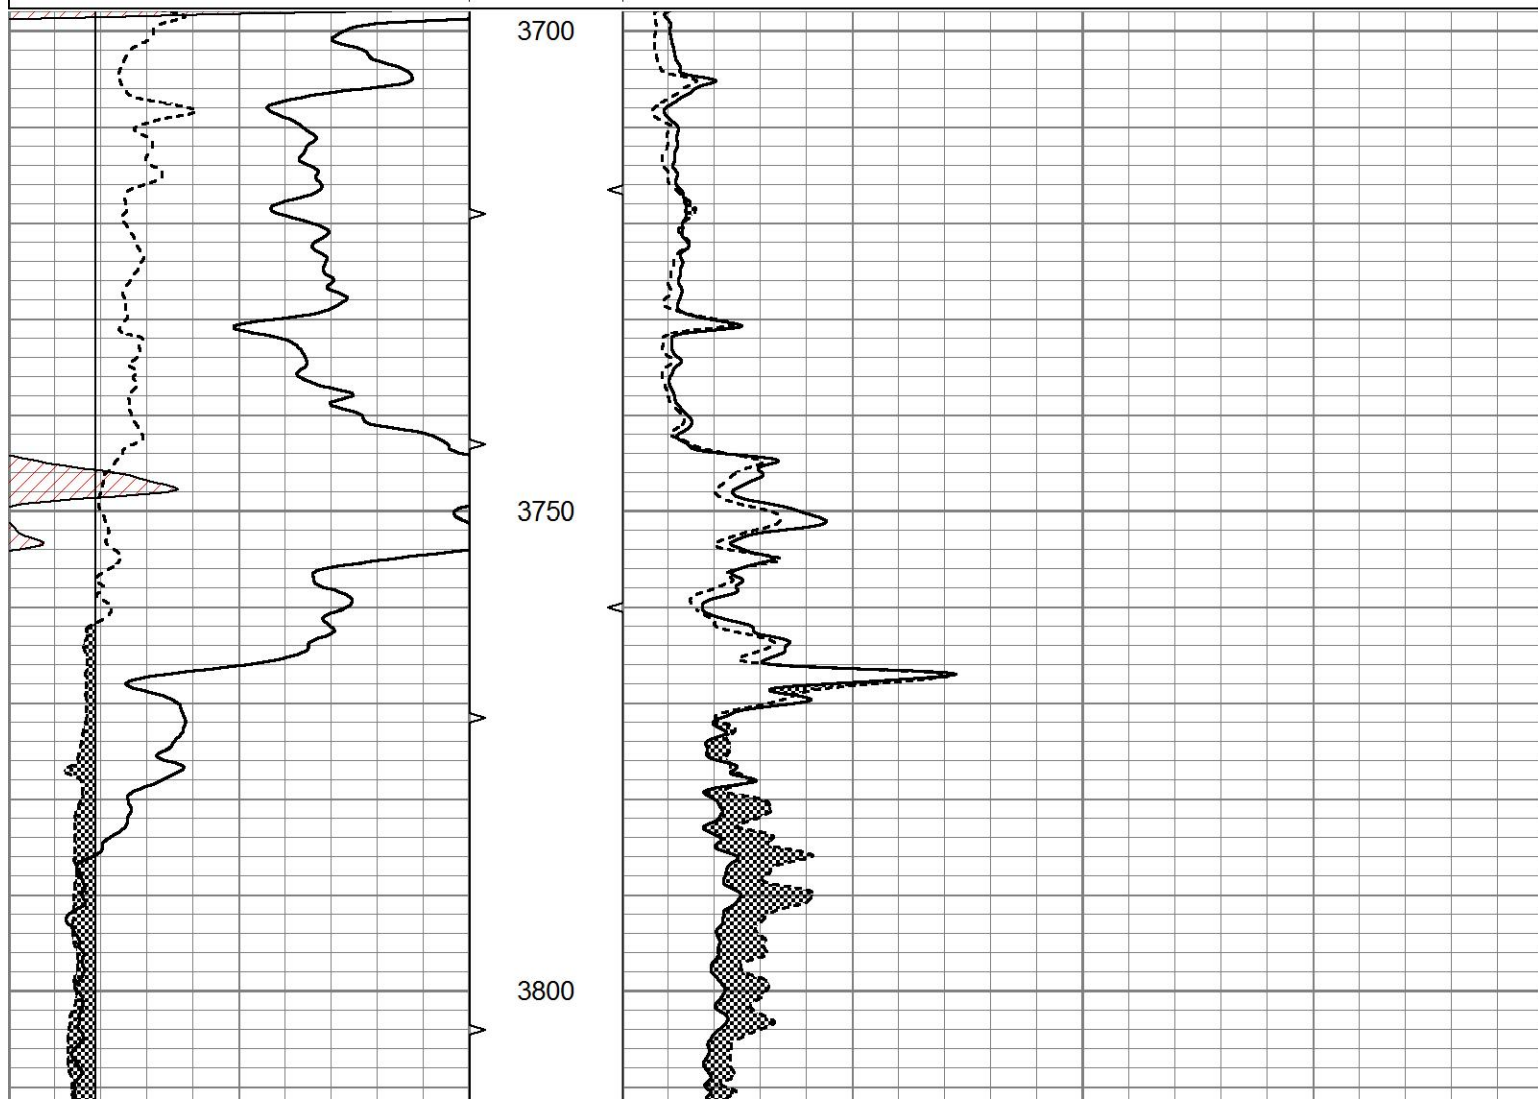

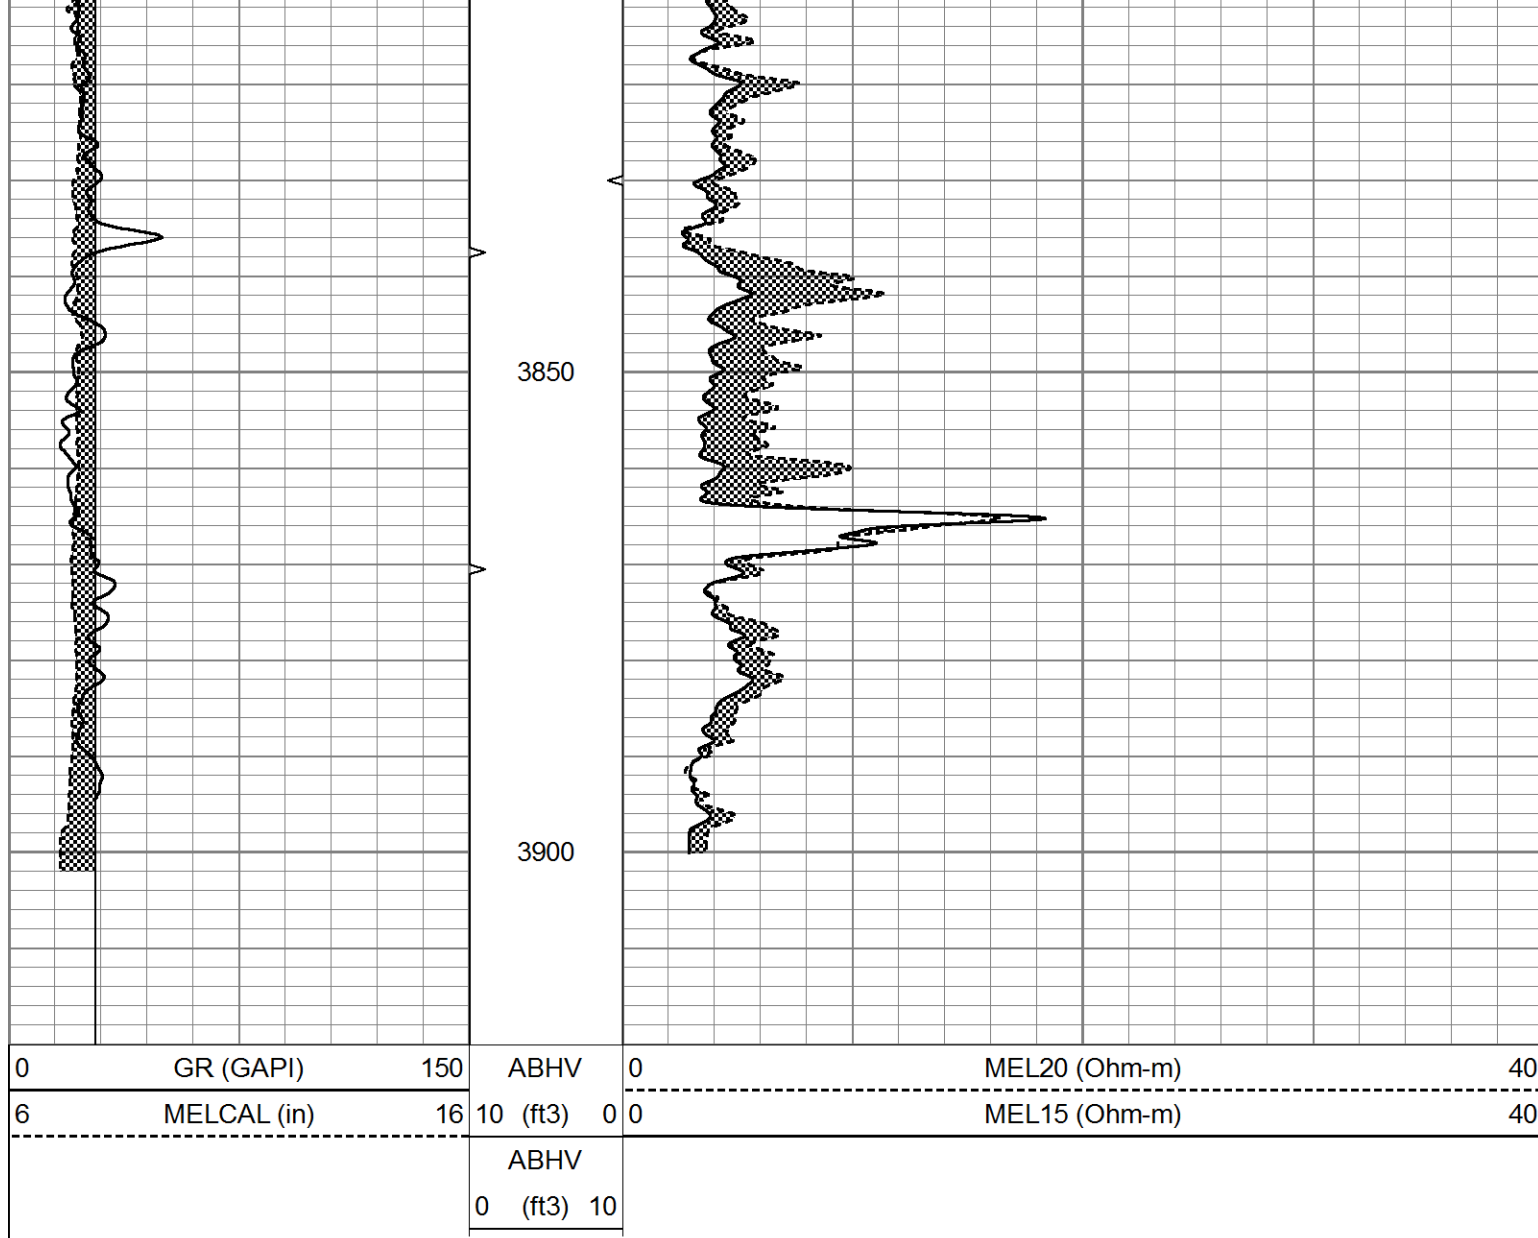

Database File		5264ddn.db		Calibration Report	
Dataset Pathname		pass6.1M			
Dataset Creation		Tue Mar 23 22:53:37 2021			
MICRO Calibration Report					
Serial Number:		070912			
Tool Model:		ProbeN			
Performed:		Fri Mar 19 15:23:22 2021			
Caliper Calibration:		Gain=3.448		Offset=0.828	
References		Low Cal		High Cal	
Readings		8.000		16.000	
		2.080		4.400	
1.5" Calibration:		Gain=28.000		Offset=0.500	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.002		1.239	
2" Calibration:		Gain=55.000		Offset=-0.500	
		Low Cal		High Cal	

References	0.000	20.000
Readings	0.003	1.075
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sat Feb 27 09:05:46 2021	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3600	GAPI/cps