

MICRO LOG

Company	VINCENT OIL COMPANY	Company	VINCENT OIL COMPANY
Well	OVERMYER #3-9	Well	OVERMYER #3-9
Field	KINGSDOWN NORTHWEST	Field	KINGSDOWN NORTHWEST
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-21031-0000		Other Services CDL/CNL/DIL SON
Permanent Datum	1334' FNL & 1904 FWL		
Log Measured From	SEC 9 TWP 29S RGE 22W		
Drilling Measured From	GROUND LEVEL Elevation 2482 KELLY BUSHING 12' A.G.L. KELLY BUSHING	Elevation K.B. 2494 D.F. 2492 G.L. 2482	
Date	11/23/19		
Run Number	TWO		
Depth Driller	5305		
Depth Logger	5306		
Bottom Logged Interval	5286		
Top Log Interval	4300		
Casing Driller	8 5/8" @ 692		
Casing Logger	692		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.1/5.1		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.45 @ 55F		
Rmt @ Meas. Temp	.38 @ 55F		
Rmc @ Meas. Temp	.54 @ 55F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.19 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	128F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	TOM DUDGEON		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
KINGSDOWN NORTH 1 MILE, EAST 1.5, SOUTH INTO.


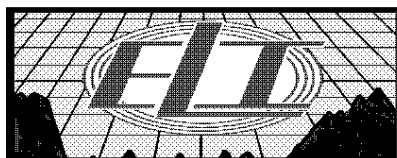



MAIN PASS


Database File: 4462pe.db
Dataset Pathname: pass7
Presentation Format: _micro
Dataset Creation: Sat Nov 23 11:57:46 2019 by Log Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

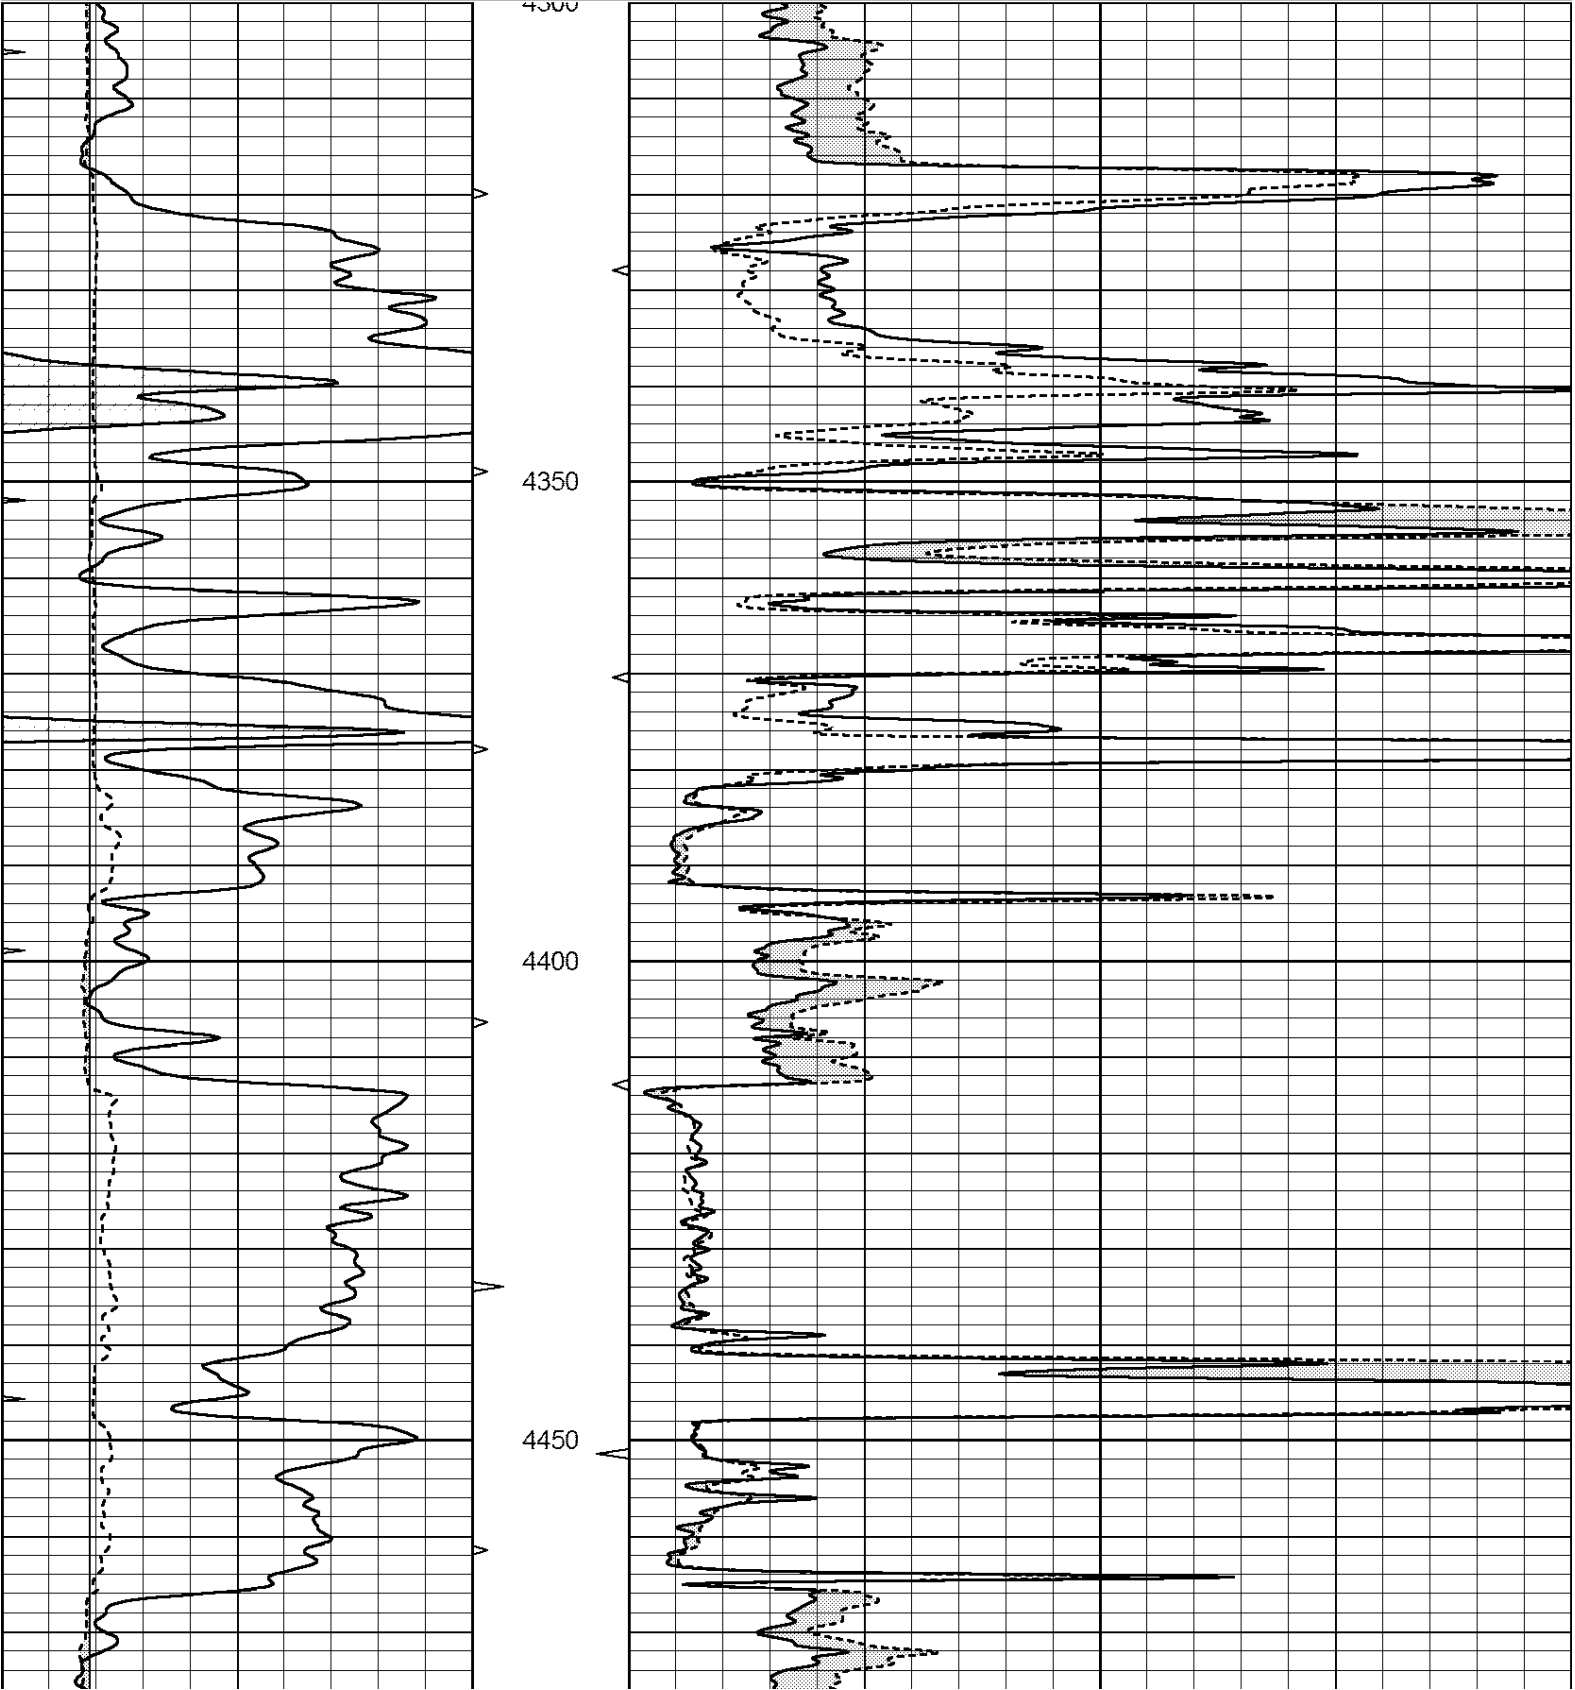

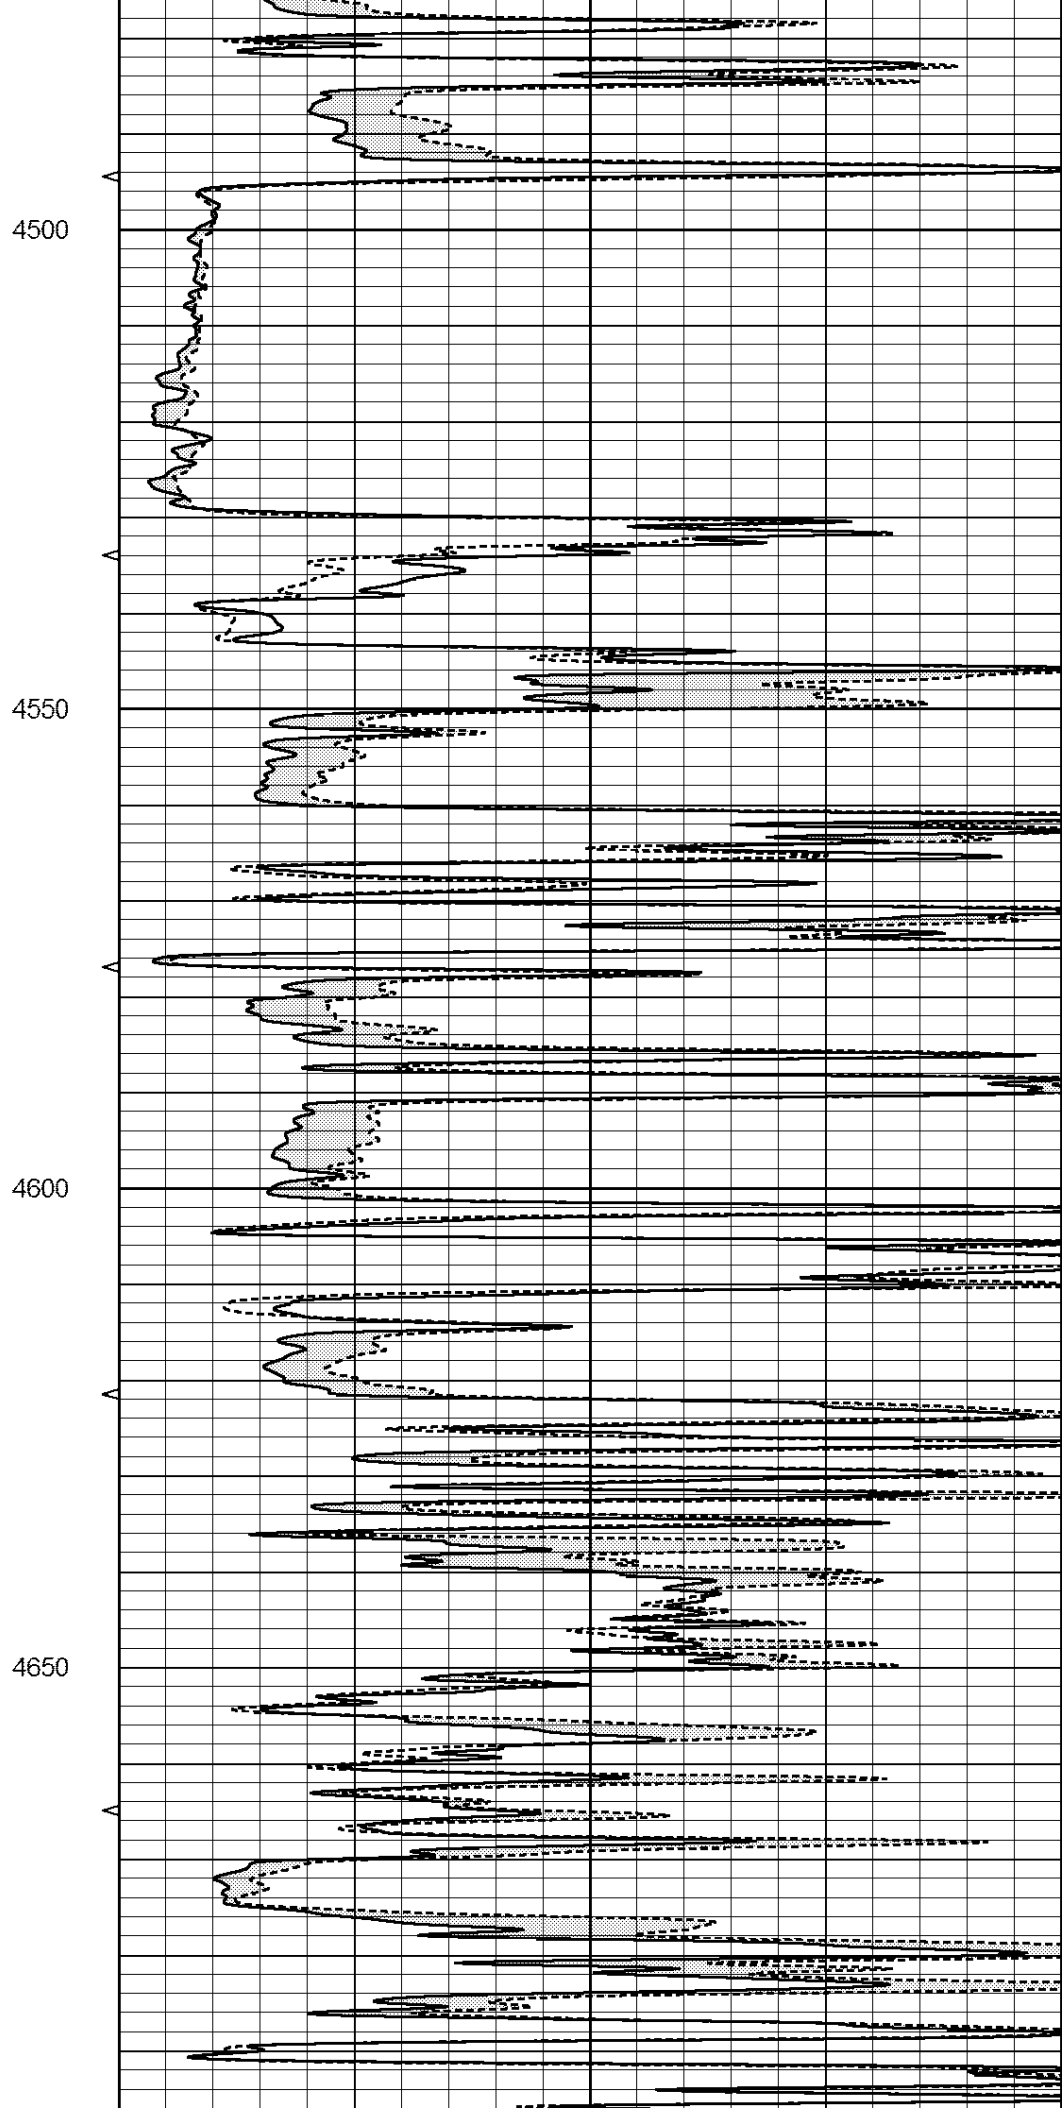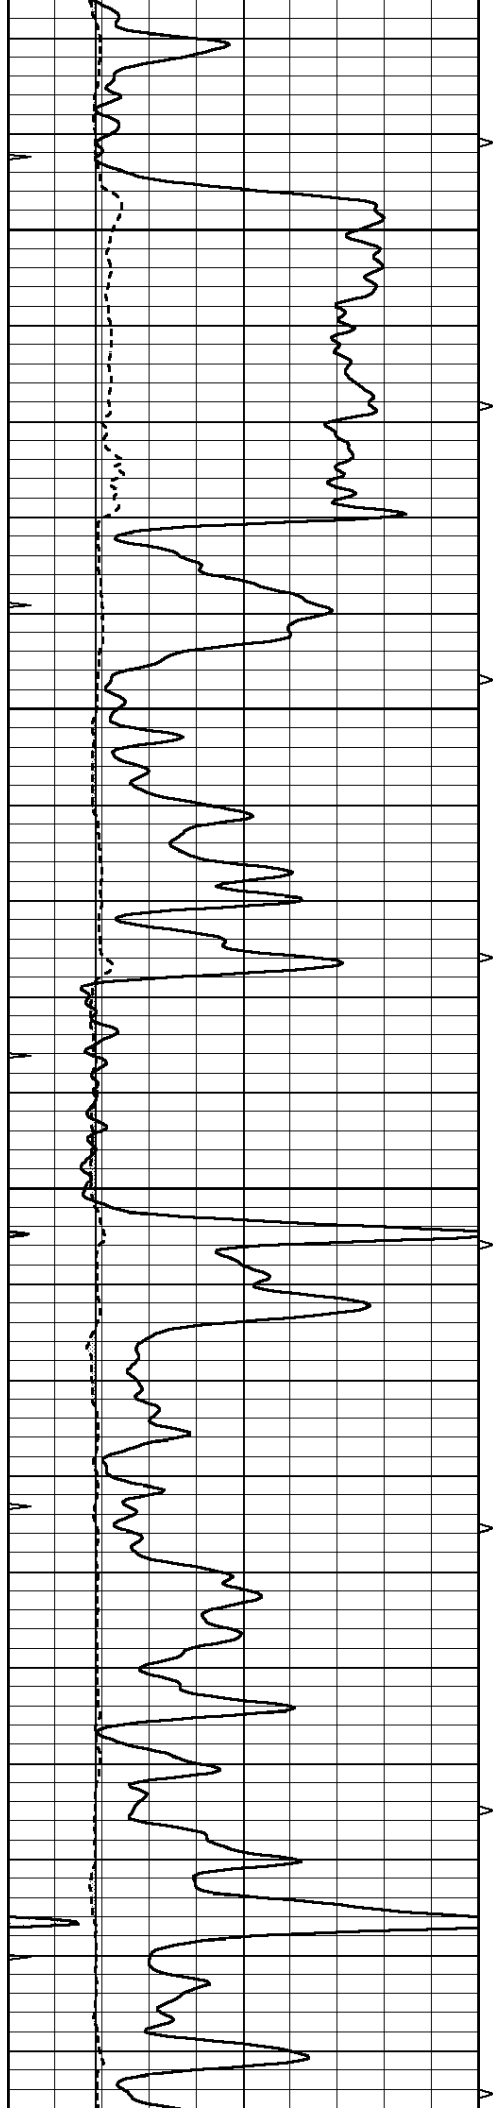

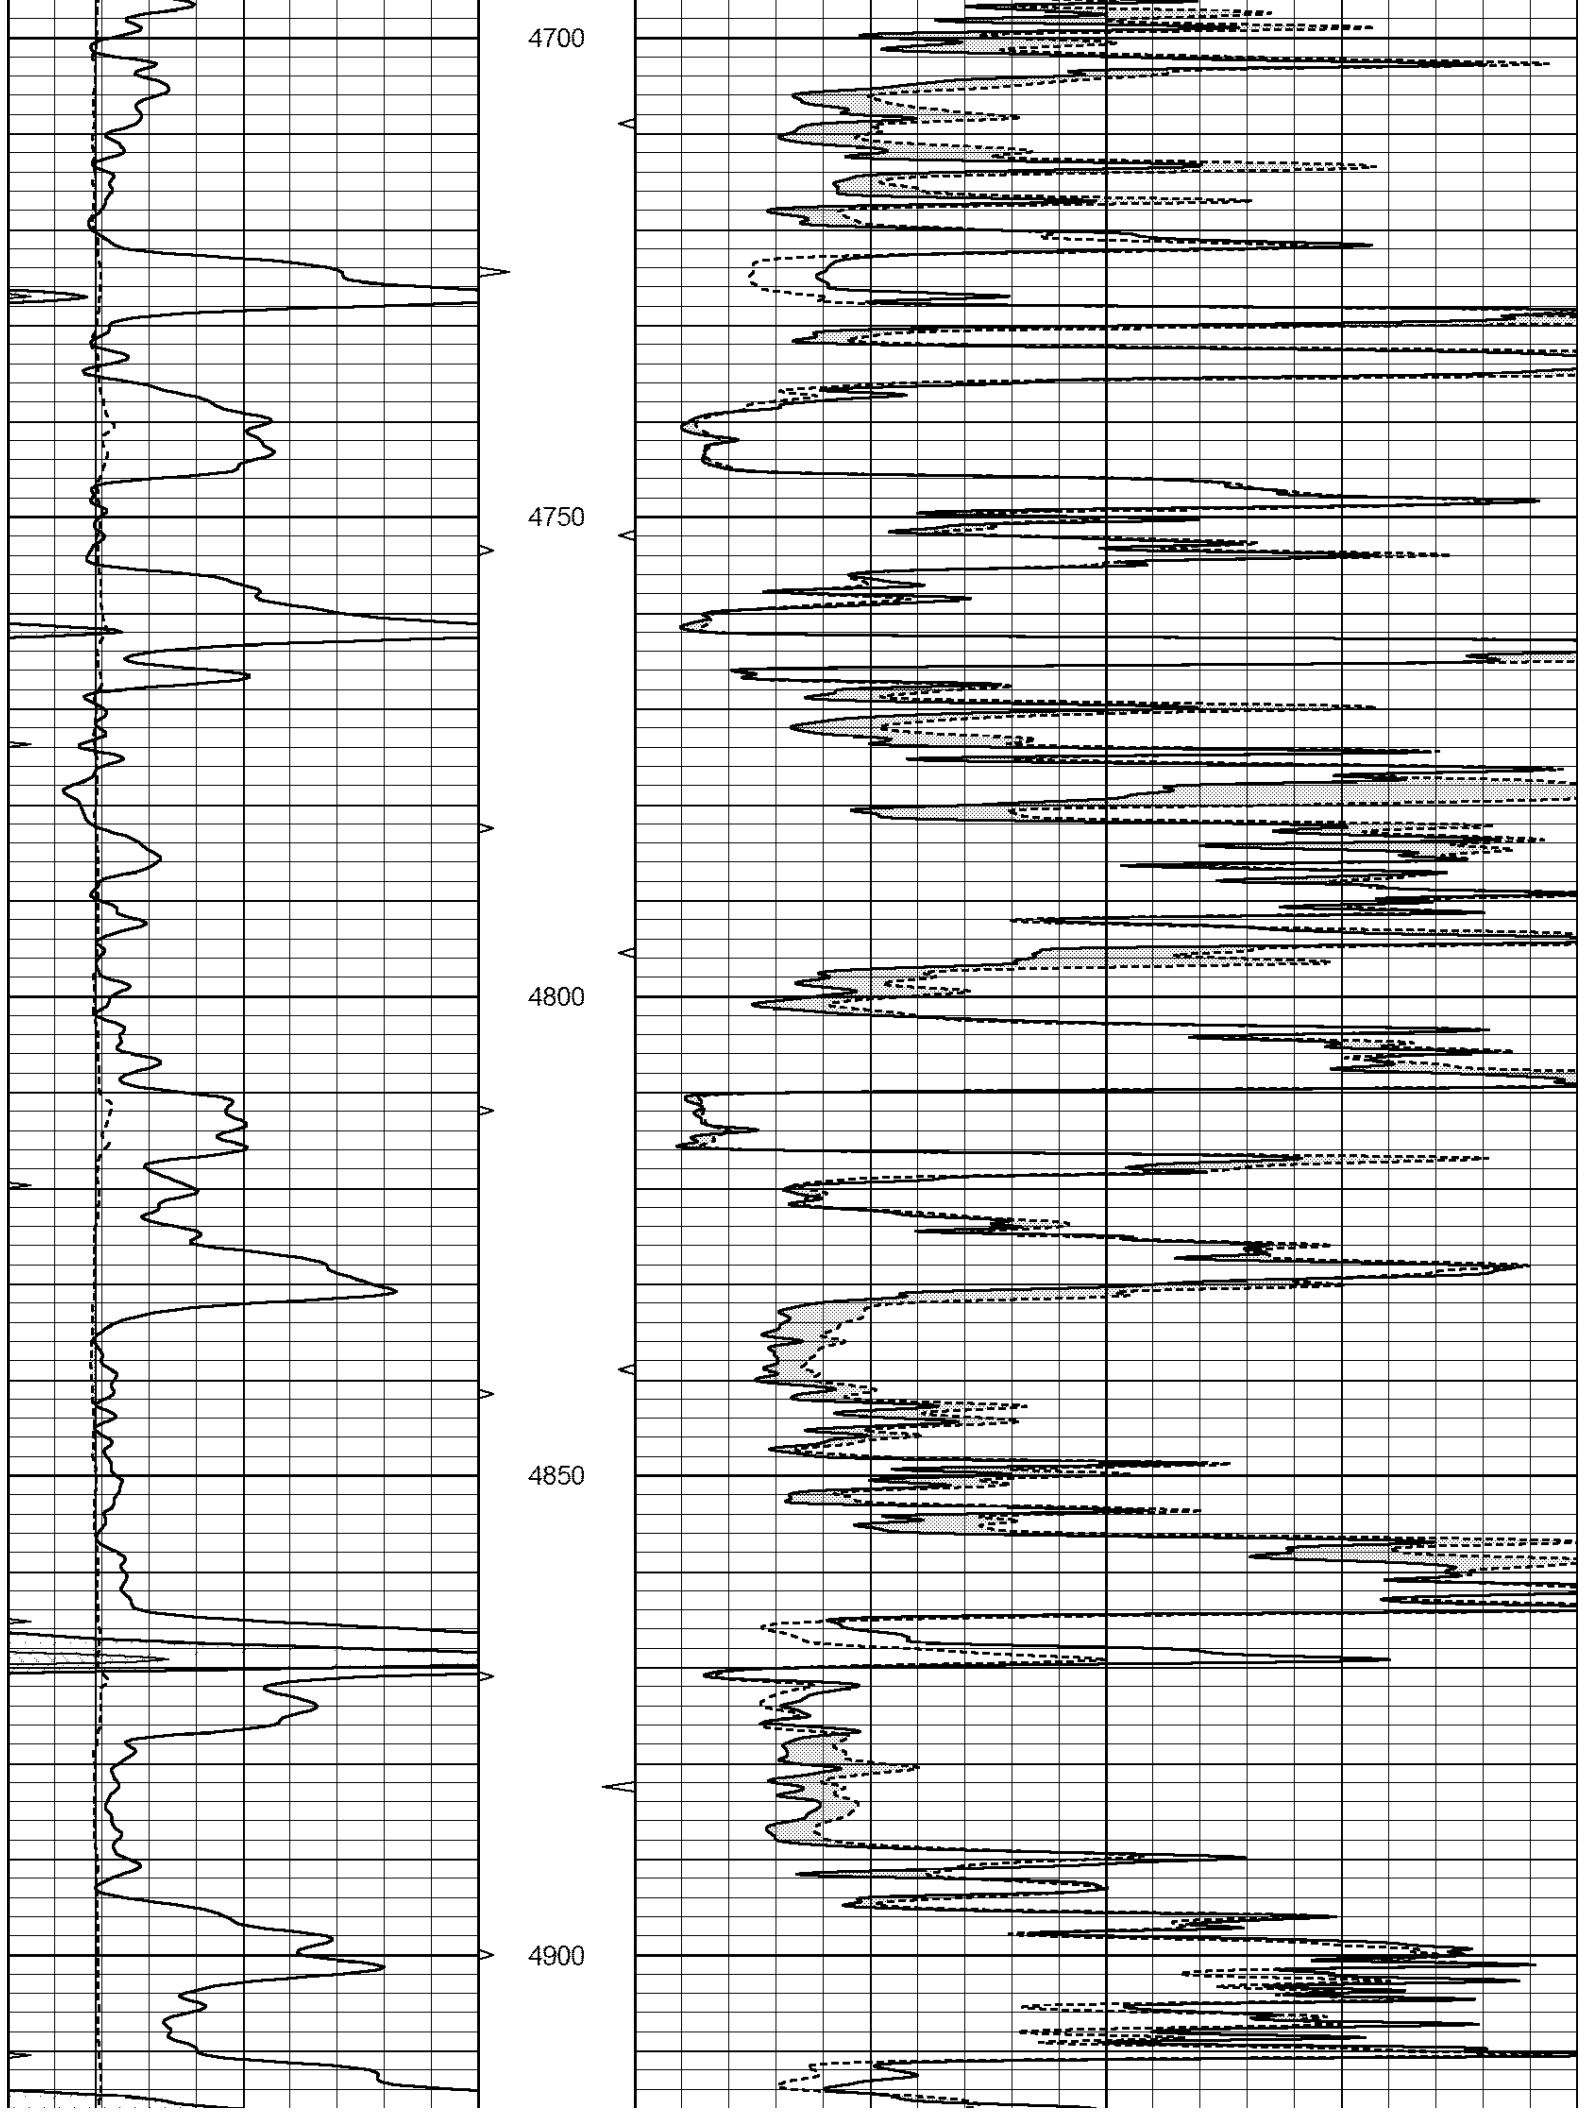

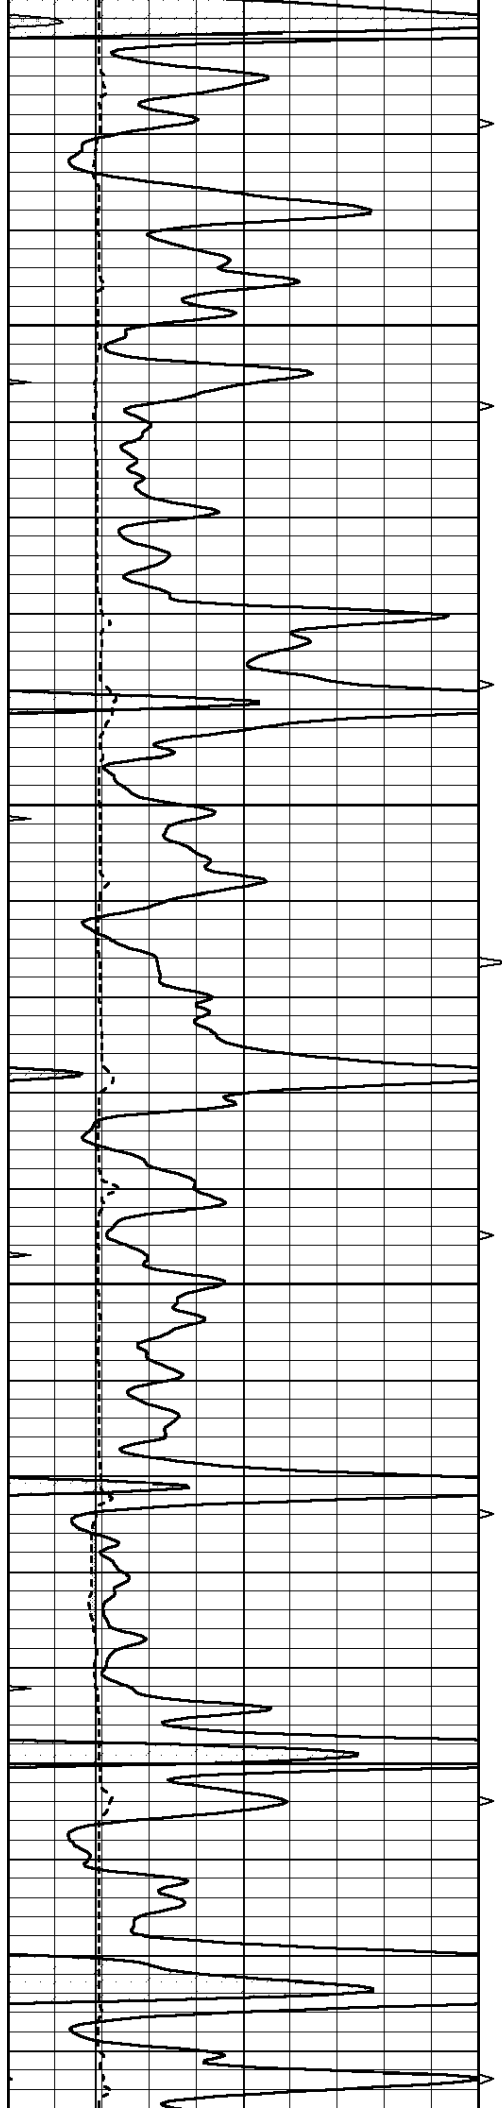




4950

5000

5050

5100

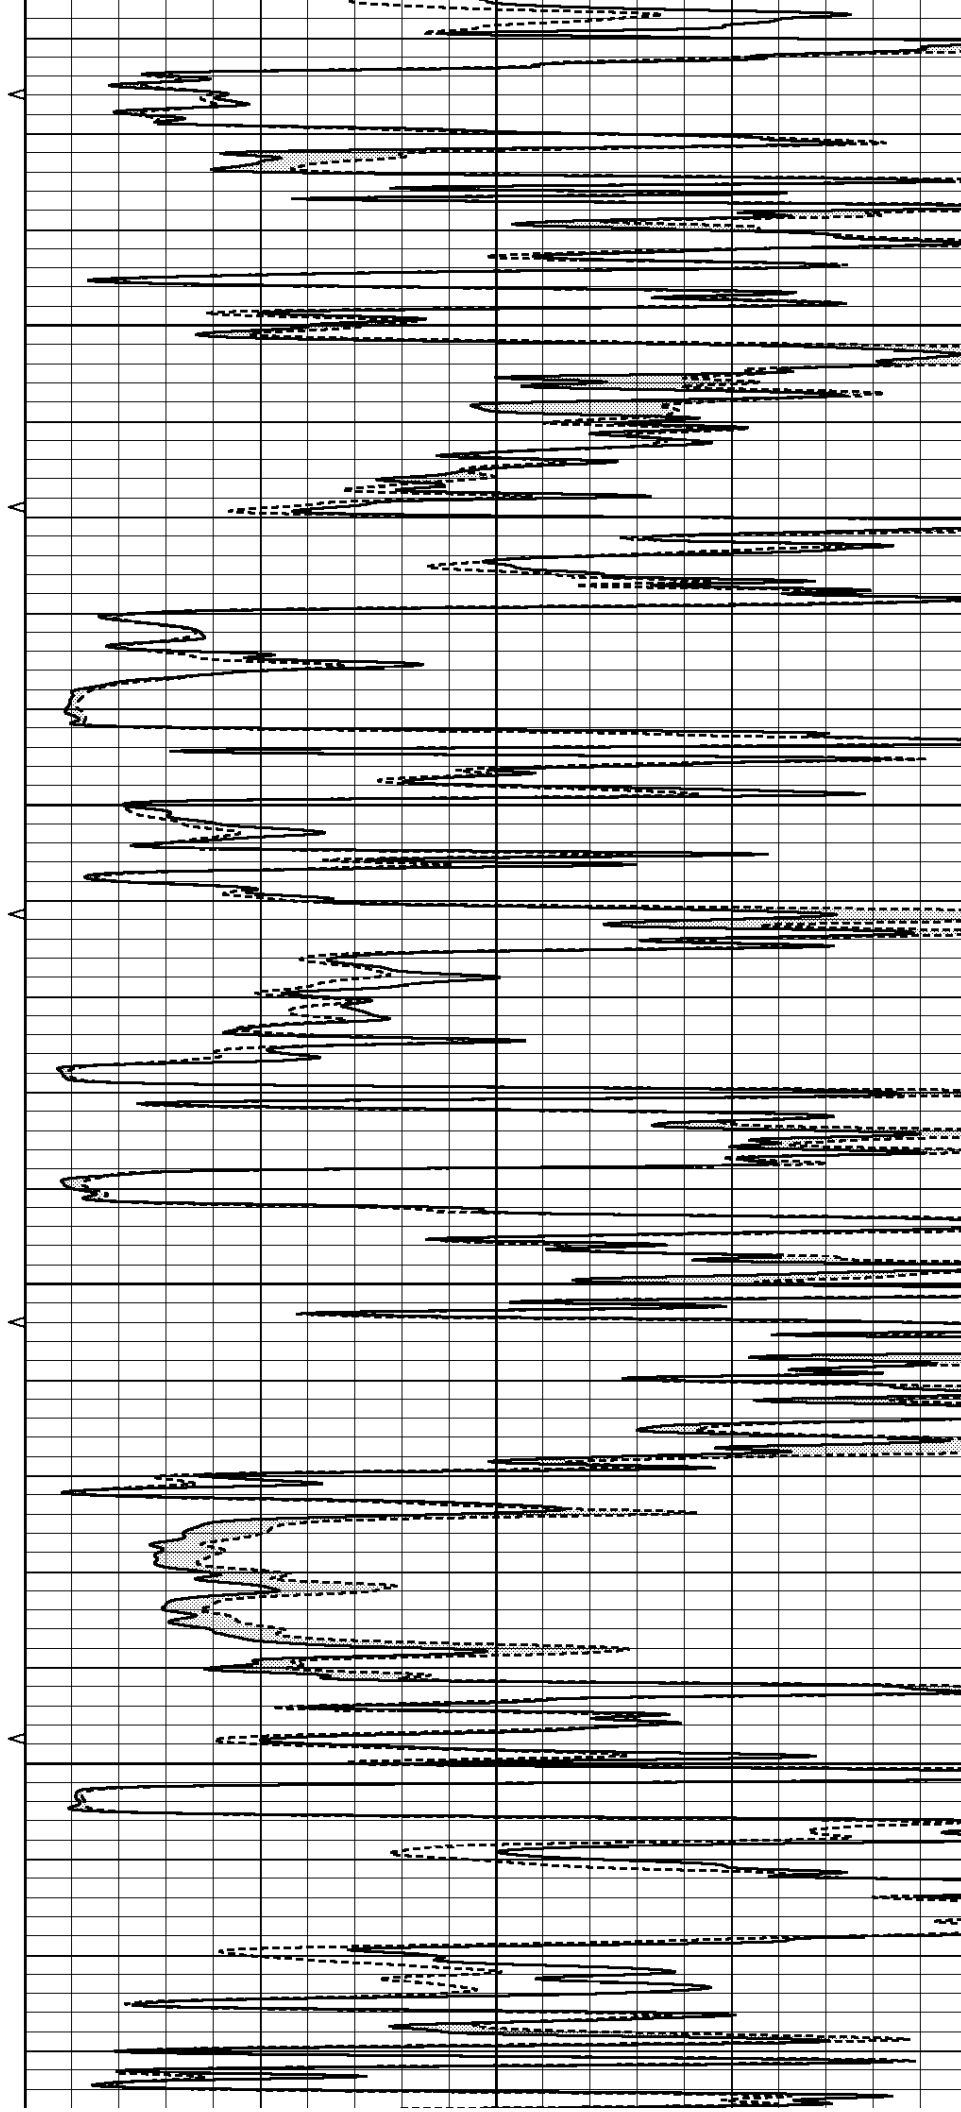


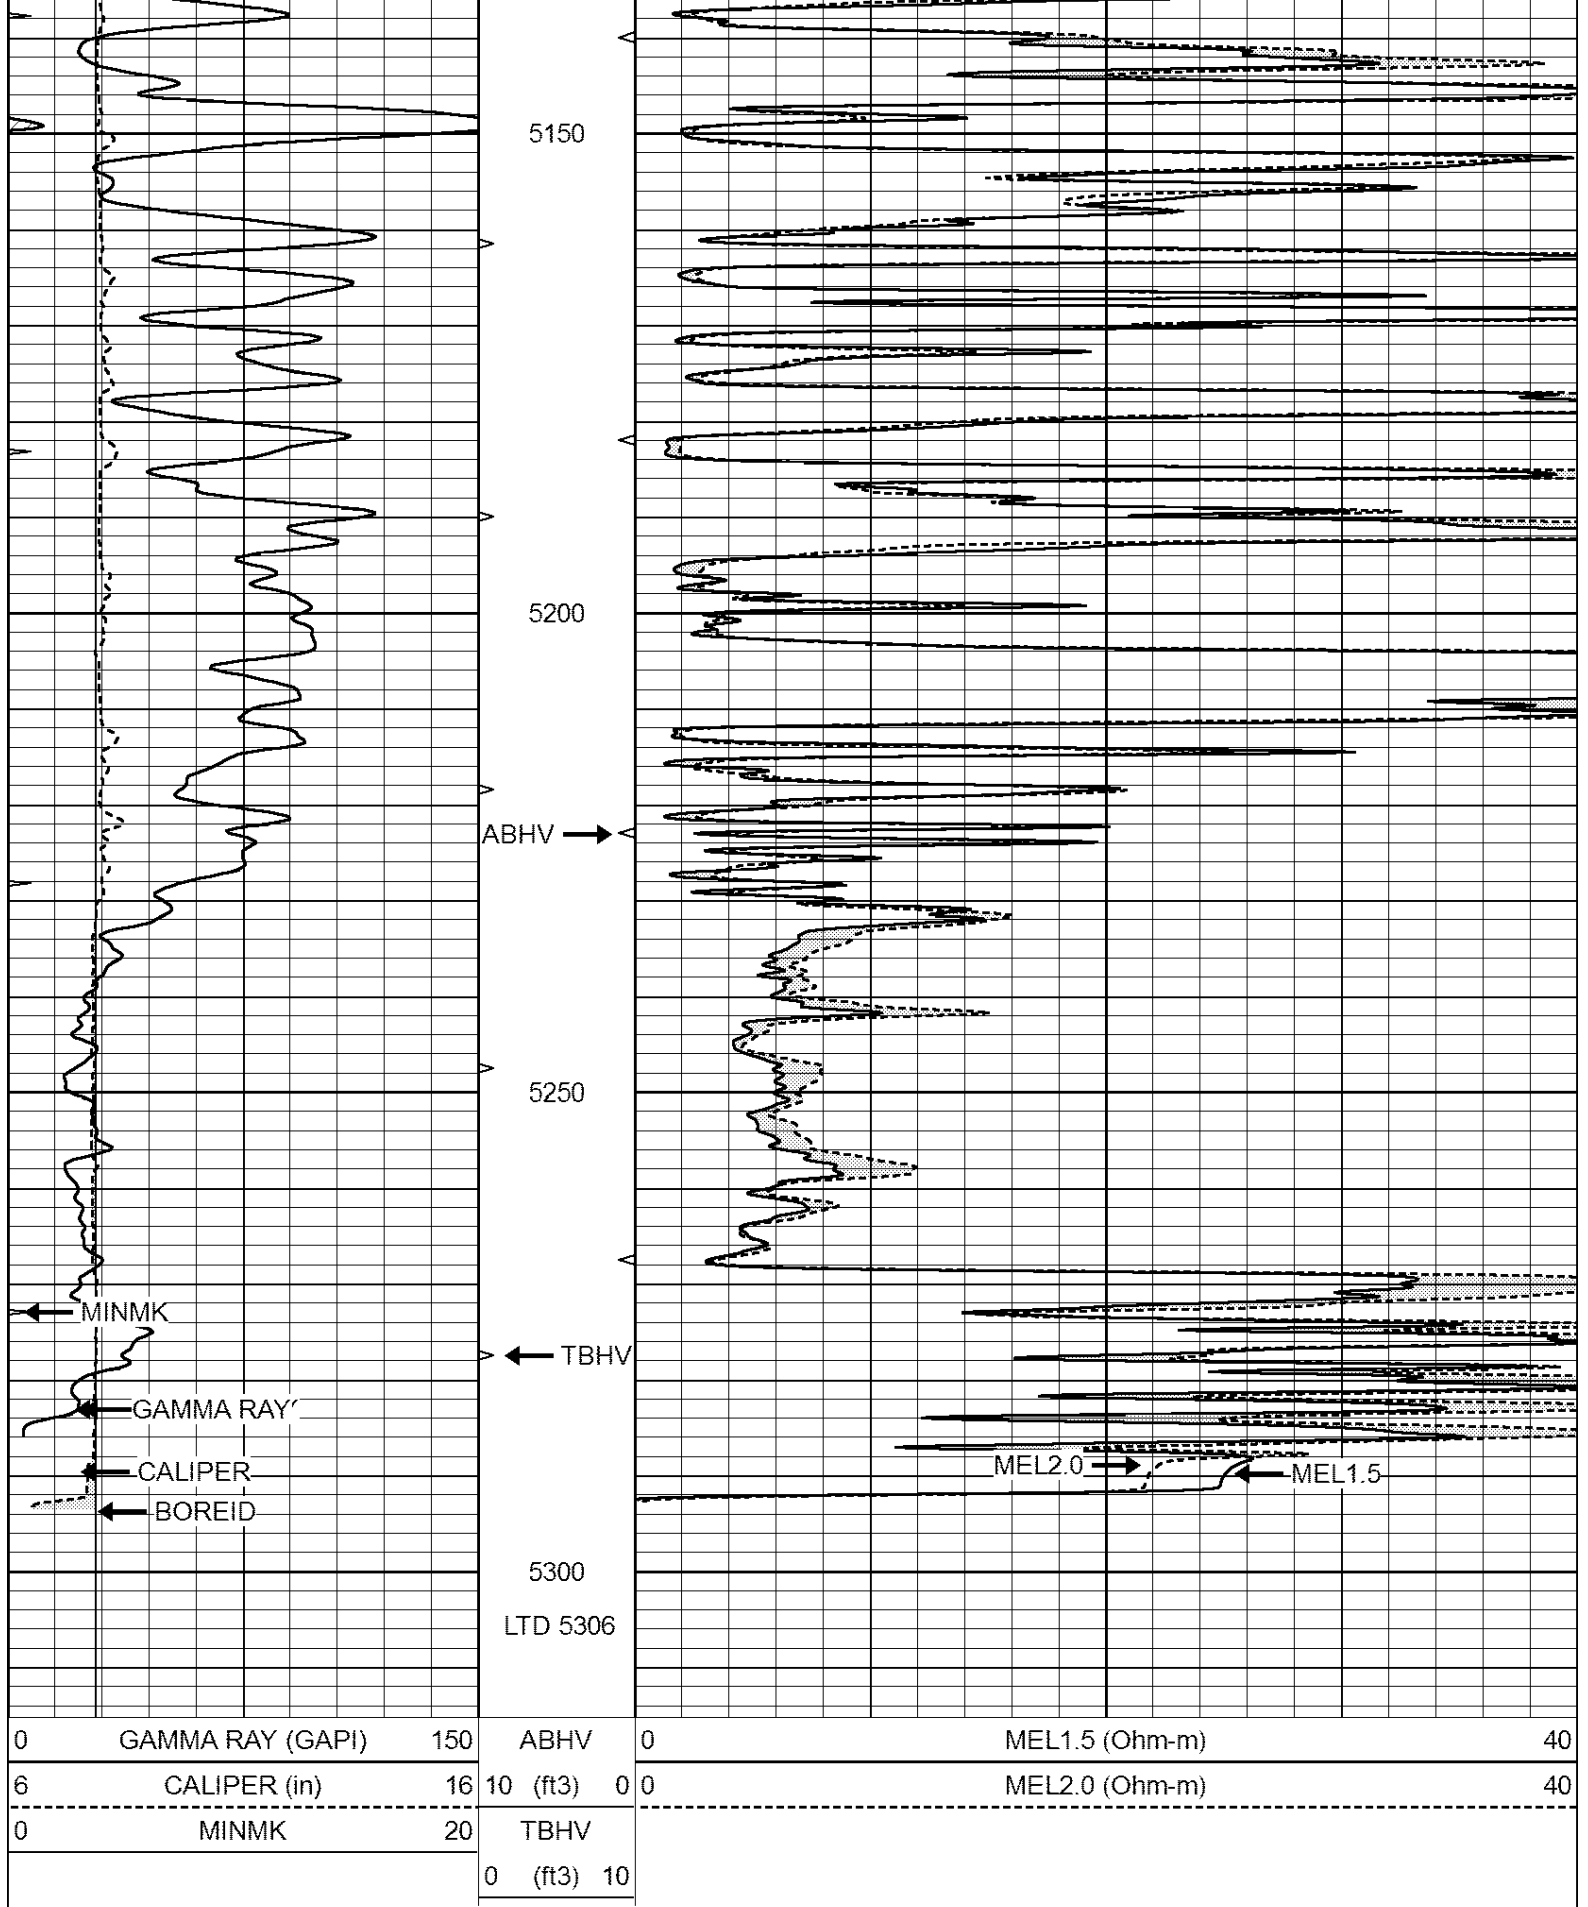


REPEAT SECTION

Database File: 4462pe.db
Dataset Pathname: pass6REPEA
Presentation Format: _micro
Dataset Creation: Sat Nov 23 12:23:28 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

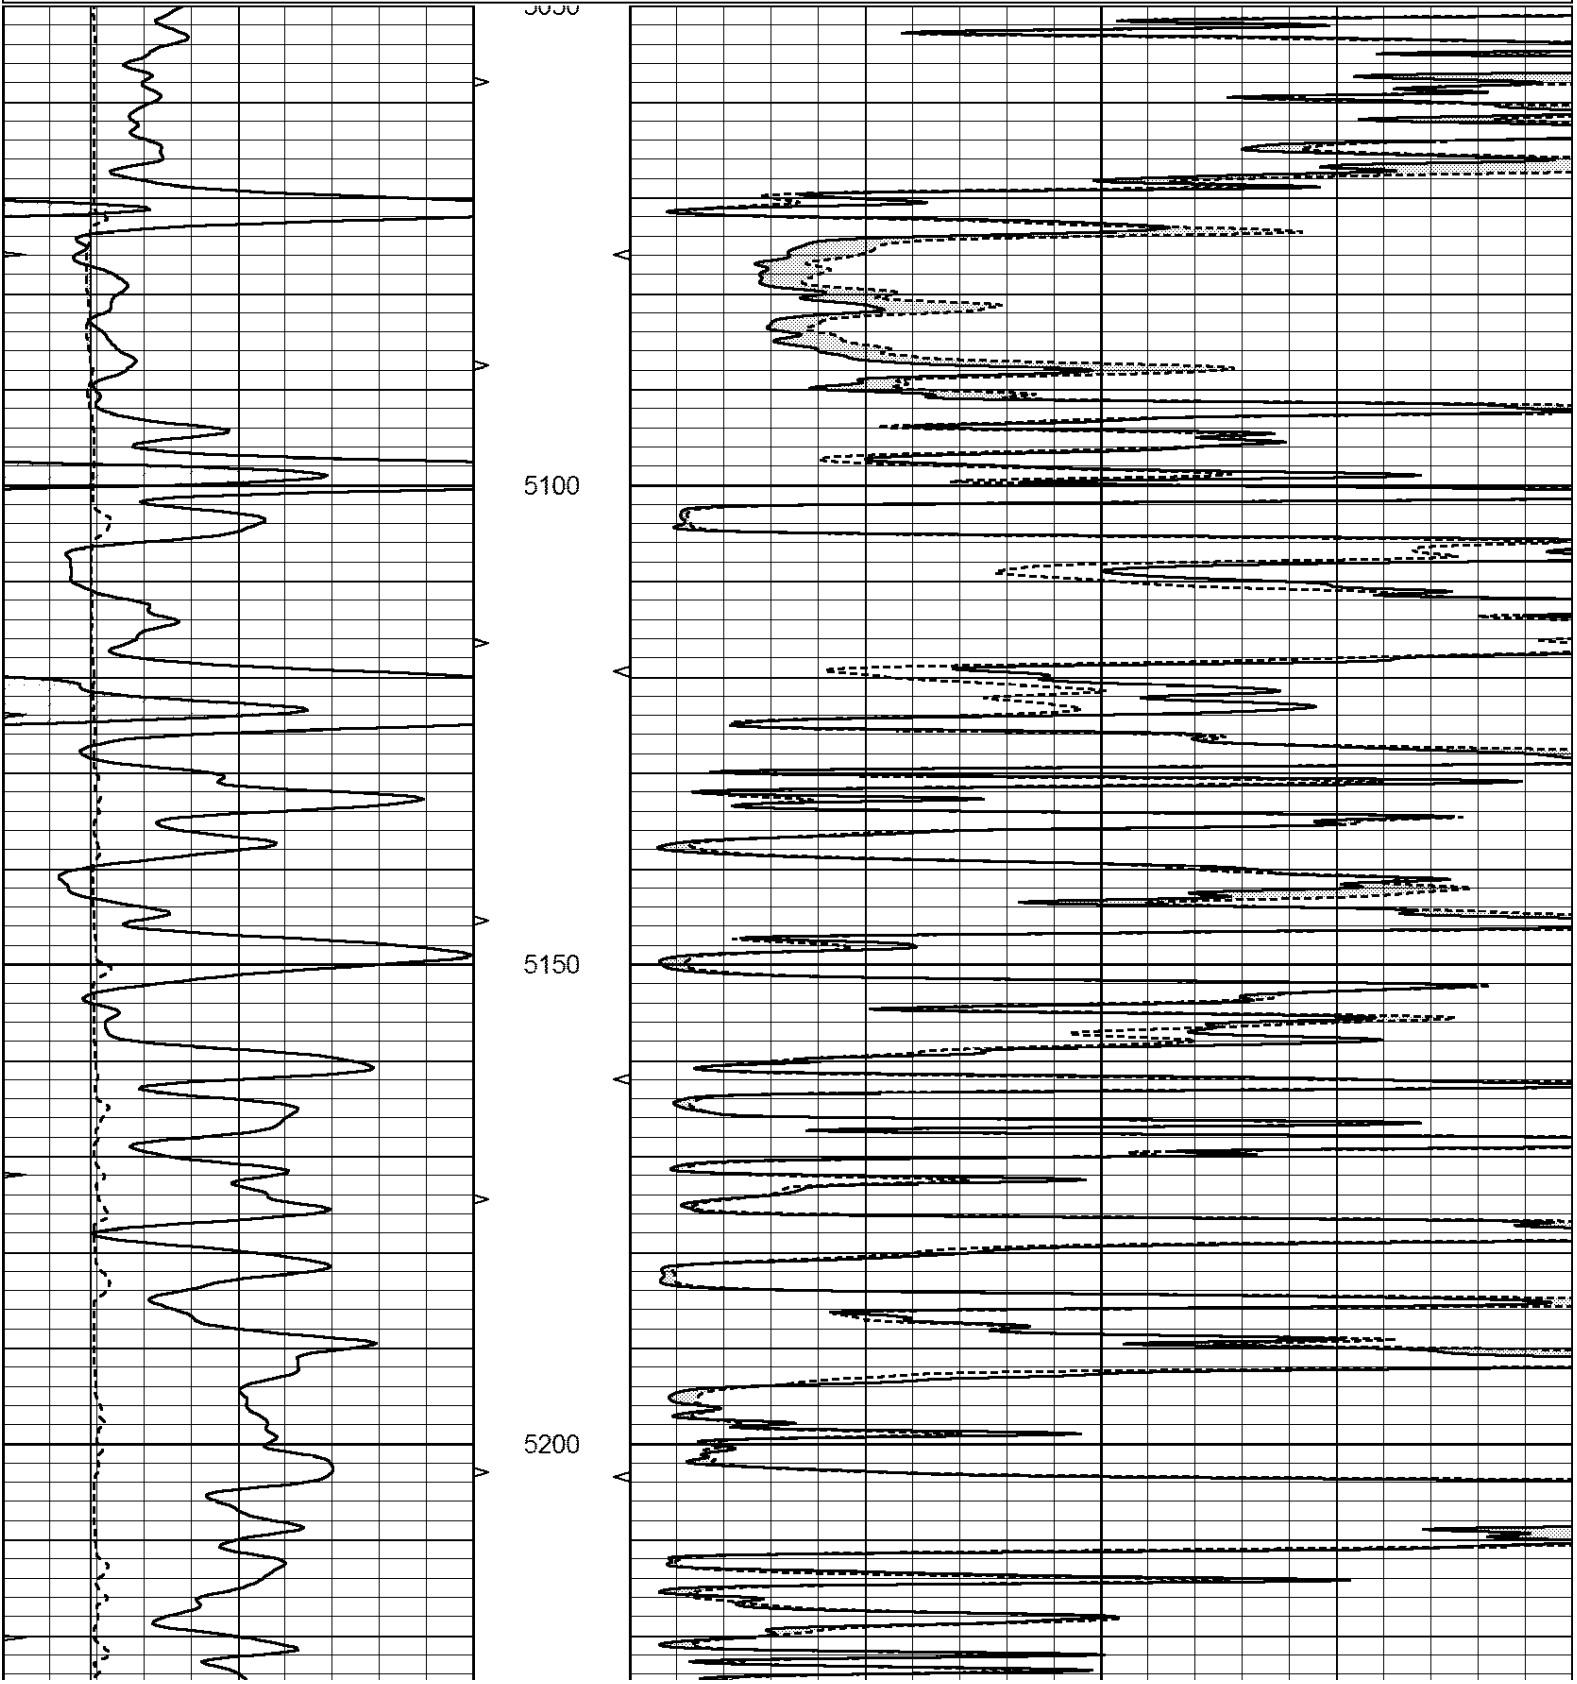

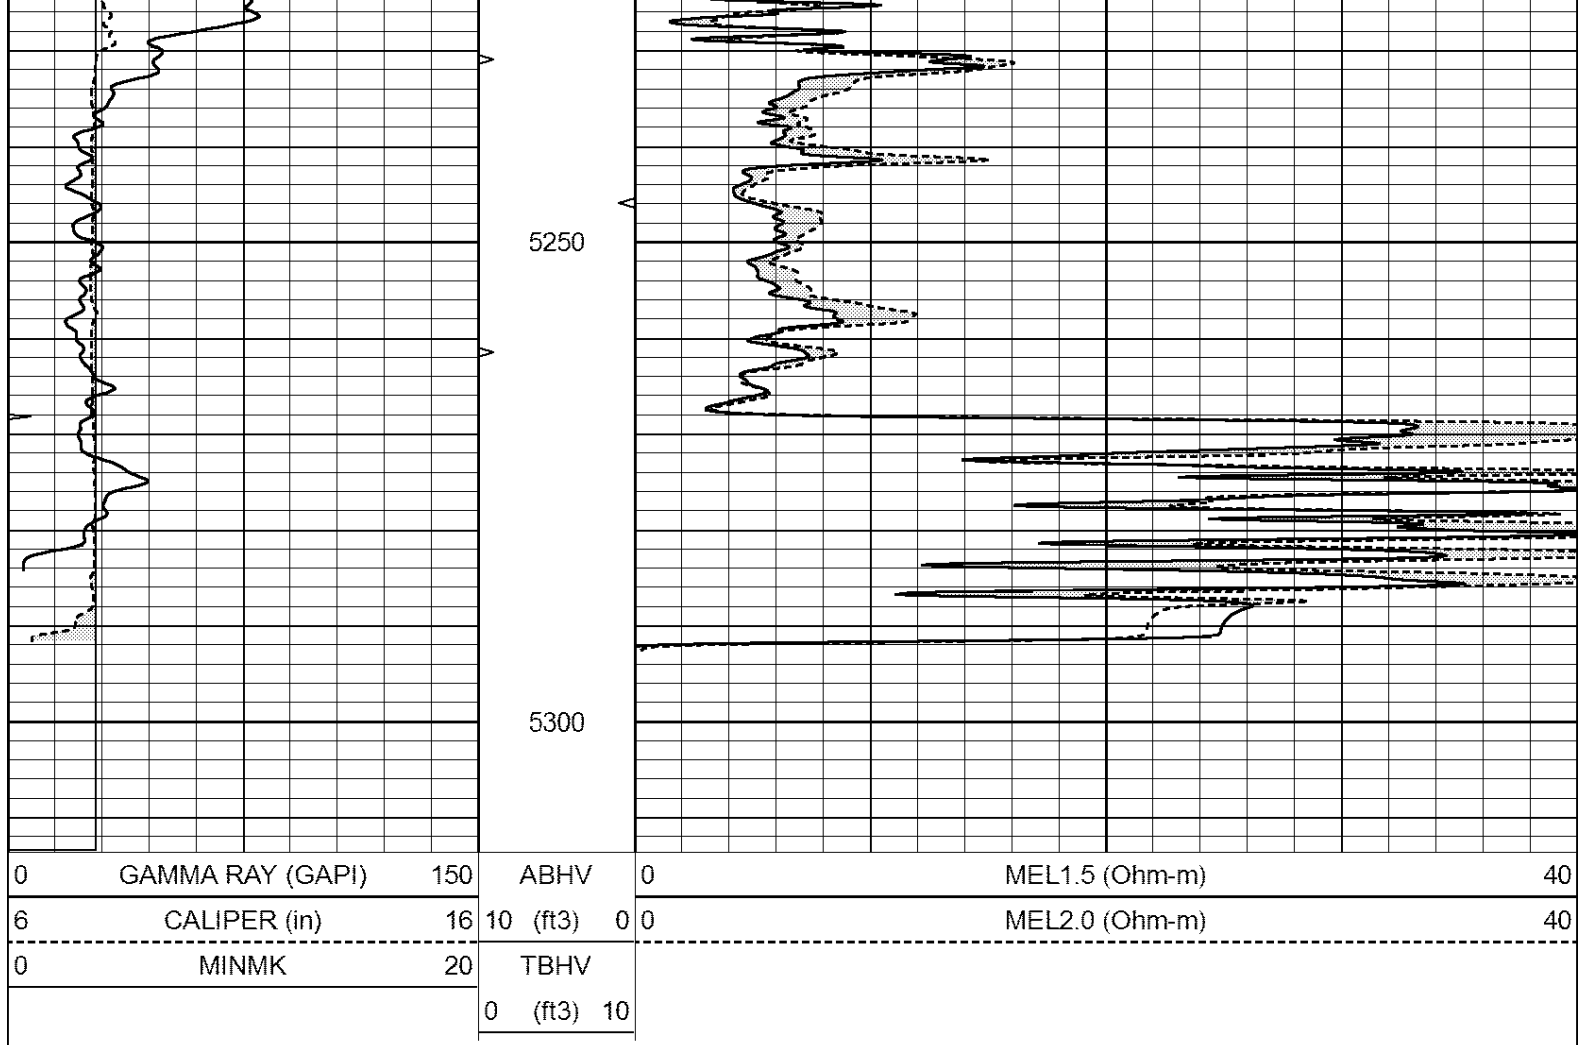

Calibration Report			
Database File:	4462pe.db		
Dataset Pathname:	pass6REPEA		
Dataset Creation:	Sat Nov 23 12:23:28 2019		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Sat Oct 26 06:47:35 2019		
Caliper Calibration:	Gain=2.030	Offset=6.505	
References	Low Cal	High Cal	
Readings	9.500	13.000	
	0.308	2.032	
1.5" Calibration:	Gain=36.134	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.832	
2" Calibration:	Gain=38.000	Offset=0.300	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.022	0.793	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPFN		

Test Method:

Thu Oct 24 16:06:54 2019

Calibrator Value:

1.0

GAPI

Background Reading:

0.0

cps

Calibrator Reading:

1.0

cps

Sensitivity:

0.5200

GAPI/cps