FRAC - FINDER LOG

Company DEUTSCH OIL COMPANY
Well HOEME TRUST #5-17
Field IUKA - CARMI
County PRATT State KANSAS

Company DEUTSCH OIL COMPANY
Well HOEME TRUST #5-17
Field IUKA - CARMI
County PRATT
State KANSAS

Location: API # : 15-151-22558-0000
660' FNL & 990' FWL
E/2 - NW - NW
SEC 17 TWP 27S RGE 12W

Other Services
CDL/CNL/PE
DIL/MEL

Elevation
K.B. 1866
D.F. 1864
G.L. 1858

Permanent Datum GROUND LEVEL Elevation 1858
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Date	12/2/22		
Run Number	TWO		
Depth Driller	4470		
Depth Logger	4468		
Bottom Logged Interval	4460		
Top Log Interval	4000		
Casing Driller	10 3/4"@242'		
Casing Logger	242		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 8,000 PPM	
Density / Viscosity	9.4/52		
pH / Fluid Loss	10.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.950@53F		
Rmf @ Meas. Temp	.713@53F		
Rmc @ Meas. Temp	1.14@53F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.420@120F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	9:00 A.M.		
Maximum Recorded Temperature	120F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	AARON YOUNG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
PRATT, KS., N.E. ON HWY 61 TO (NATRONA CHURCH) 3/4E., N INTO


MAIN SECTION

Database File	6807pe.db
Dataset Pathname	pass6.1
Presentation Format	frac
Dataset Creation	Fri Dec 02 09:52:23 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	200	WVF1 (usec) 1200
6	BOREID (in)	16	10 (ft3) 0		
6	CALIPER (in)	16	TBHV		
			0 (ft3) 10		

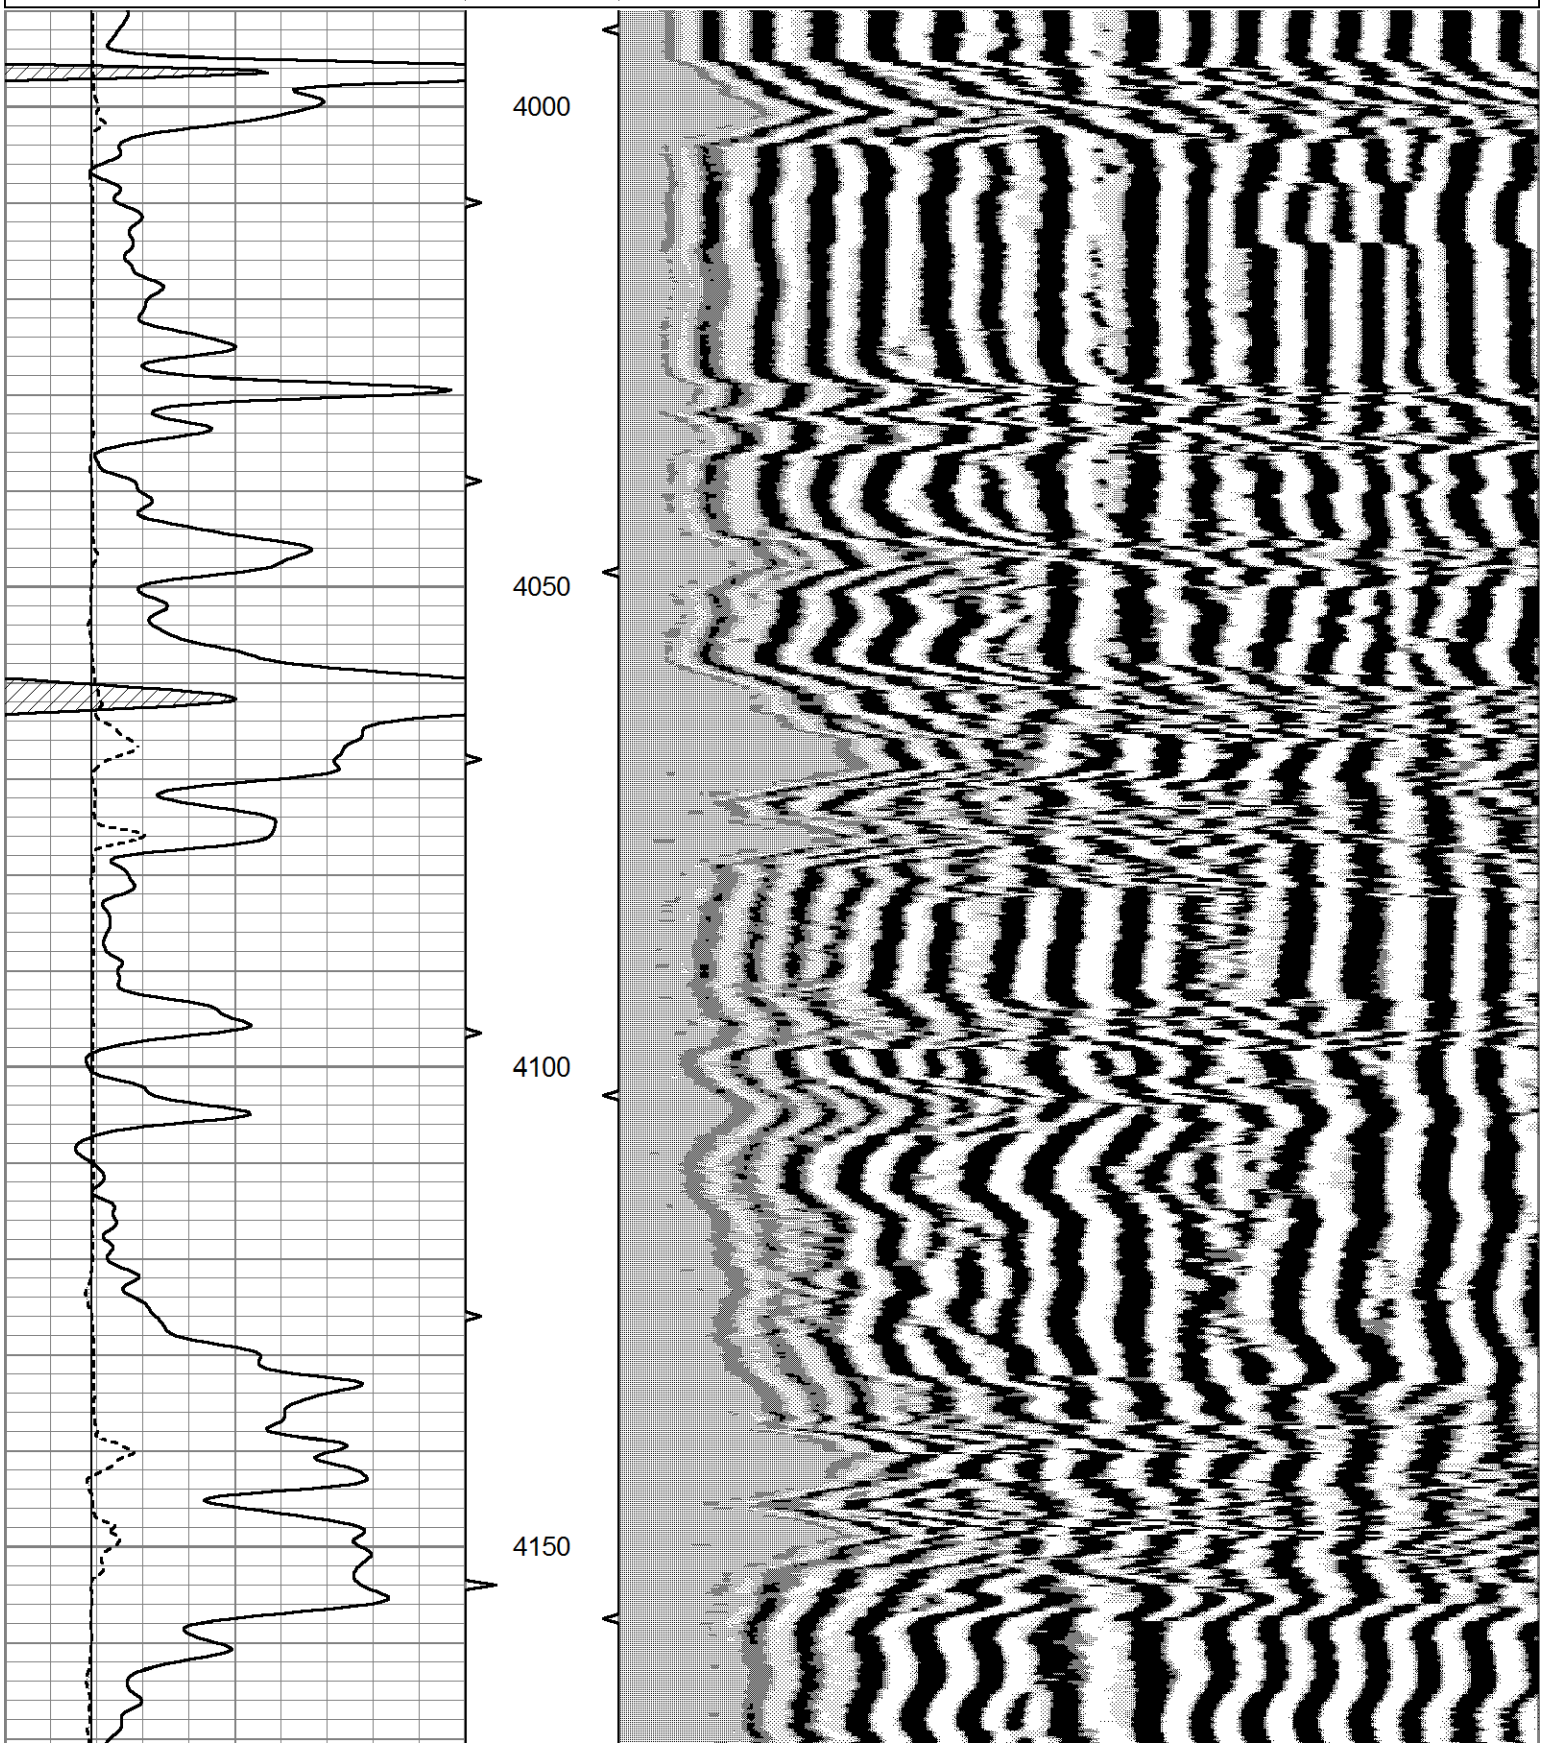

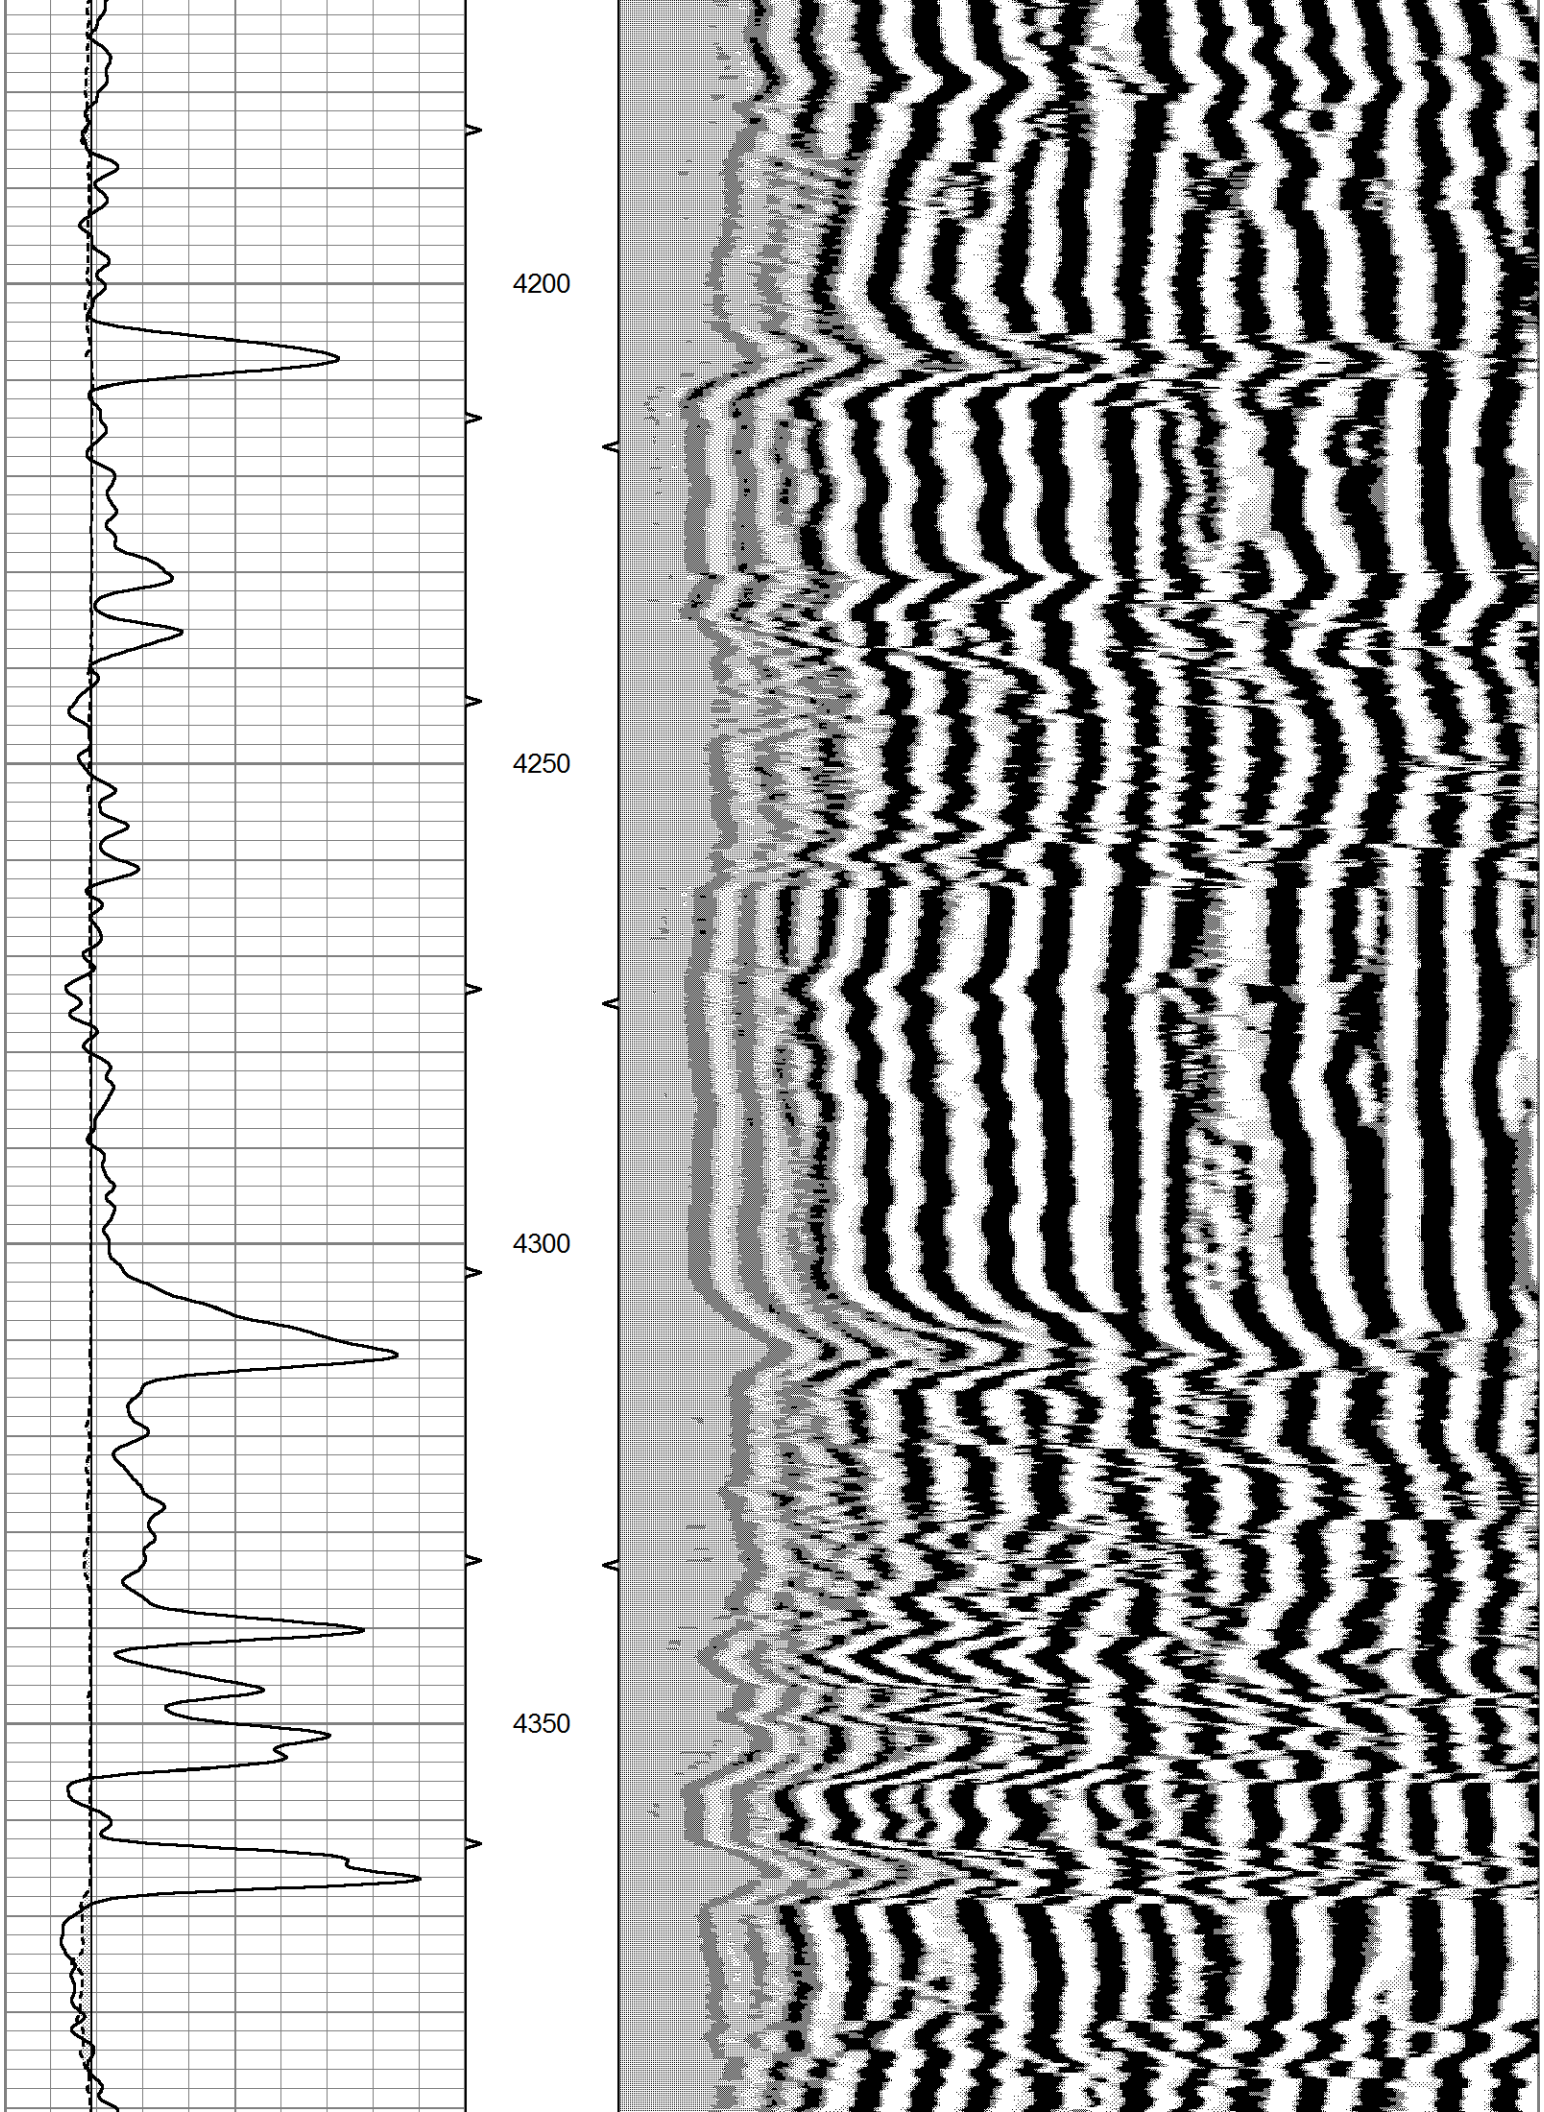
4200
4250
4300
4350

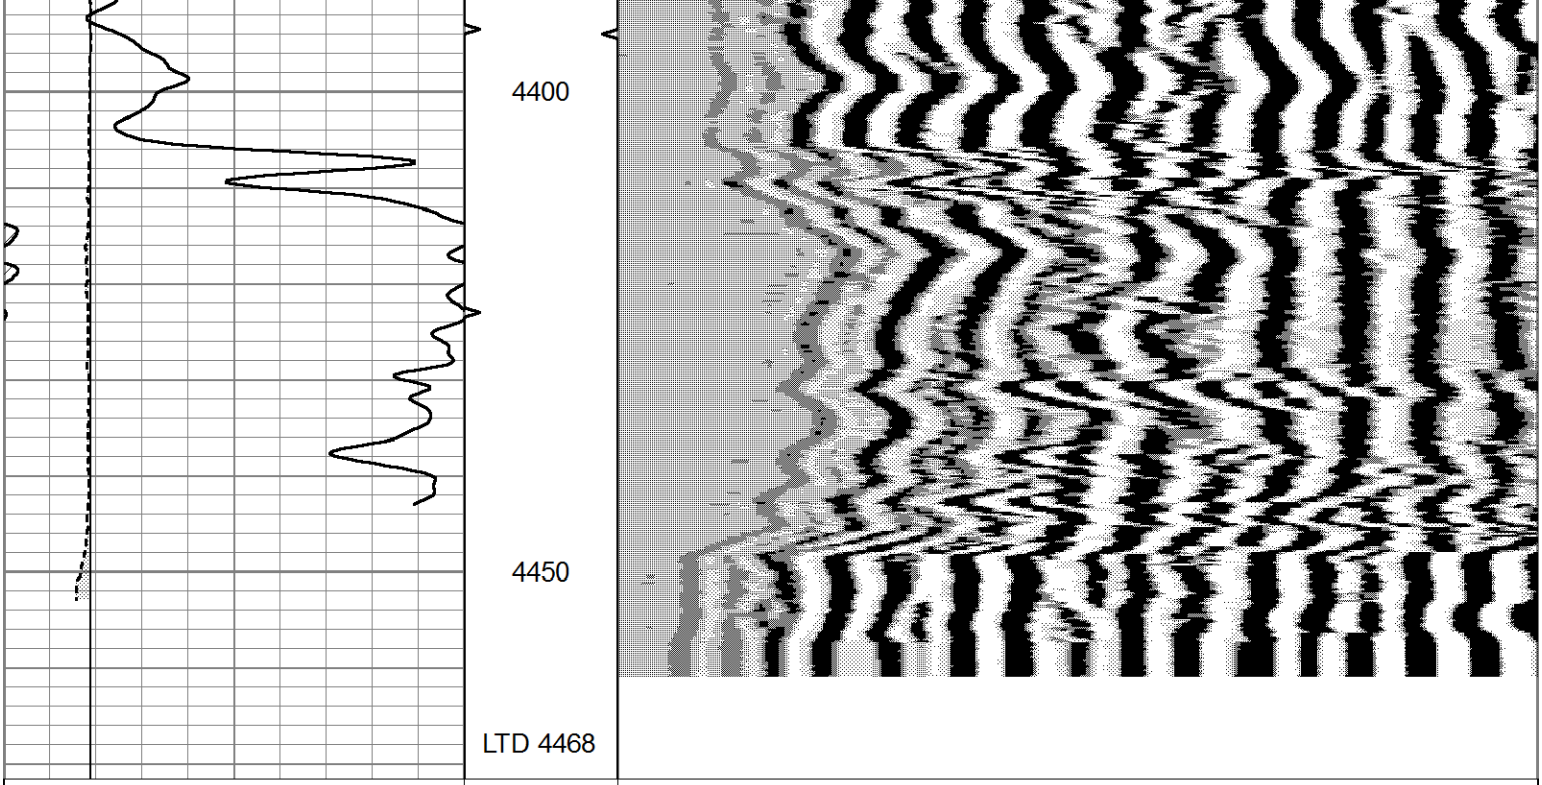

0	GR (GAPI)	150	ABHV	200	WVF1 (usec) 1200
6	BOREID (in)	16	10 (ft3) 0		
6	CALIPER (in)	16	TBHV		
			0 (ft3) 10		