MICRO LOG

Company BEREXCO, LLC.
Well COUTURE #1
Field MARCOTTE
County ROOKS State KANSAS

Location: API # : 15-163-24467-0000
330' FSL & 1090' FWL
E/2 - SE - SW - SW

SEC 9 TWP 10S RGE 20W

Other Services
CDL/CNL
DIL

Permanent Datum GROUND LEVEL Elevation 2237
Log Measured From KELLY BUSHING 10' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2247
D.F. 2245
G.L. 2237

Date	11/1/22		
Run Number	TWO		
Depth Driller	3900		
Depth Logger	3902		
Bottom Logged Interval	3900		
Top Log Interval	3200		
Casing Driller	8 5/8"@263'		
Casing Logger	263		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.3/60		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.20@71F		
Rmf @ Meas. Temp	.900@71F		
Rmc @ Meas. Temp	1.44@71F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.741@115F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	10:45 P.M.		
Maximum Recorded Temperature	115F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BRYAN BYNOG	CHAD SPRUNGER	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


15-163-24467-0000


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PALCO, KS., S. ON BLKTOP TO "AA RD.", 1/4E., N. INTO


MAIN SECTION


Database File	7257ddn.db
Dataset Pathname	pass7.4
Presentation Format	micro
Dataset Creation	Tue Nov 01 23:13:43 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

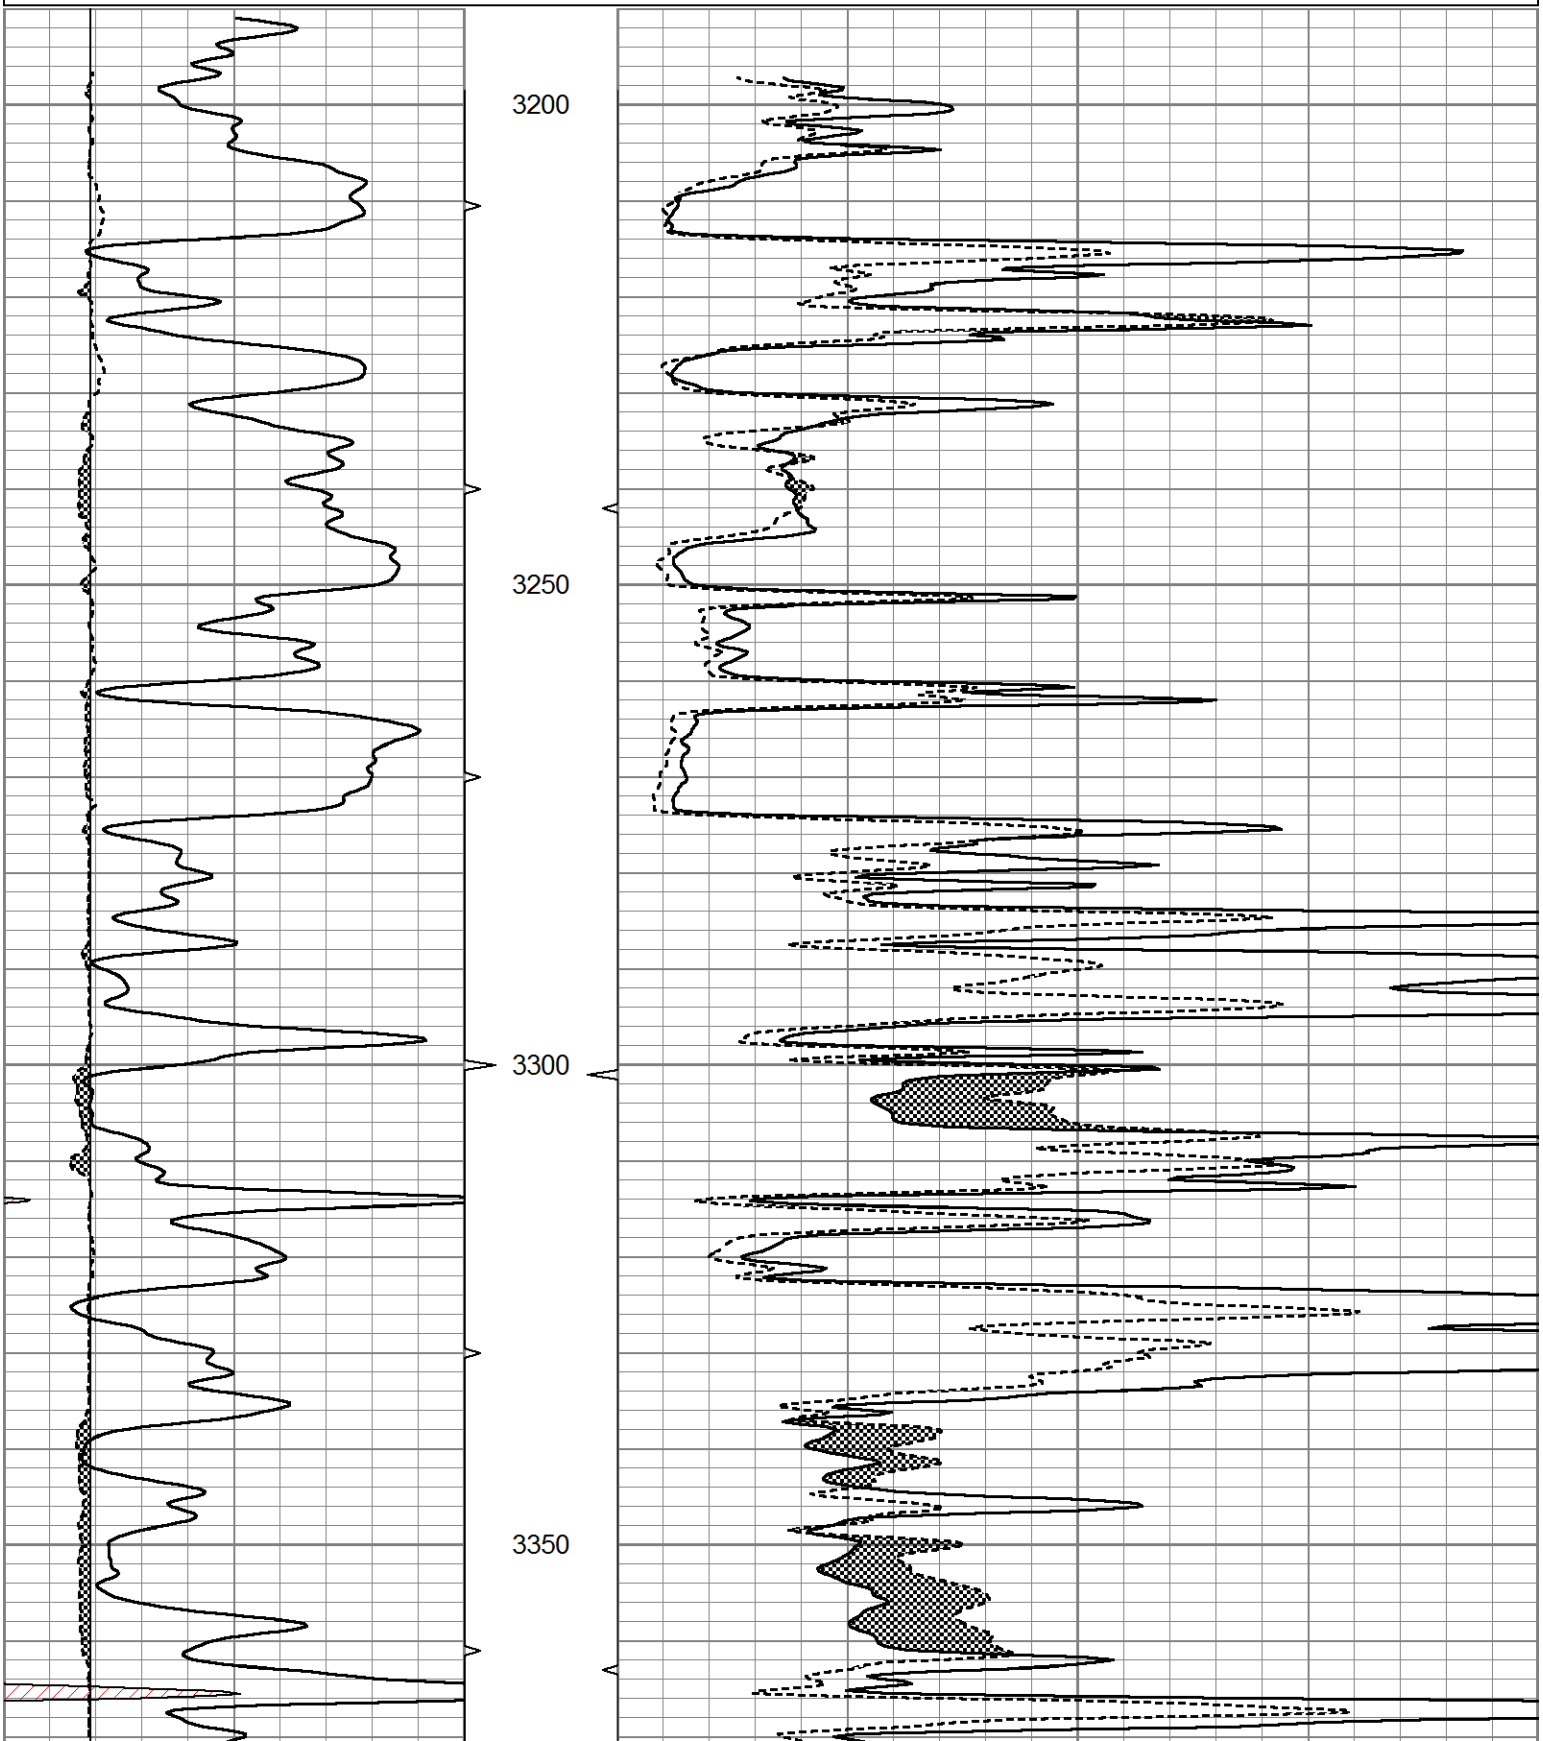

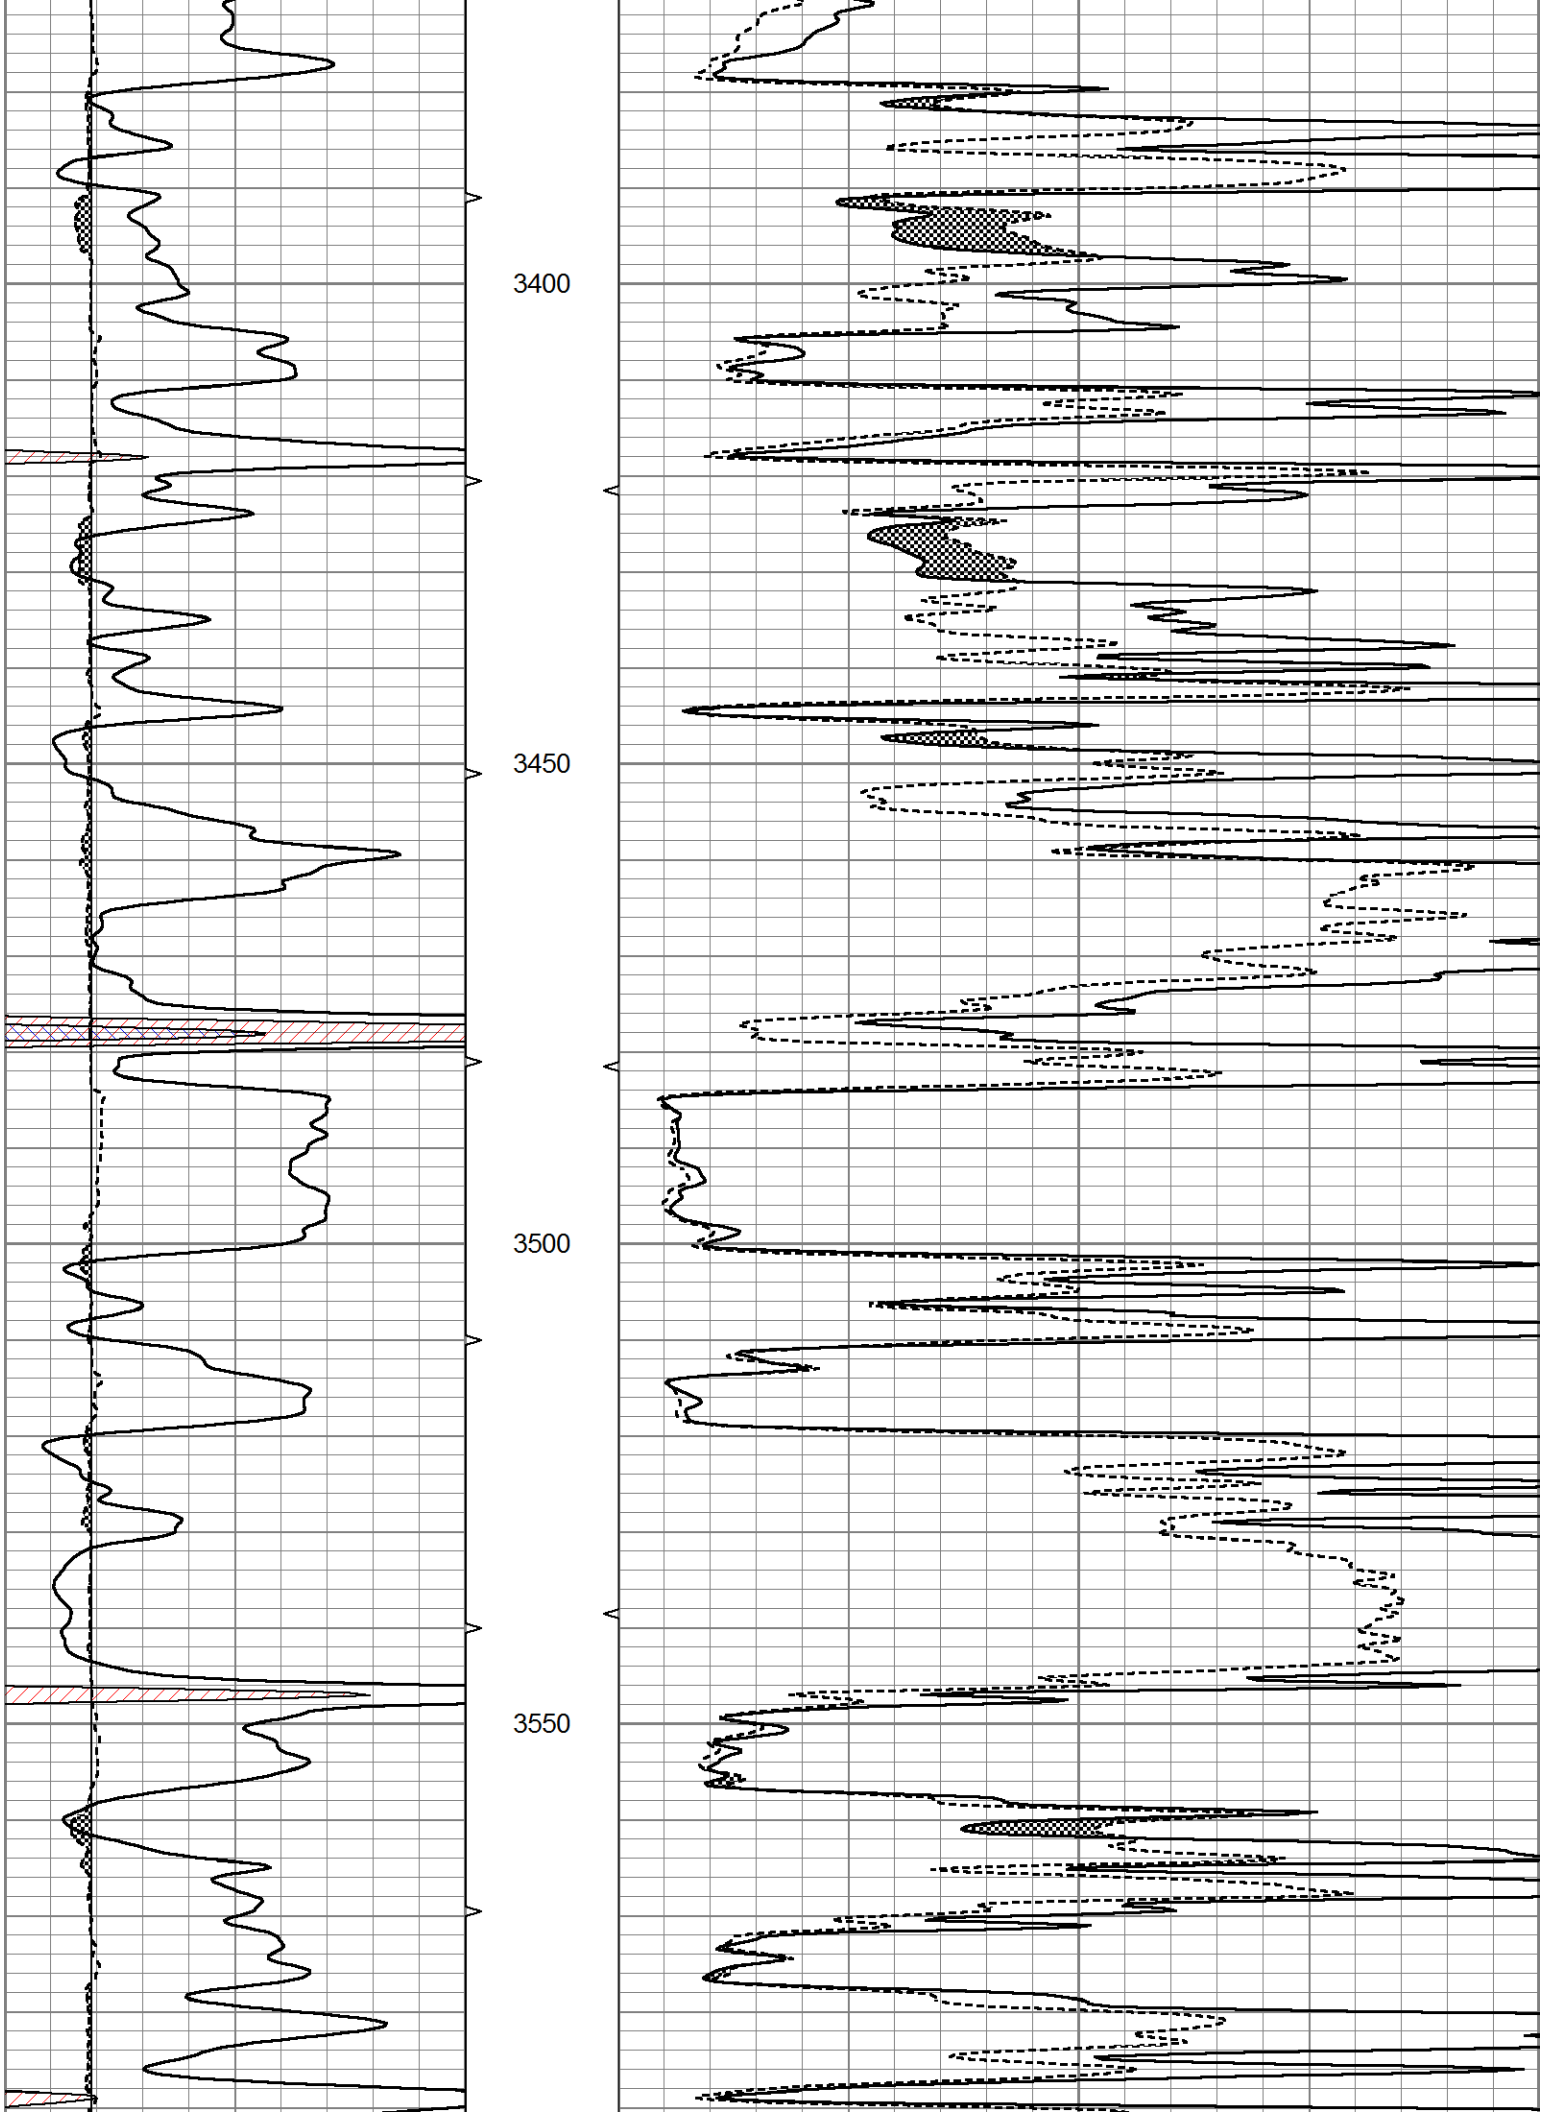

3400
3450
3500
3550

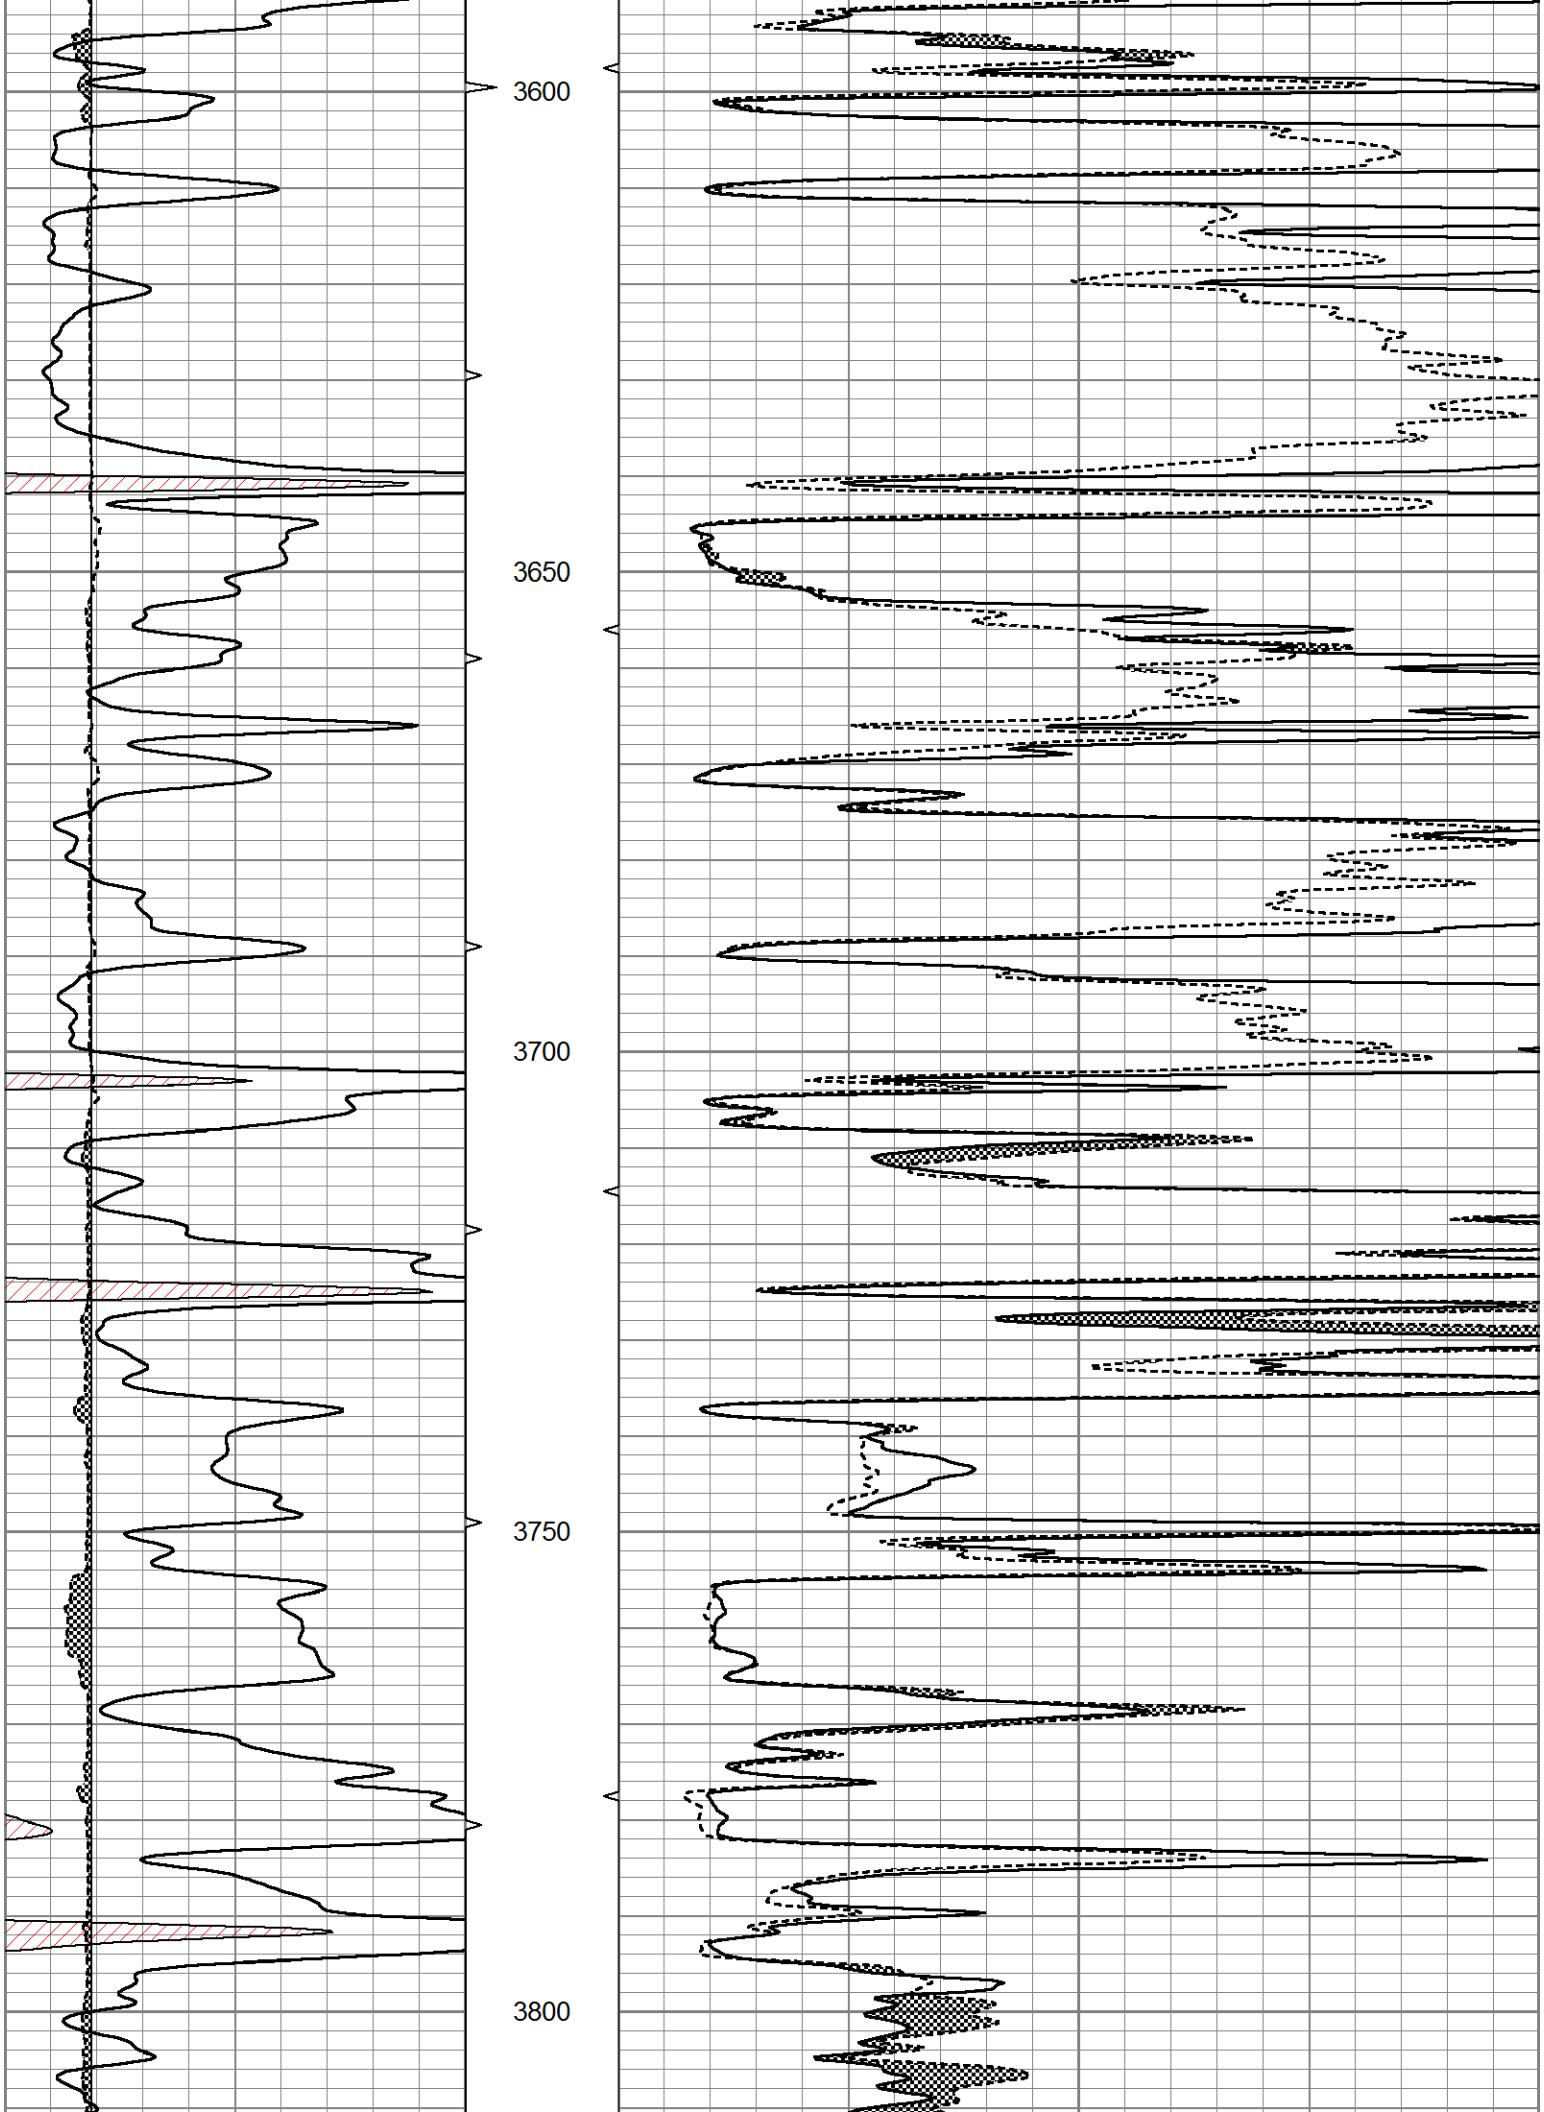

3600
3650
3700
3750
3800

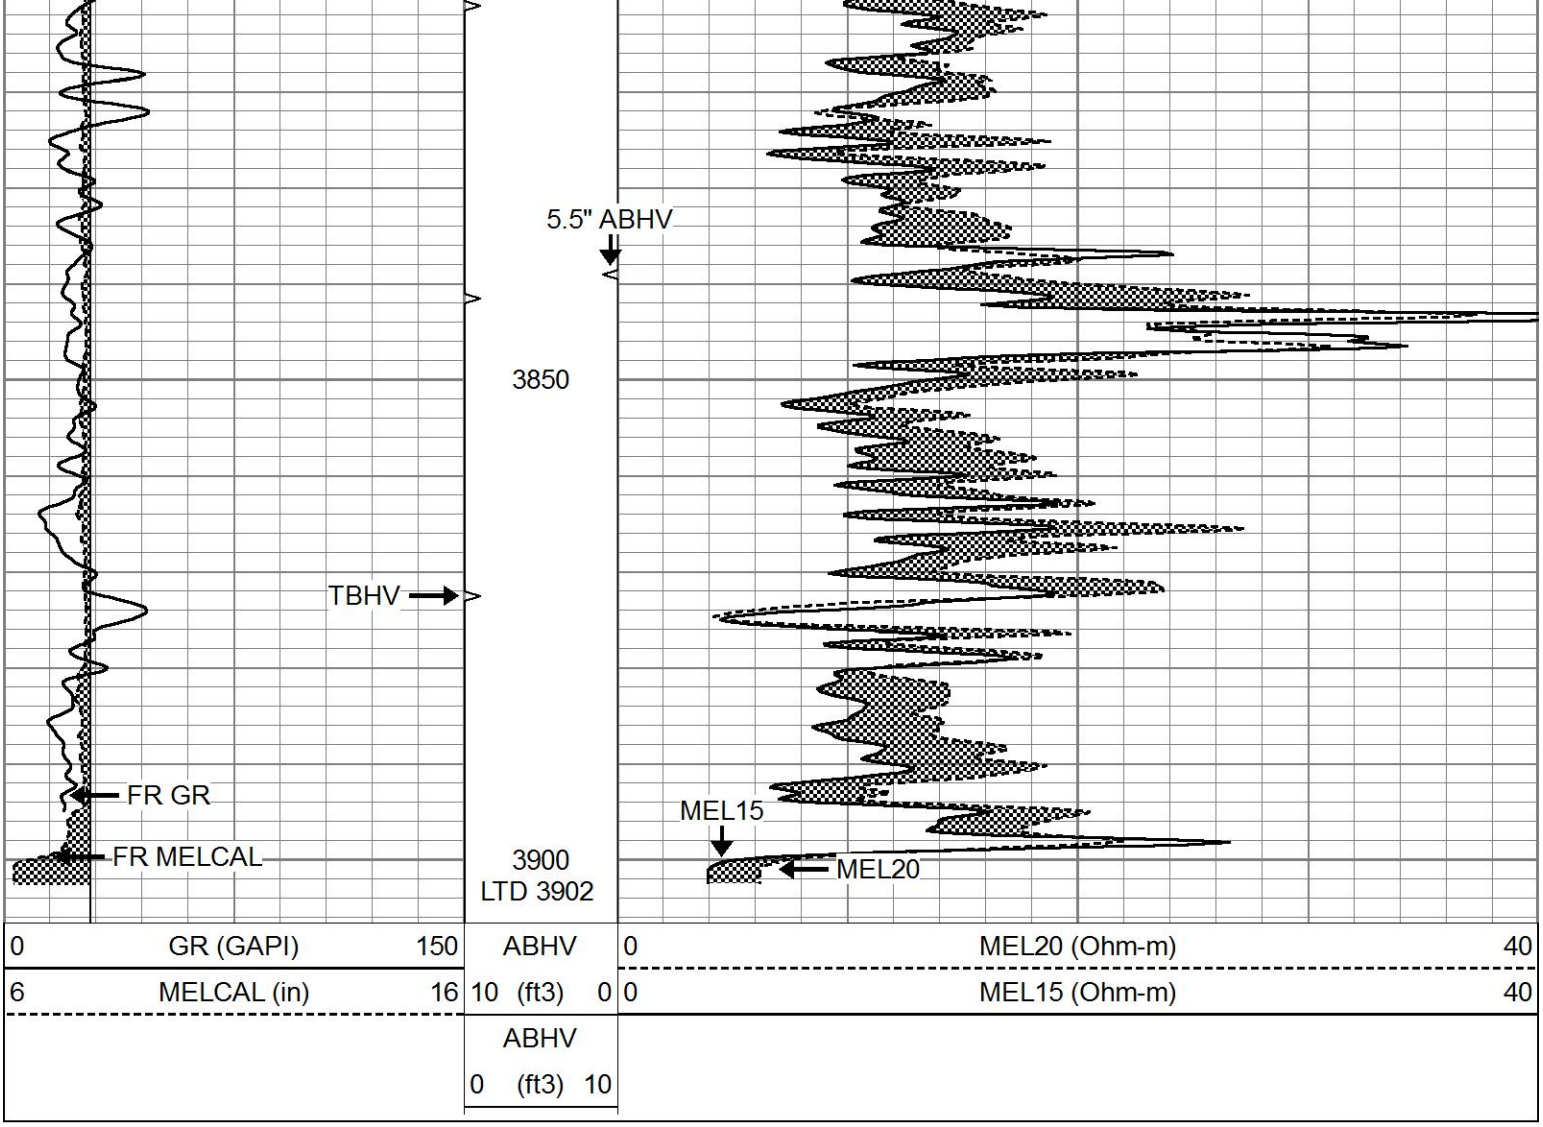

REPEAT SECTION

Database File	7257ddn.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Tue Nov 01 22:54:11 2022
Charted by	Depth in Feet scaled 1:240

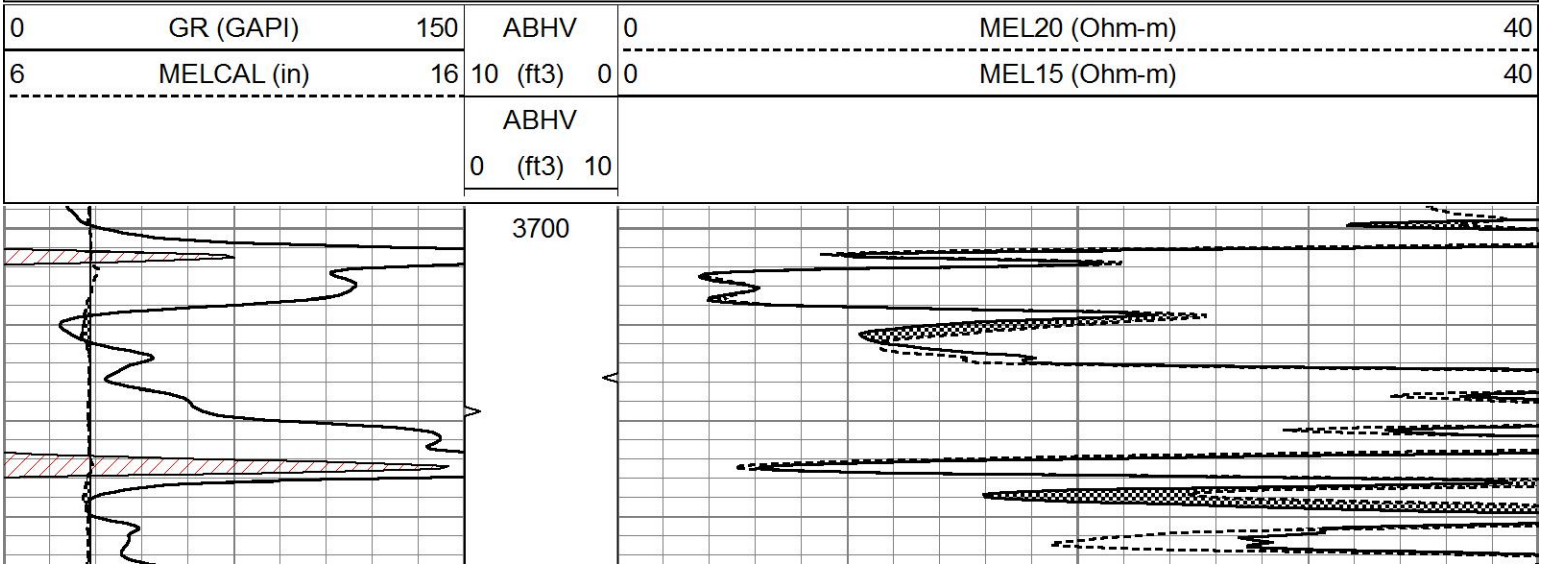

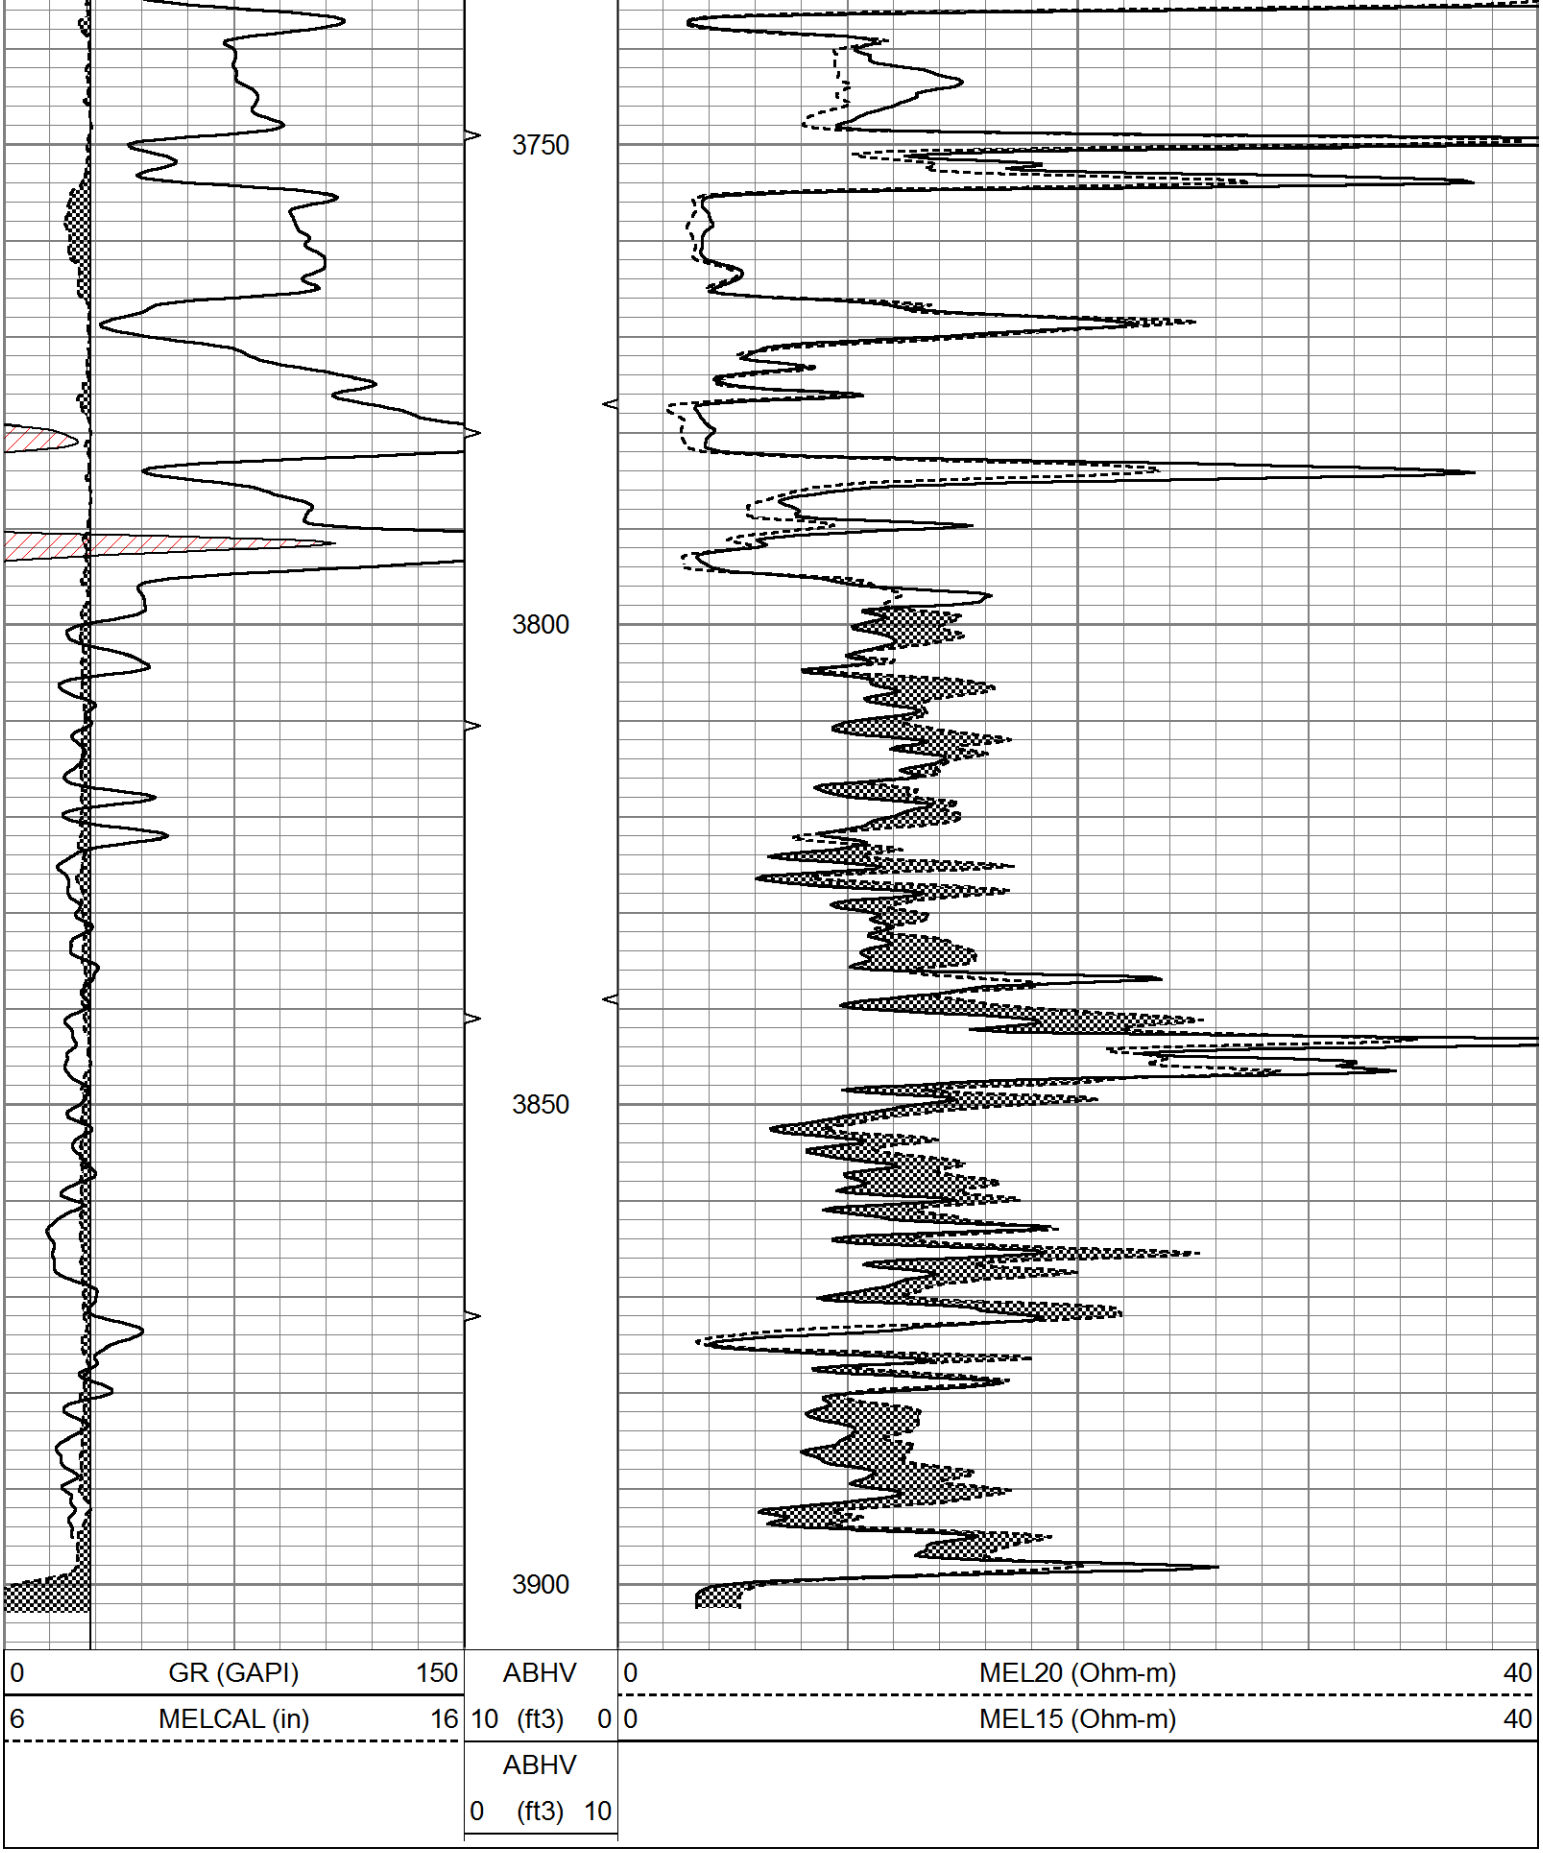

Calibration Report

Database File	7257ddn.db
Dataset Pathname	pass7.4
Dataset Creation	Tue Nov 01 23:13:43 2022

MICRO Calibration Report

Serial Number:	070911	
Tool Model:	ProbeN	
Performed:	Fri Oct 28 07:31:01 2022	
Caliper Calibration:	Gain=5.063	Offset=1.823
	Low Cal	High Cal
References	8.000	16.000
Readings	1.220	2.800
1.5" Calibration:	Gain=32.000	Offset=0.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.291
2" Calibration:	Gain=58.000	Offset=-1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.003	1.103

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Tue Nov 01 22:39:16 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3200	GAPI/cps