

MICRO LOG

Company		AGV CORPORATION	
Well	BENFER #8		
Field	BENFER		
County	BUTLER	State	KANSAS
Location:		API # : 15-015-24161-0000	
Permanent Datum		GROUND LEVEL Elevation 1347	
Log Measured From		KELLY BUSHING 9' A.G.L	
Drilling Measured From		KELLY BUSHING	
SEC 9 TWP 26S RGE 3E		Other Services CDL/CNL PE/DIL	
Date	10/9/22		
Run Number	TWO		
Depth Driller	2925		
Depth Logger	2926		
Bottom Logged Interval	2924		
Top Log Interval	2000		
Casing Driller	8 5/8" @ 223		
Casing Logger	223		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.80 @ 70F		
Rmf @ Meas. Temp	1.35 @ 70F		
Rmc @ Meas. Temp	2.16 @ 70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.19 @ 106F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	12:00 P.M.		
Maximum Recorded Temperature	106F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	KENT ROBERTS		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


BENTON, KANSAS NORTH TO SW PRAIRIE CREEK ROAD, NORTH 1/2 MILE AND FOLLOW CURVE NORTH FOR 1/4 MILE, EAST INTO

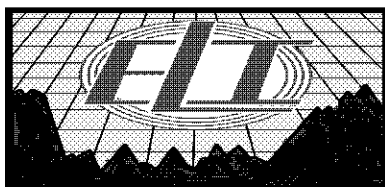


MAIN SECTION

Database File	7230pe.db
Dataset Pathname	pass9M1
Presentation Format	_micro
Dataset Creation	Sun Oct 09 13:12:25 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

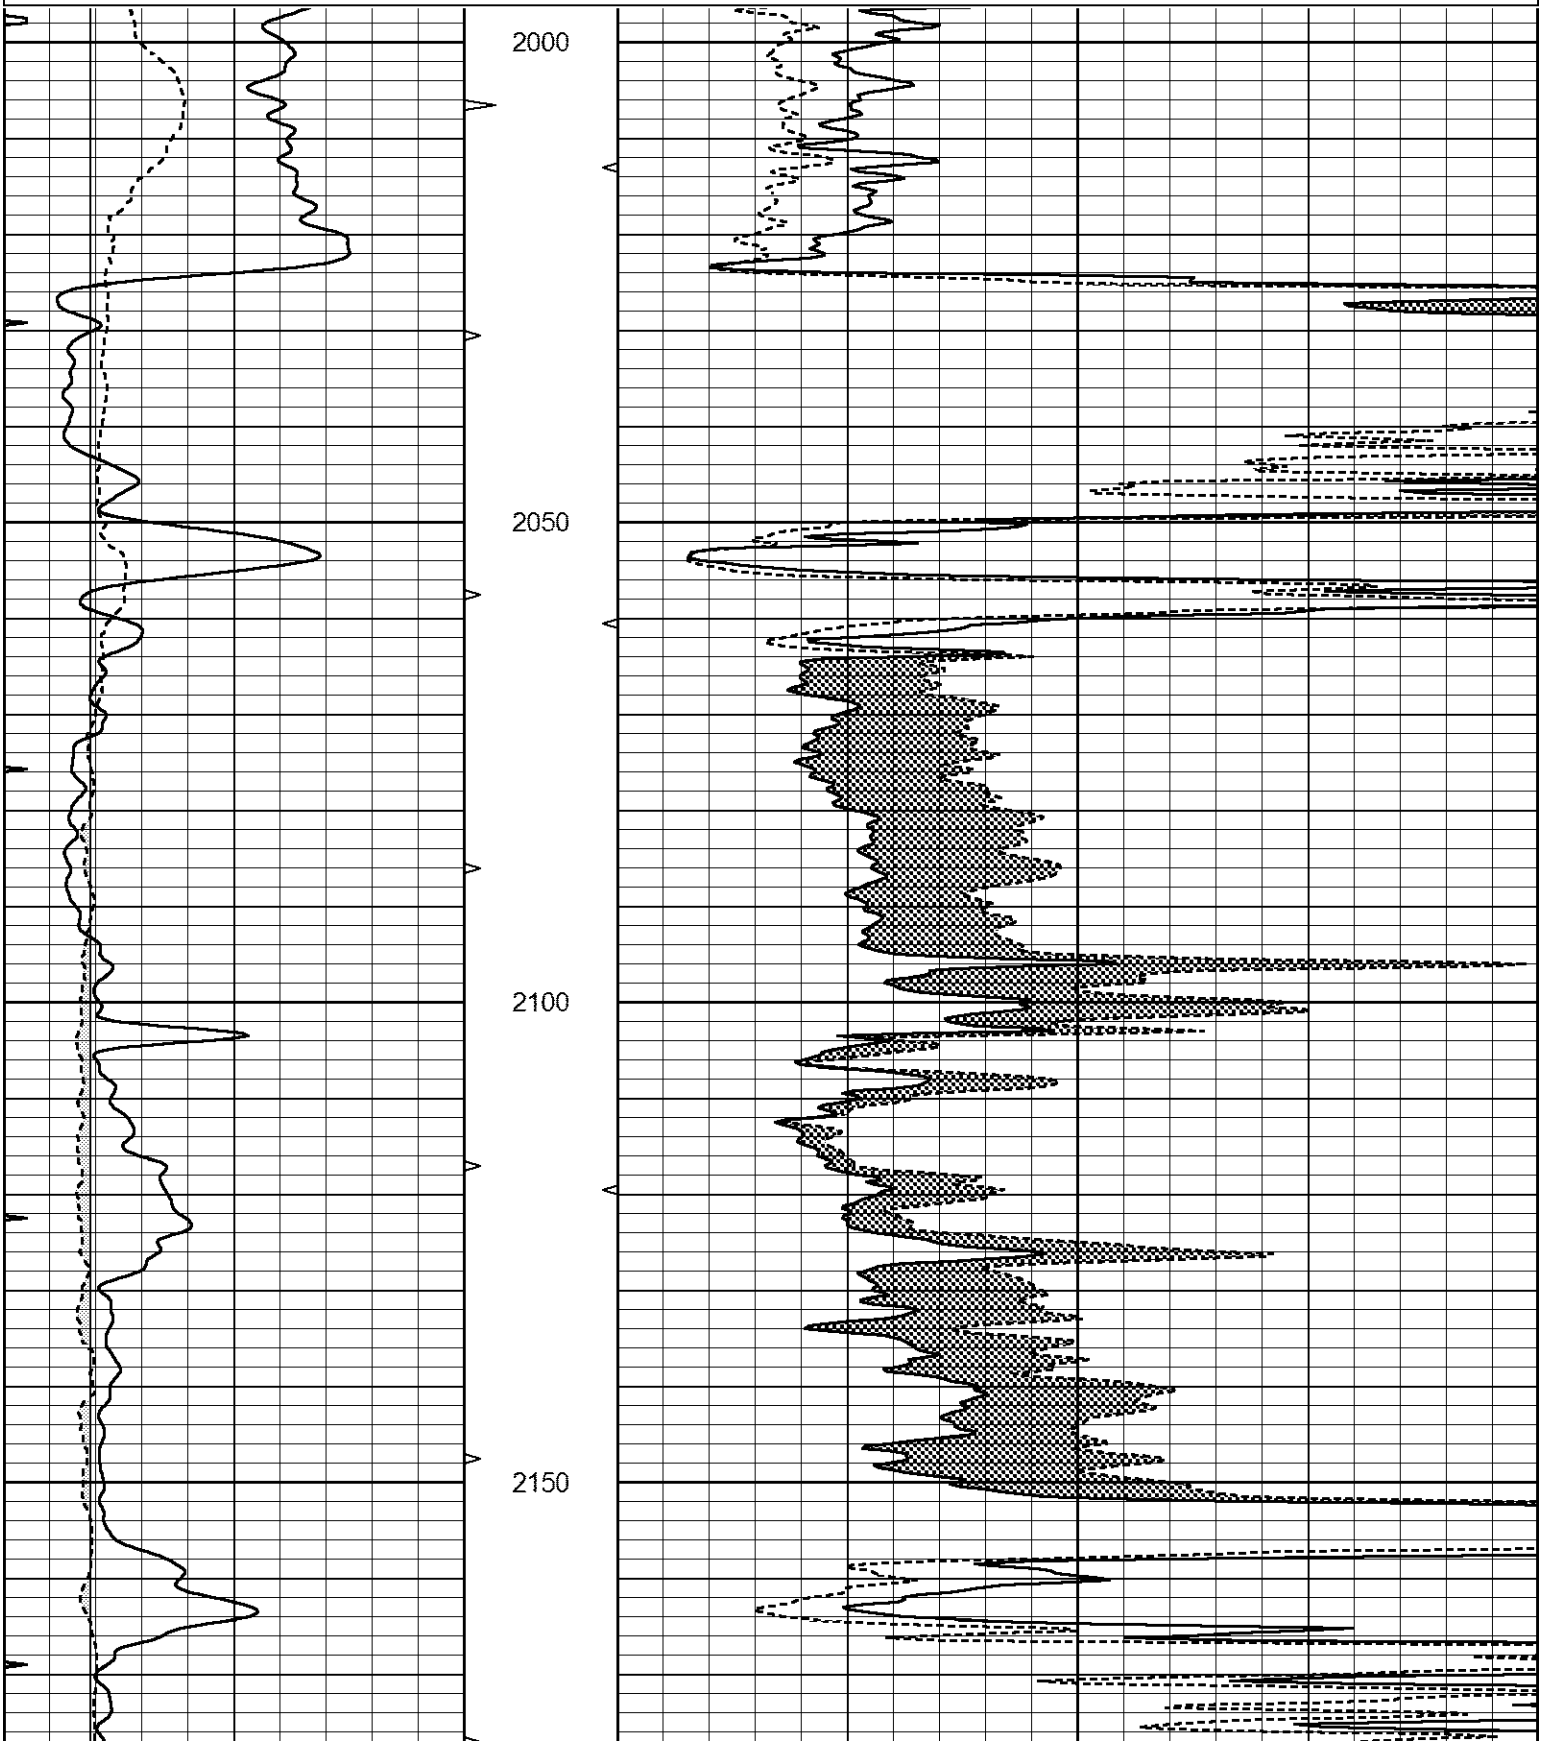

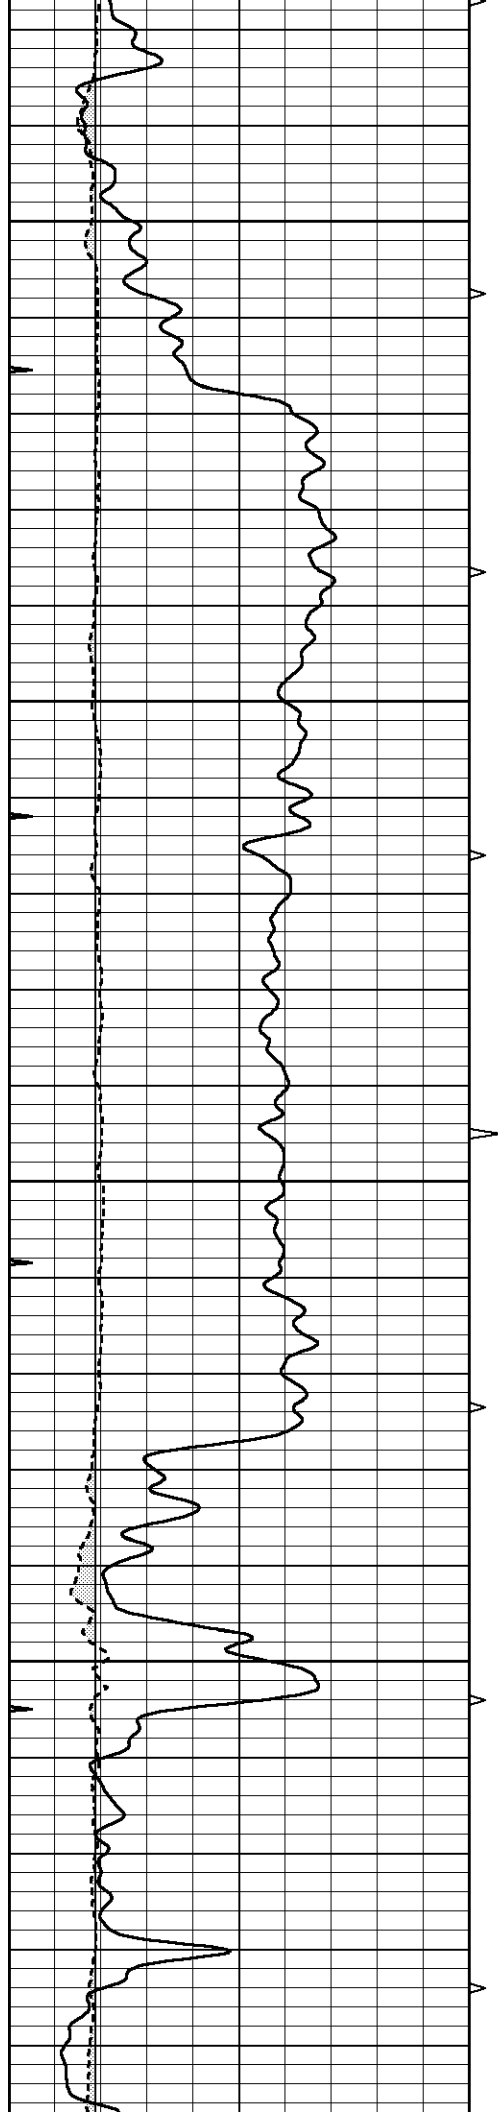



2200

2250

300

350

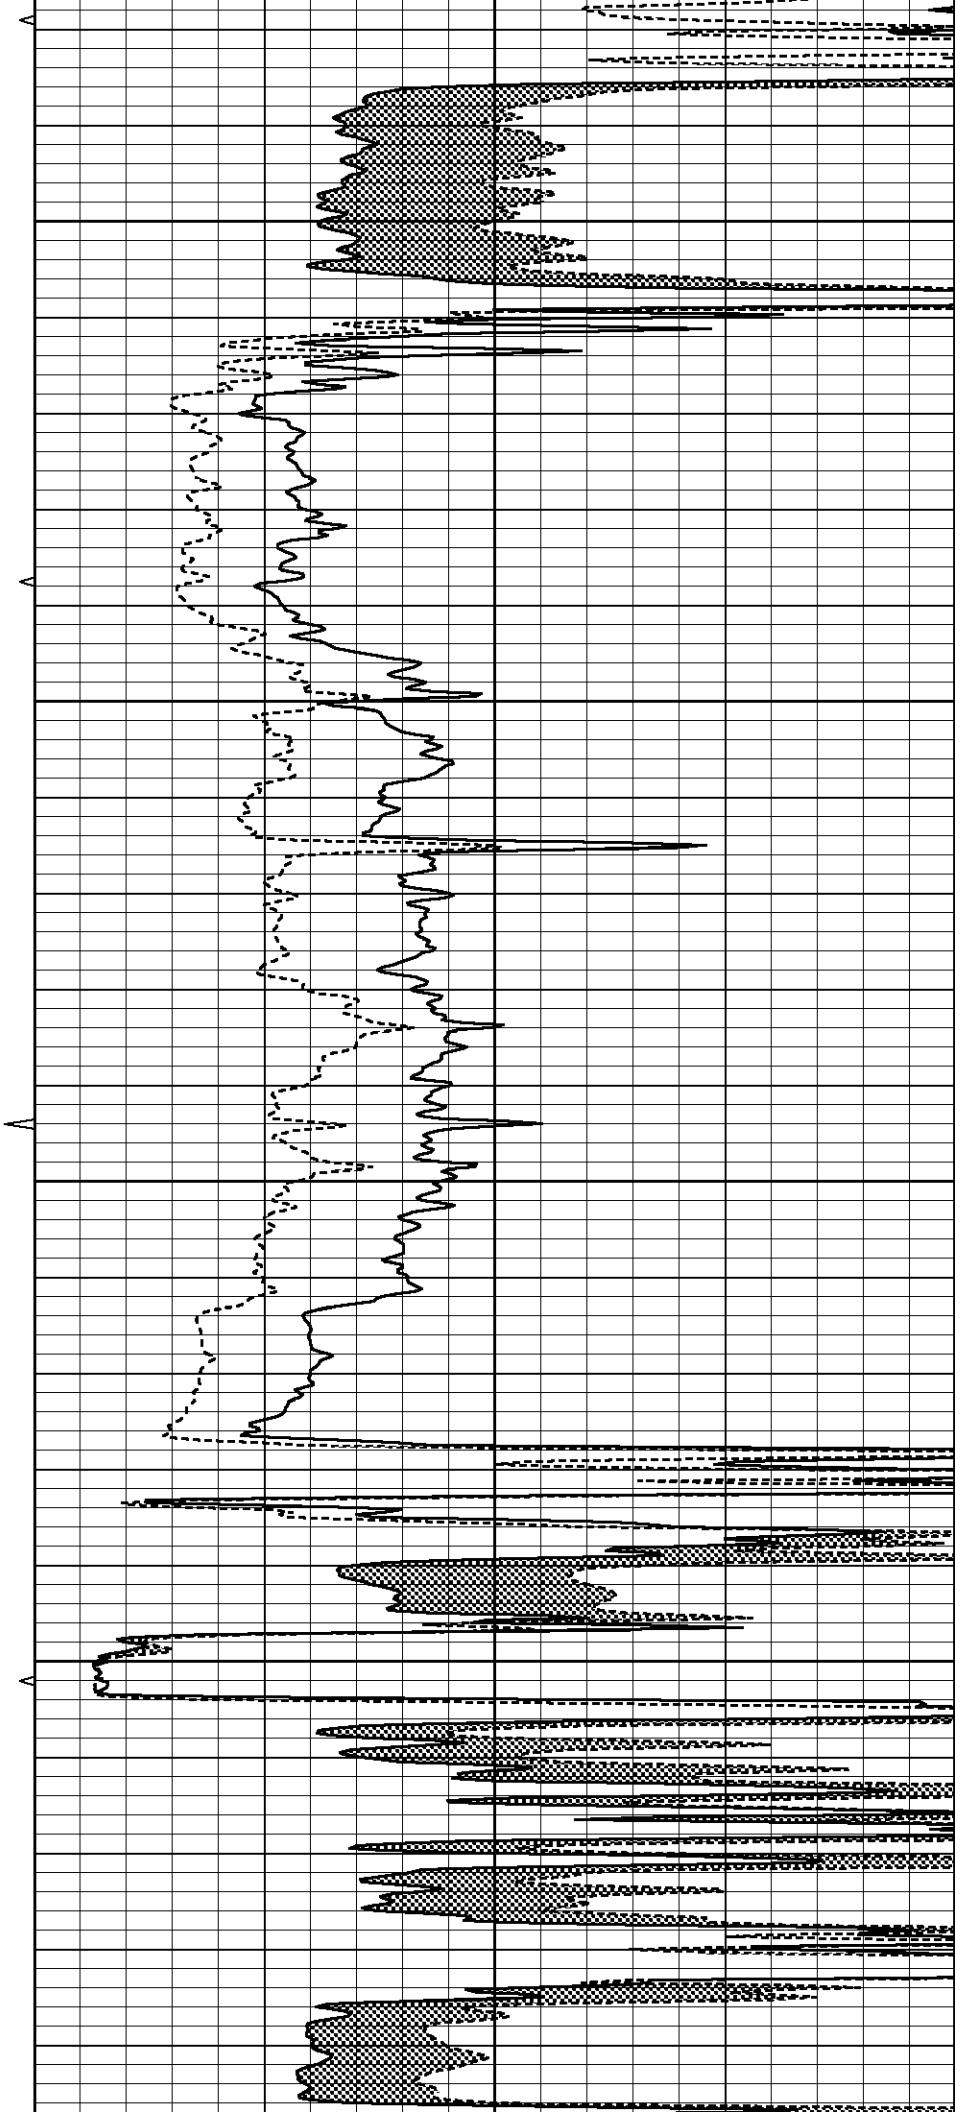

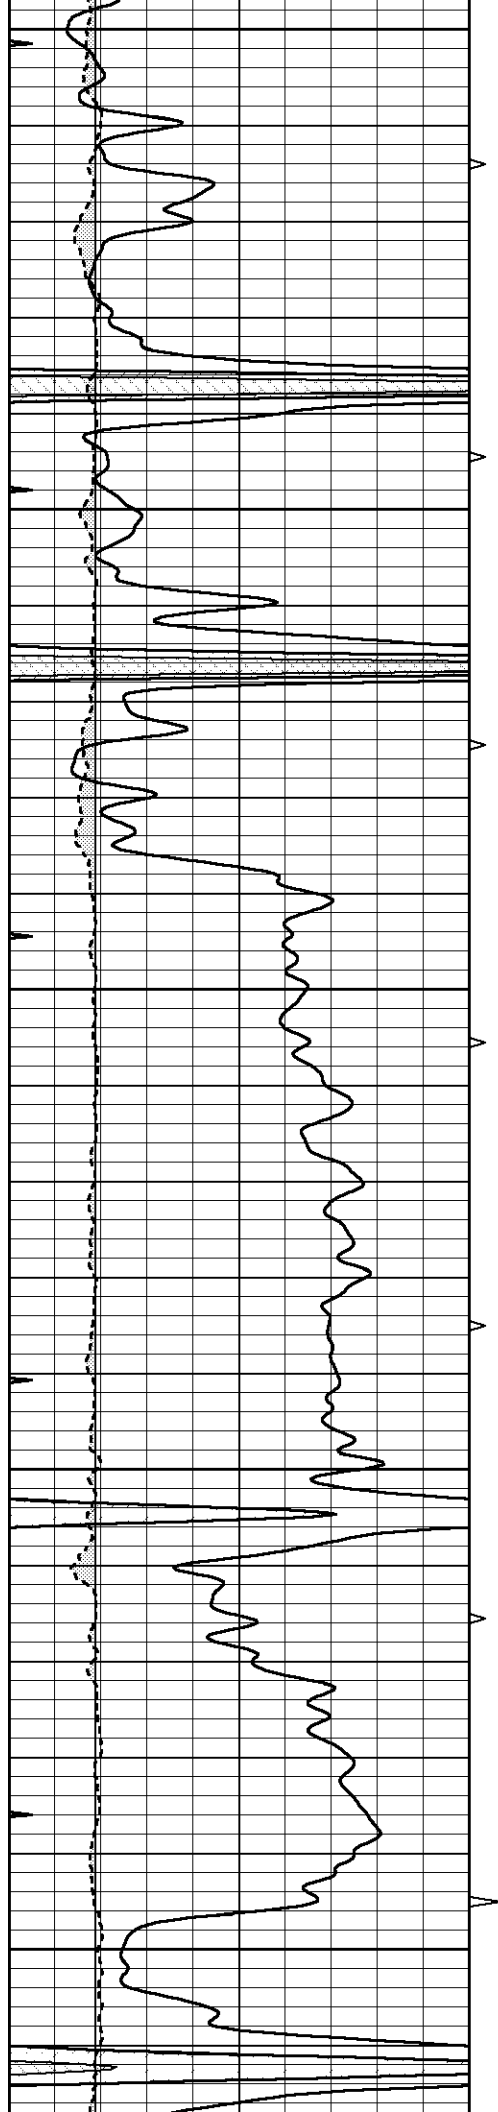


2400


2450



2500

2550

2600

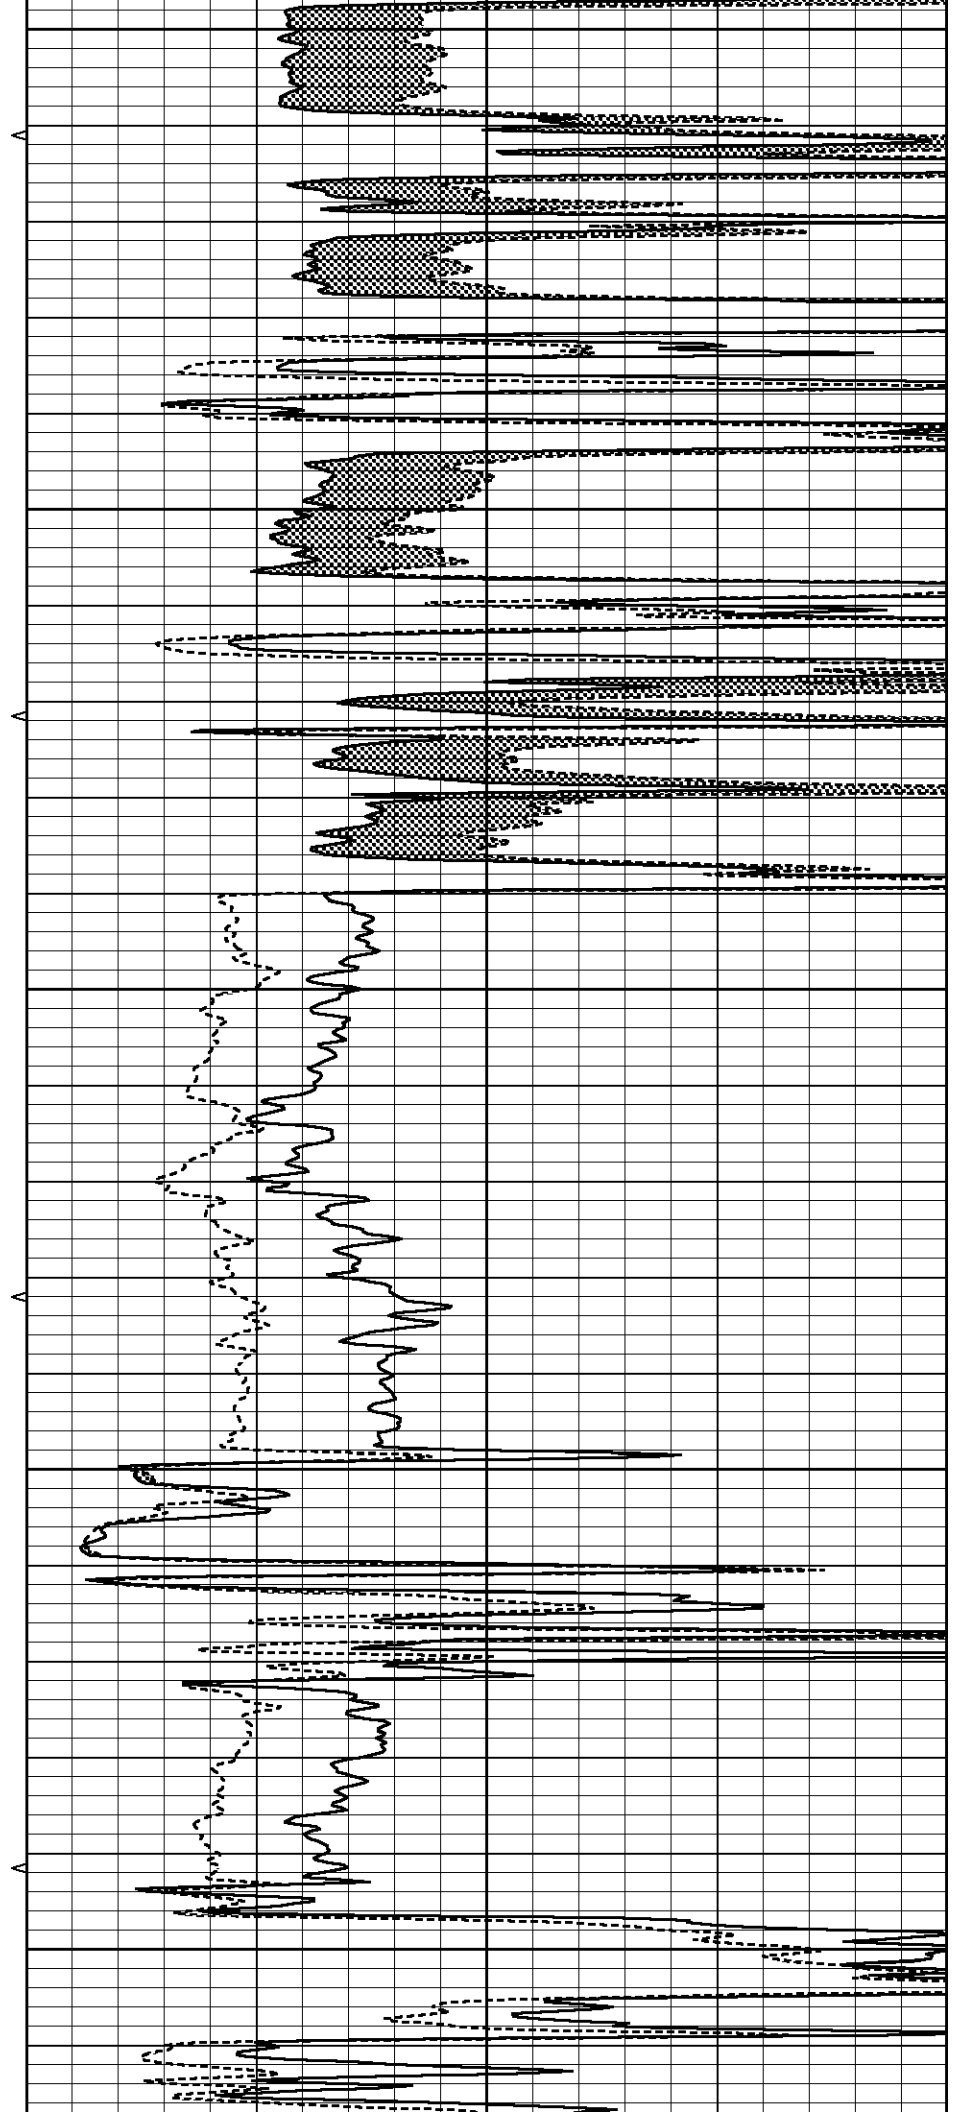

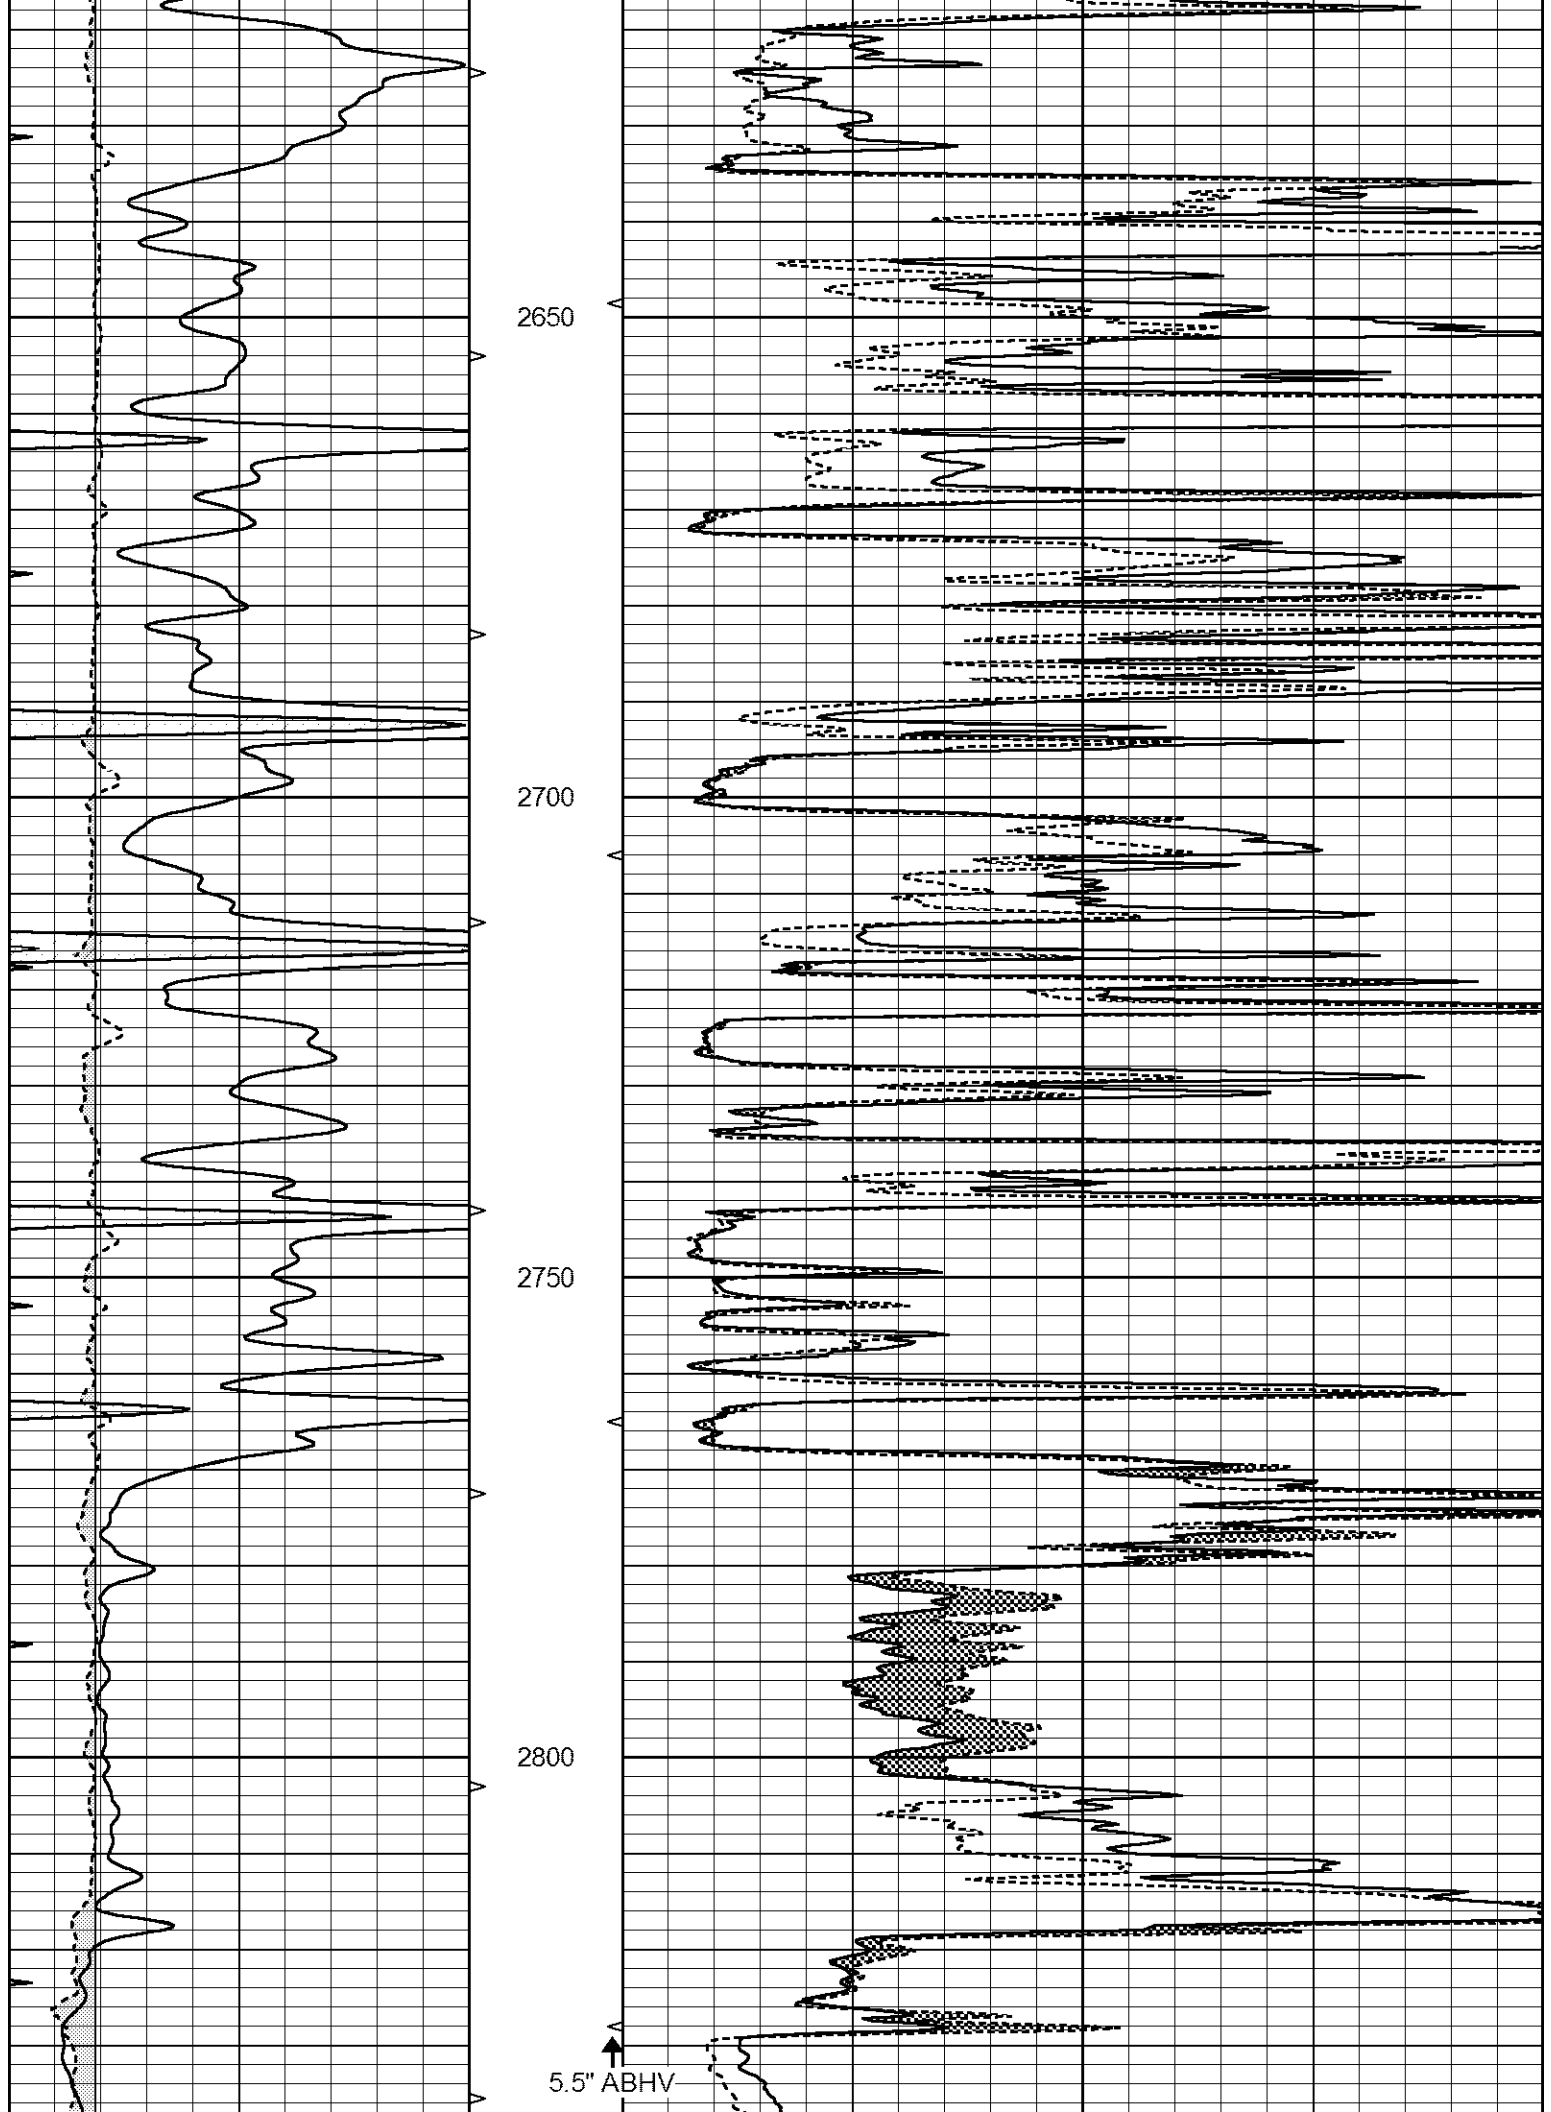


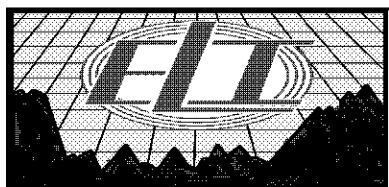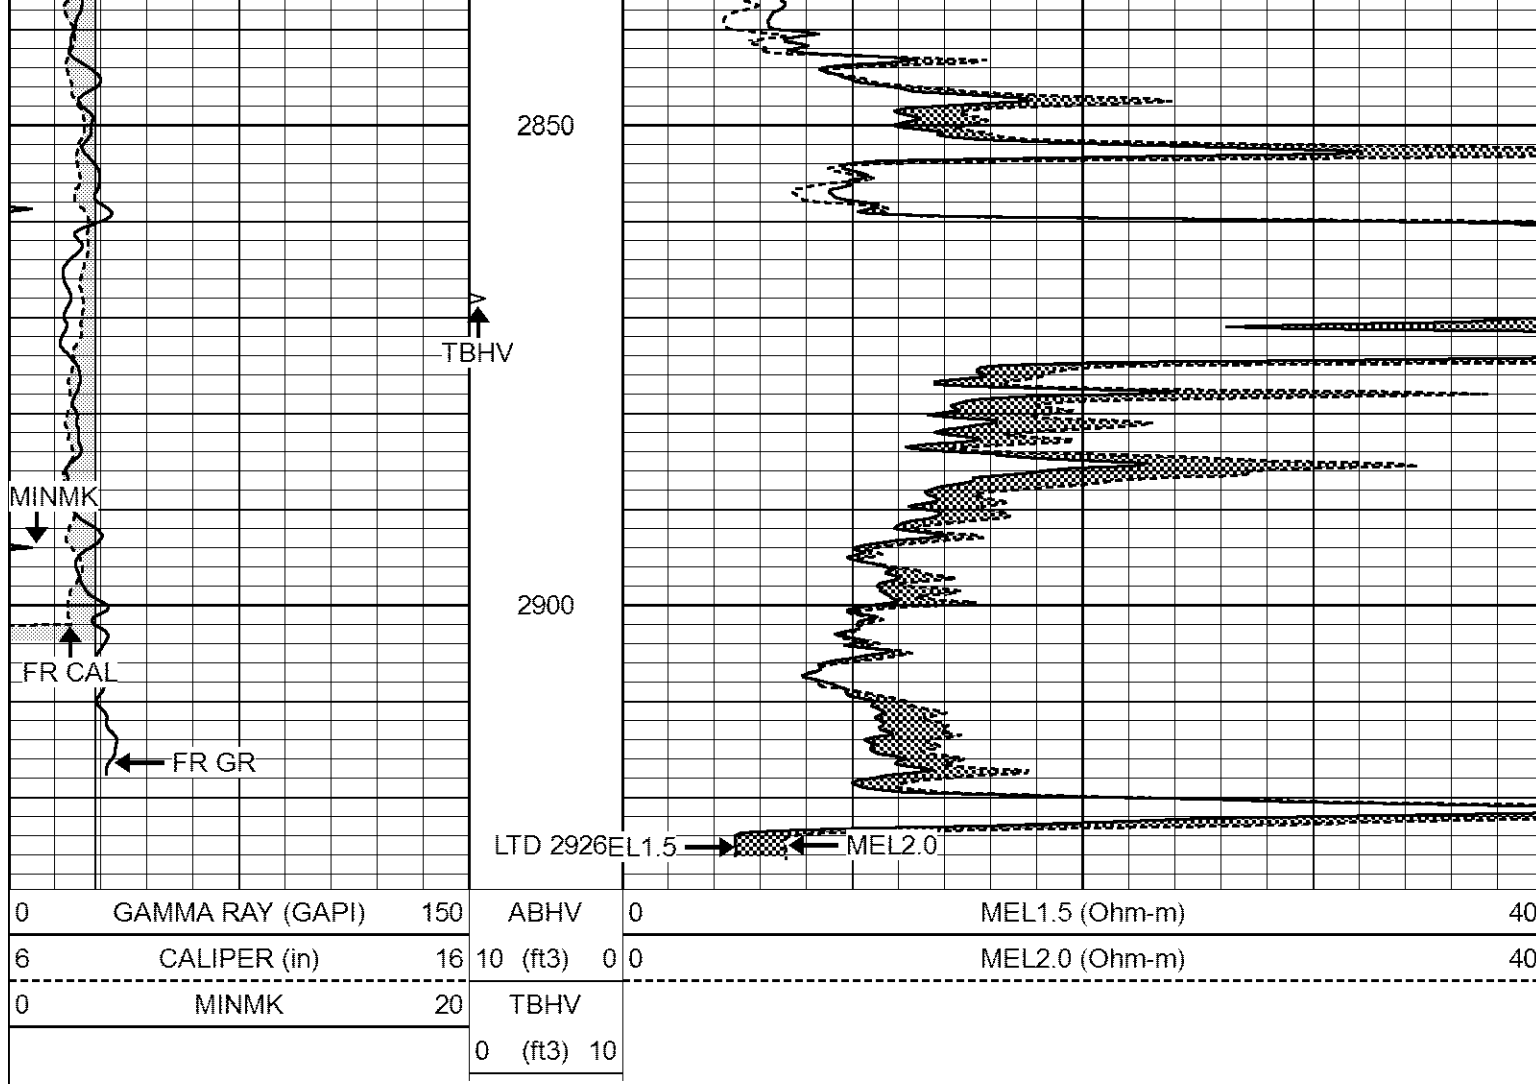


REPEAT SECTION

Database File 7230pe.db
 Dataset Pathname pass8R
 Presentation Format _micro
 Dataset Creation Sun Oct 09 13:17:16 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

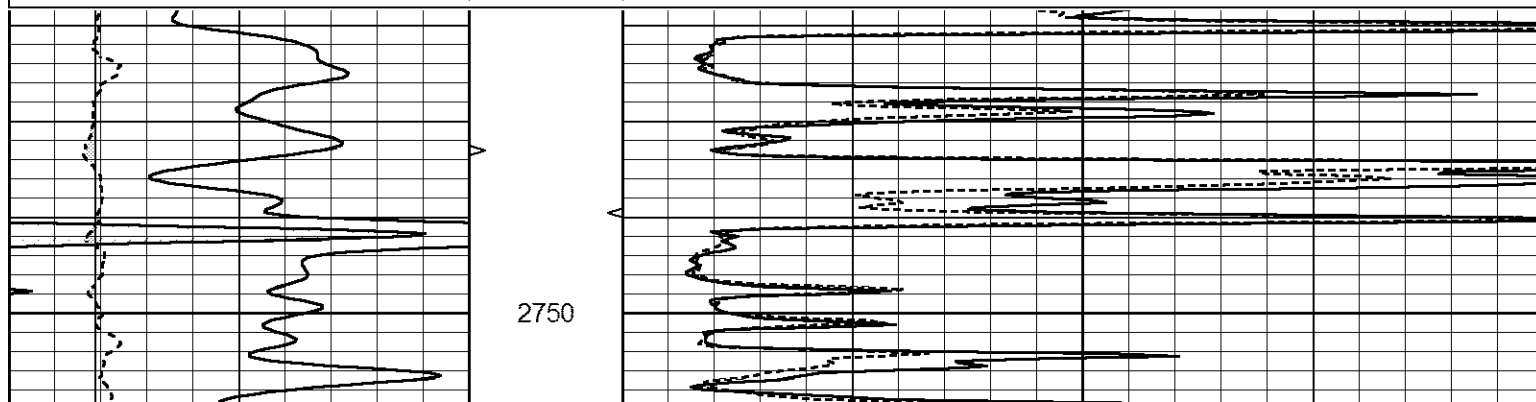

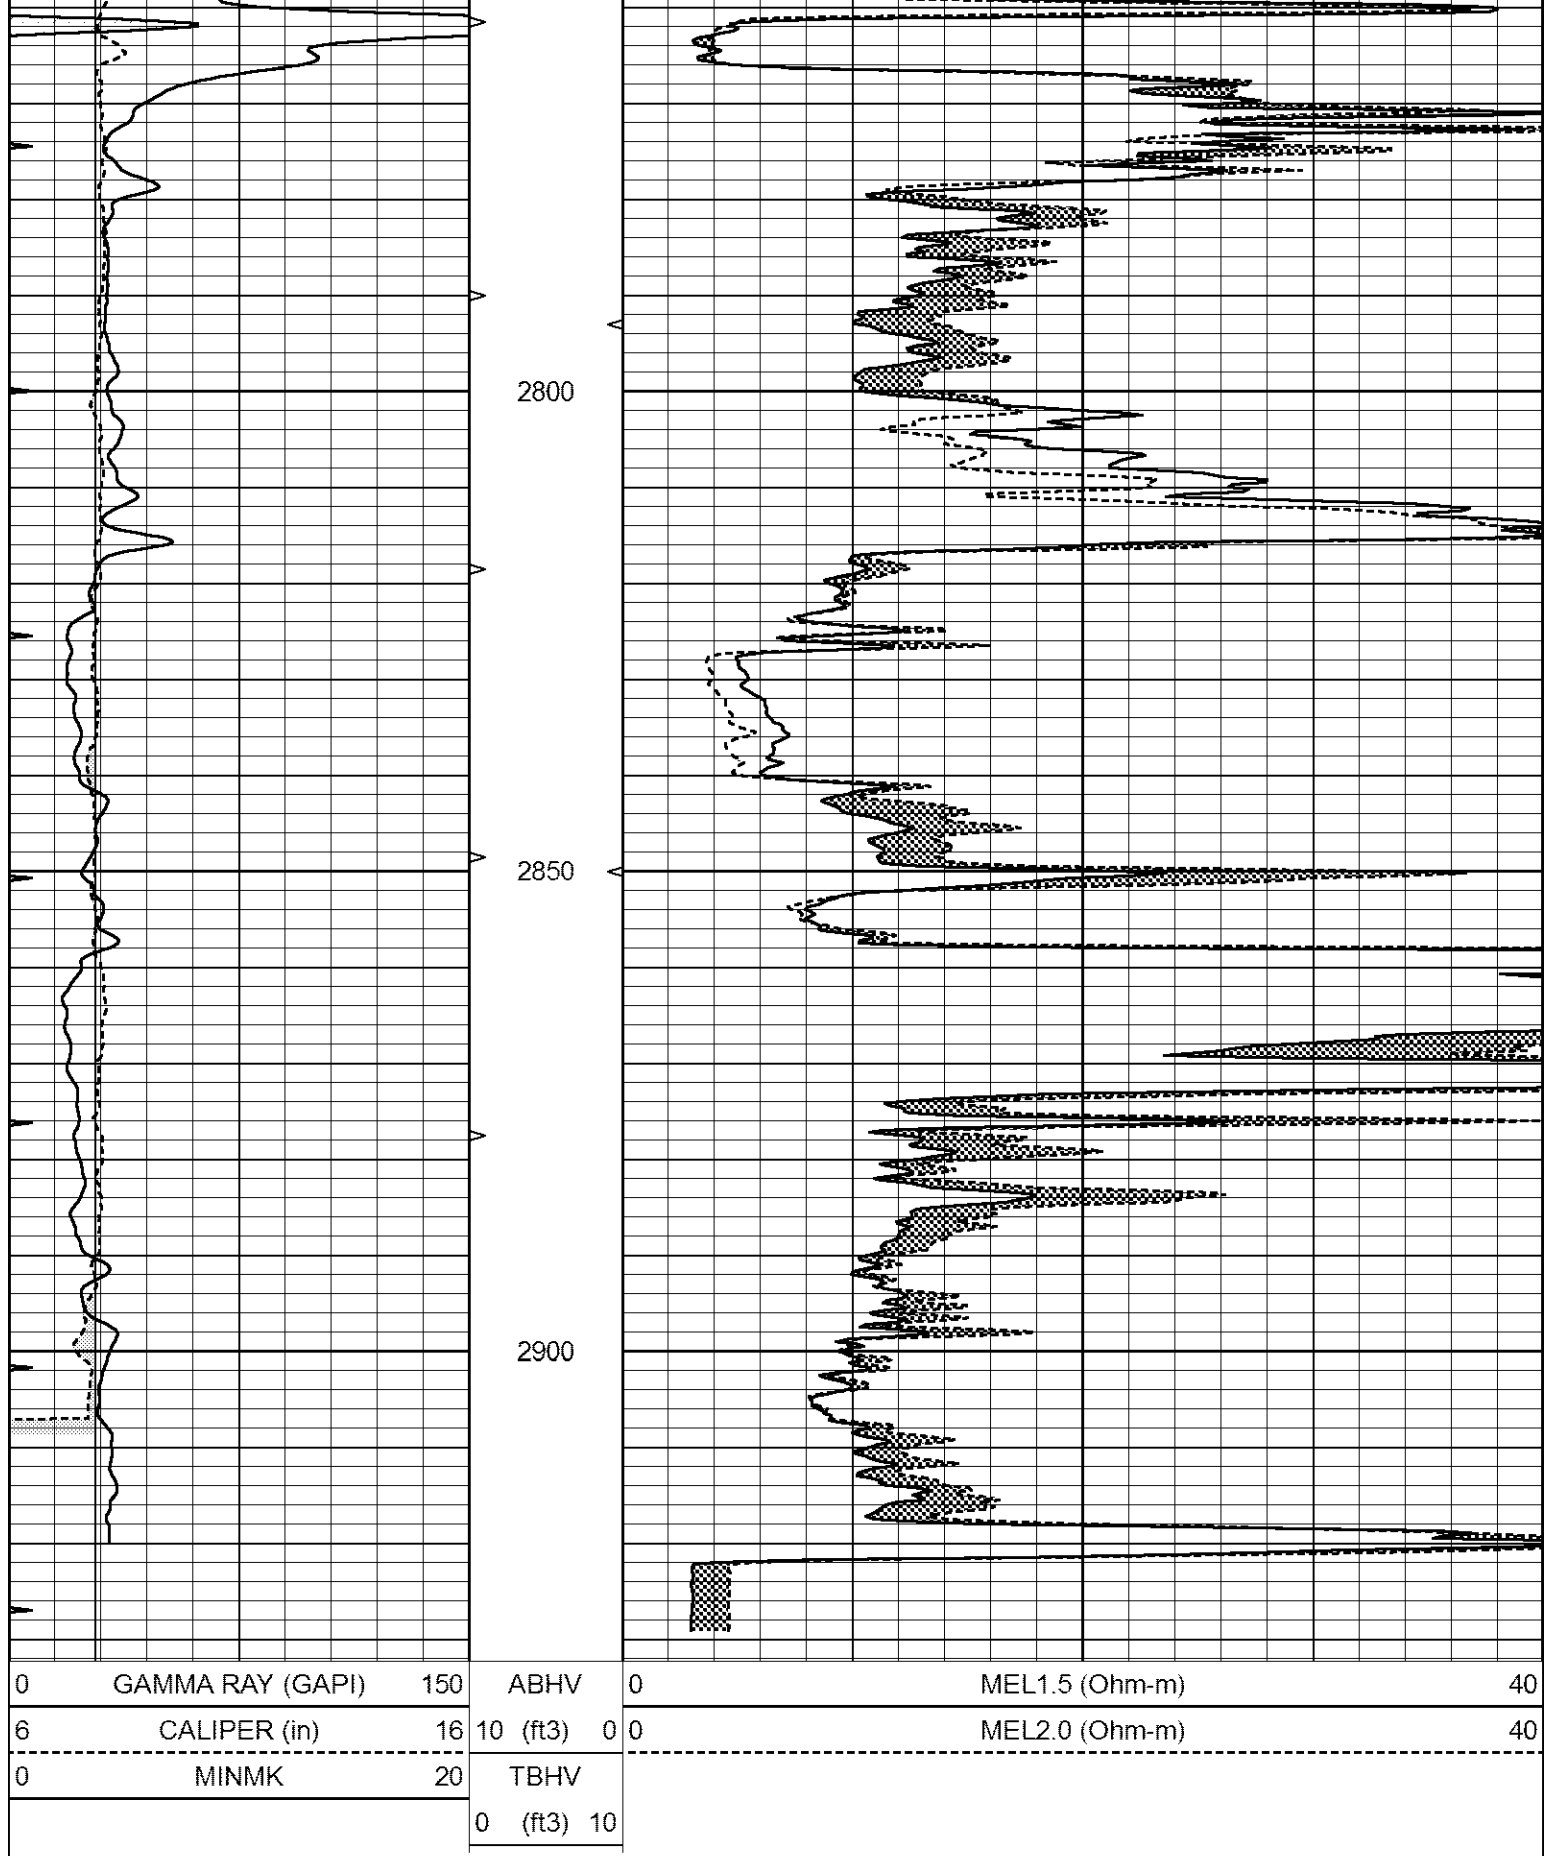

Calibration Report

Database File 7230pe.db
 Dataset Pathname pass8R
 Dataset Creation Sun Oct 09 13:17:16 2022

Serial Number:		070910	
Tool Model:		ProbeL	
Performed:		Sat Oct 01 06:55:09 2022	
Caliper Calibration:		Gain=7.212	Offset=-3.500
References Readings		Low Cal	High Cal
		8.000	14.000
		0.725	1.557
1.5" Calibration:		Gain=38.000	Offset=0.030
References Readings		Low Cal	High Cal
		0.000	20.000
		0.004	1.335
2" Calibration:		Gain=45.000	Offset=0.000
References Readings		Low Cal	High Cal
		0.000	20.000
		0.004	1.029
Microlog Calibration Report			
Serial-Model:		070910-ProbeL	
Performed:		(Not Performed)	
	Readings		References
	Zero	Cal	Results
			Zero
			Cal
			m
			b
Normal	0.0000	1.0000	V 0.0000 1.0000 Ohm-m 1.0000 0.0000
Inverse	0.0000	1.0000	V 0.0000 1.0000 Ohm-m 1.0000 0.0000
Caliper	0.0000	1.0000	V 0.0000 1.0000 in 1.0000 0.0000
Gamma Ray Calibration Report			
Serial Number:		070558	
Tool Model:		Probe1	
Performed:		Sat Jul 02 05:55:58 2022	
Calibrator Value:		1.0	GAPI
Background Reading:		0.0	cps
Calibrator Reading:		1.0	cps
Sensitivity:		0.2600	GAPI/cps