



MICRO LOG

Company	BLUERIDGE PETROLEUM CORPORATION	Company	BLUERIDGE PETROLEUM CORPORATION
Well	VAVROCH FARMS #1-18	Well	VAVROCH FARMS #1-18
Field	WILDCAT	Field	WILDCAT
County	DECATUR	County	DECATUR
State	KANSAS	State	KANSAS
Location:	API # : 15-039-21252-0001 671' FNL & 2086' FWL NW - SE - NE - NW	Other Services CDL/CNL/PE DIL	
Permanent Datum	GROUND LEVEL	Elevation	2659
Log Measured From	KELLY BUSHING	Elevation	K.B. 2664 D.F. 2662 G.L. 2659
Drilling Measured From	KELLY BUSHING		
Date	5/27/21		
Run Number	TWO		
Depth Driller	4030		
Depth Logger	4028		
Bottom Logged Interval	4026		
Top Log Interval	3300		
Casing Driller	8 5/8"@241'		
Casing Logger	240		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,000 PPM	
Density / Viscosity	9.1/57		
pH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10@90F		
Rmf @ Meas. Temp	.825@90F		
Rmc @ Meas. Temp	1.32@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.853@116F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	3:00 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	WYATT URBAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-039-21252-0001

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
OBERLIN, KS. 7S. ON HWY 83 TO (CR 340 OR K AVE.) 6 1/2E., S. INTO




MAIN SECTION

Database File	5273pe.db
Dataset Pathname	pass7.1
Presentation Format	micro
Dataset Creation	Thu May 27 15:29:49 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

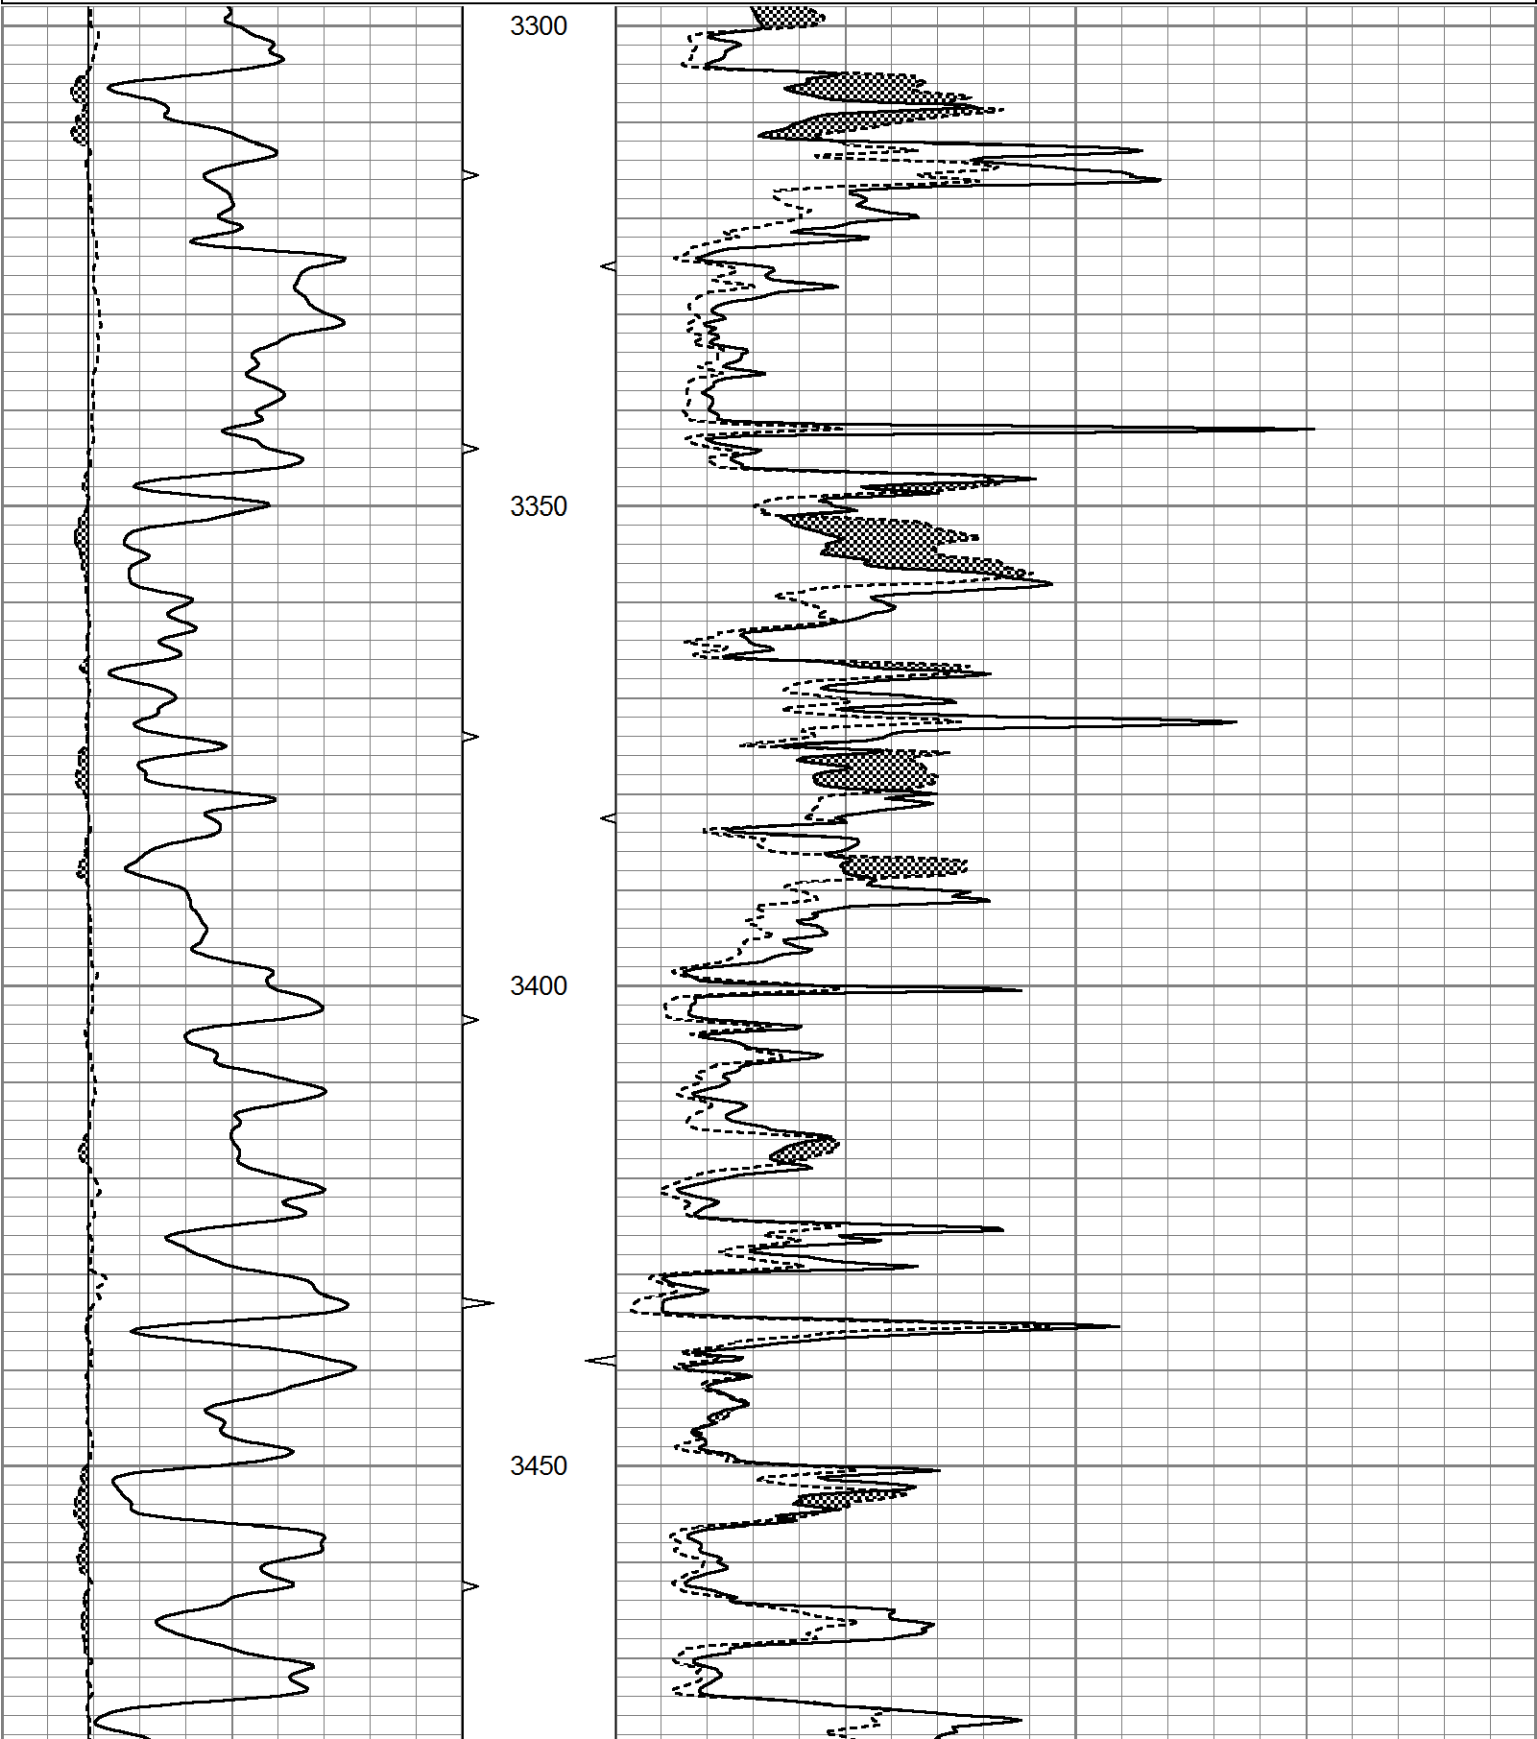

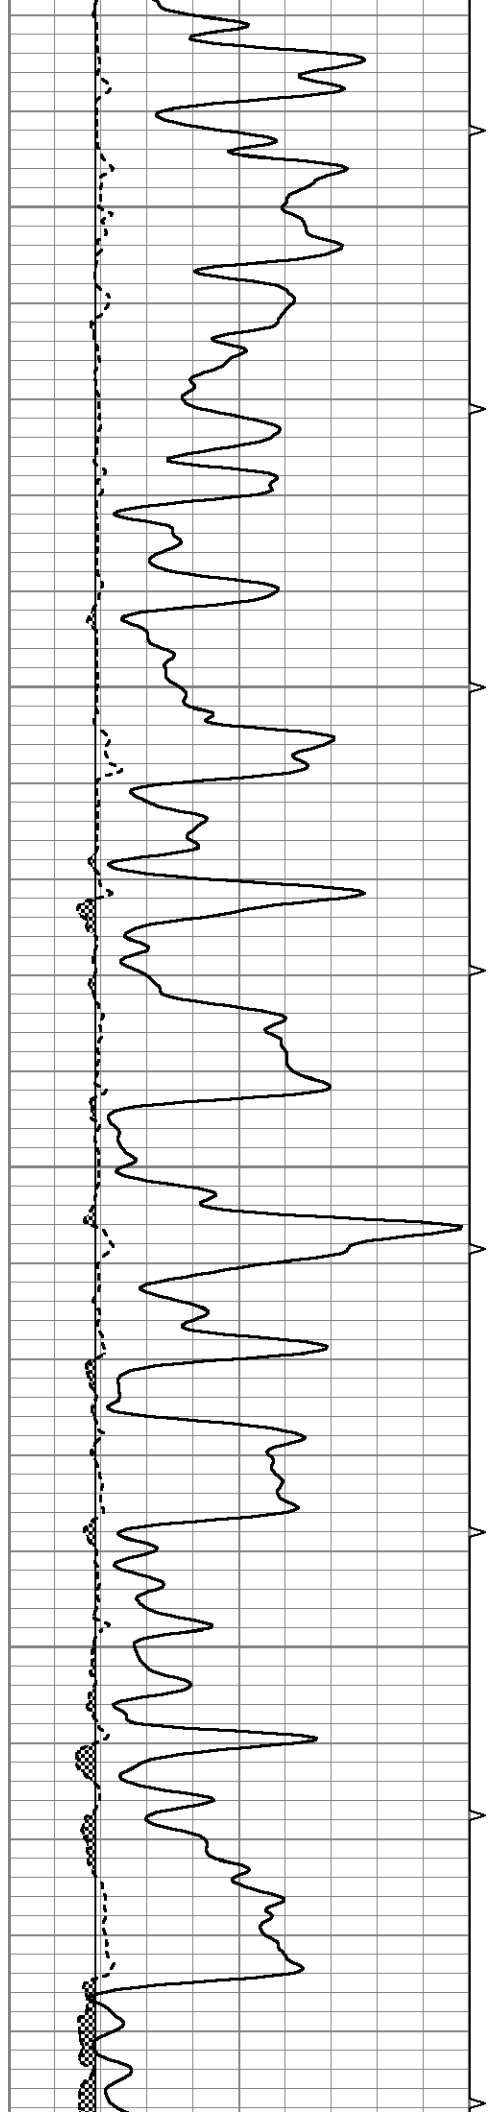



3500

3550

3600

3650

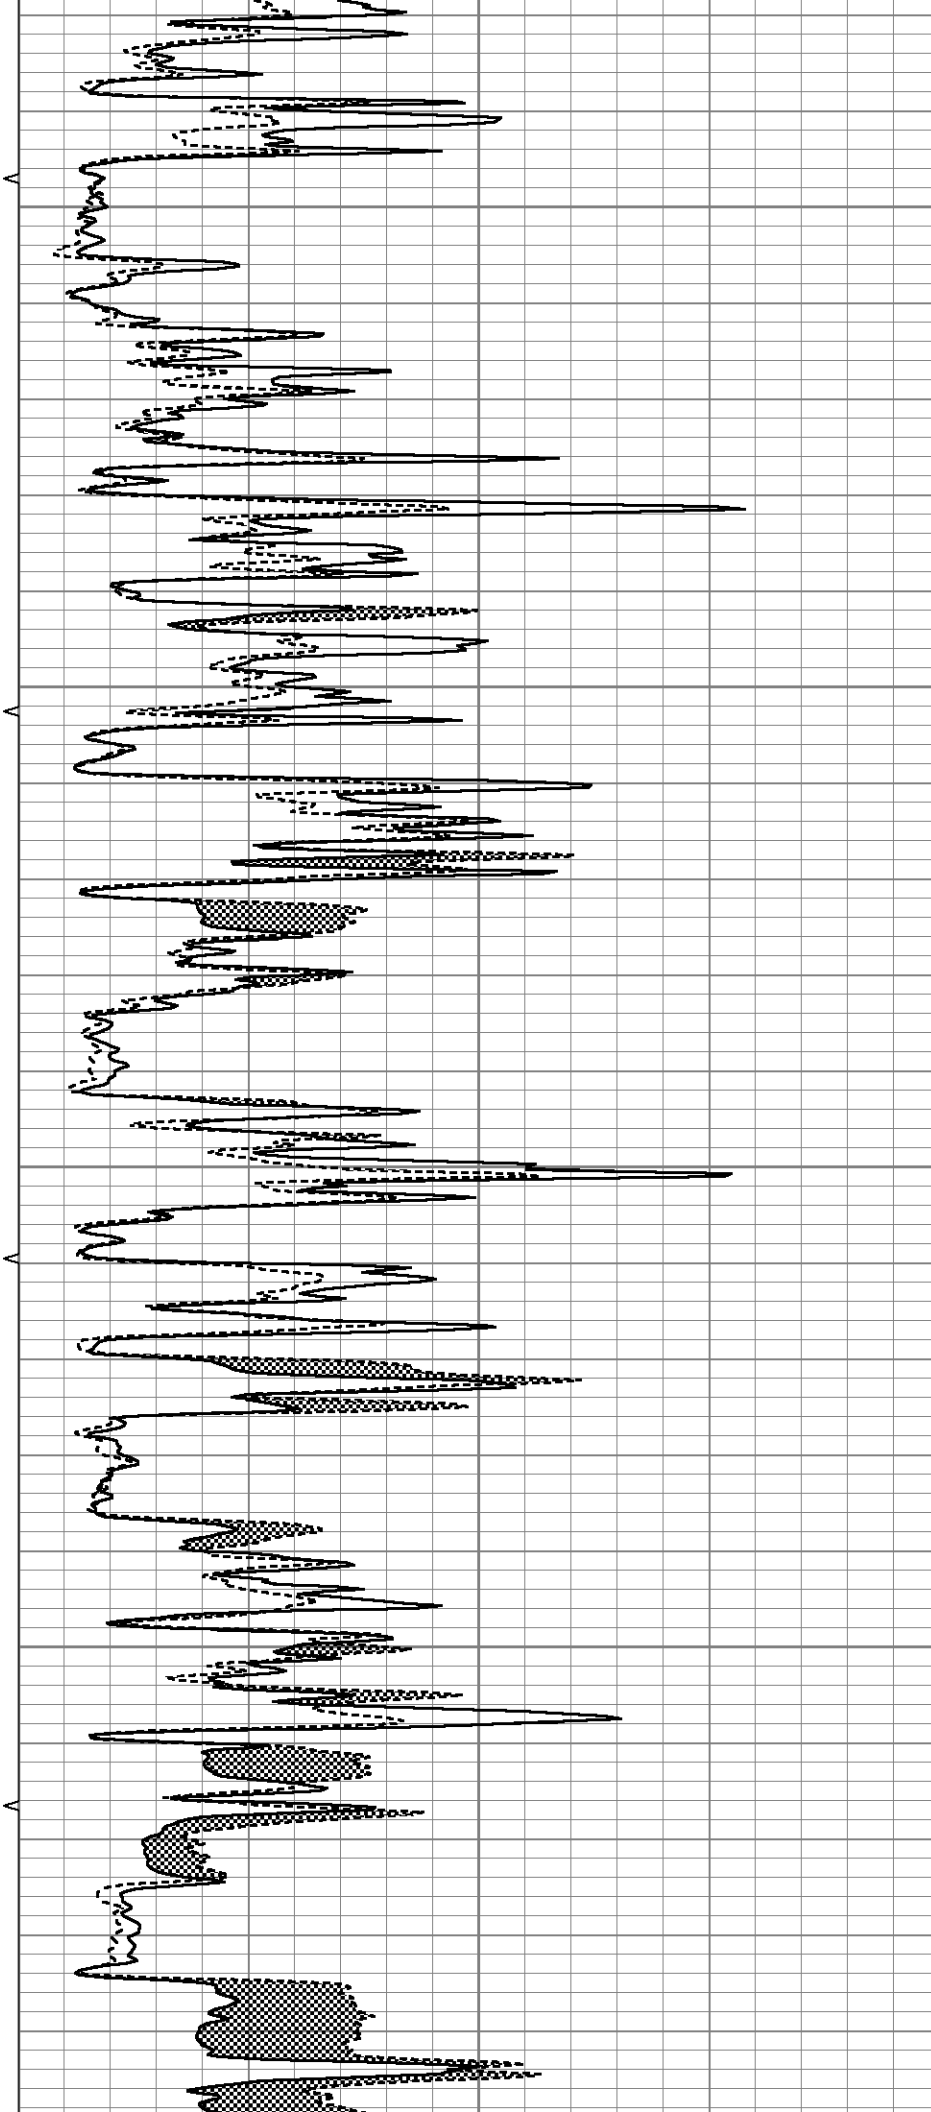

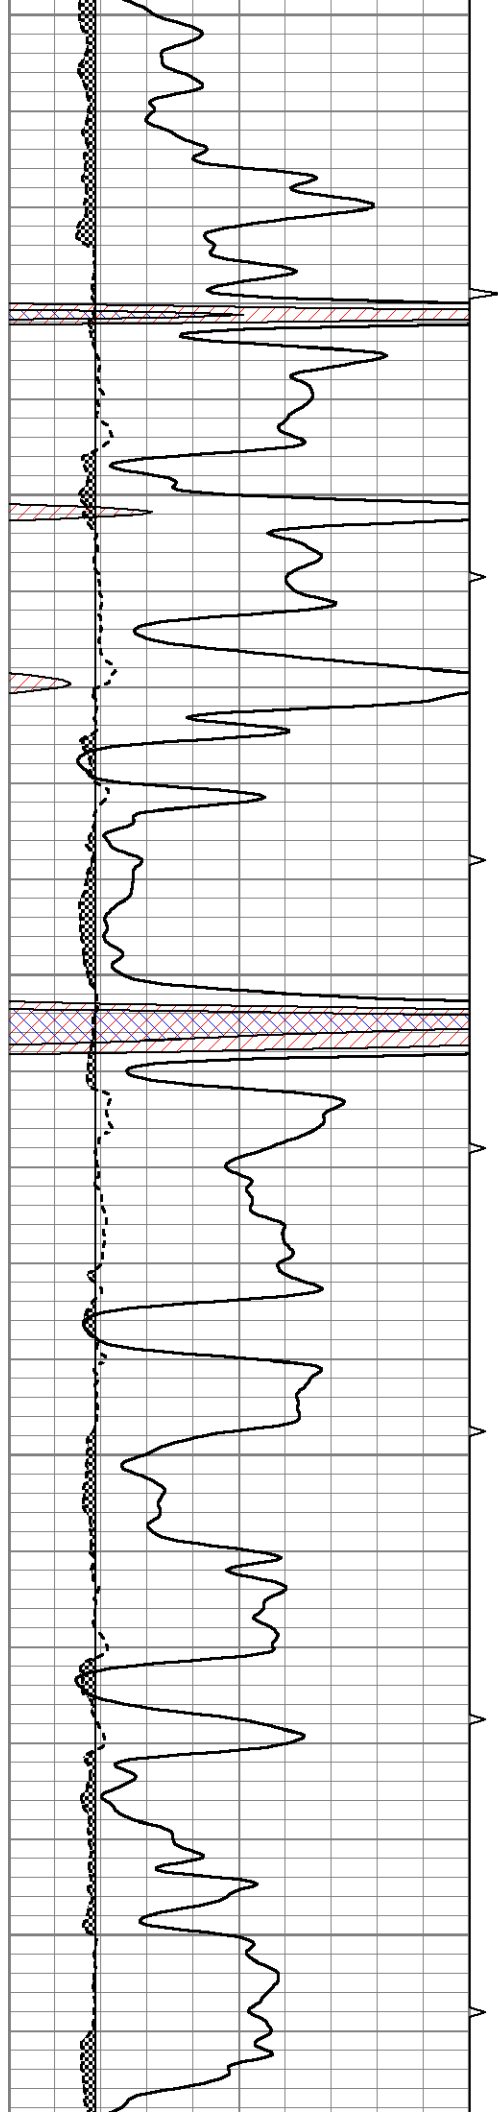


3700


3750

3800

3850

3900


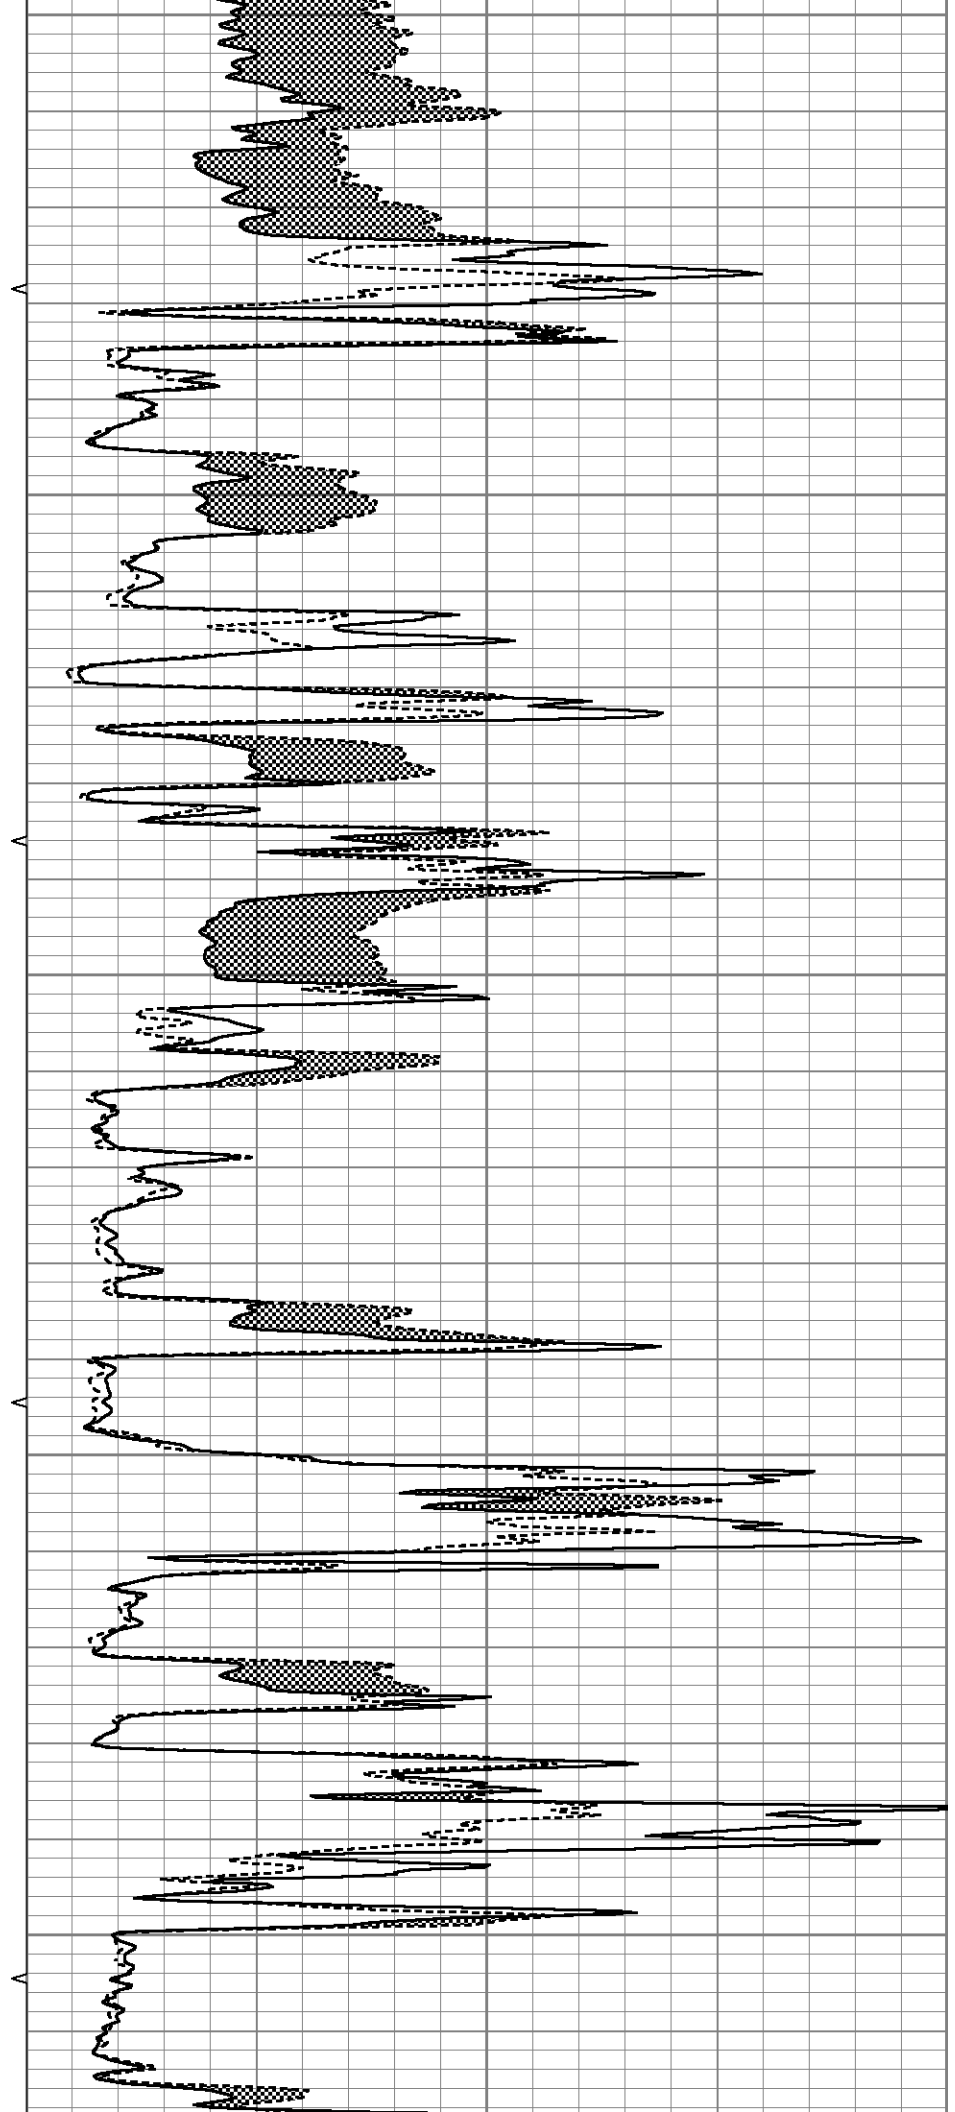


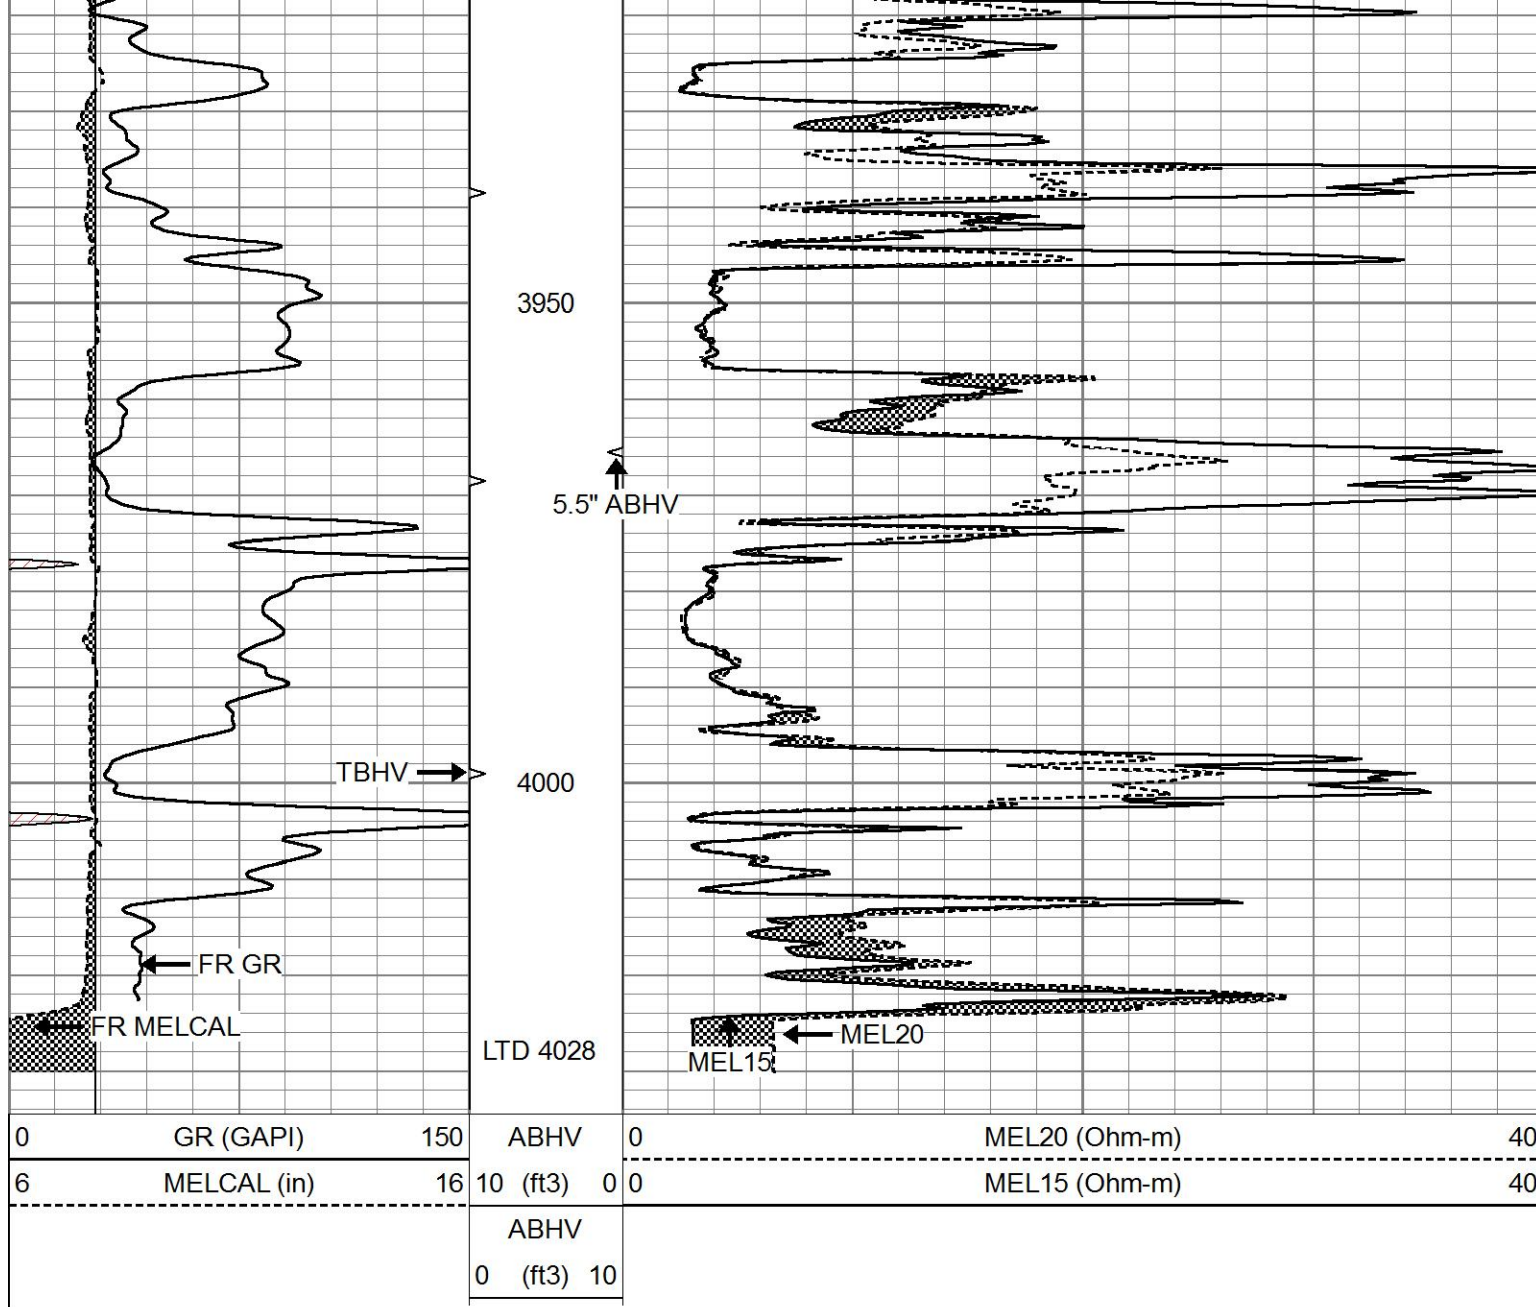


REPEAT SECTION

Database File 5273pe.db
 Dataset Pathname pass6.3
 Presentation Format micro
 Dataset Creation Thu May 27 15:06:57 2021
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

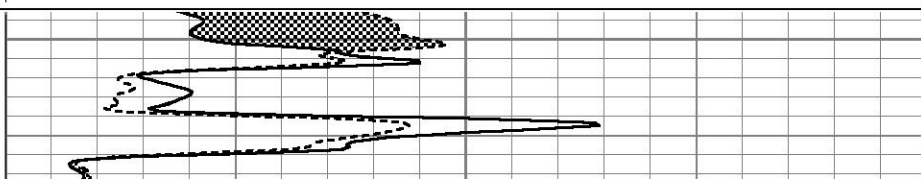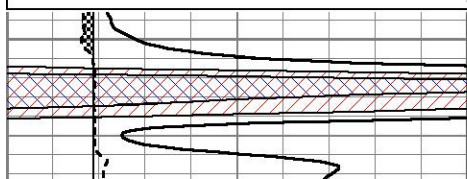

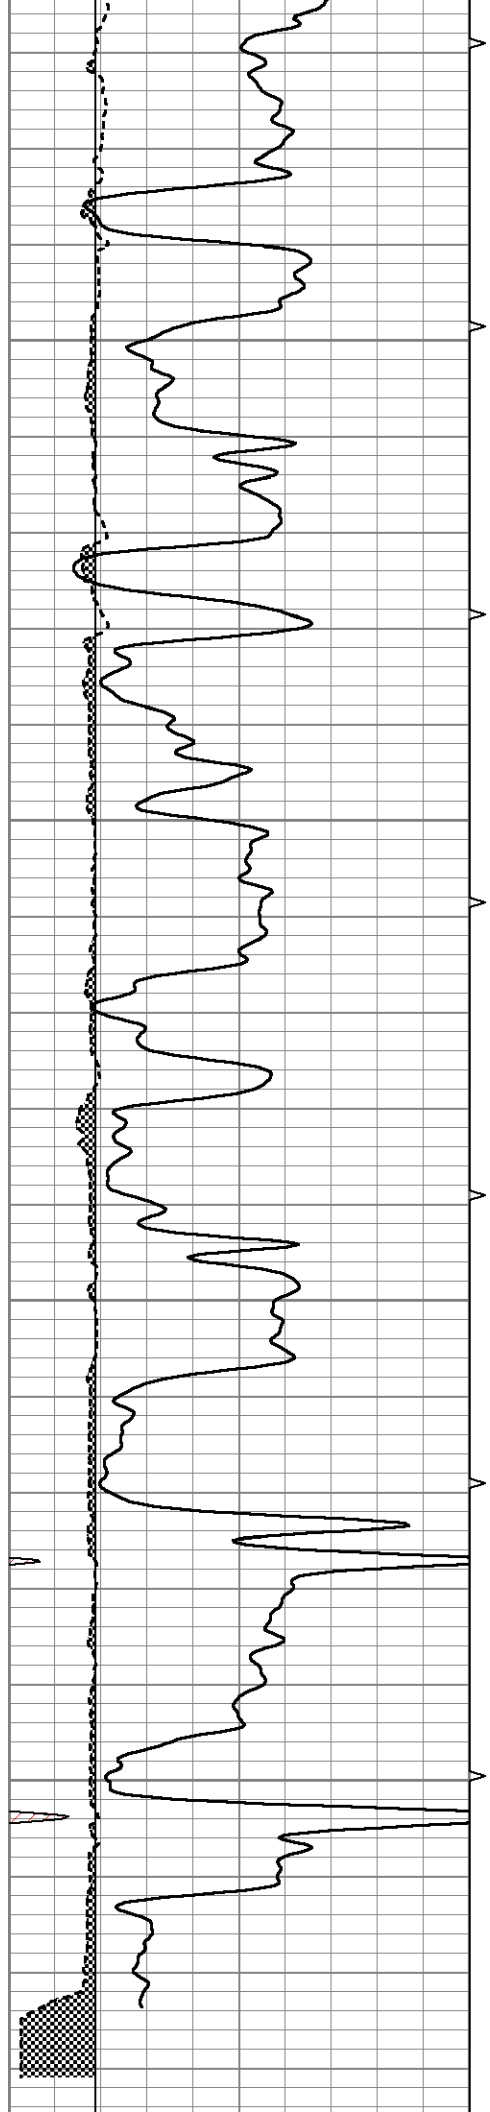


3850

3900

3950

4000

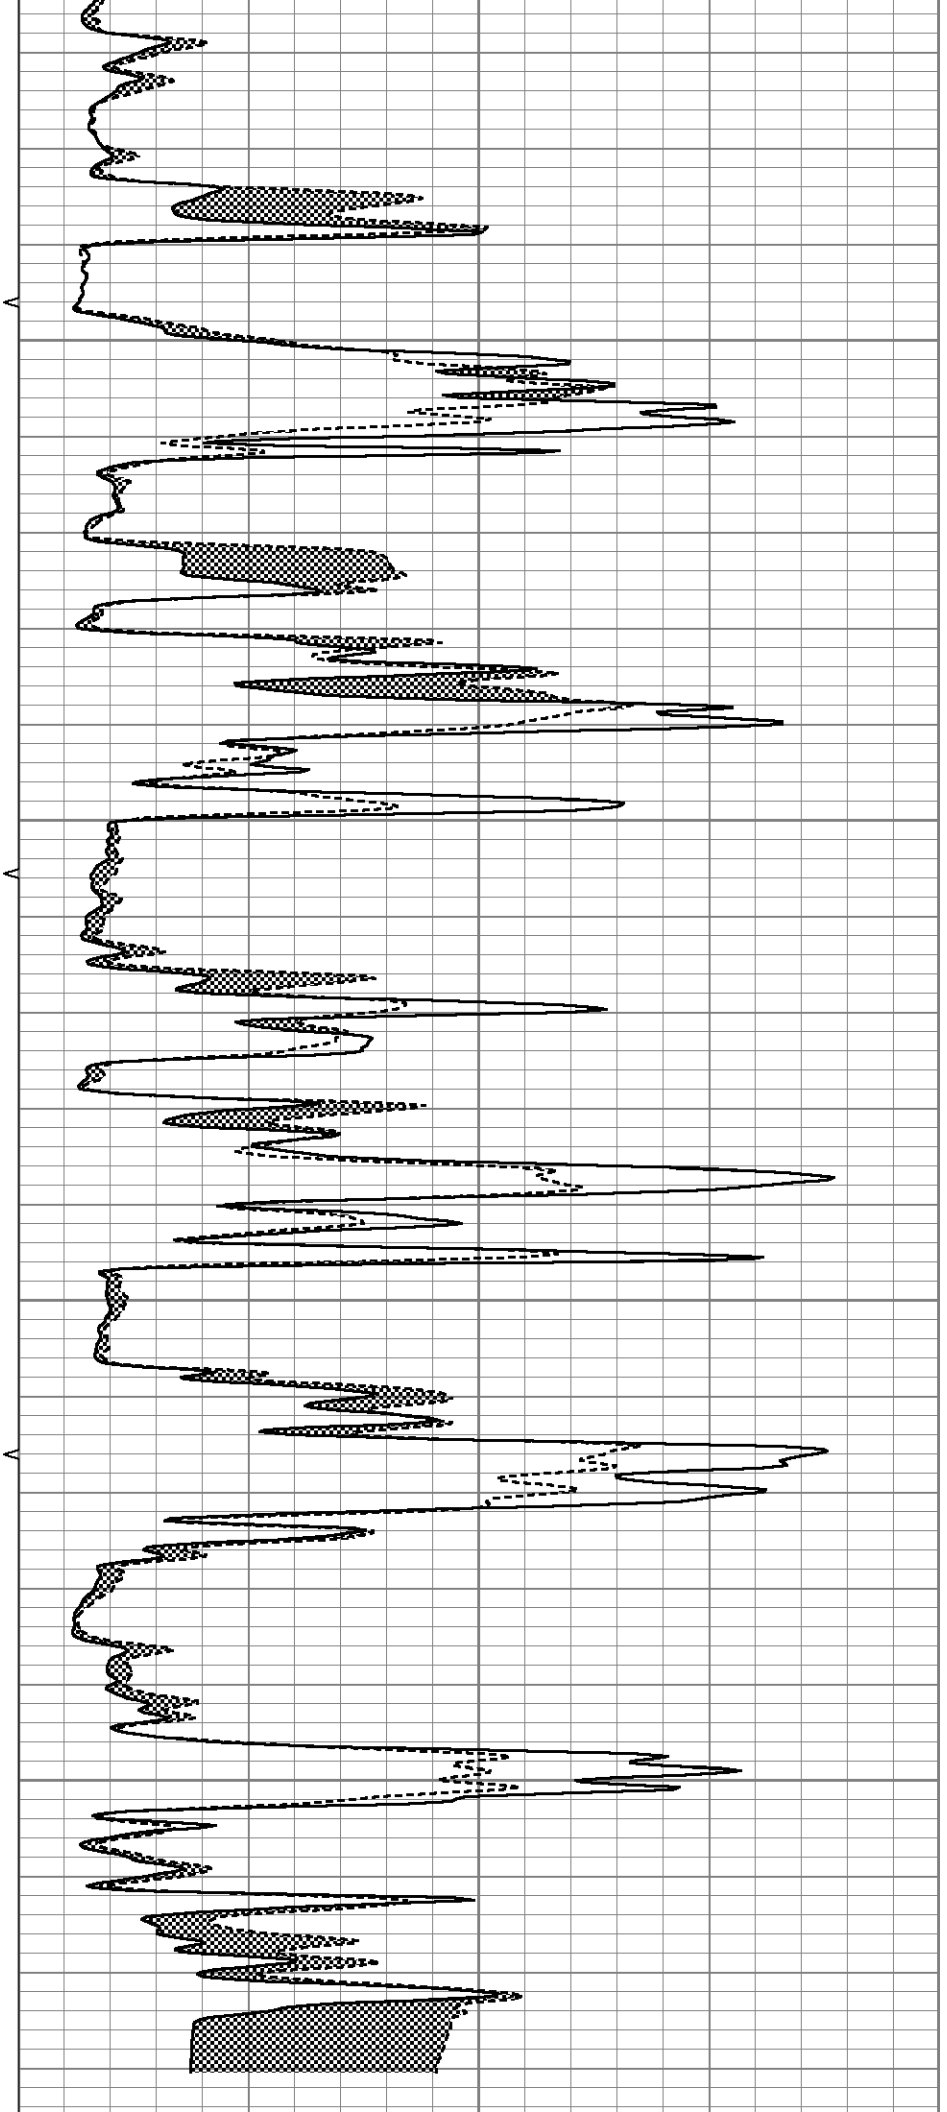

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

Calibration Report			
Database File	5273pe.db		
Dataset Pathname	pass7.1		
Dataset Creation	Thu May 27 15:29:49 2021		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Thu May 27 15:07:55 2021		
Caliper Calibration:	Gain=3.474	Offset=2.720	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.520	3.247	
1.5" Calibration:	Gain=18.000	Offset=1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.001	1.291	
2" Calibration:	Gain=48.000	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.003	1.103	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Wed Apr 21 02:21:11 2021		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3600	GAPI/cps	