MICRO LOG

Company JASPAR CO, INC.
Well DORI #1
Field TODD NORTHEAST
County ROOKS State KANSAS

Company JASPAR CO, INC.
Well DORI #1
Field TODD NORTHEAST
County ROOKS
State KANSAS

Location: API # : 15-163-24437-0000

1708' FNL & 340' FEL

SEC 21 TWP 6S RGE 20W

Other Services
CDL/CNL
DIL

Elevation
K.B. 2162
D.F. 2160
G.L. 2155

Permanent Datum GROUND LEVEL Elevation 2155
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Date	9/12/21		
Run Number	ONE		
Depth Driller	3775		
Depth Logger	3775		
Bottom Logged Interval	3773		
Top Log Interval	3050		
Casing Driller	8 5/8" @ 222		
Casing Logger	222		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.4/50		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.4@ 70F		
Rmf @ Meas. Temp	1.05@ 70F		
Rmc @ Meas. Temp	1.68 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.85@ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	114F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JEFF LAWLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS:BENOIT CORNER NORTH TO J RD. EAST TO LOGAN RD, NORTH TO E RD.
EAST 1 TO 4 RD., WEST INTO AFTER TANK BATTERIES


MAIN PASS


Database File	5876ddn.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Sun Sep 12 13:35:40 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK	20	TBHV		
			0 (ft3) 10		

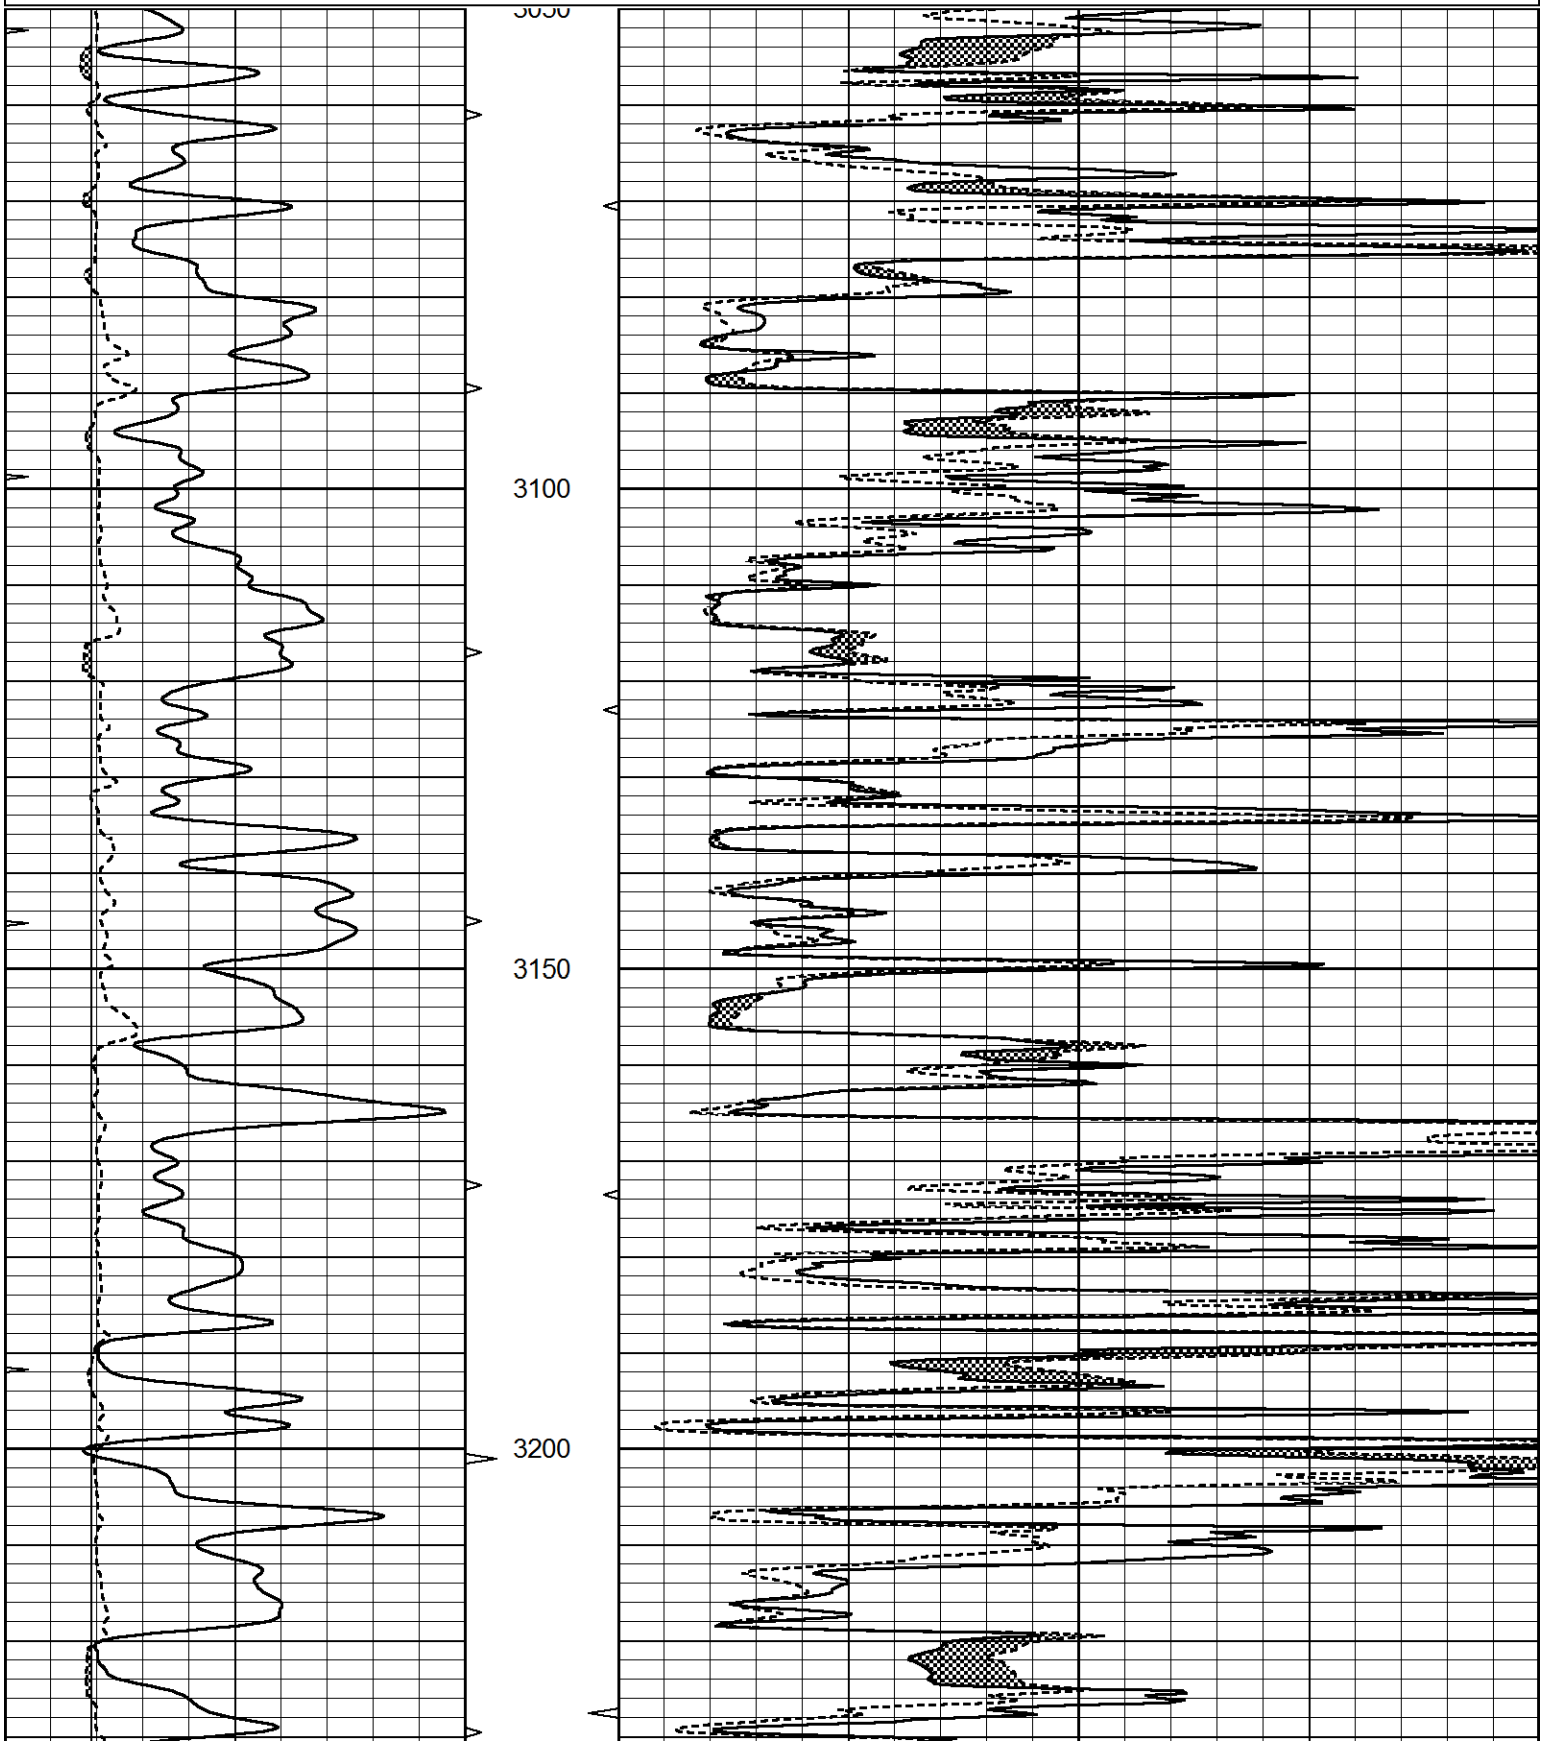

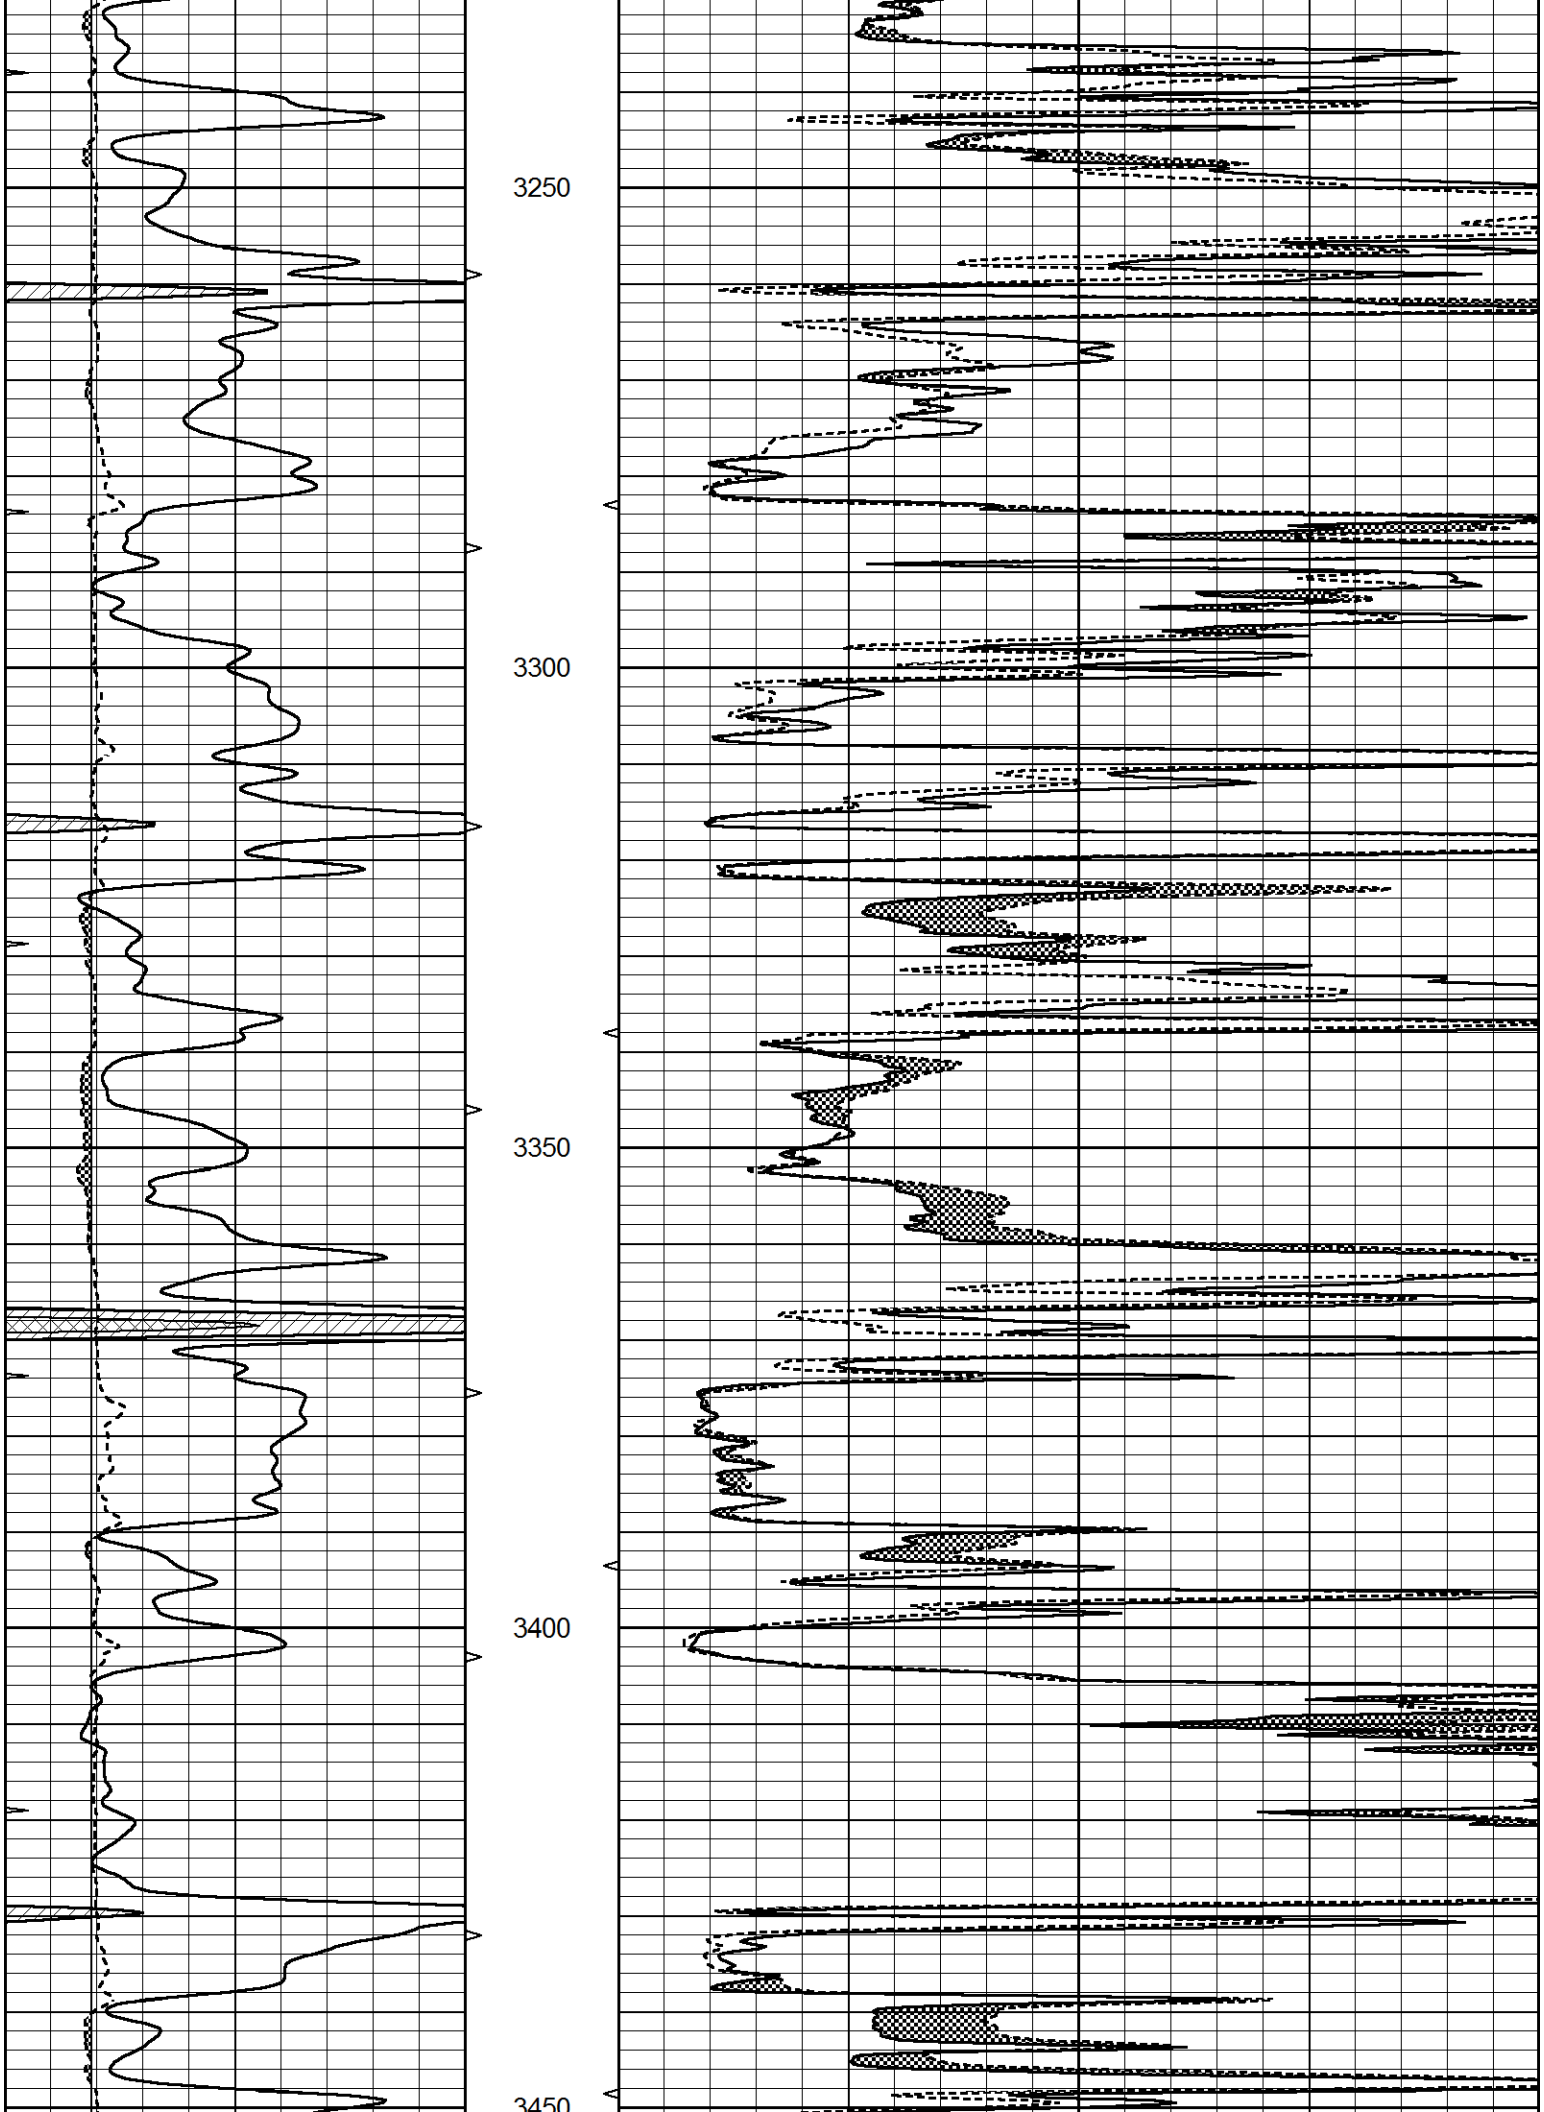
3250
3300
3350
3400
3450

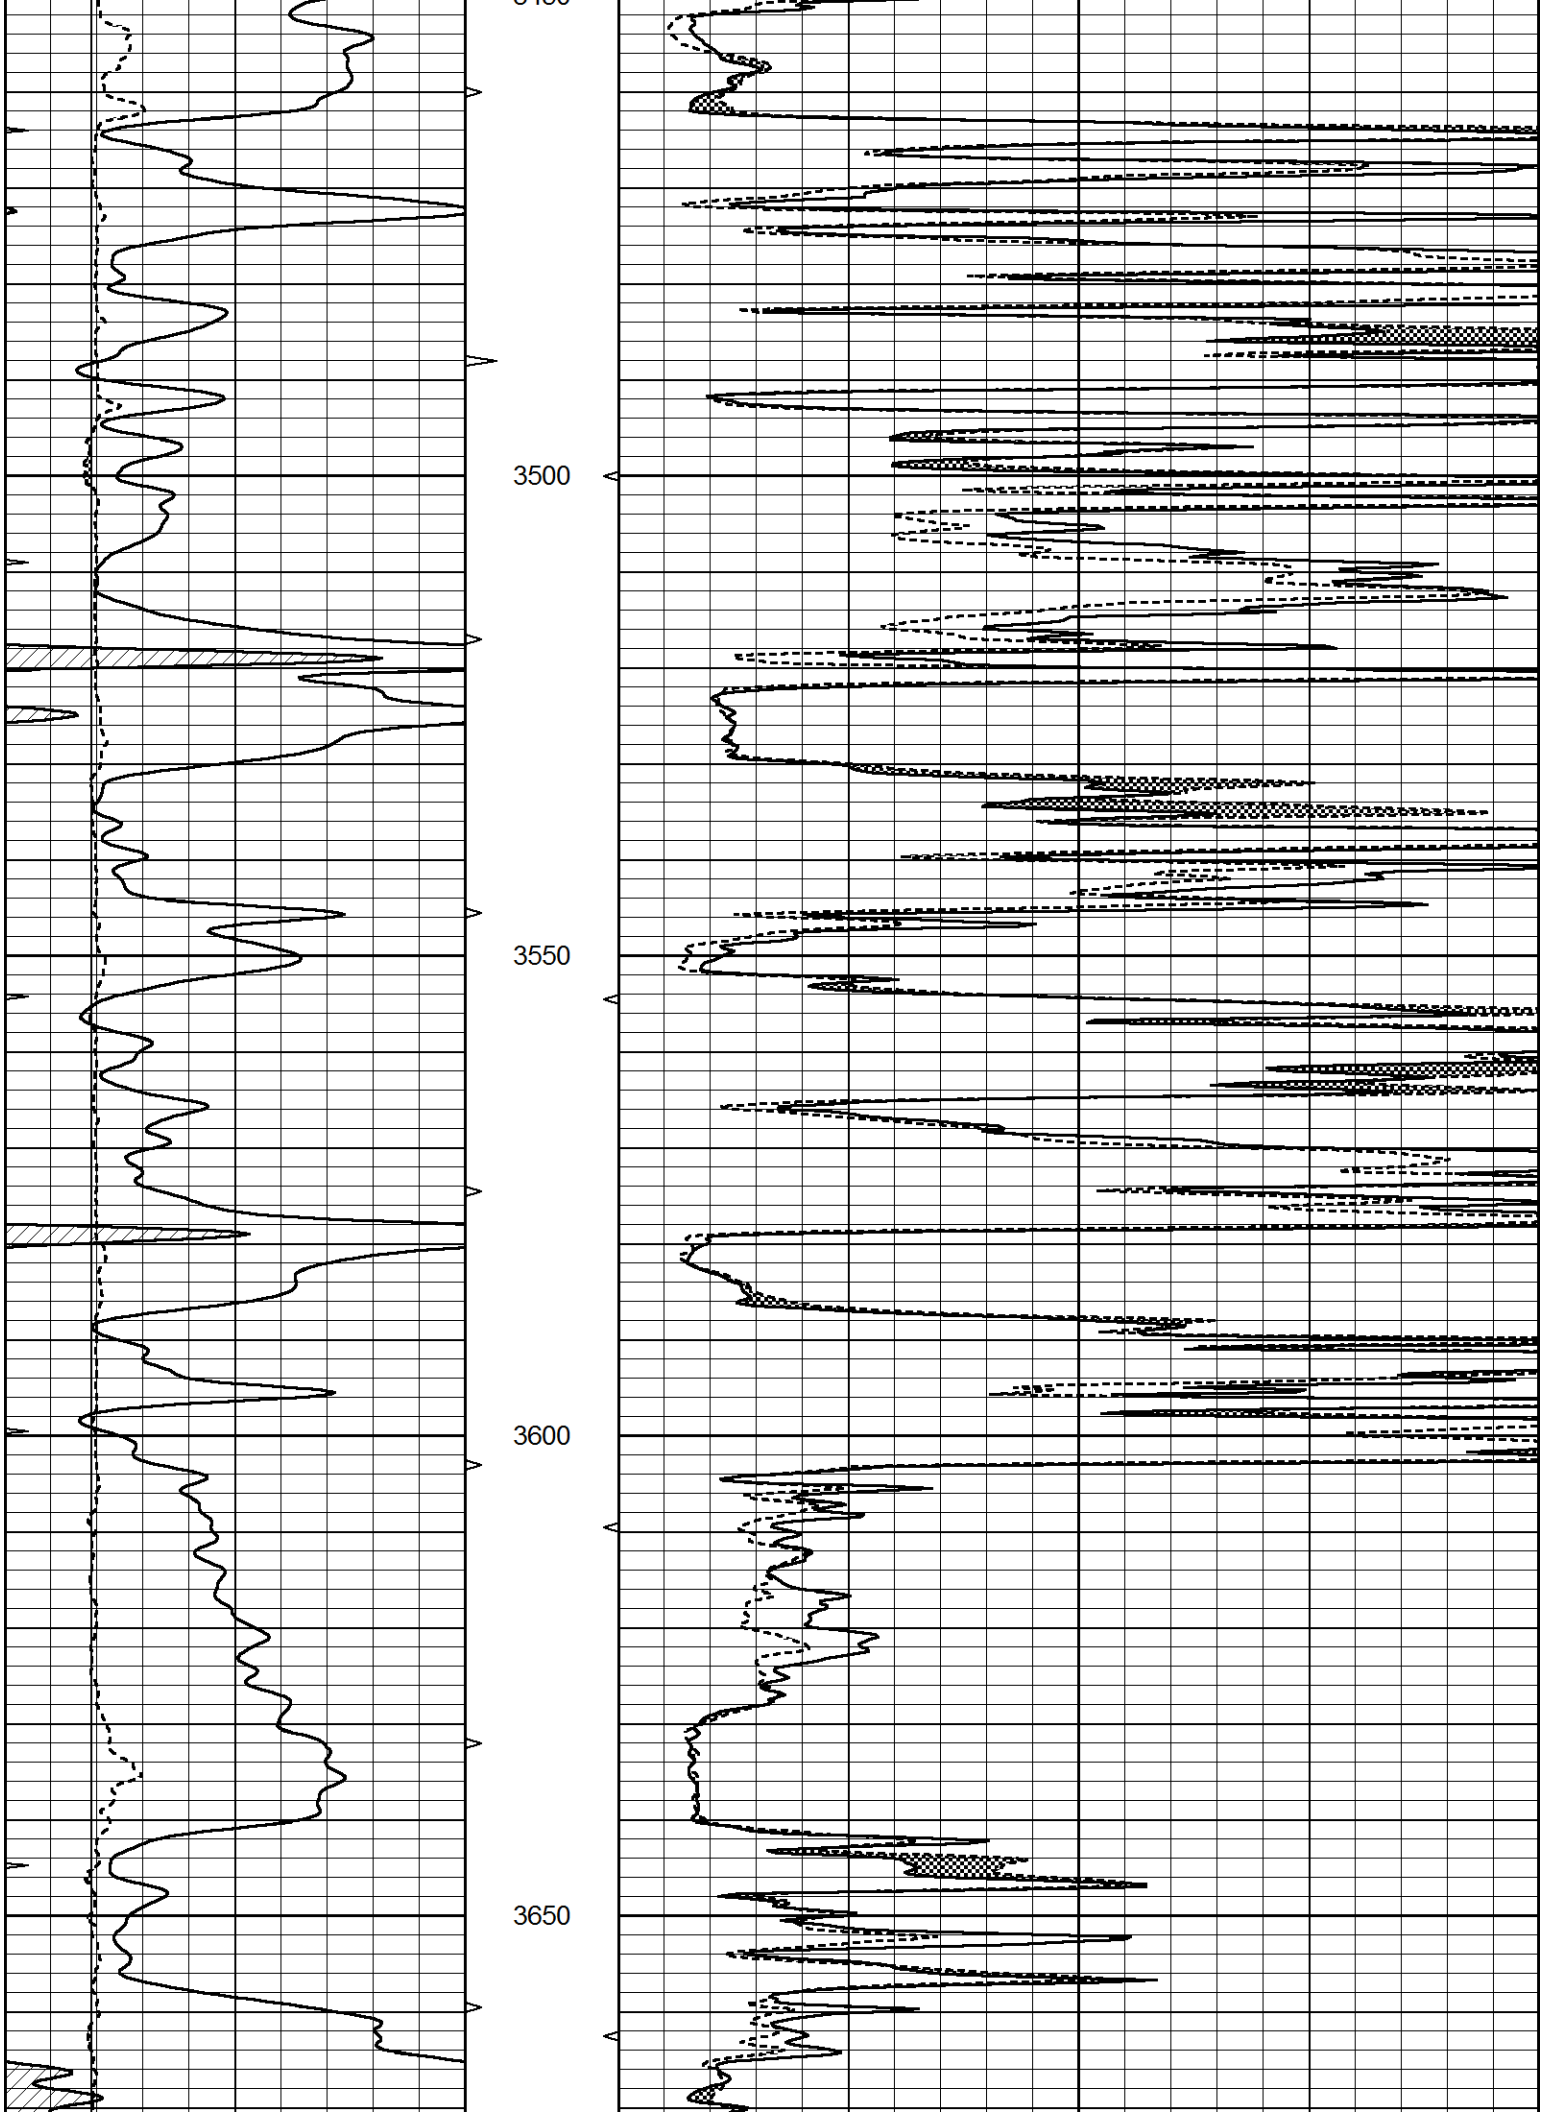
3500
3550
3600
3650

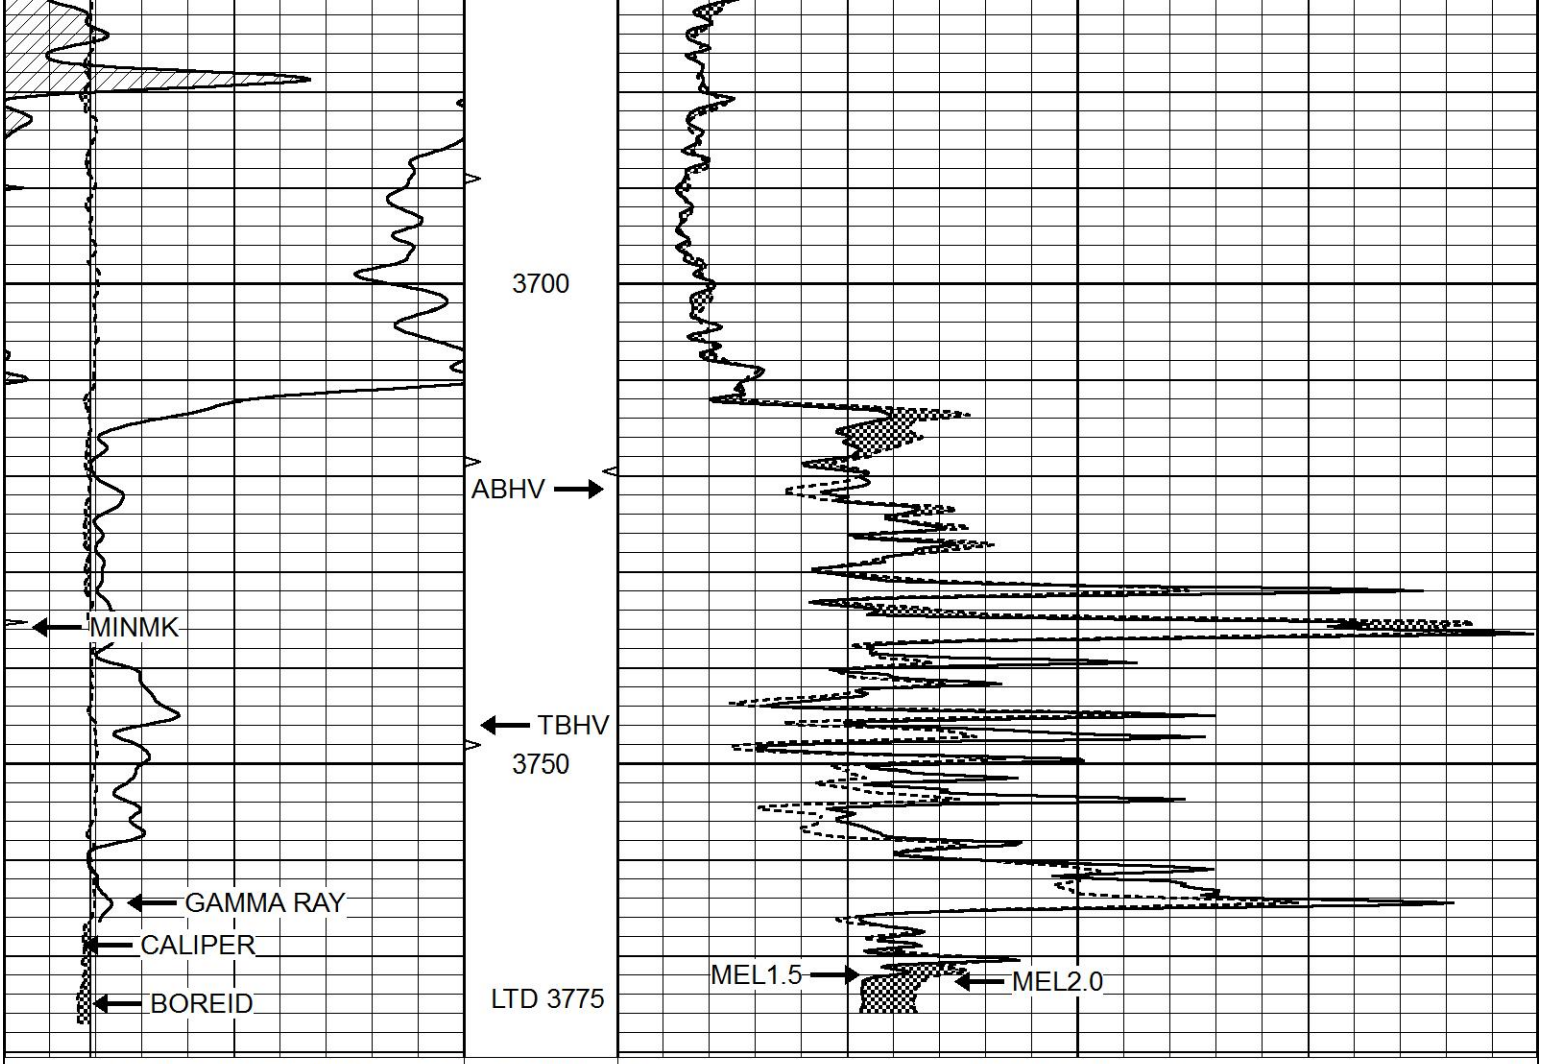



0	GAMMA RAY (GAPI) 150	ABHV		0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10 (ft3) 0		0	MEL2.0 (Ohm-m) 40
0	MINMK 20	TBHV			
		0 (ft3) 10			

REPEAT SECTION

Database File	5876ddn.db
Dataset Pathname	pass4.1
Presentation Format	_micro
Dataset Creation	Sun Sep 12 13:39:43 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	ABHV		0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10 (ft3) 0		0	MEL2.0 (Ohm-m) 40
0	MINMK 20	TBHV			
		0 (ft3) 10			

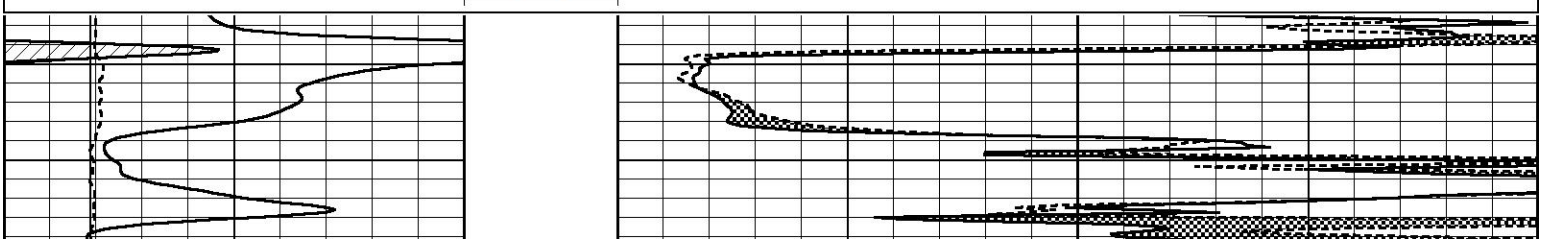

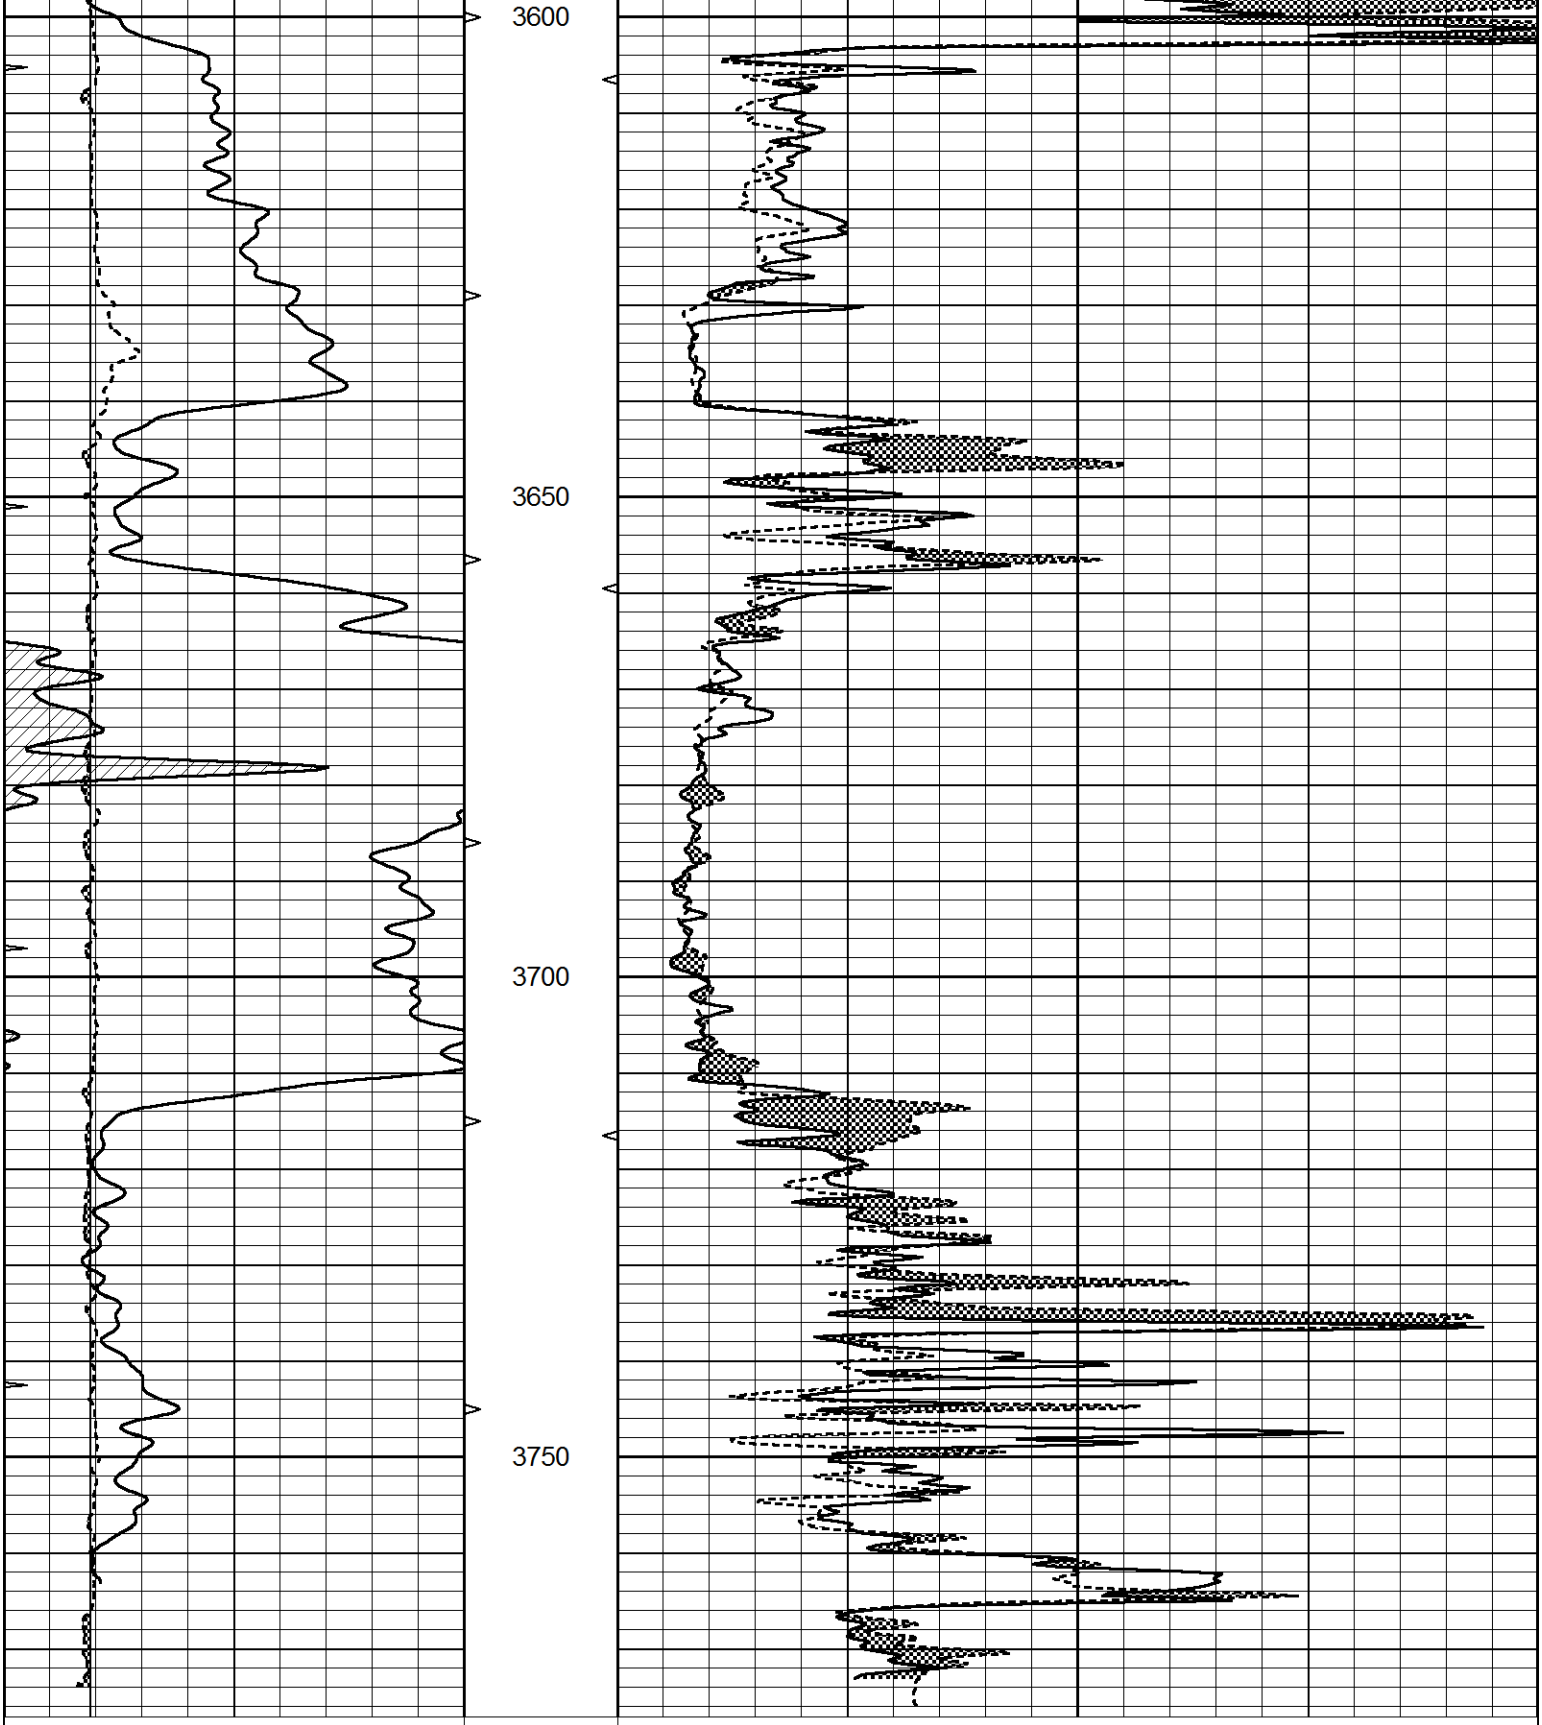

Calibration Report

Database File	5876ddn.db
Dataset Pathname	pass4.1
Dataset Creation	Sun Sep 12 13:39:43 2021

MICRO Calibration Report

Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Thu Aug 05 13:03:33 2021	

Caliper Calibration:	Gain=2.815	Offset=4.552
	Low Cal	High Cal
References	8.500	13.500
Readings	0.887	2.663

1.5" Calibration:	Gain=32.134	Offset=1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832

2" Calibration:	Gain=36.000	Offset=-3.800
	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Thu Jul 30 23:16:16 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6000	GAPI/cps