



MICRO LOG

Company PICKRELL DRILLING COMPANY, INC.

Well SUTTON "C" #7

Field

County NESS

State KANSAS

Location: API #: 15-135-26112-0000

268' FSL & 1450' FWL

SEC 8 TWP 18S RGE 24W

Permanent Datum GROUND LEVEL Elevation 2310
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL

Elevation

K.B. 2317
D.F. 2315
G.L. 2310

Date 8/11/21

Run Number TWO

Depth Driller 4450

Depth Logger 4452

Bottom Logged Interval 4450

Top Log Interval 3500

Casing Driller 8 5/8" @ 220

Casing Logger 220

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.1/55

pH / Fluid Loss 10.0/9.2

Source of Sample FLOWLINE

Rm @ Meas. Temp .90 @ 86F

Rmf @ Meas. Temp .67 @ 86F

Rmc @ Meas. Temp 1.08 @ 86F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .64 @ 120F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom

Maximum Recorded Temperature 120F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By AARON YOUNG

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
NESS CITY, KS. - NORTH TO RD. 160 - 5 3/4 WEST - NORTH INTO




MAIN SECTION

Database File	5640pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Thu Aug 12 01:49:04 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

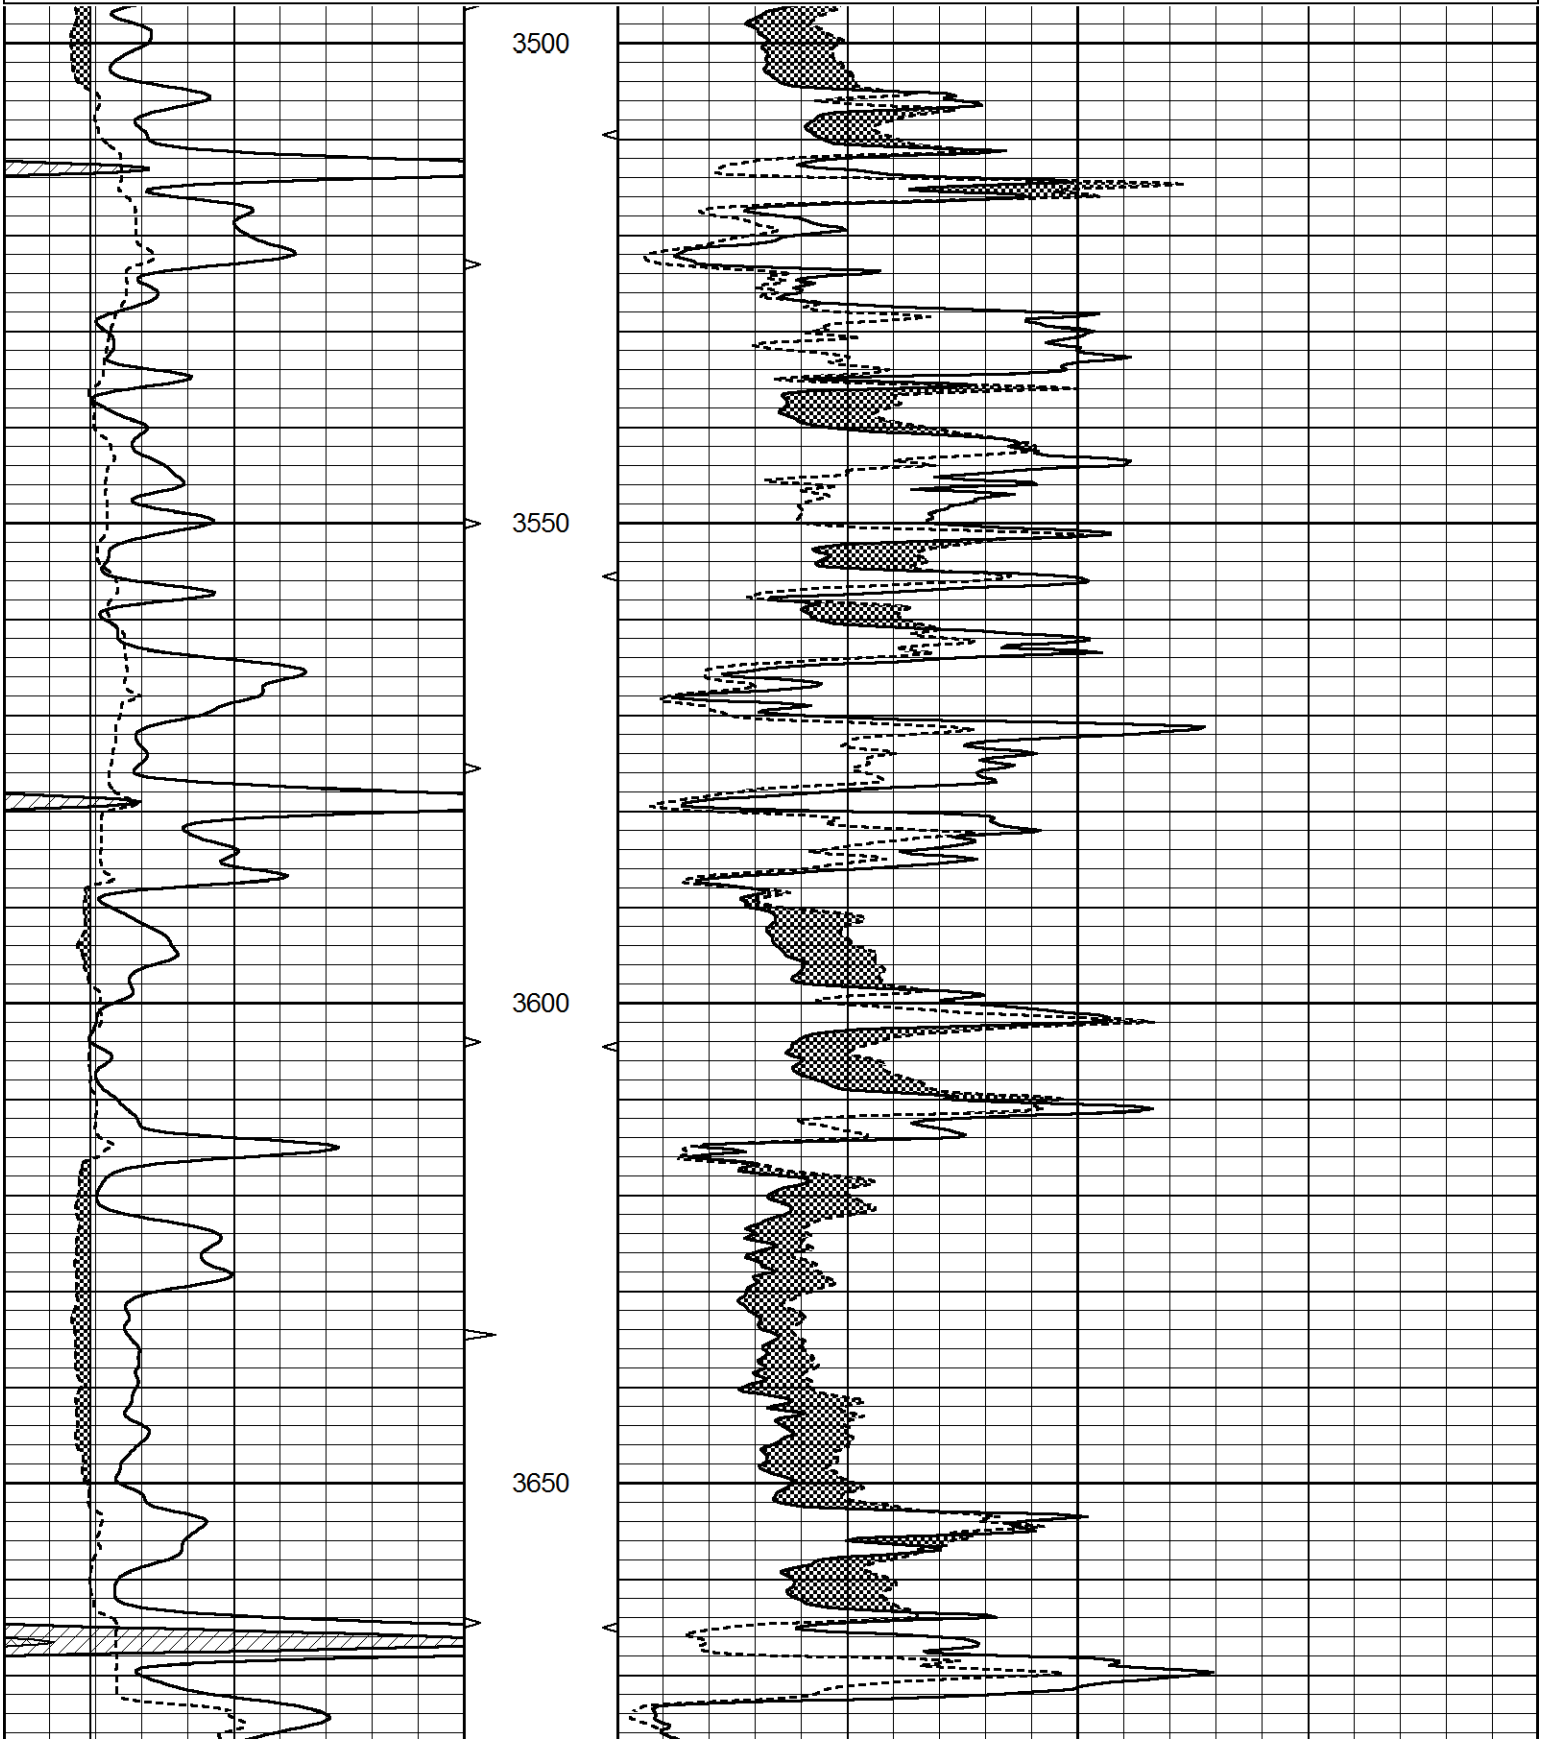

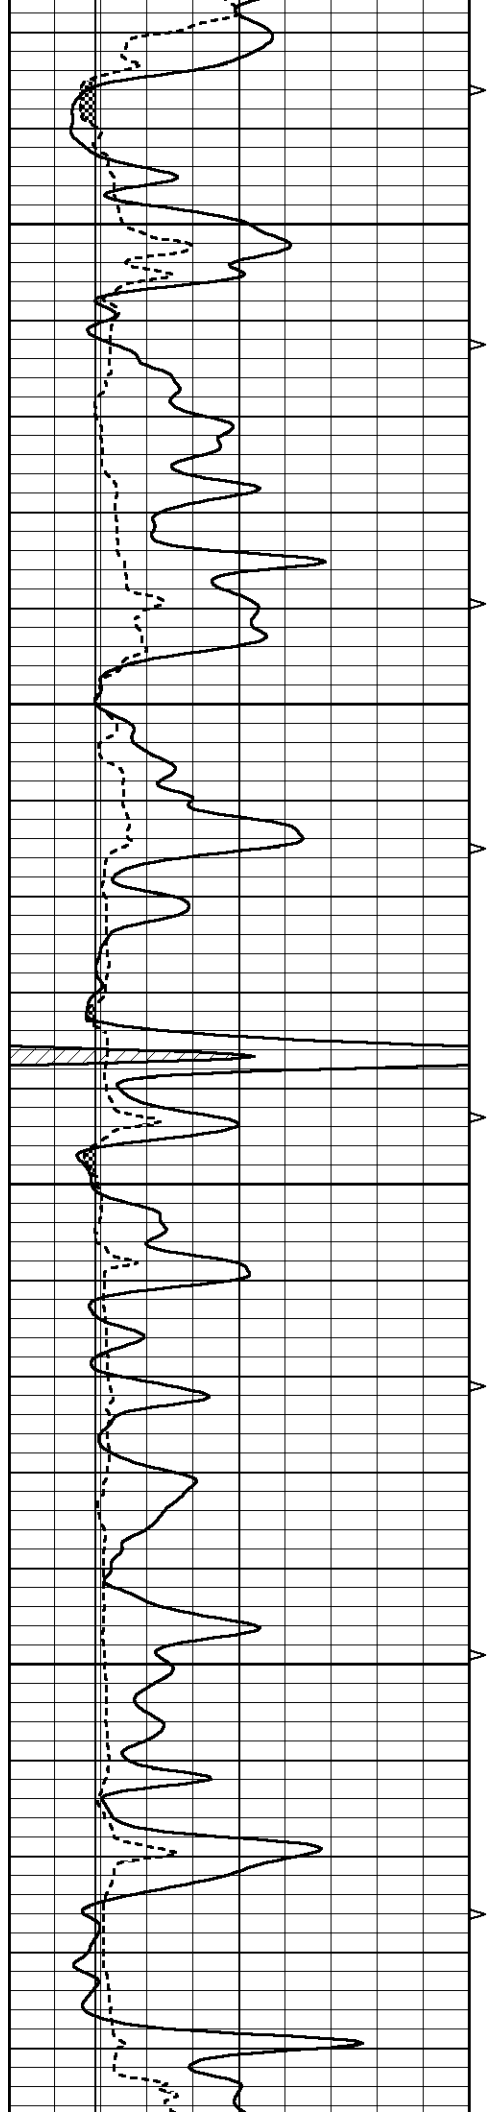




3700


3750

3800

3850

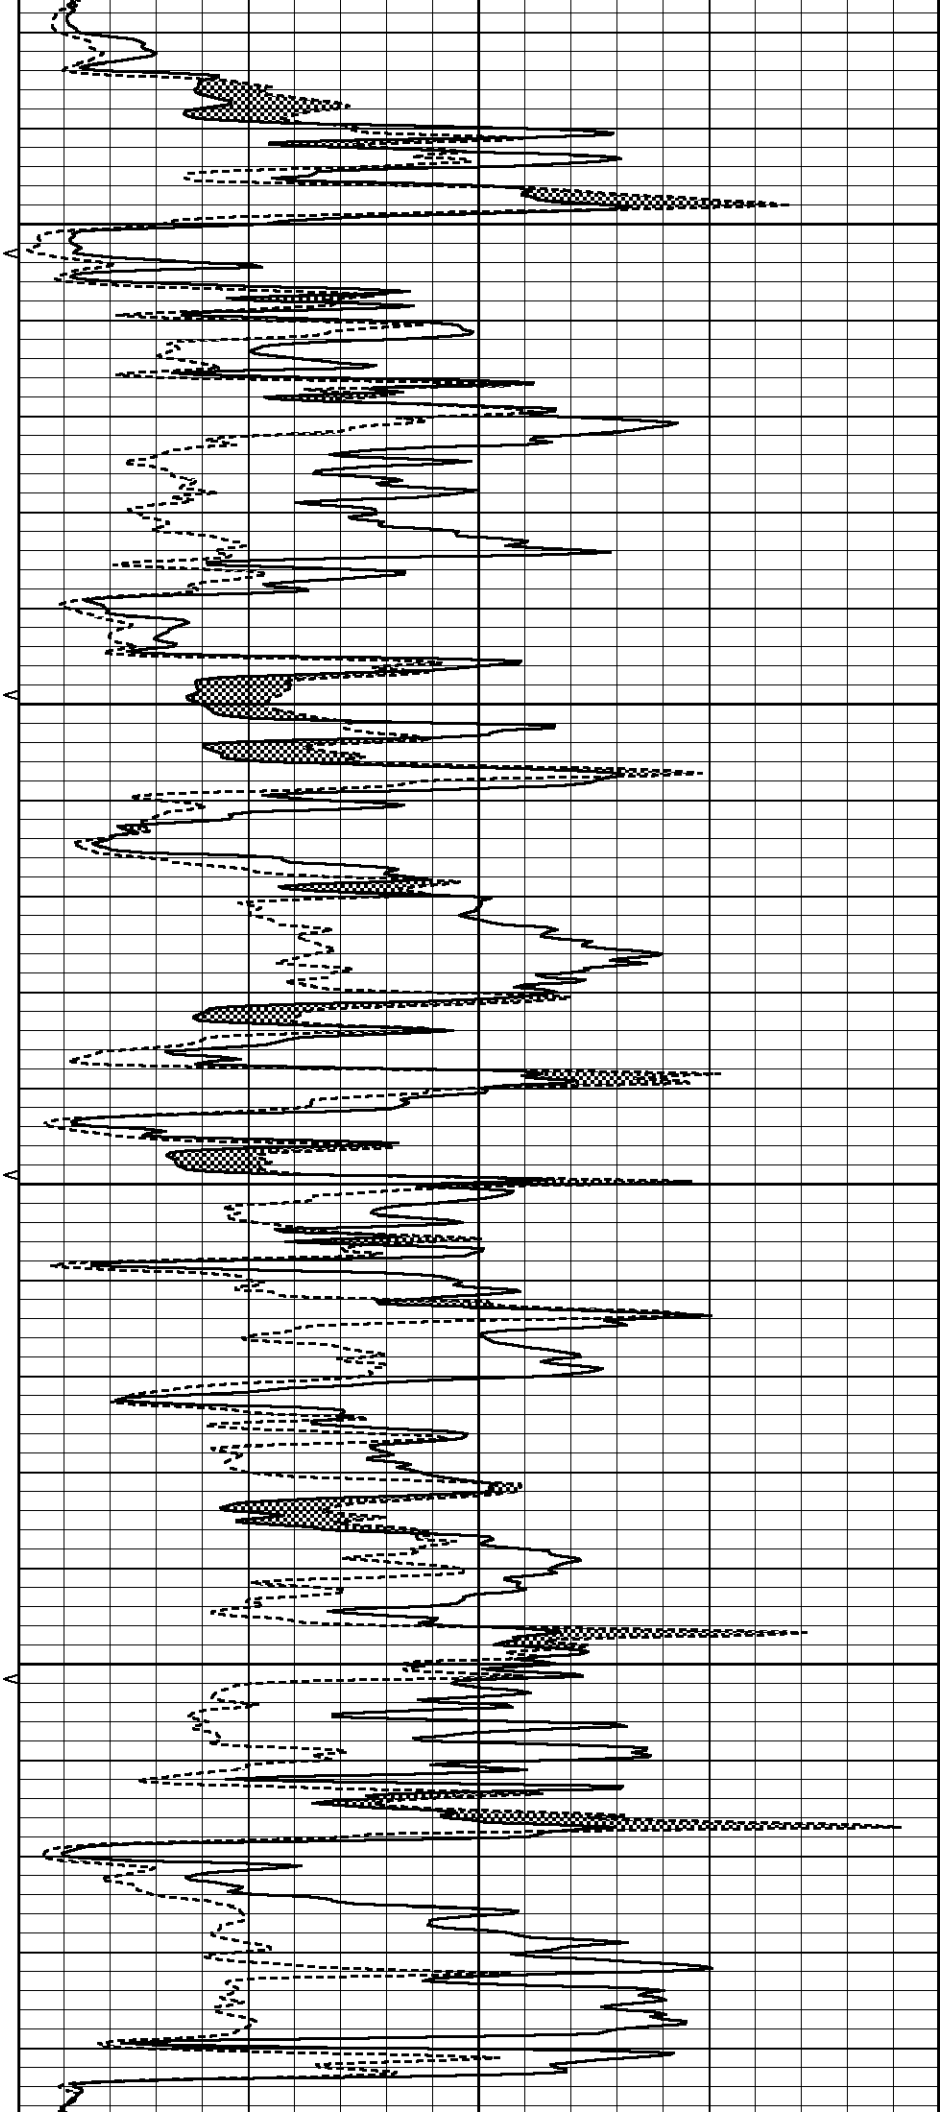

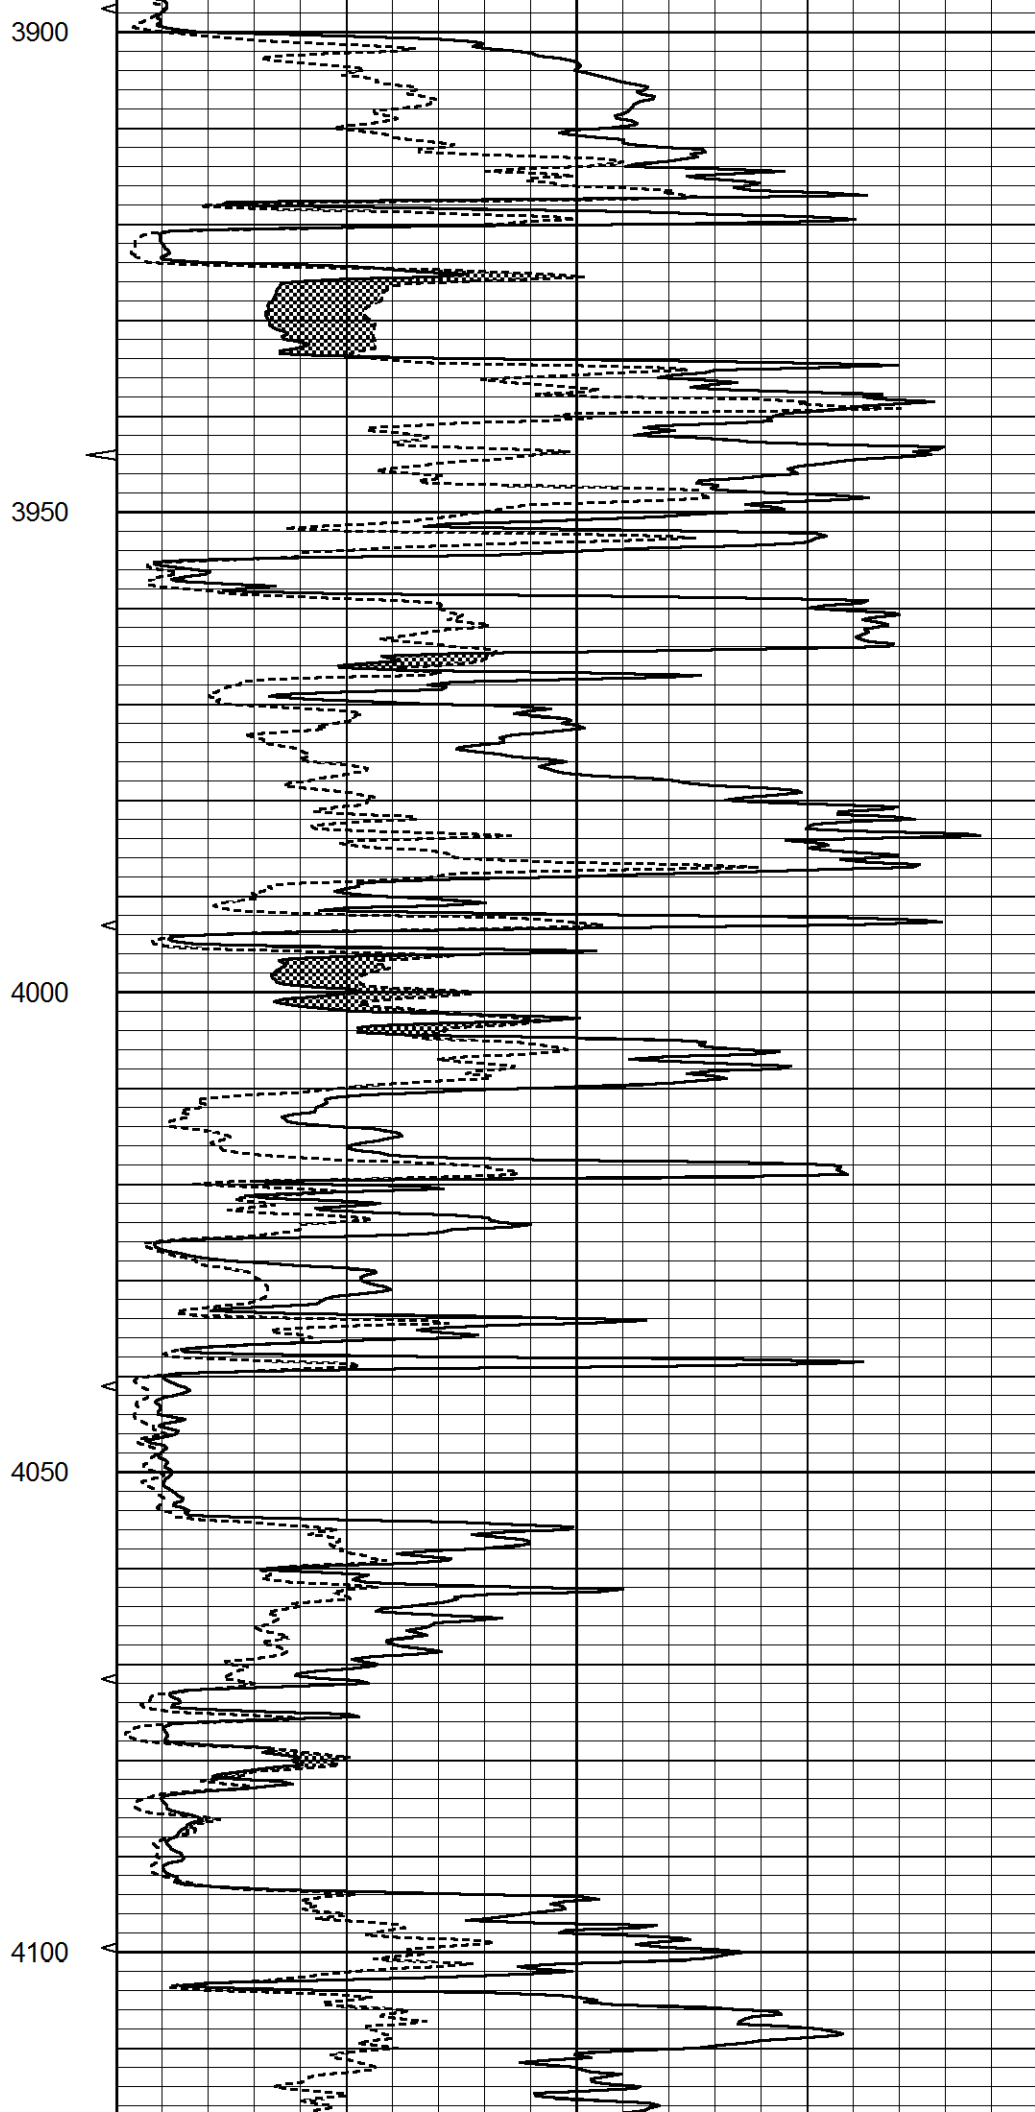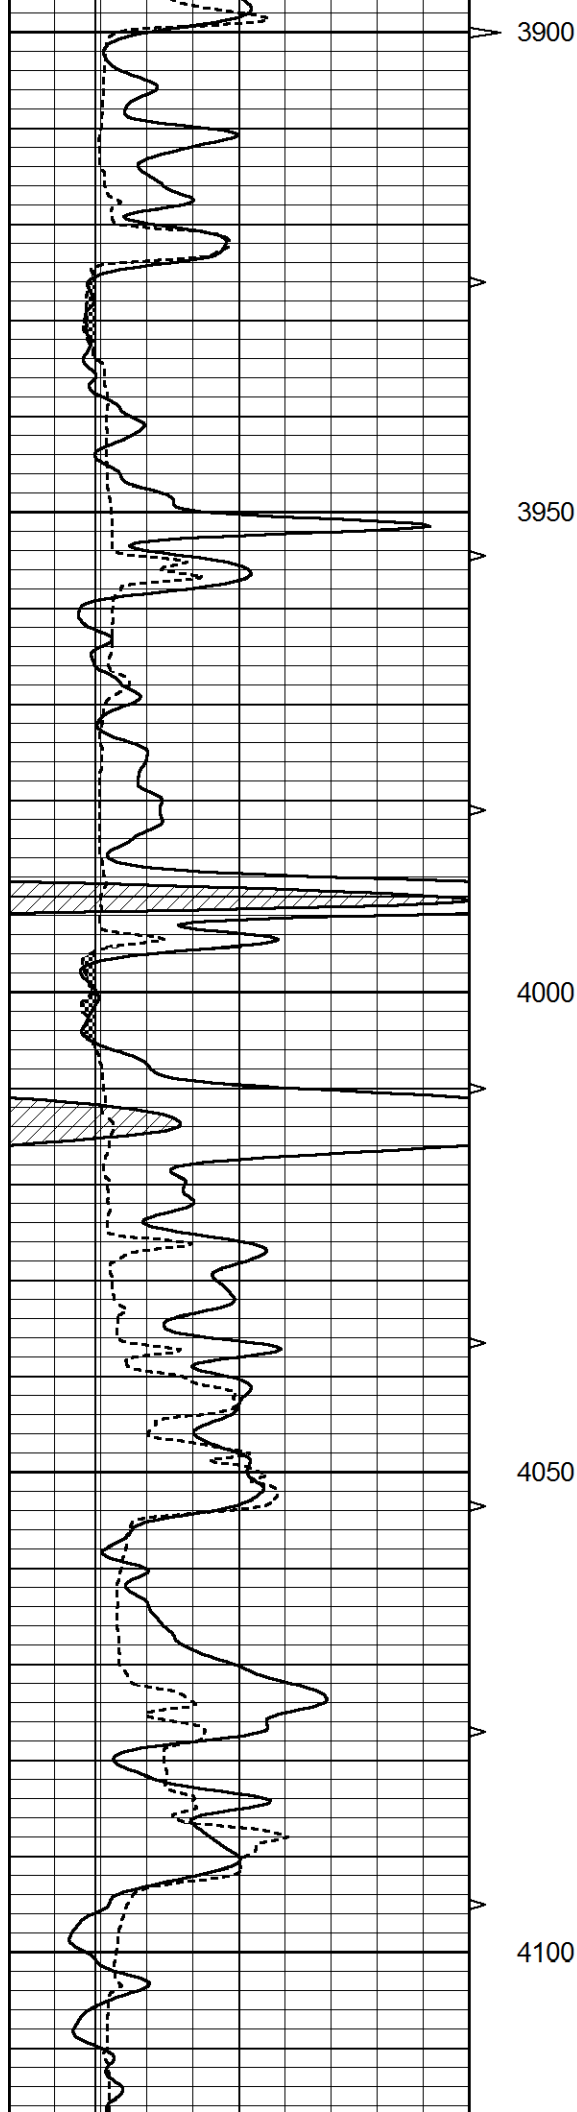

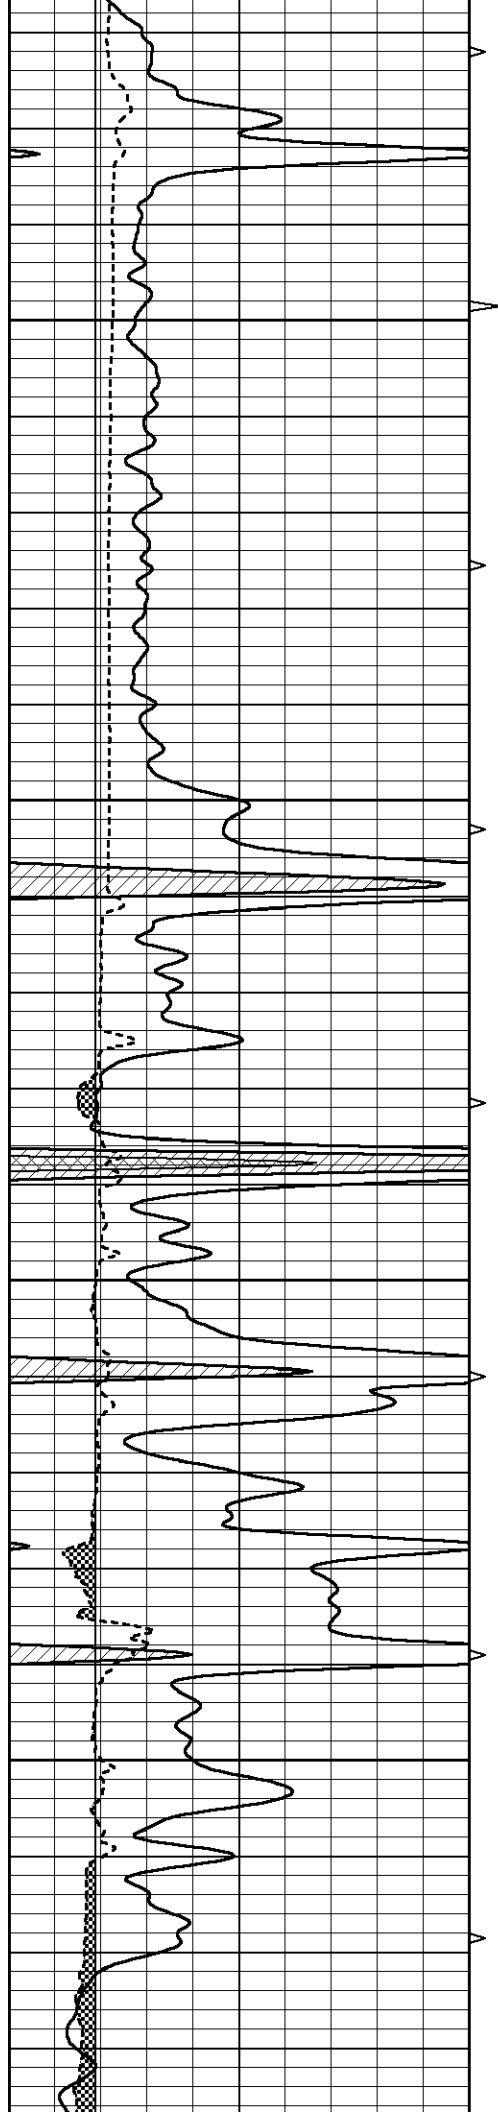



4150

4200

4250


4300

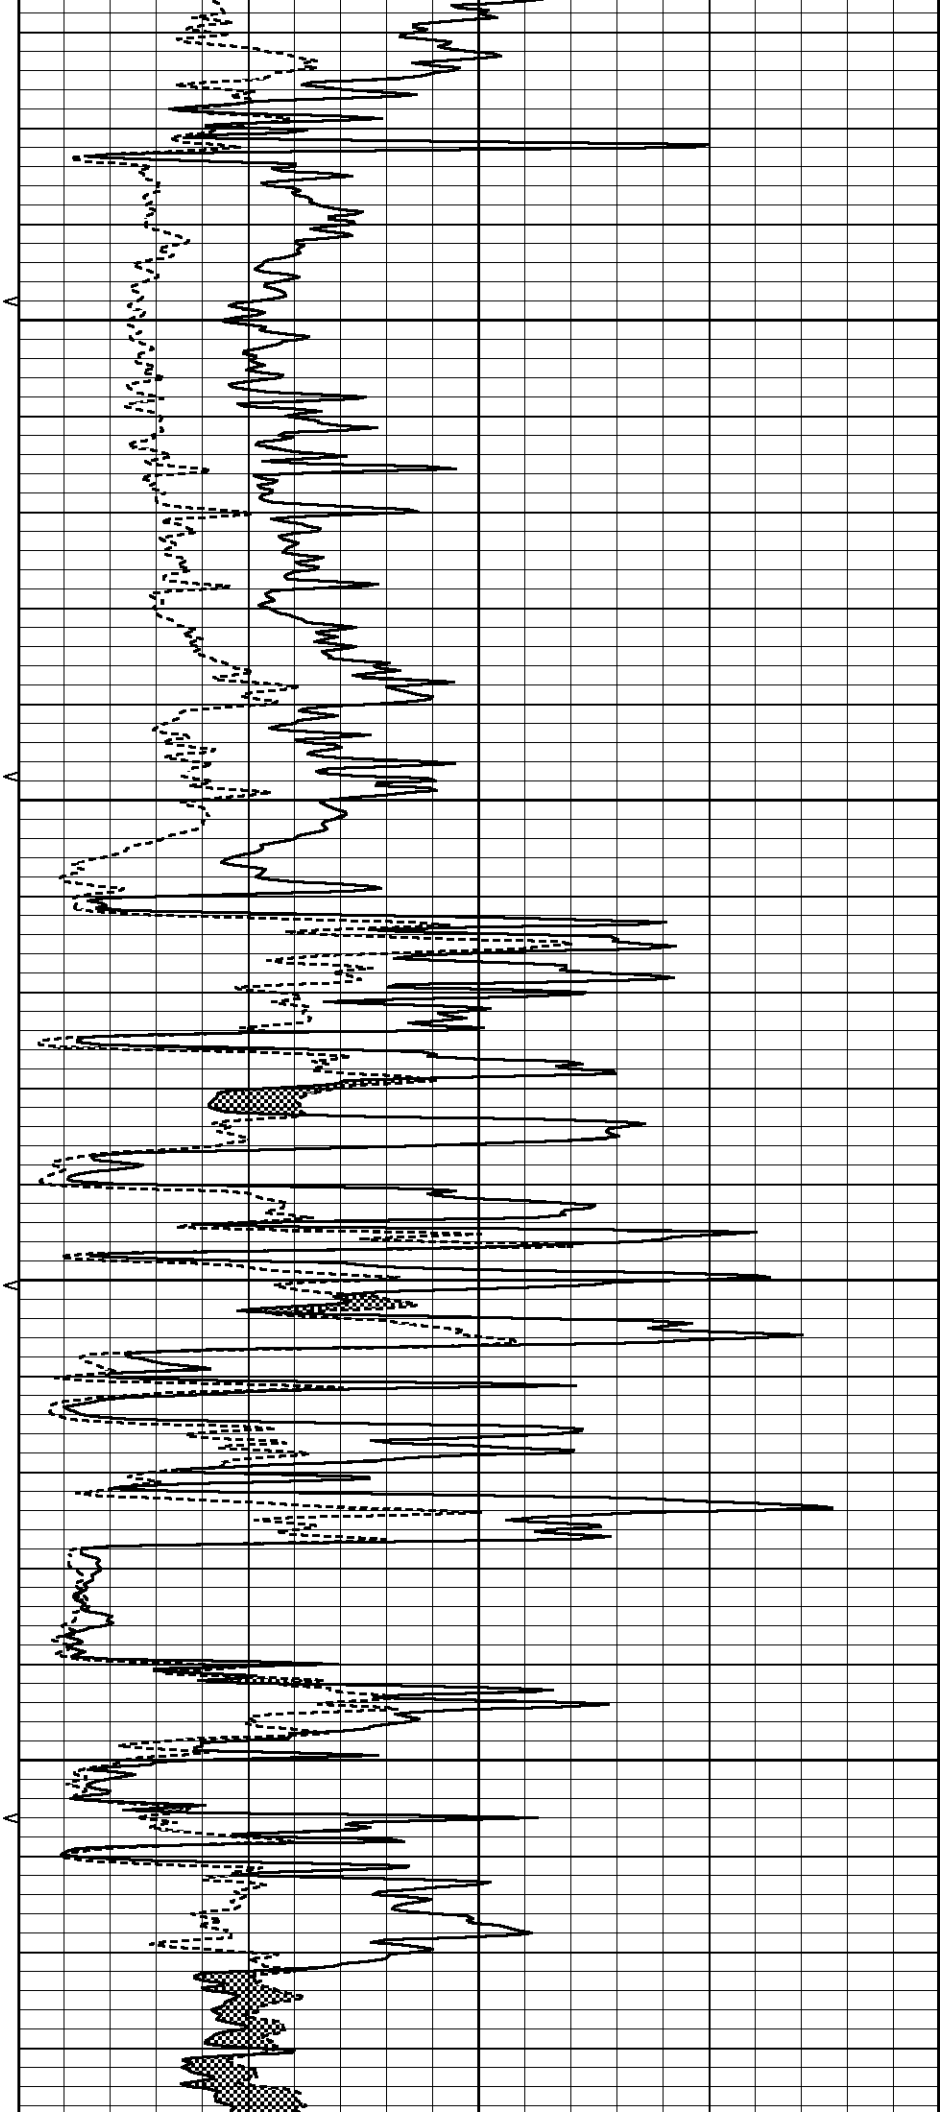


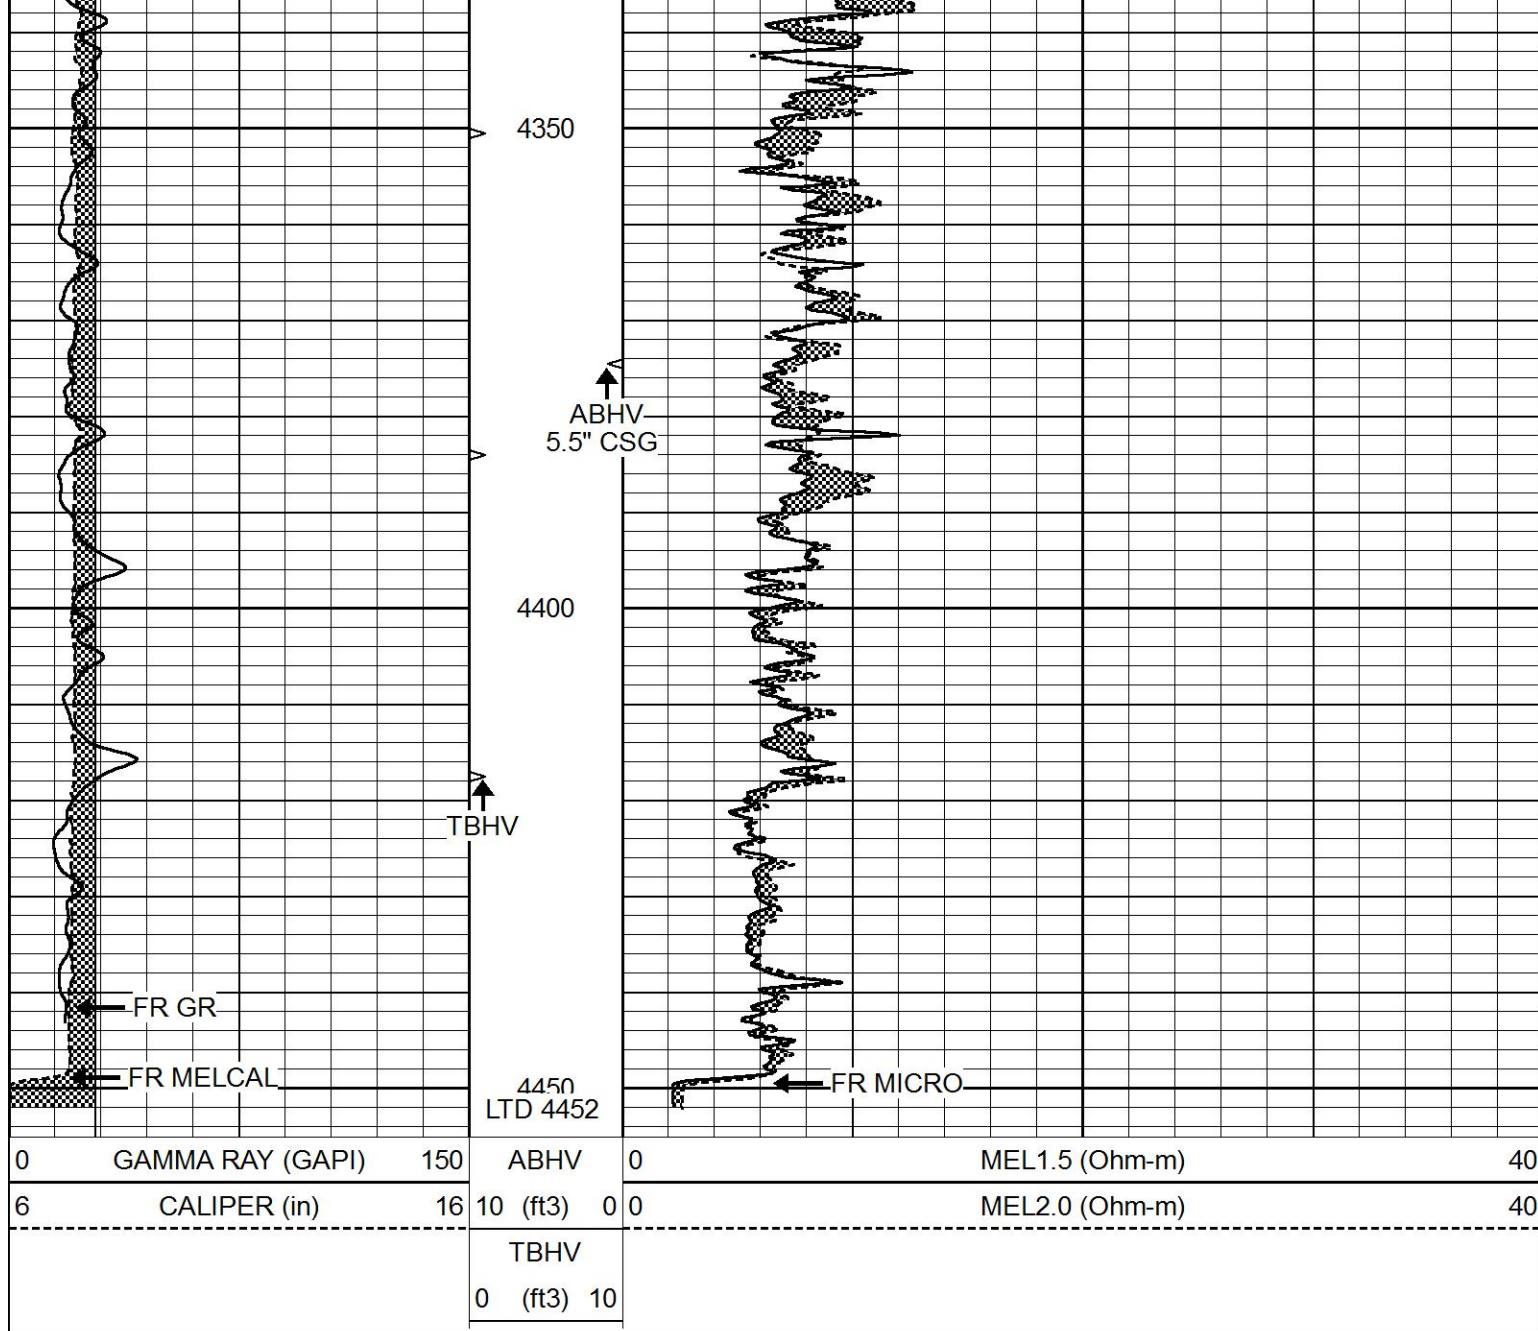

REPEAT SECTION

Database File 5640pe.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Thu Aug 12 01:44:30 2021
 Charted by Depth in Feet scaled 1:240

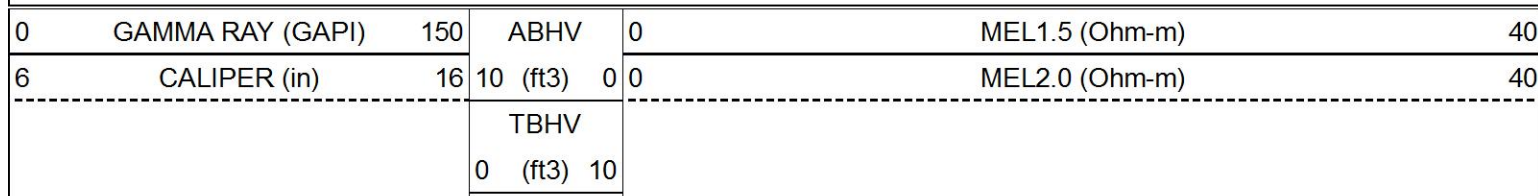

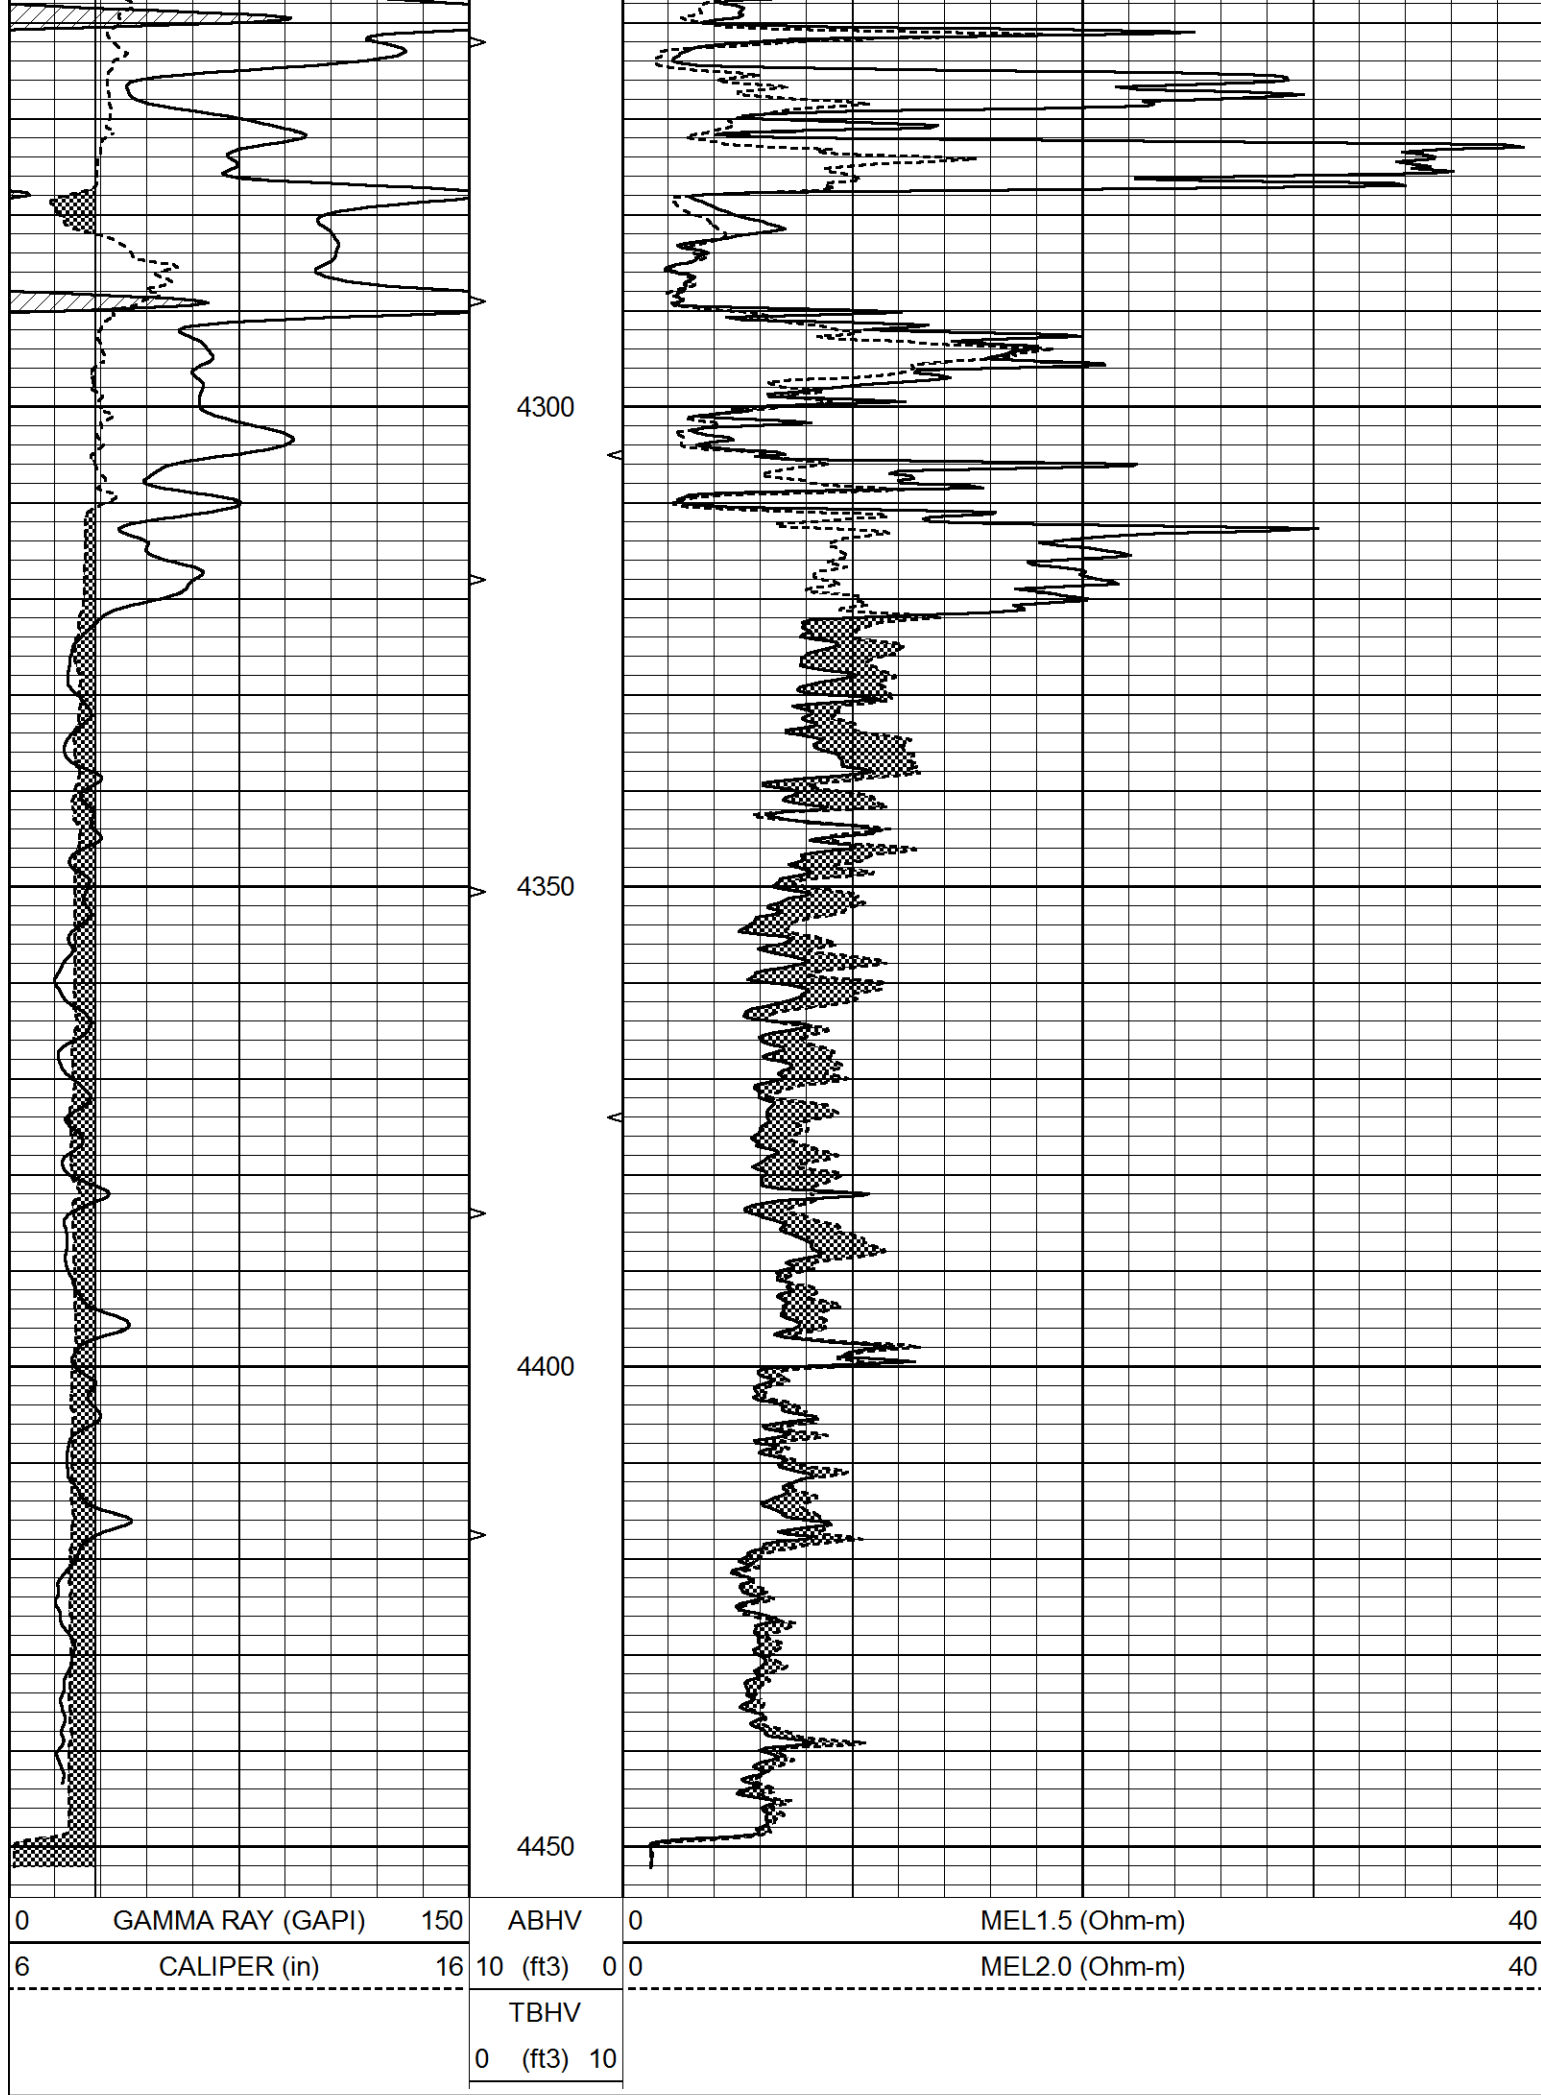

Calibration Report								
Database File	5640pe.db							
Dataset Pathname	pass5.1							
Dataset Creation	Thu Aug 12 01:44:30 2021							
MICRO_USR Calibration Report								
Serial Number:			070910					
Tool Model:			ProbeL					
Performed:			Thu Jun 10 10:36:57 2021					
Caliper Calibration:			Gain=7.192		Offset=2.802			
References			Low Cal		High Cal			
Readings			8.000		14.000			
			0.723		1.557			
1.5" Calibration:			Gain=50.000		Offset=-0.567			
References			Low Cal		High Cal			
Readings			0.000		20.000			
			0.004		1.335			
2" Calibration:			Gain=85.000		Offset=-2.400			
References			Low Cal		High Cal			
Readings			0.000		20.000			
			0.004		1.029			
Microlog Calibration Report								
Serial-Model:			070910-ProbeL					
Performed:			(Not Performed)					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Fri Oct 30 21:32:56 2020					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.2700		GAPI/cps			