

MICRO LOG


Company	MTM PETROLEUM, INC.	Company	MTM PETROLEUM, INC.
Well	J. ALBERS#1 OWWO	Well	J. ALBERS#1 OWWO
Field	KOMAREK	Field	KOMAREK
County	KINGMAN	County	KINGMAN
State	KANSAS	State	KANSAS
Location:	API # : 15-095-21375-0001 710' FSL & 1940' FWL	Other Services CNL/CDL/DIL SON	
Permanent Datum	SEC 10 TWP 29S RGE 10W	Elevation	
Log Measured From	GROUND LEVEL Elevation 1725 KELLY BUSHING 7' A.G.L	K.B. 1732 D.F. 1730 G.L. 1725	
Drilling Measured From	KELLY BUSHING		
Date	11/02/21		
Run Number	TWO		
Depth Driller	4665		
Depth Logger	4663		
Bottom Logged Interval	4643		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 292		
Casing Logger	292		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5300 PPM	
Density / Viscosity	9.2/47		
pH / Fluid Loss	10.5/9.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.75 @ 62F		
Rmf @ Meas. Temp	0.56 @ 62F		
Rmc @ Meas. Temp	.90 @ 62F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	0.25 @ 122F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	122F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	T. WILLIAMS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
ST. LEO 1/2 EAST, NORTH INTO.

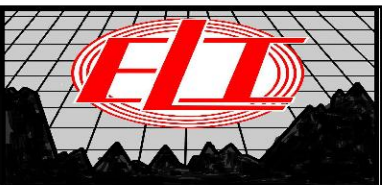


MAIN PASS

Database File	5870ddn.db
Dataset Pathname	pass8.1
Presentation Format	_micro
Dataset Creation	Tue Nov 02 10:35:12 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

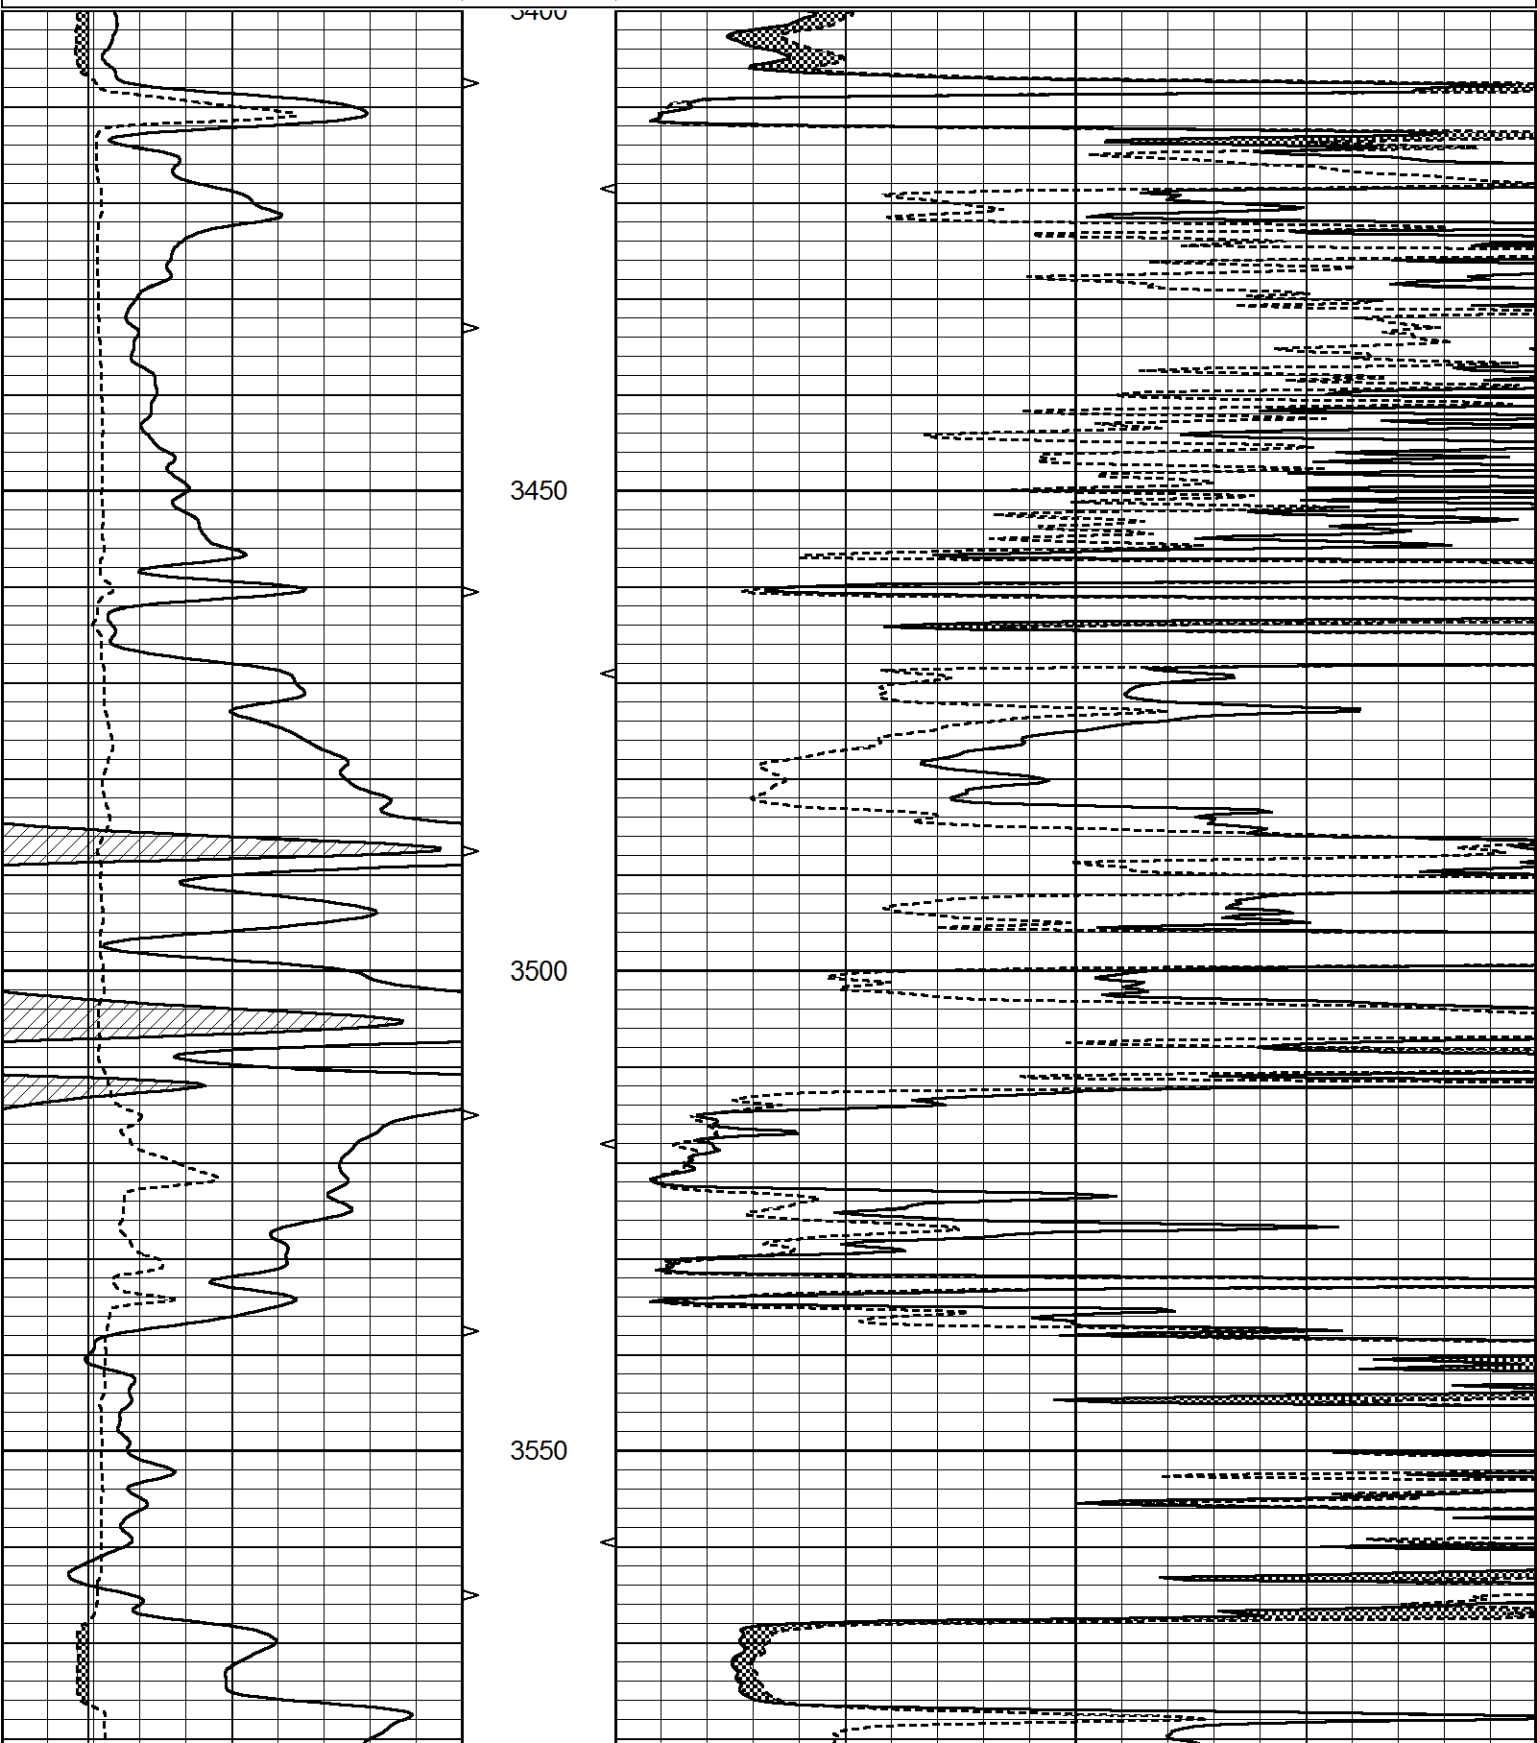

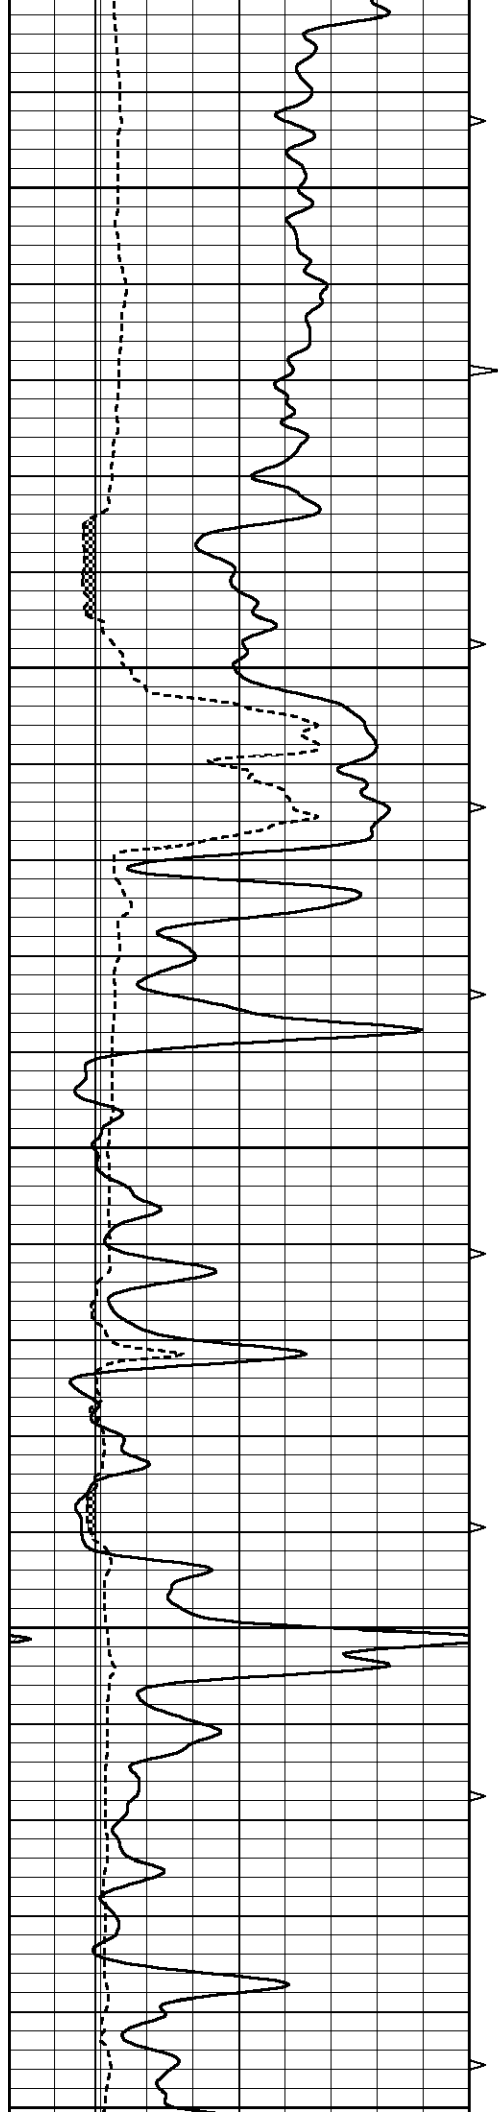


3600


3650


3700



3750


3800

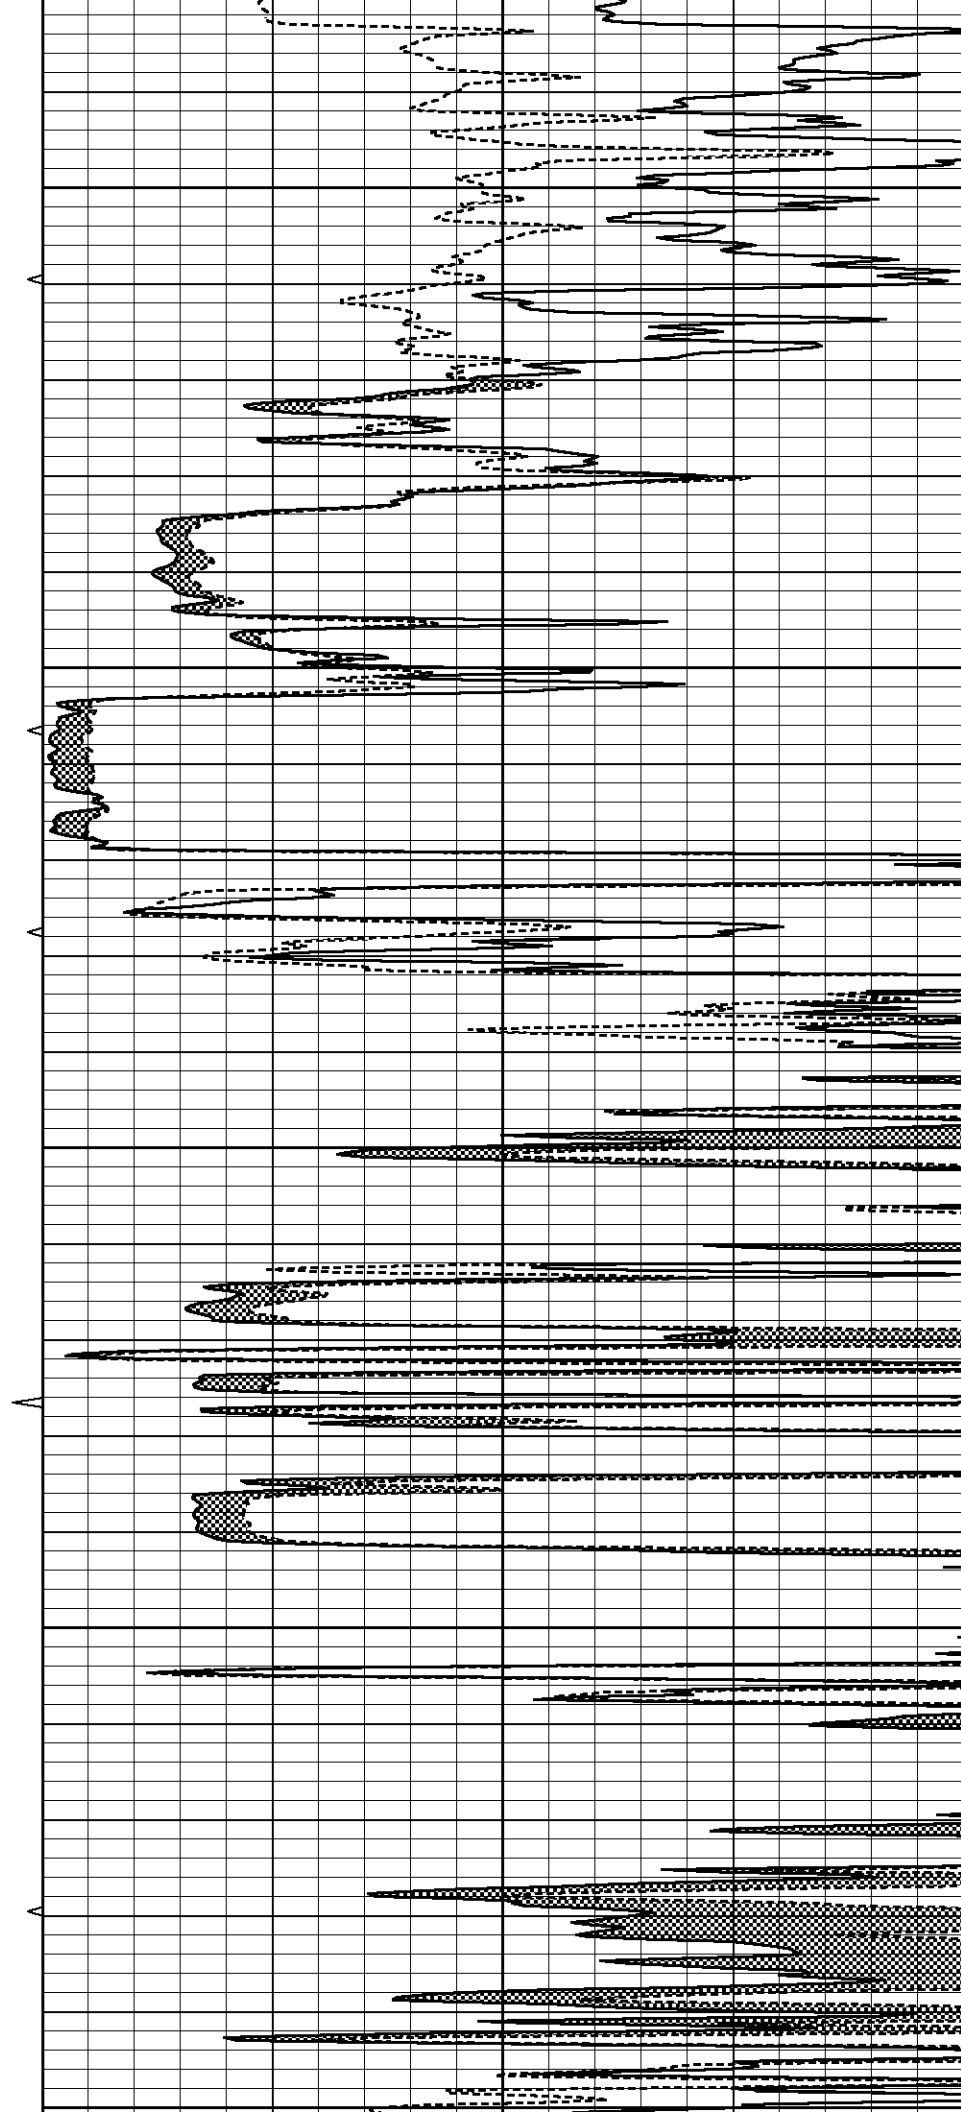

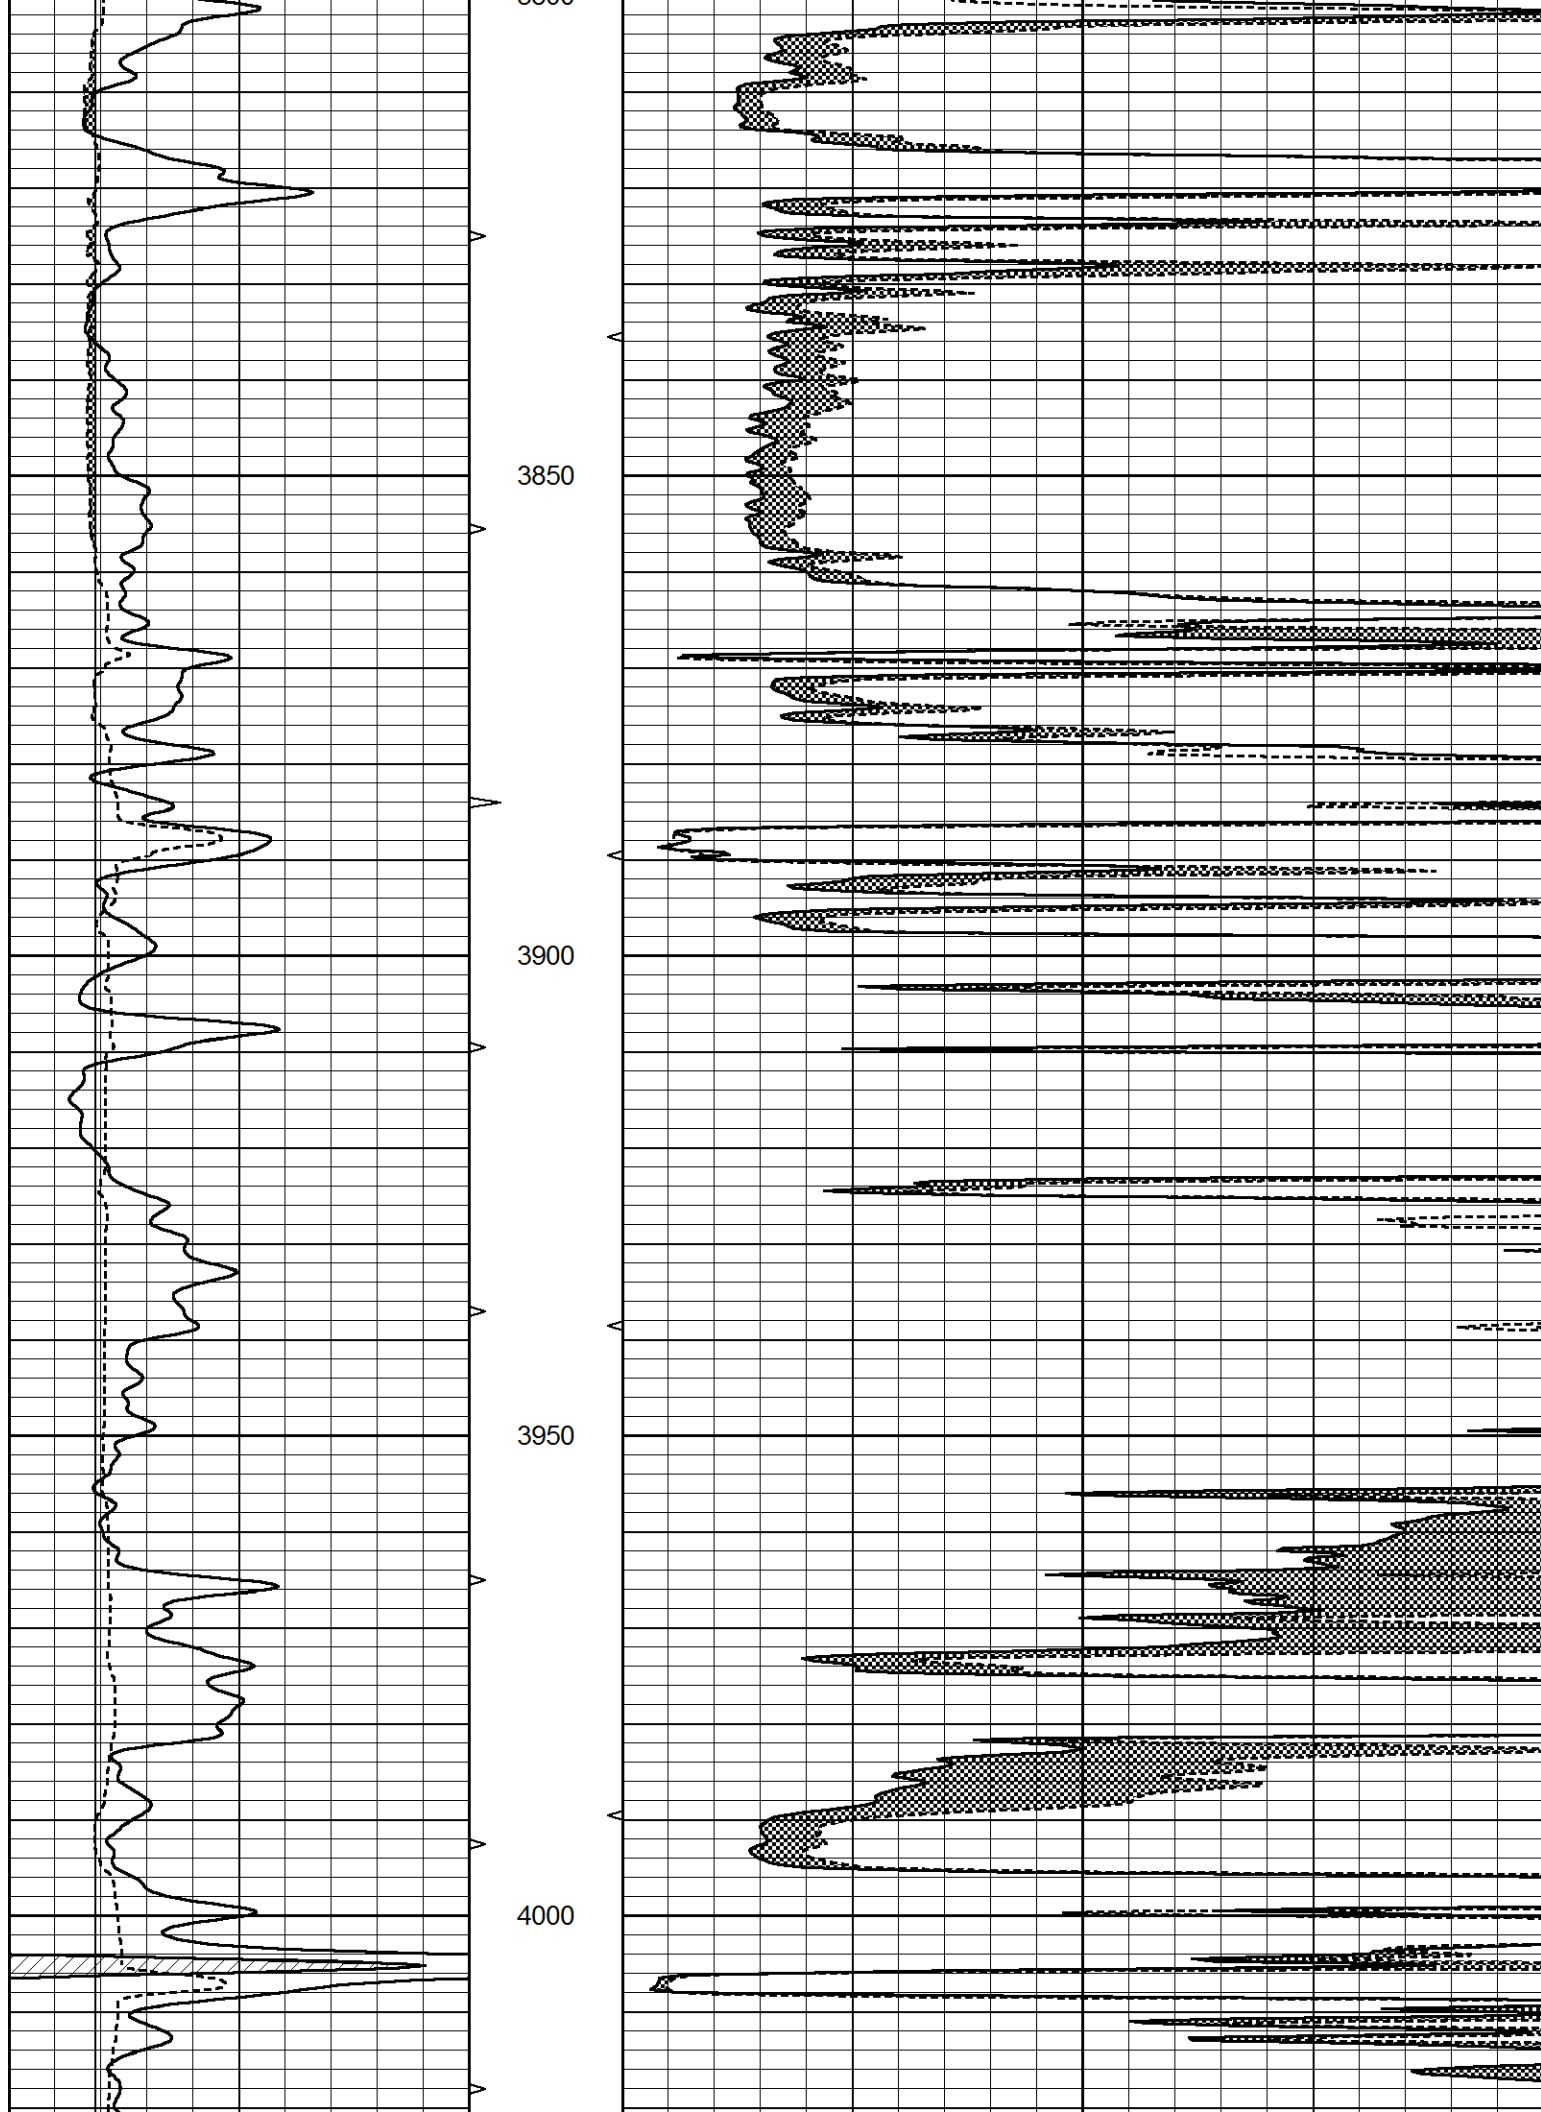

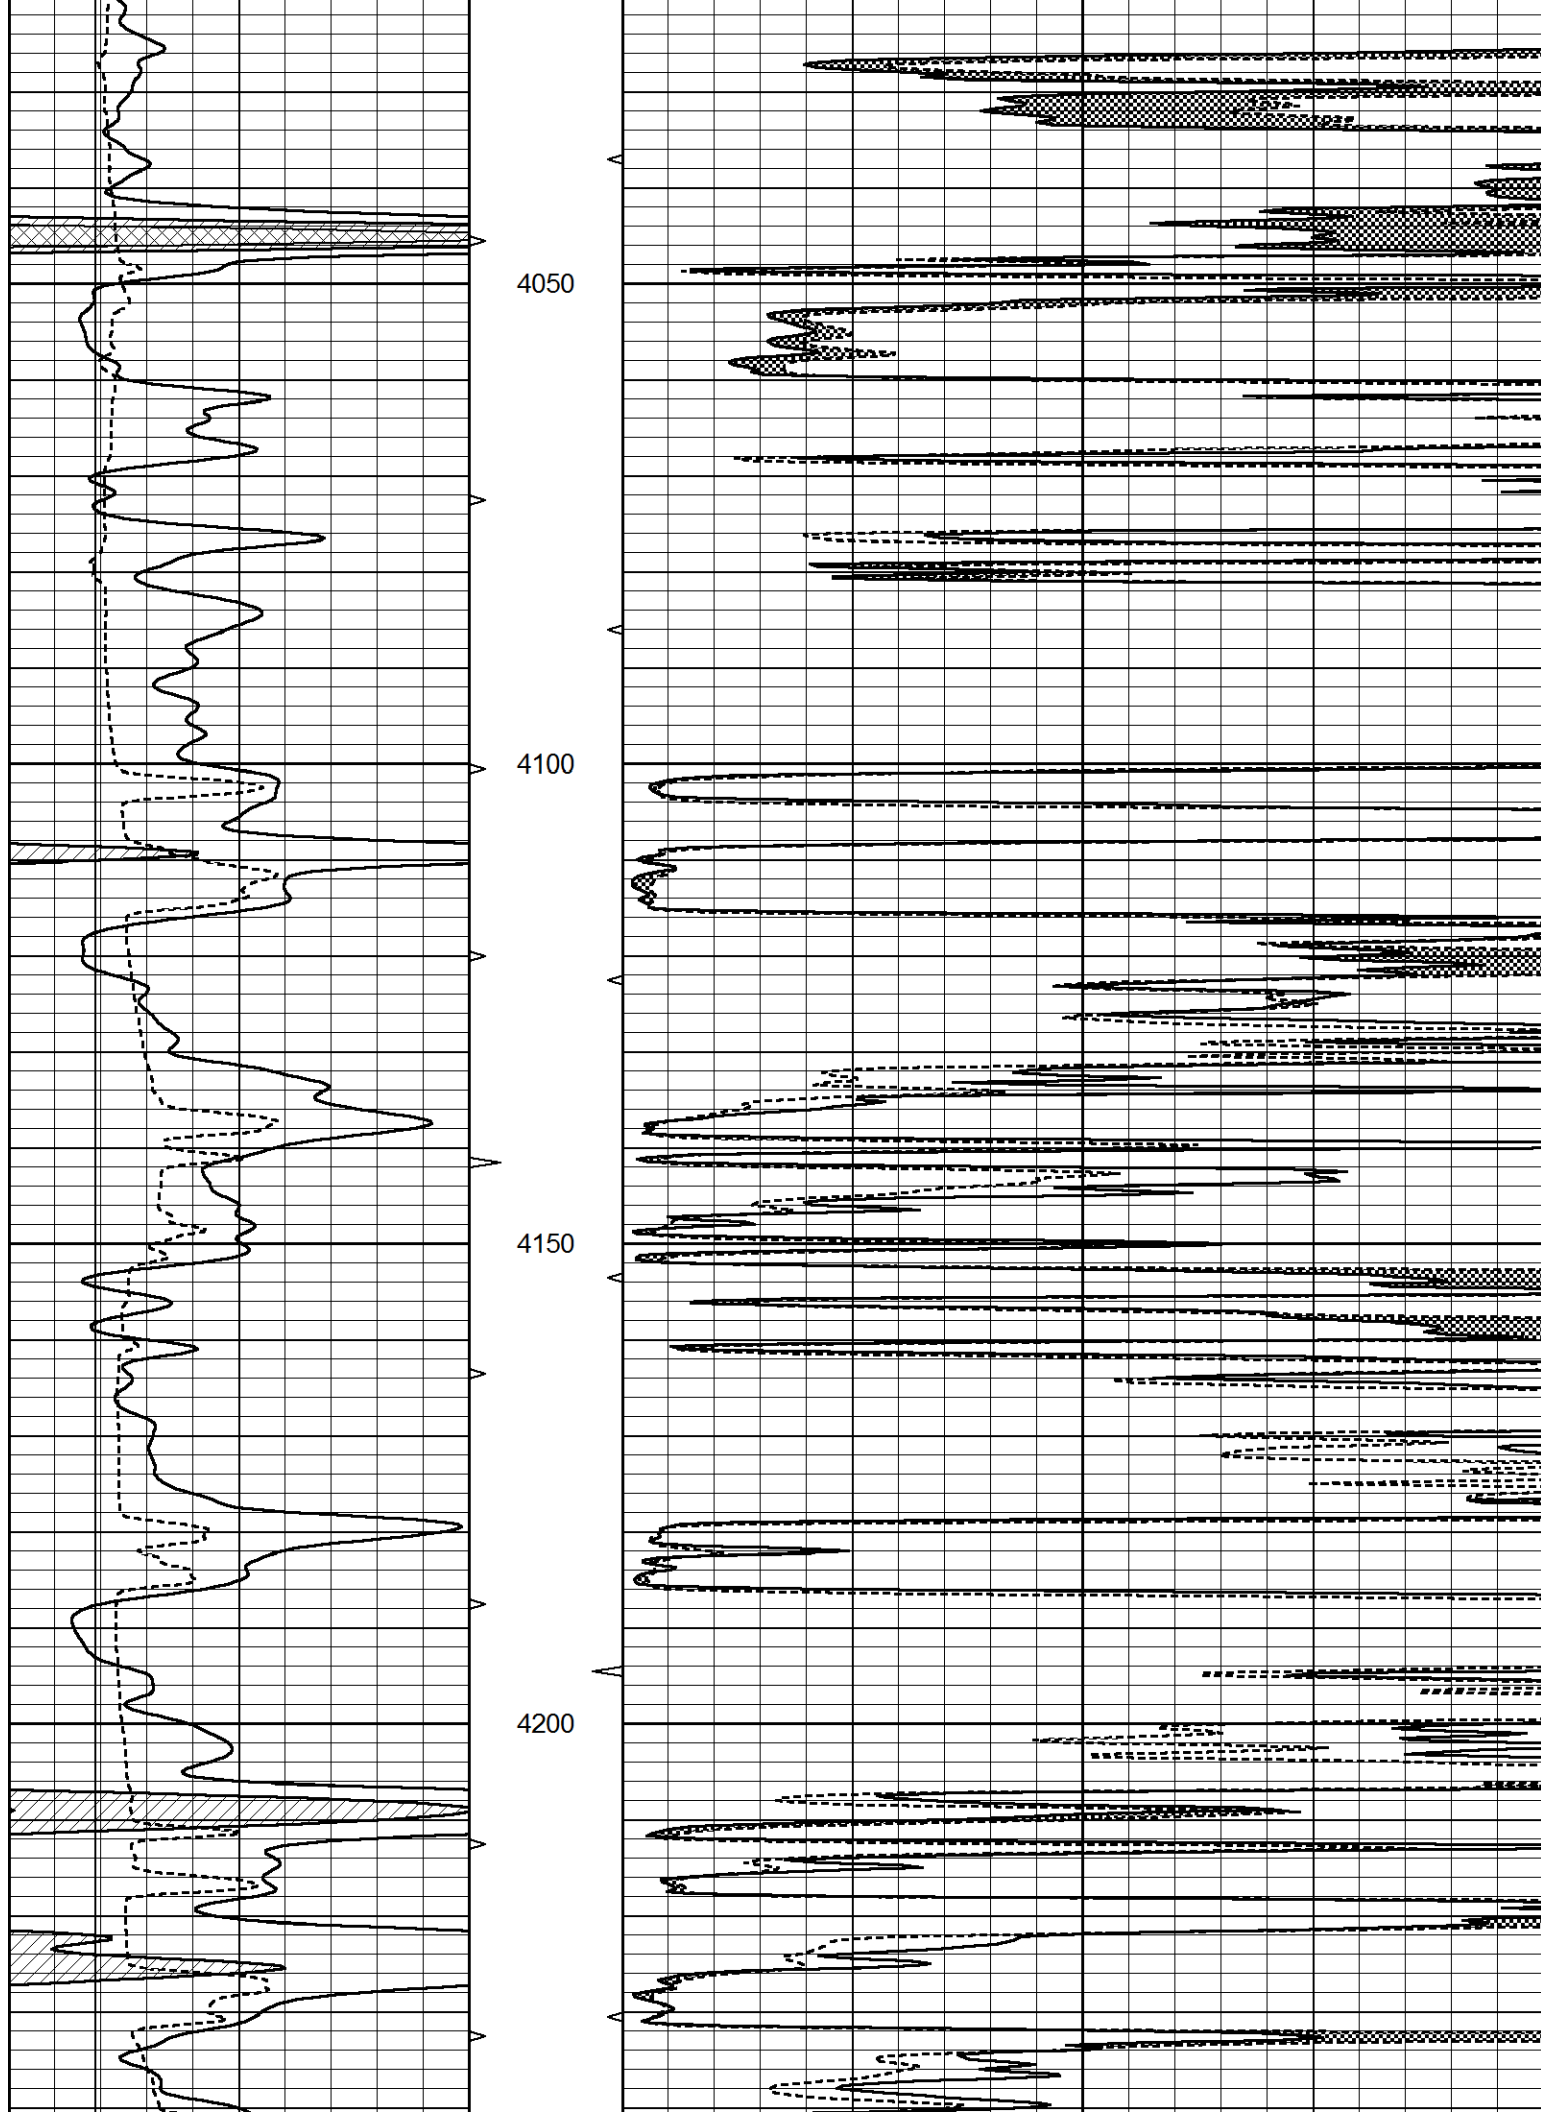

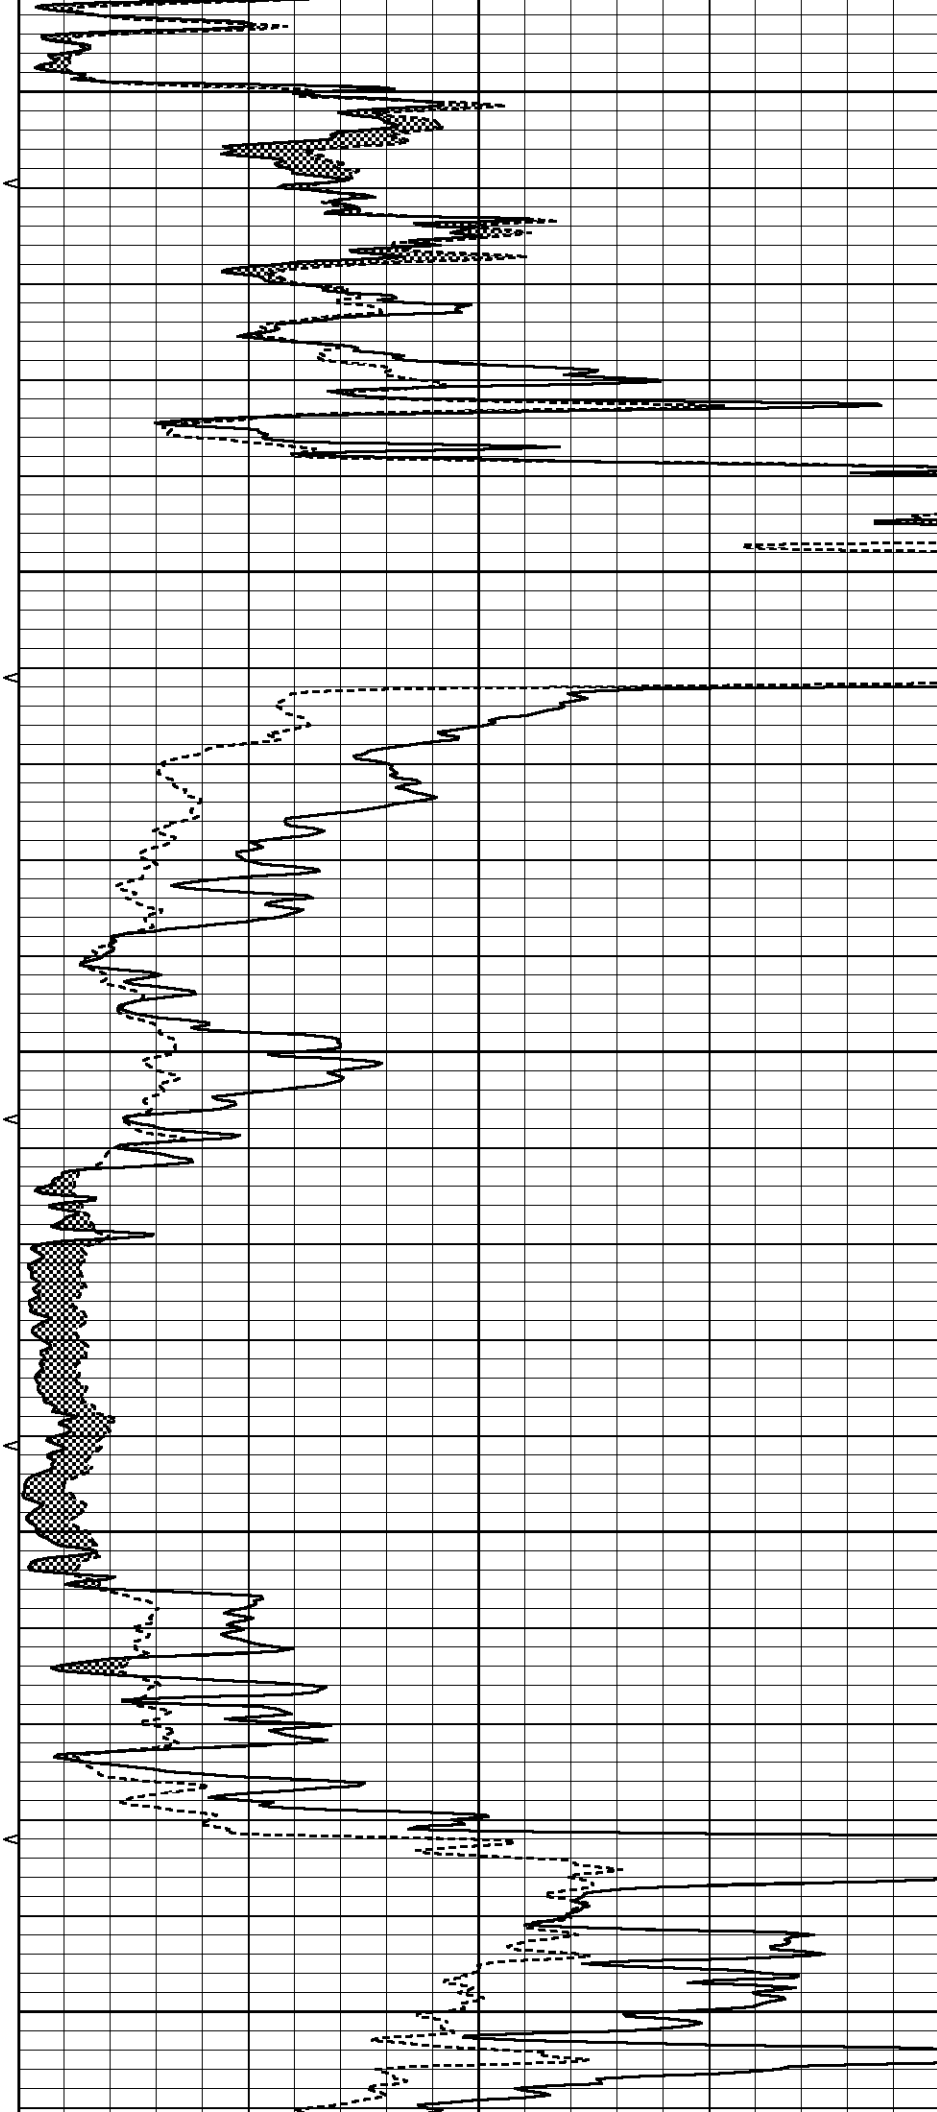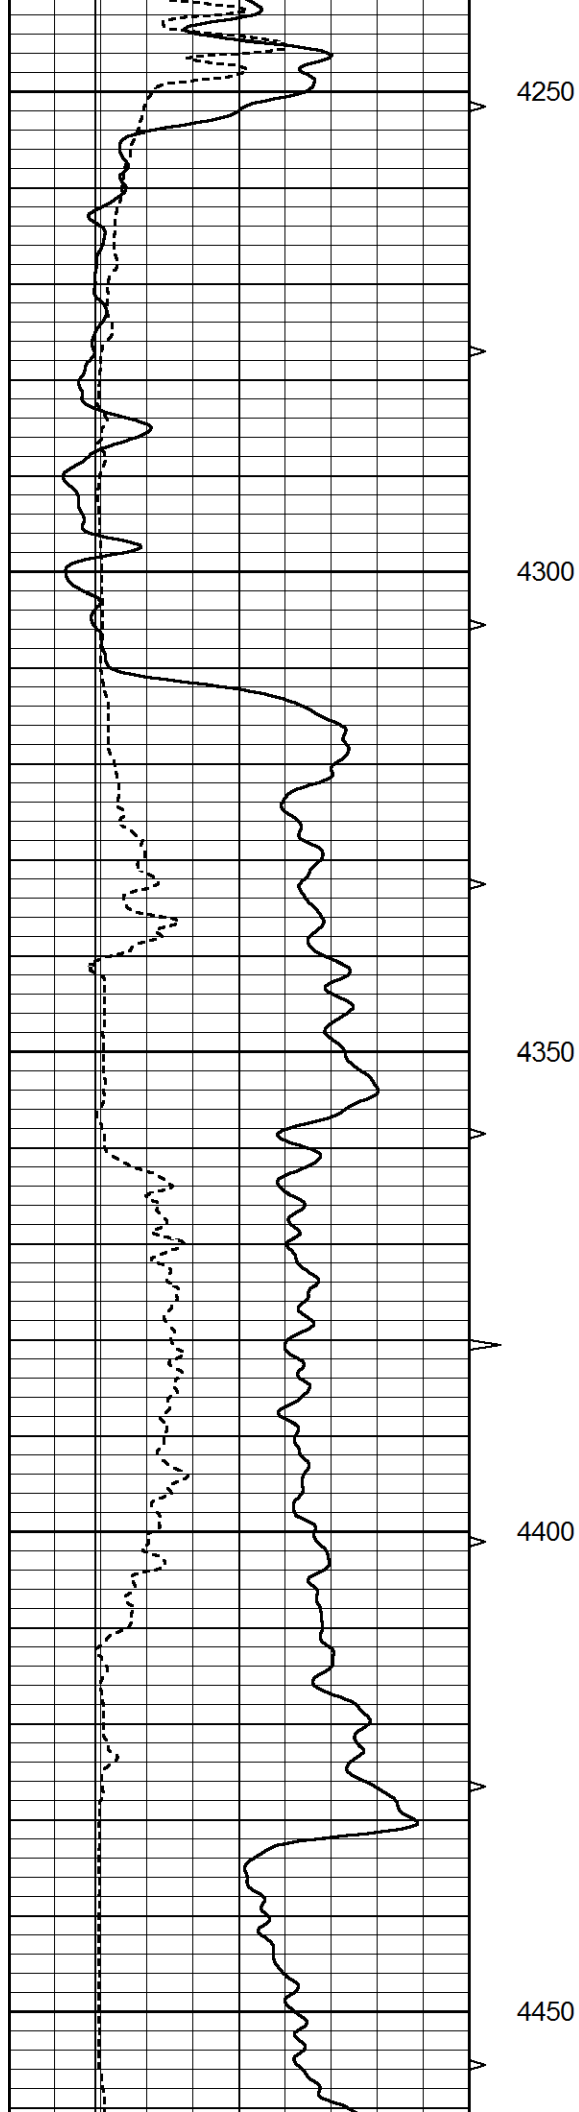

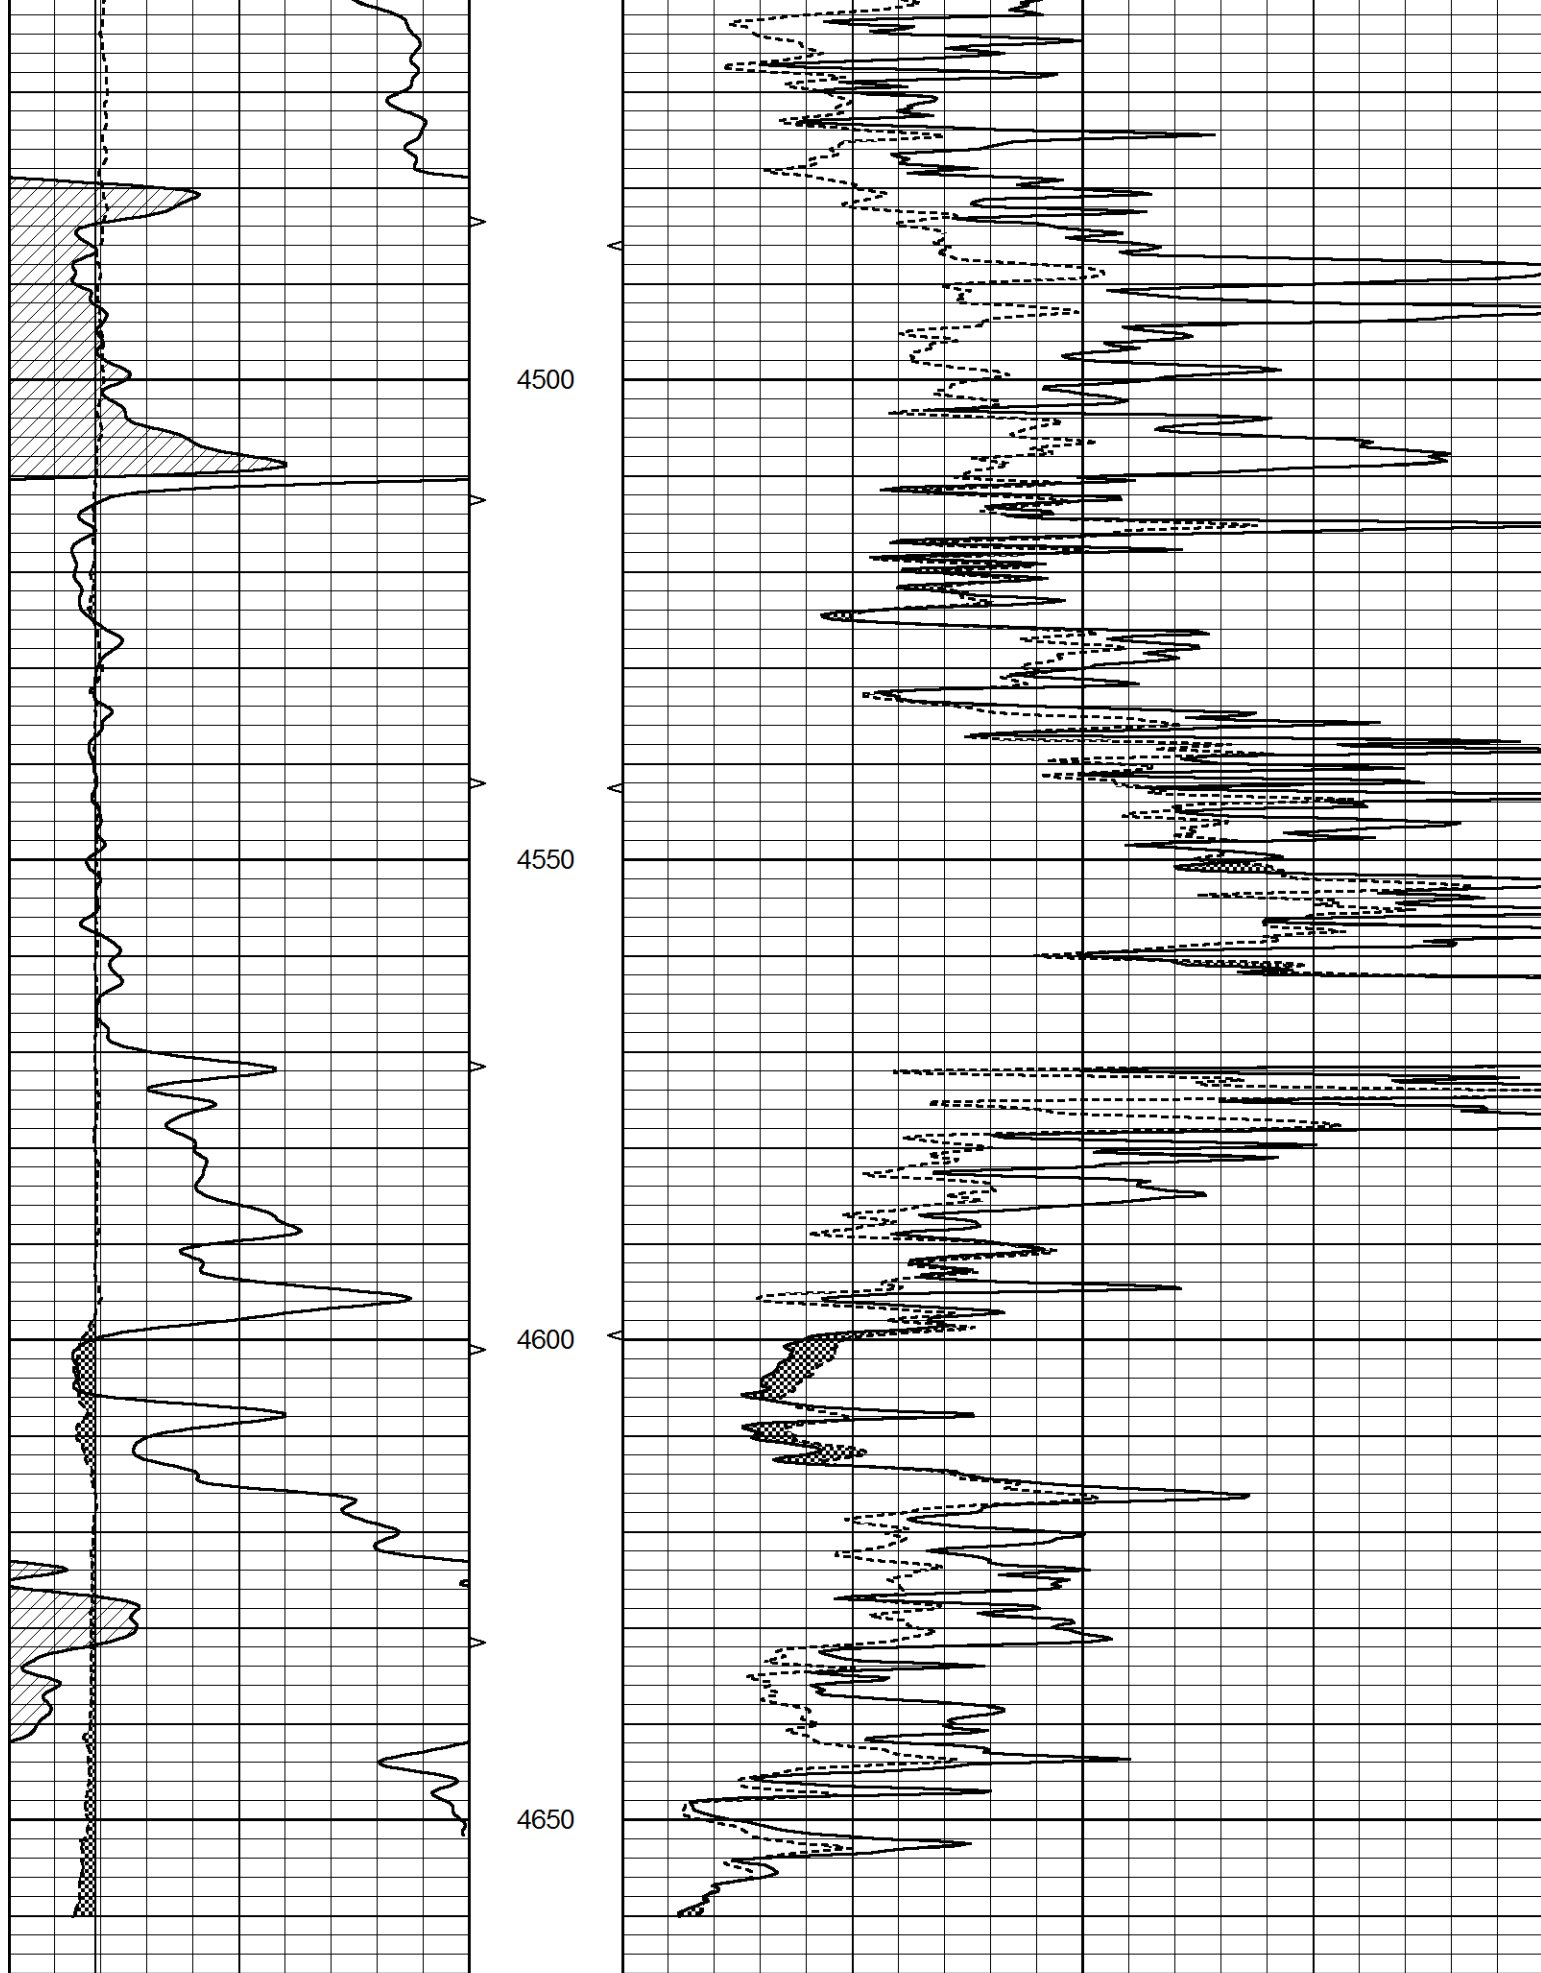


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			




REPEAT SECTION

Database File 5870ddn.db
 Dataset Pathname pass7
 Presentation Format _micro
 Dataset Creation Tue Nov 02 09:57:05 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

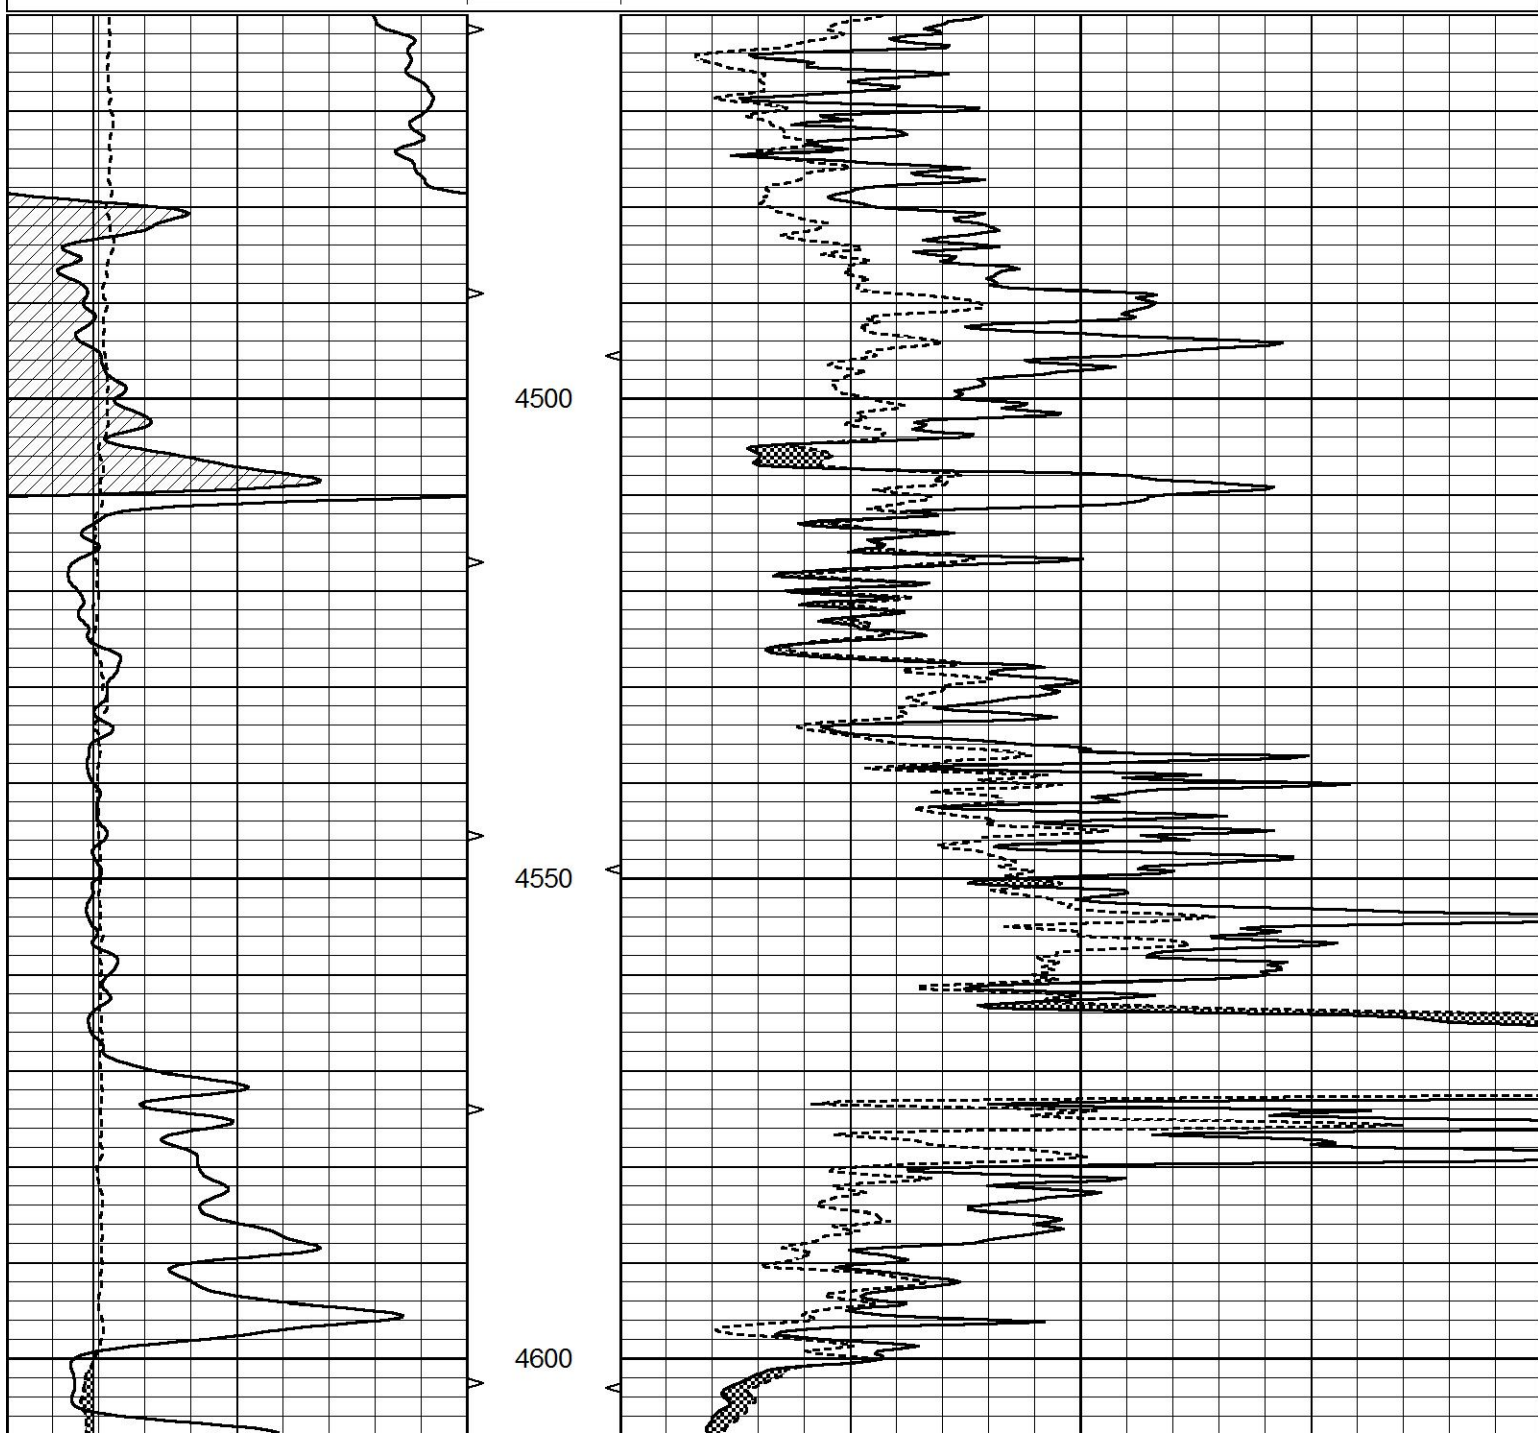

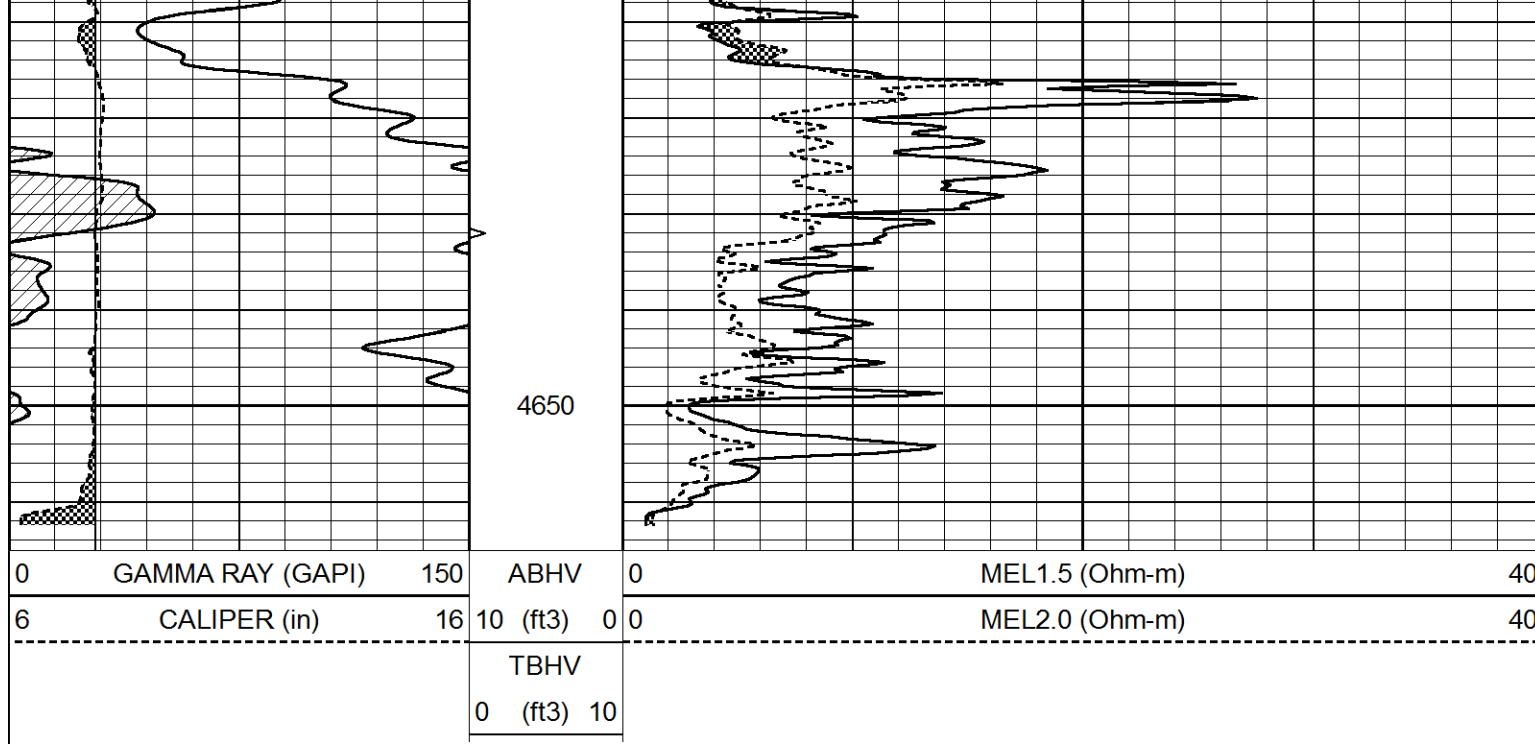

Calibration Report								
Database File	5870ddn.db							
Dataset Pathname	pass7							
Dataset Creation	Tue Nov 02 09:57:05 2021							
MICRO_USR Calibration Report								
Serial Number:	070911							
Tool Model:	ProbeL							
Performed:	Sun Dec 13 14:24:22 2020							
Caliper Calibration:	Gain=3.755		Offset=2.050					
References	Low Cal		High Cal					
Readings	8.000		14.000					
	1.451		3.049					
1.5" Calibration:	Gain=55.000		Offset=-0.700					
References	Low Cal		High Cal					
Readings	0.000		20.000					
	0.004		0.843					
2" Calibration:	Gain=50.000		Offset=-0.650					
References	Low Cal		High Cal					
Readings	0.000		20.000					
	0.021		0.810					
Microlog Calibration Report								
Serial-Model:	070911-ProbeL							
Performed:	Sat Apr 11 01:13:01 2015							
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps