



MICRO LOG

Company PALOMINO PETROLEUM, INC.

Well WESTSIDE #1

Field

County NESS

State KANSAS

Location: API # : 15-135-26125-0000

1353' FNL & 1969' FEL

SEC 7 TWP 18S RGE 26W

Permanent Datum GROUND LEVEL Elevation 2563
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL
DIL

Elevation
K.B. 2574
D.F. 2572
G.L. 2563

Date 10/21/21

Run Number TWO

Depth Driller 4637

Depth Logger 4638

Bottom Logged Interval 4636

Top Log Interval 3700

Casing Driller 8 5/8" @ 228

Casing Logger 228

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/60

pH / Fluid Loss 11.0/6.0

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.30 @ 62F

Rmf @ Meas. Temp 0.97 @ 62F

Rmc @ Meas. Temp 1.56 @ 62F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT 0.66 @ 122F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom

Maximum Recorded Temperature 122F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By RYAN SEIB

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
NESS CITY, KS. - WEST TO RD. A - 4 1/2 NORTH - WEST INTO




MAIN SECTION

Database File	5865ddn.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Fri Oct 22 01:17:13 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

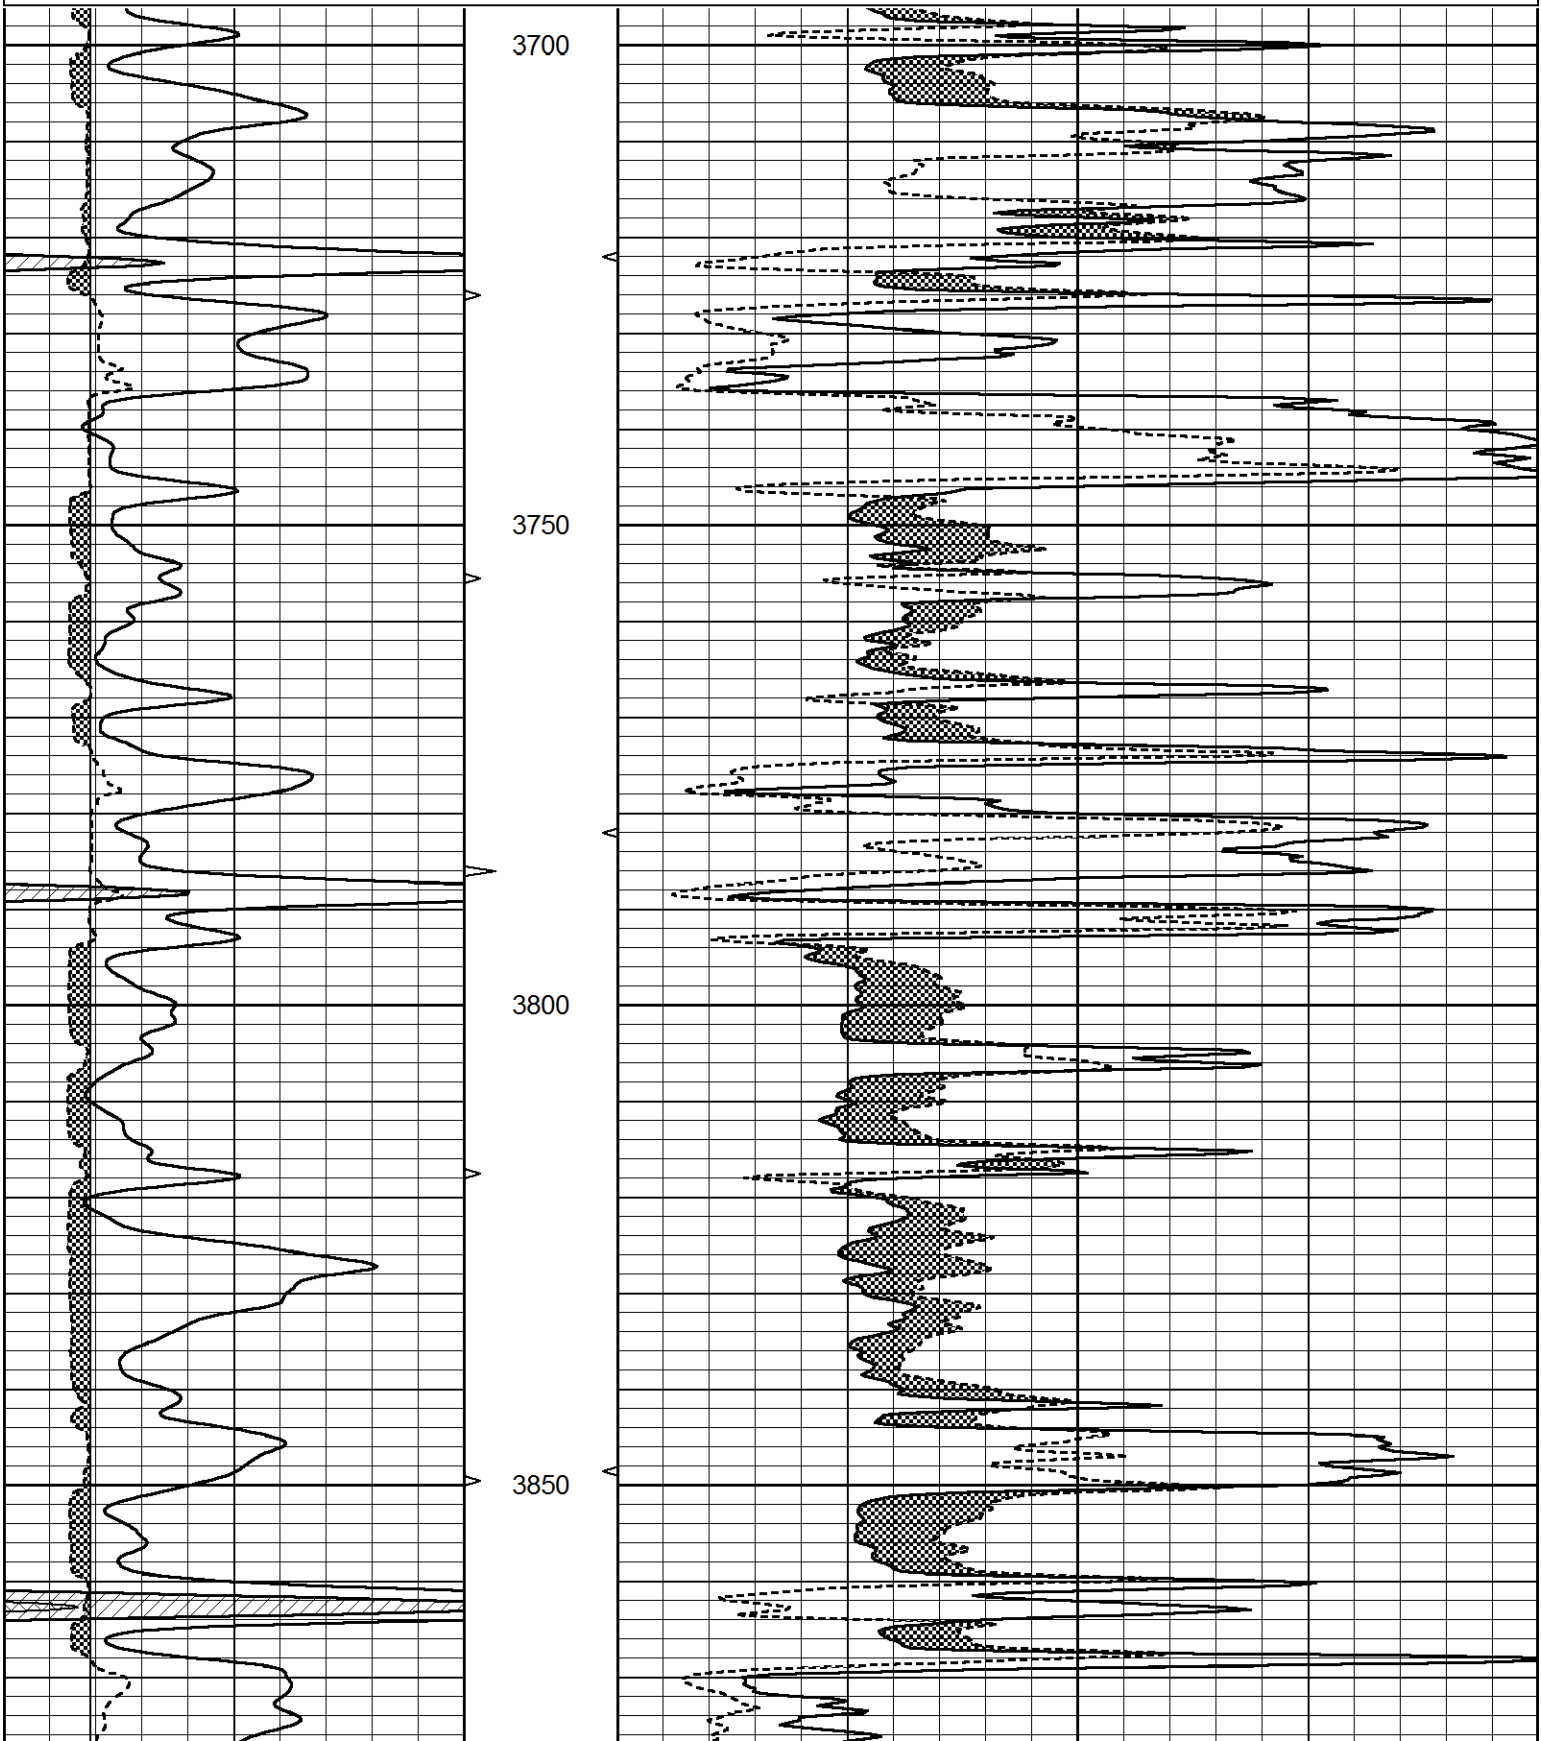

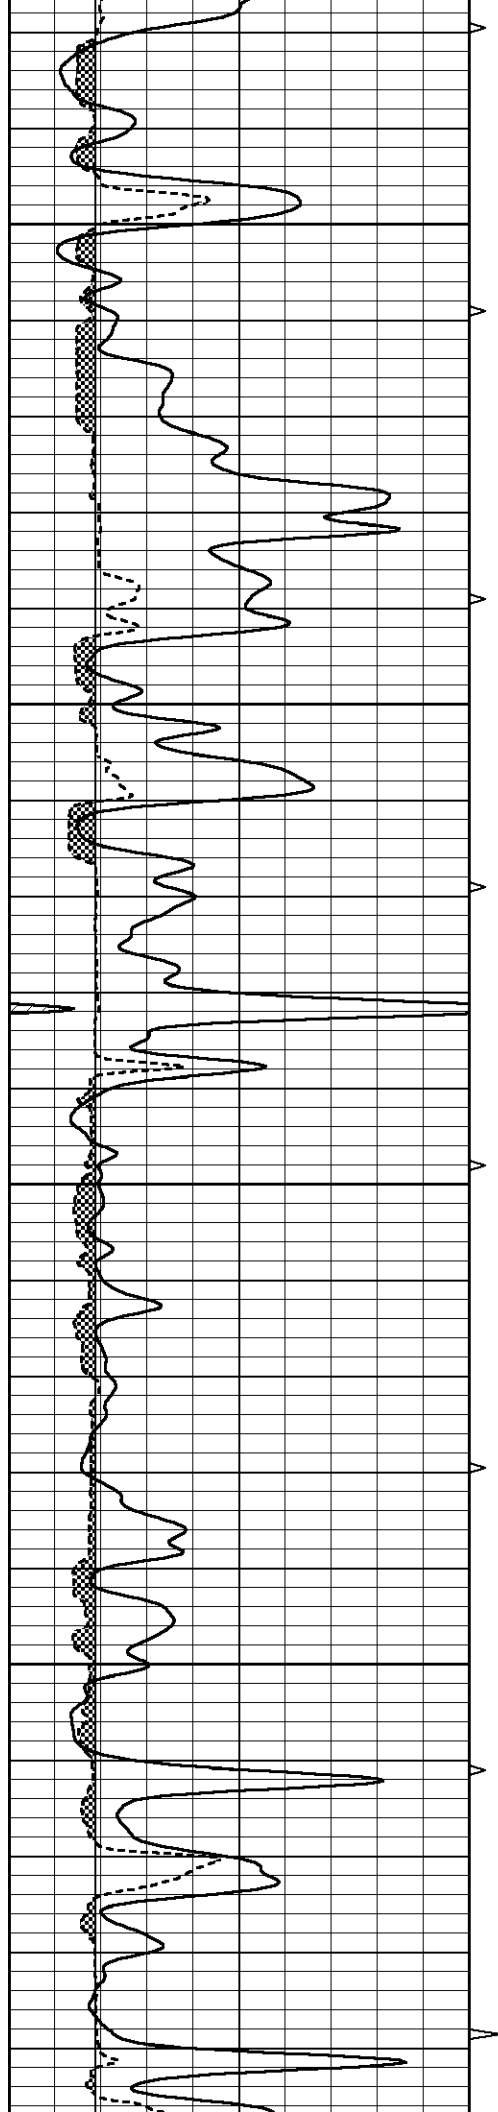



3900

3950

4000

4050

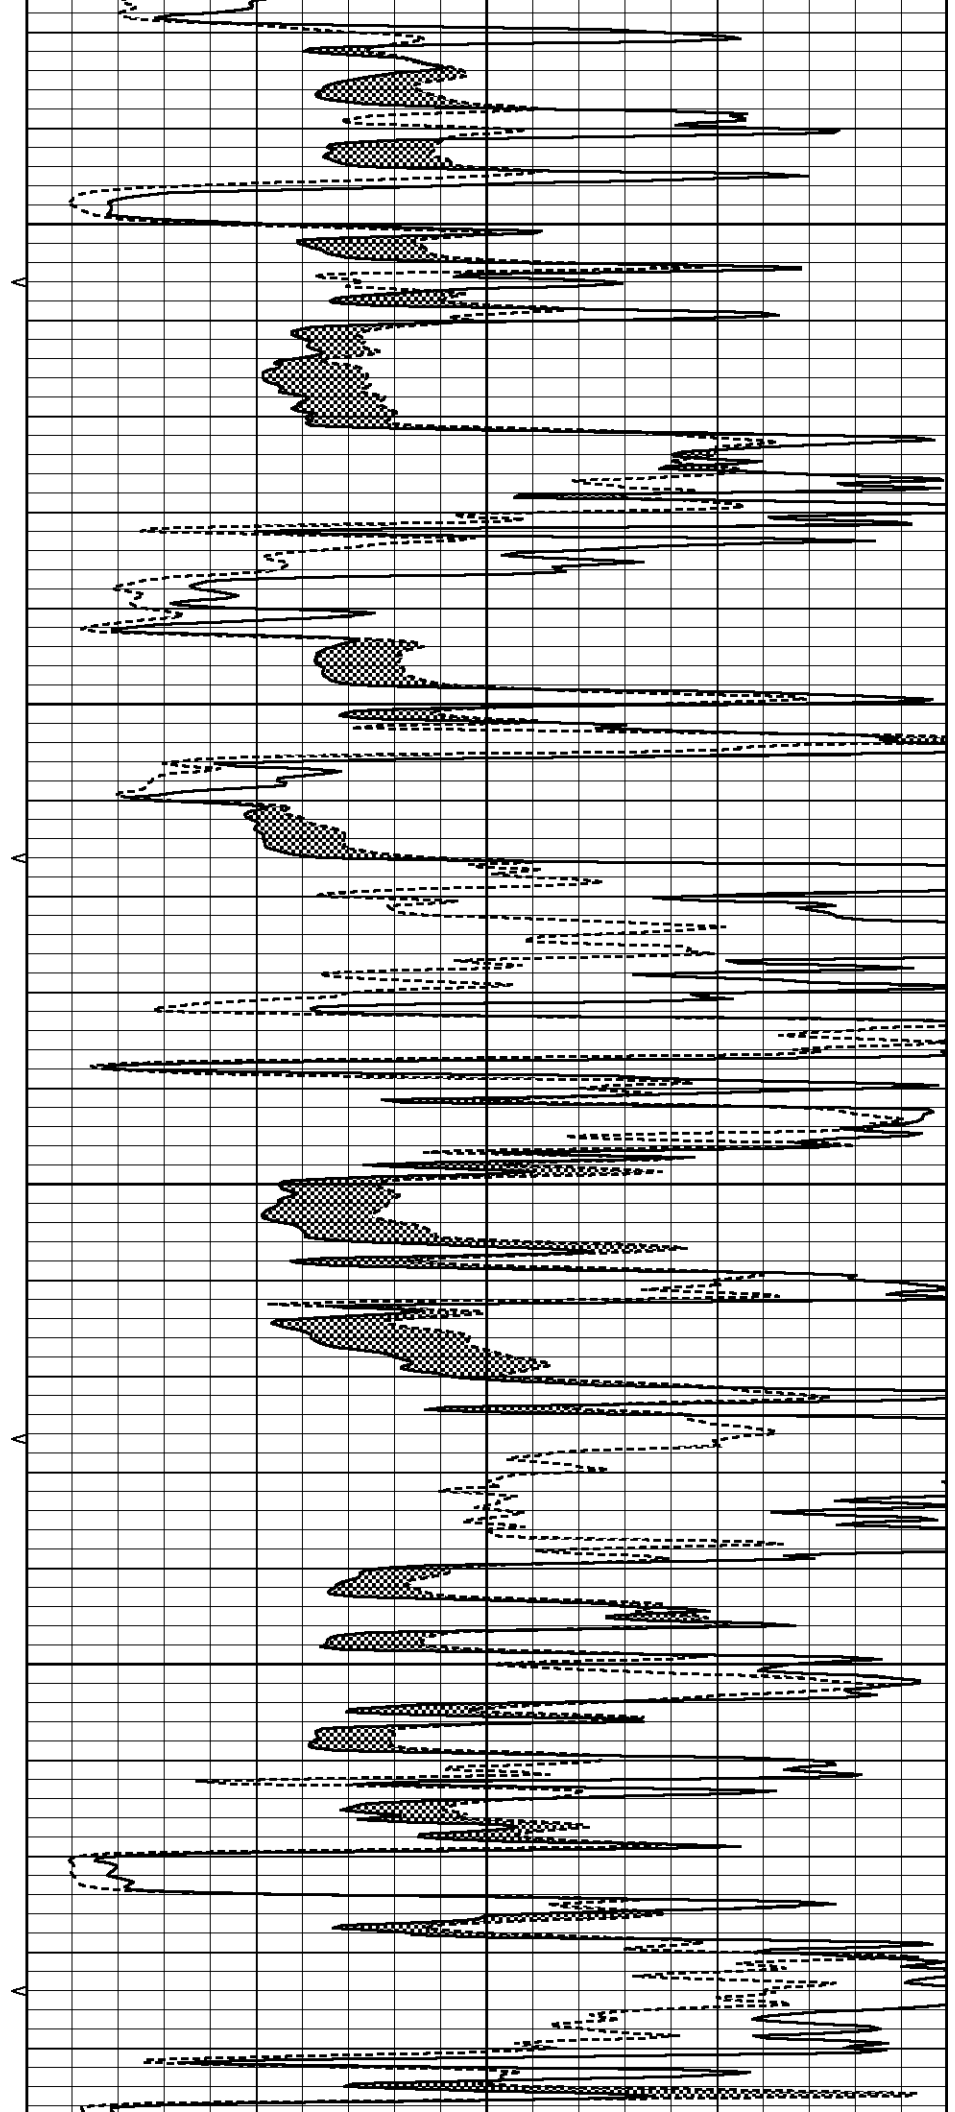

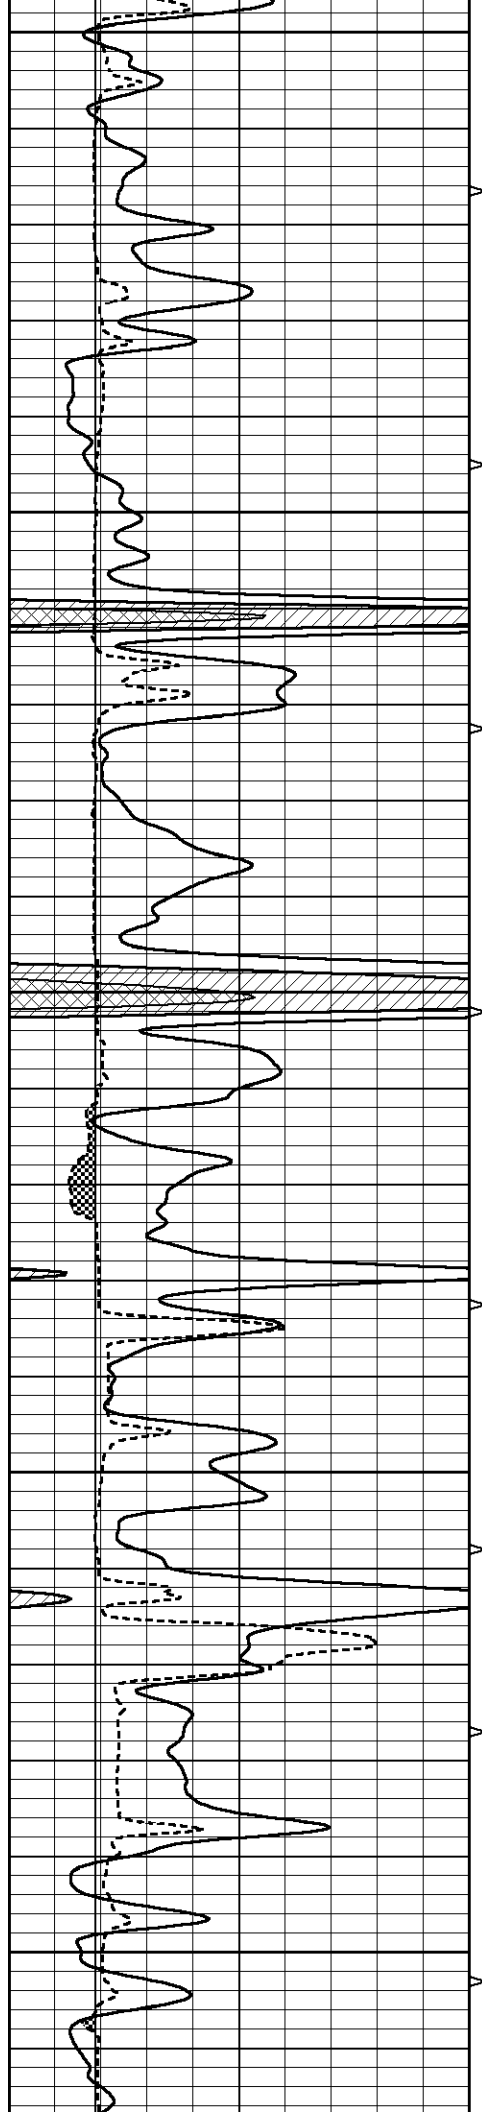


4100


4150

4200

4250

4300

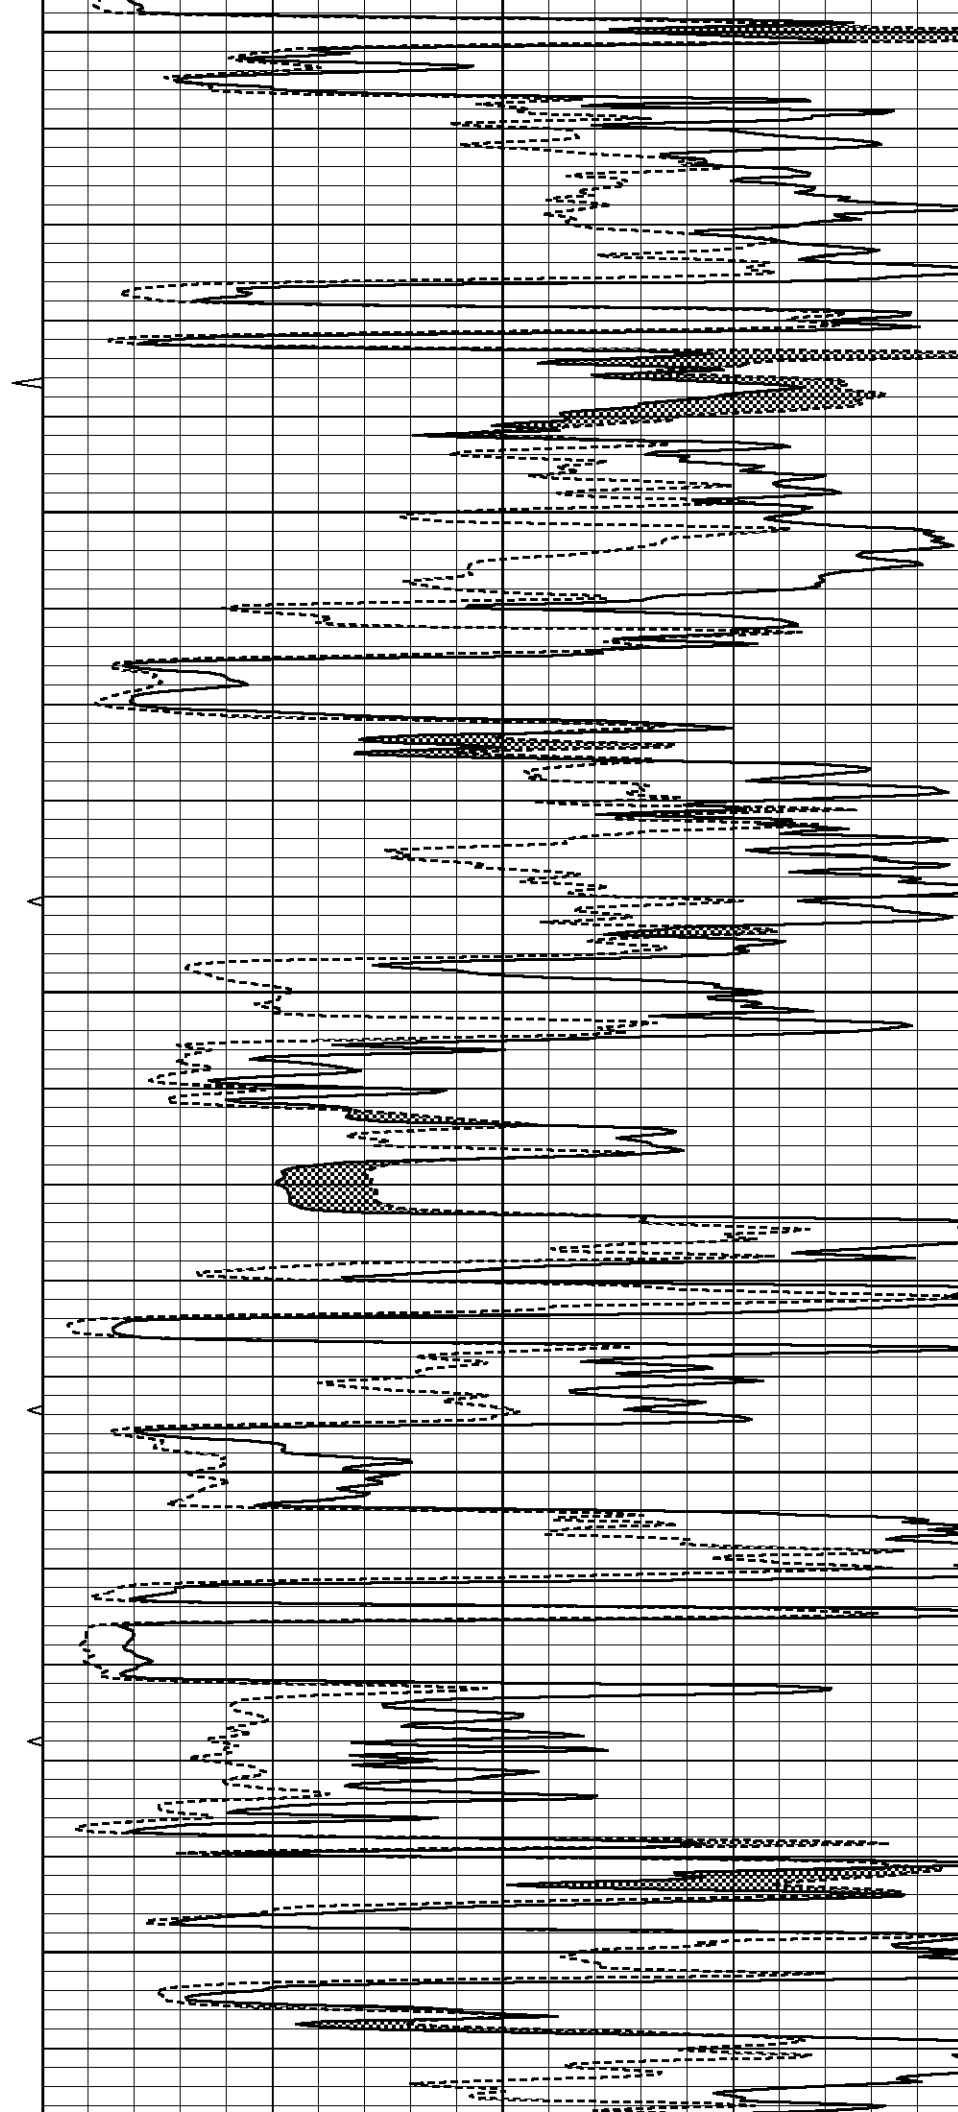

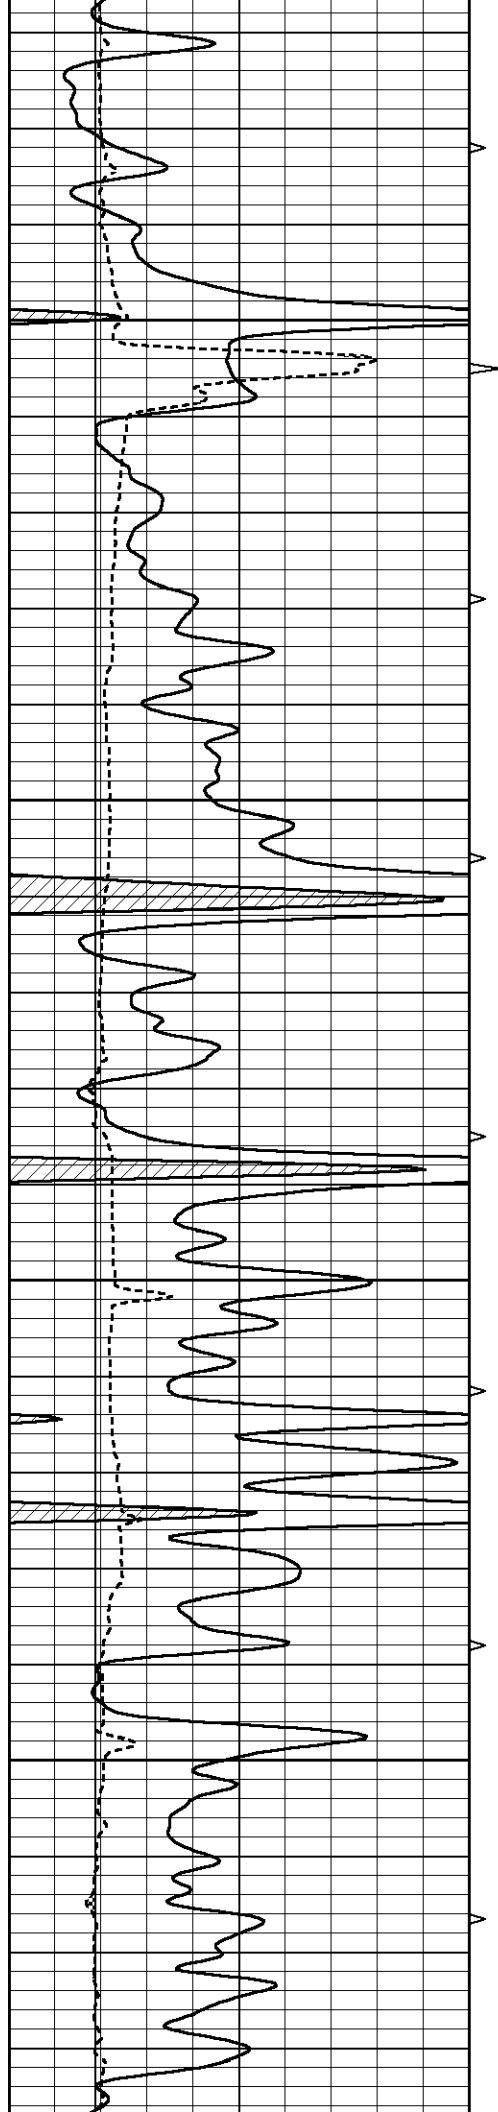



4350

4400

4450

4500

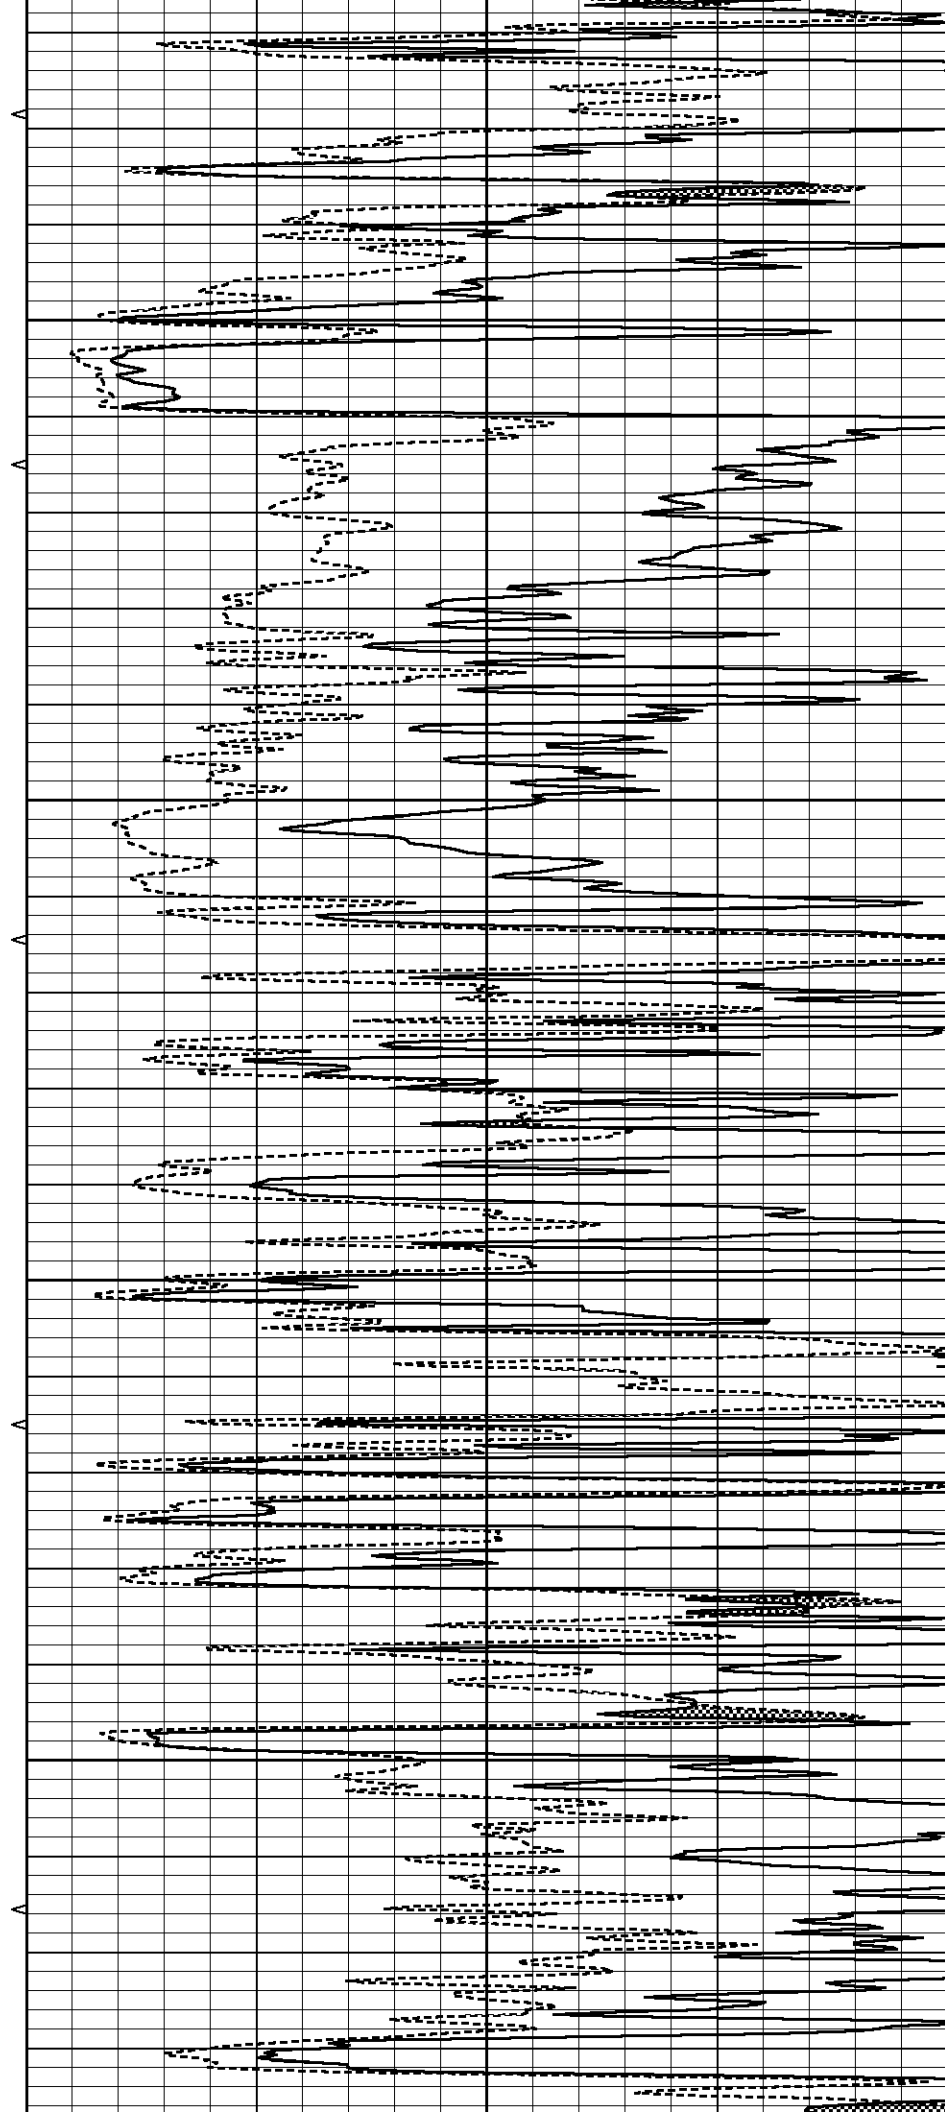


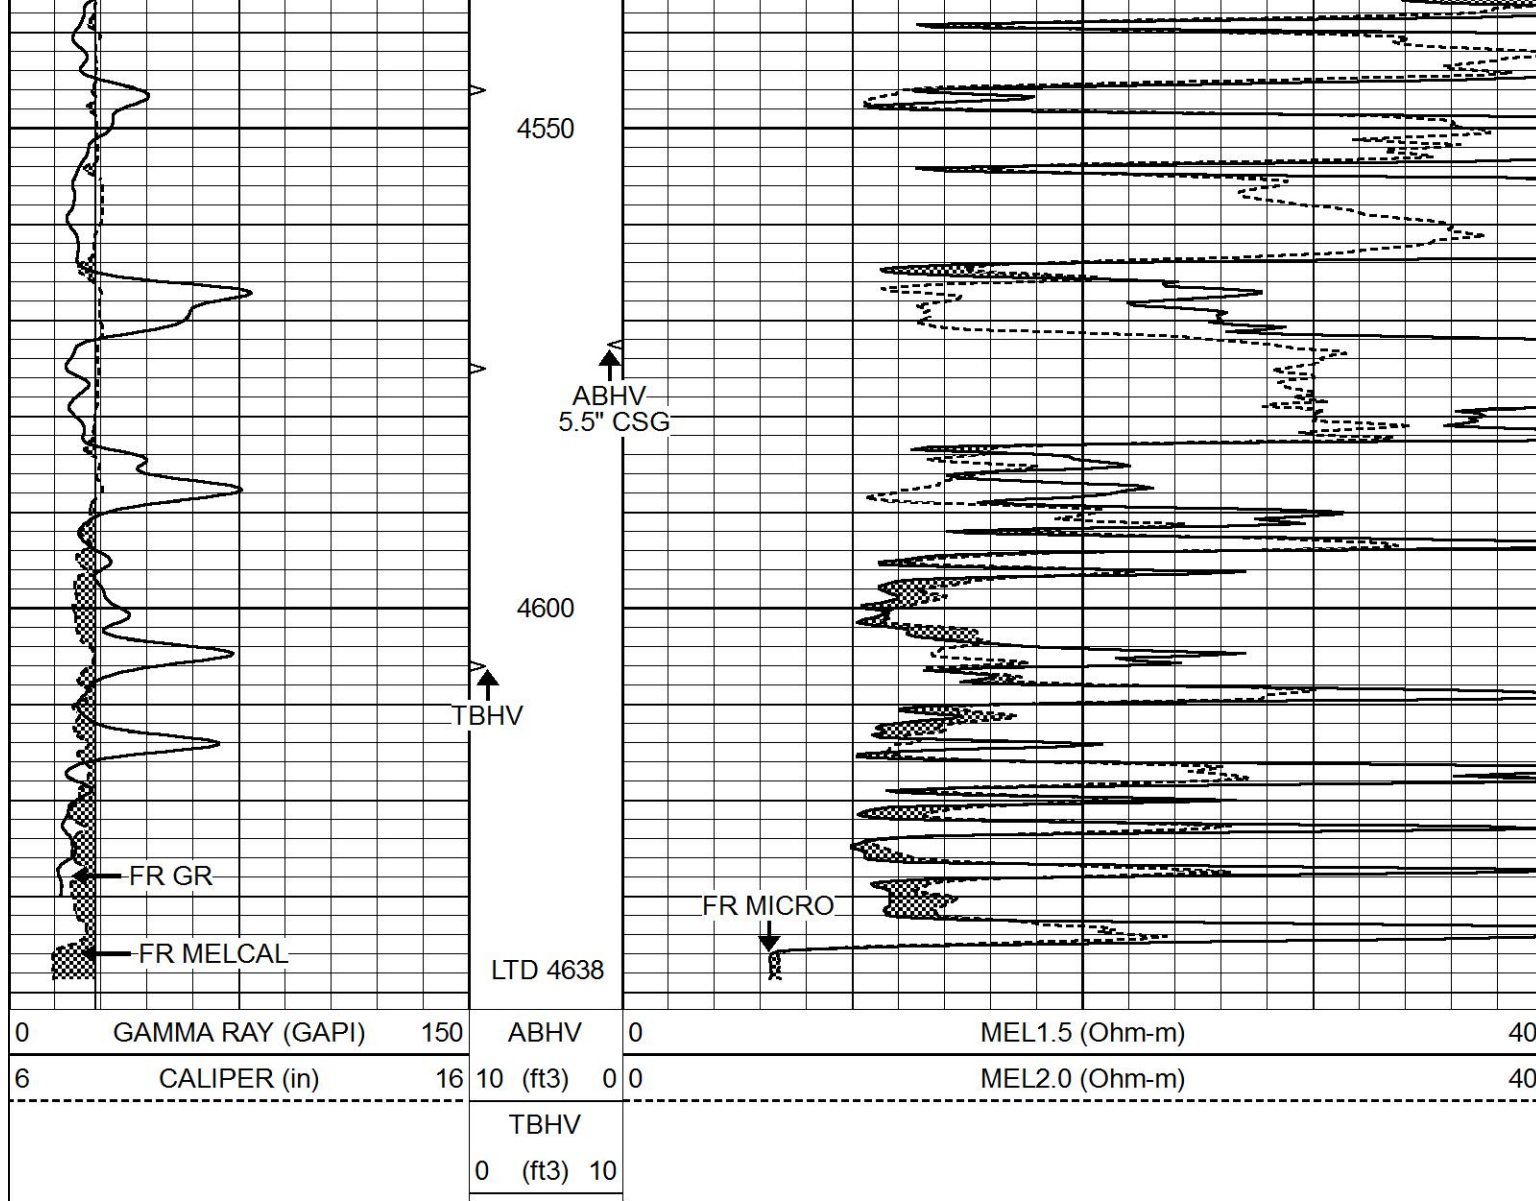


REPEAT SECTION

Database File 5865ddn.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Fri Oct 22 01:11:33 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

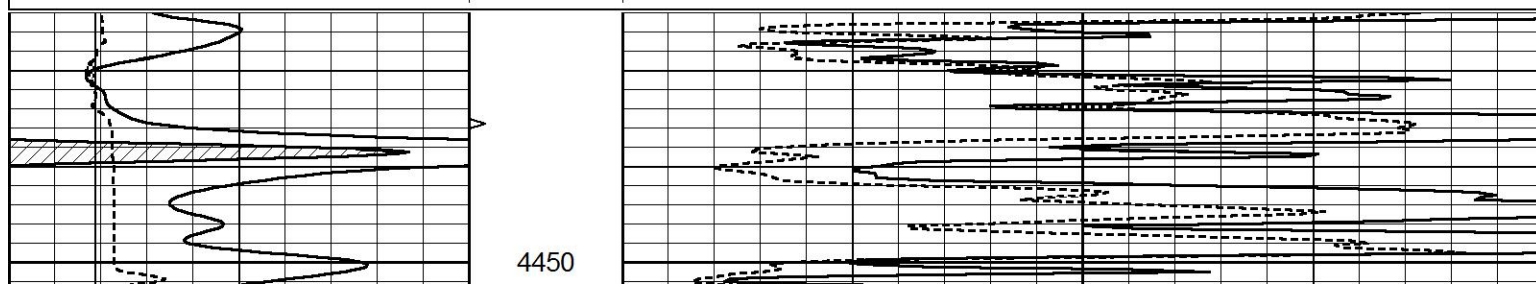

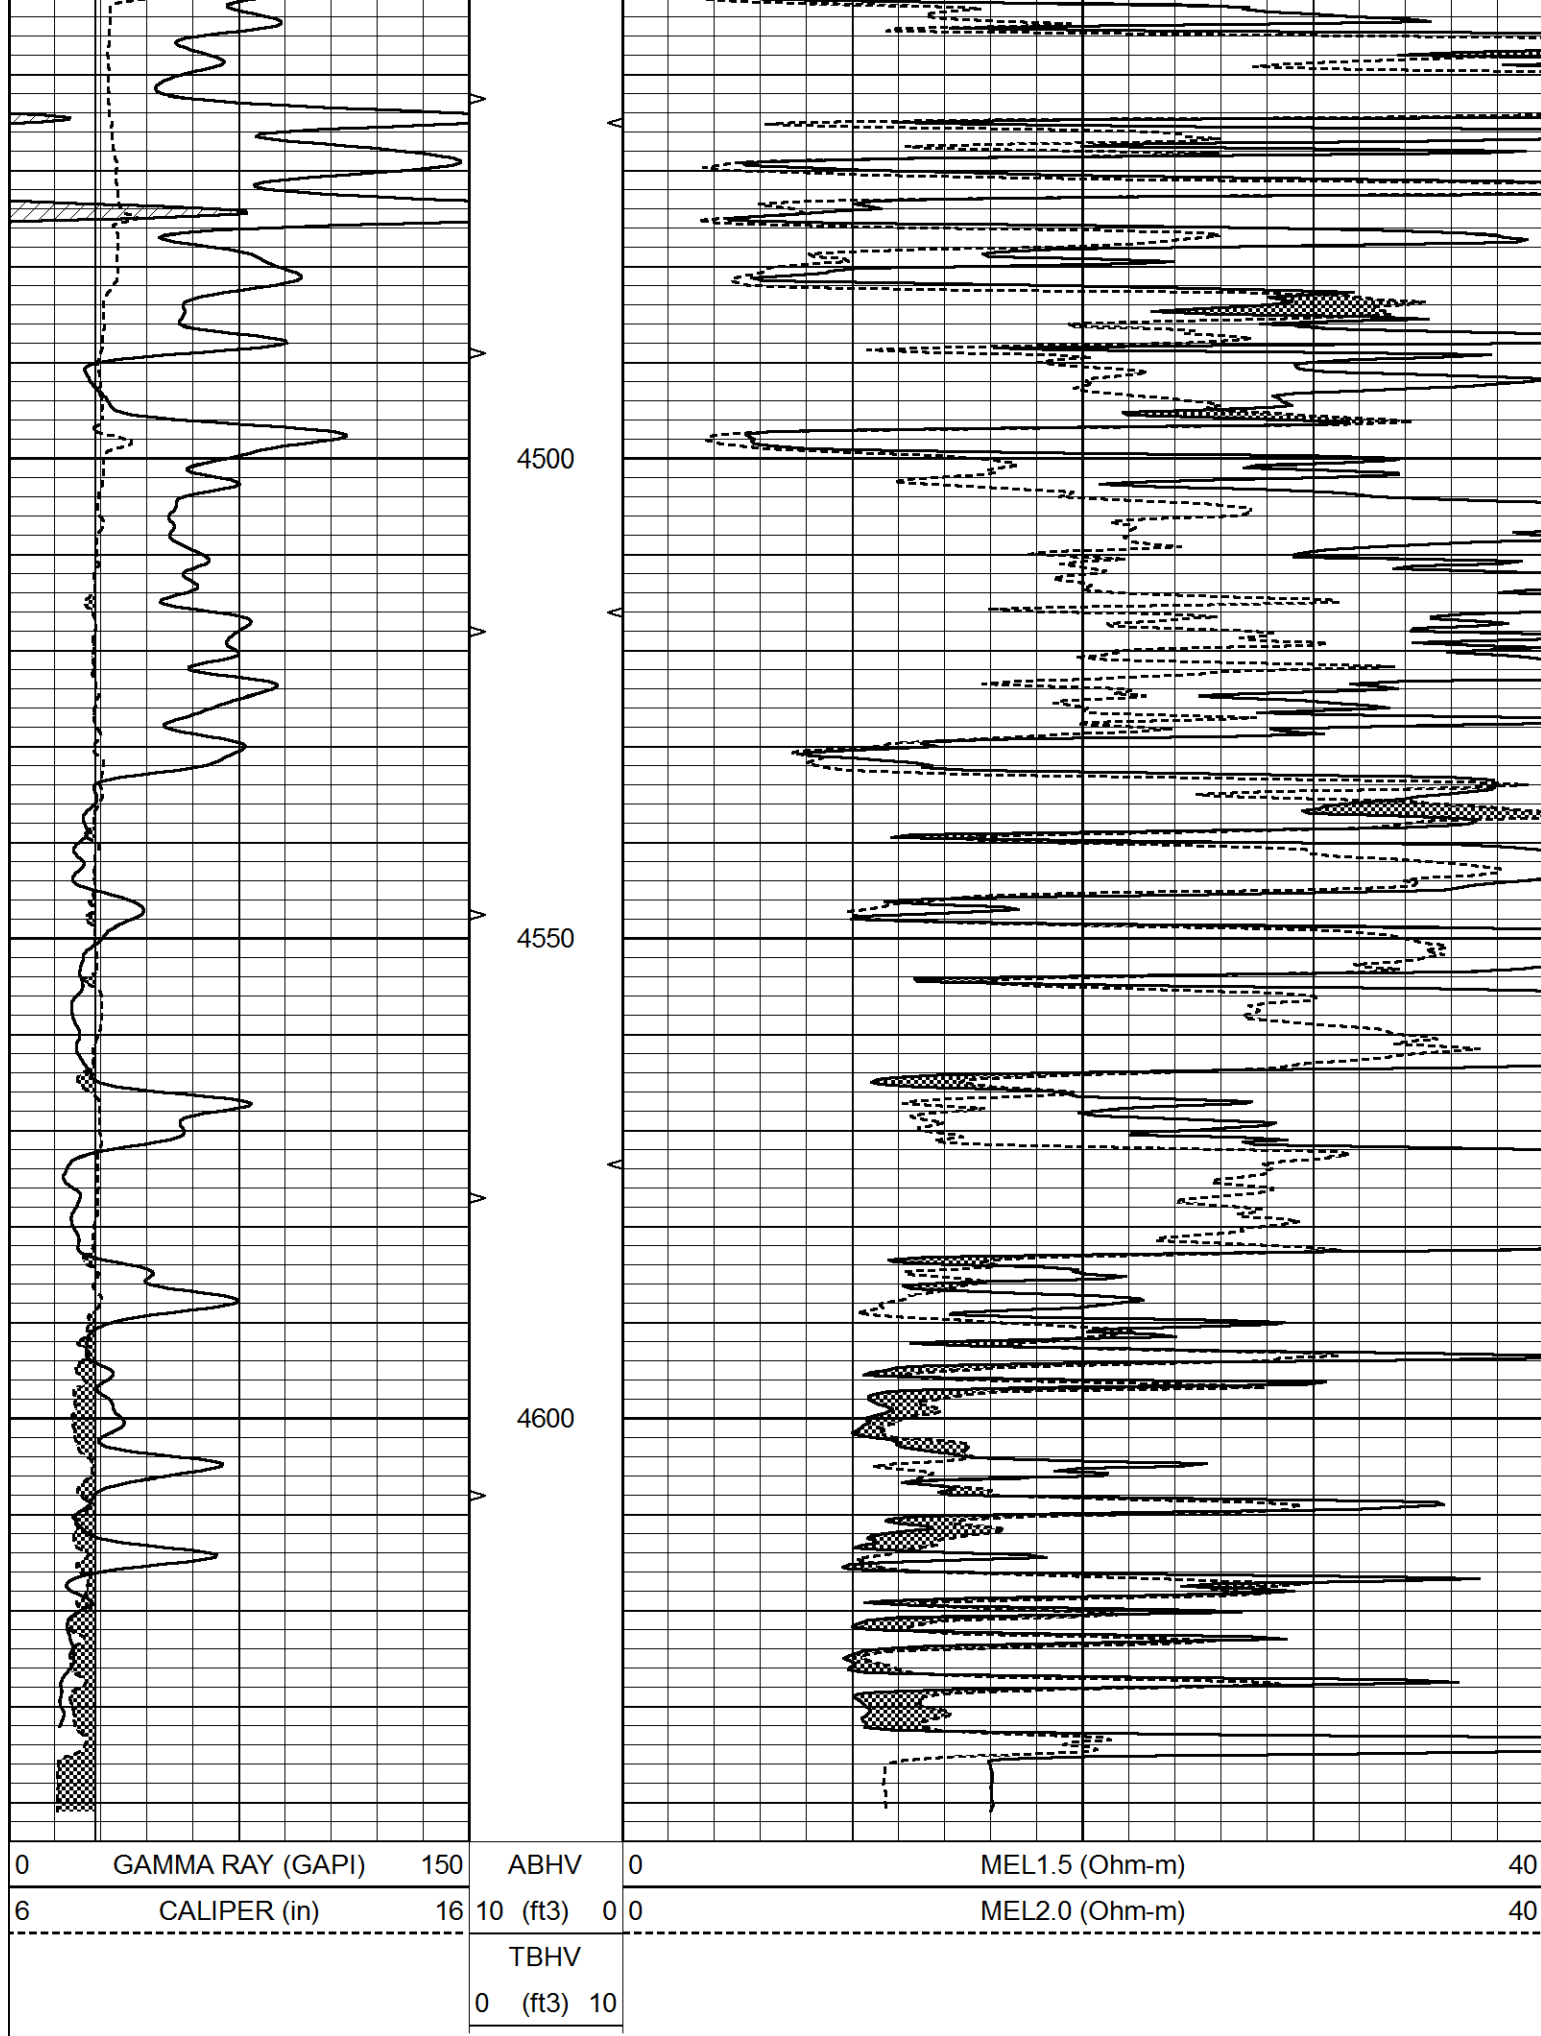

Calibration Report

Database File 5865ddn.db
 Dataset Pathname pass5.1
 Dataset Creation Fri Oct 22 01:11:33 2021

MICRO_USR Calibration Report

Serial Number:	070910	
Tool Model:	ProbeL	
Performed:	Wed Oct 13 12:38:16 2021	
Caliper Calibration:	Gain=7.192	Offset=2.702
	Low Cal	High Cal
References	8.000	14.000
Readings	0.723	1.557
1.5" Calibration:	Gain=65.000	Offset=-0.567
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.335
2" Calibration:	Gain=85.000	Offset=-2.400
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model:	070910-ProbeL
Performed:	(Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps