MICRO LOG

Company PALOMINO PETROLEUM
Well LIVE AND LET DIE #1
Field UNNAMED
County NESS State KANSAS

Company PALOMINO PETROLEUM
Well LIVE AND LET DIE #1
Field UNNAMED
County NESS
State KANSAS

Location: API # : 15-135-26124-0000

2384' FSL & 380' FWL

SEC 22 TWP 17S RGE 25W

Other Services
DIL
CDL/CNL

Elevation
K.B. 2469
D.F. 2467
G.L. 2458

Permanent Datum GROUND LEVEL Elevation 2458
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Date	10/12/21		
Run Number	TWO		
Depth Driller	4574		
Depth Logger	4574		
Bottom Logged Interval	4572		
Top Log Interval	3500		
Casing Driller	8 5/8" @ 250		
Casing Logger	250		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.6/51		
pH / Fluid Loss	10.0/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85@ 70F		
Rmf @ Meas. Temp	.64@ 70F		
Rmc @ Meas. Temp	1.02 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.49@ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	121F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	RYAN SEIB		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS:NESS CITY WEST H RD., NORTH 6.5 MILES, EAST INTO.


MAIN PASS


Database File	5884ddn.db
Dataset Pathname	pass1LAS
Presentation Format	_micro
Dataset Creation	Tue Oct 12 09:28:56 2021
Charted by	Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
-100	SP (mV)	100	TBHV			
			0 (ft3) 10			

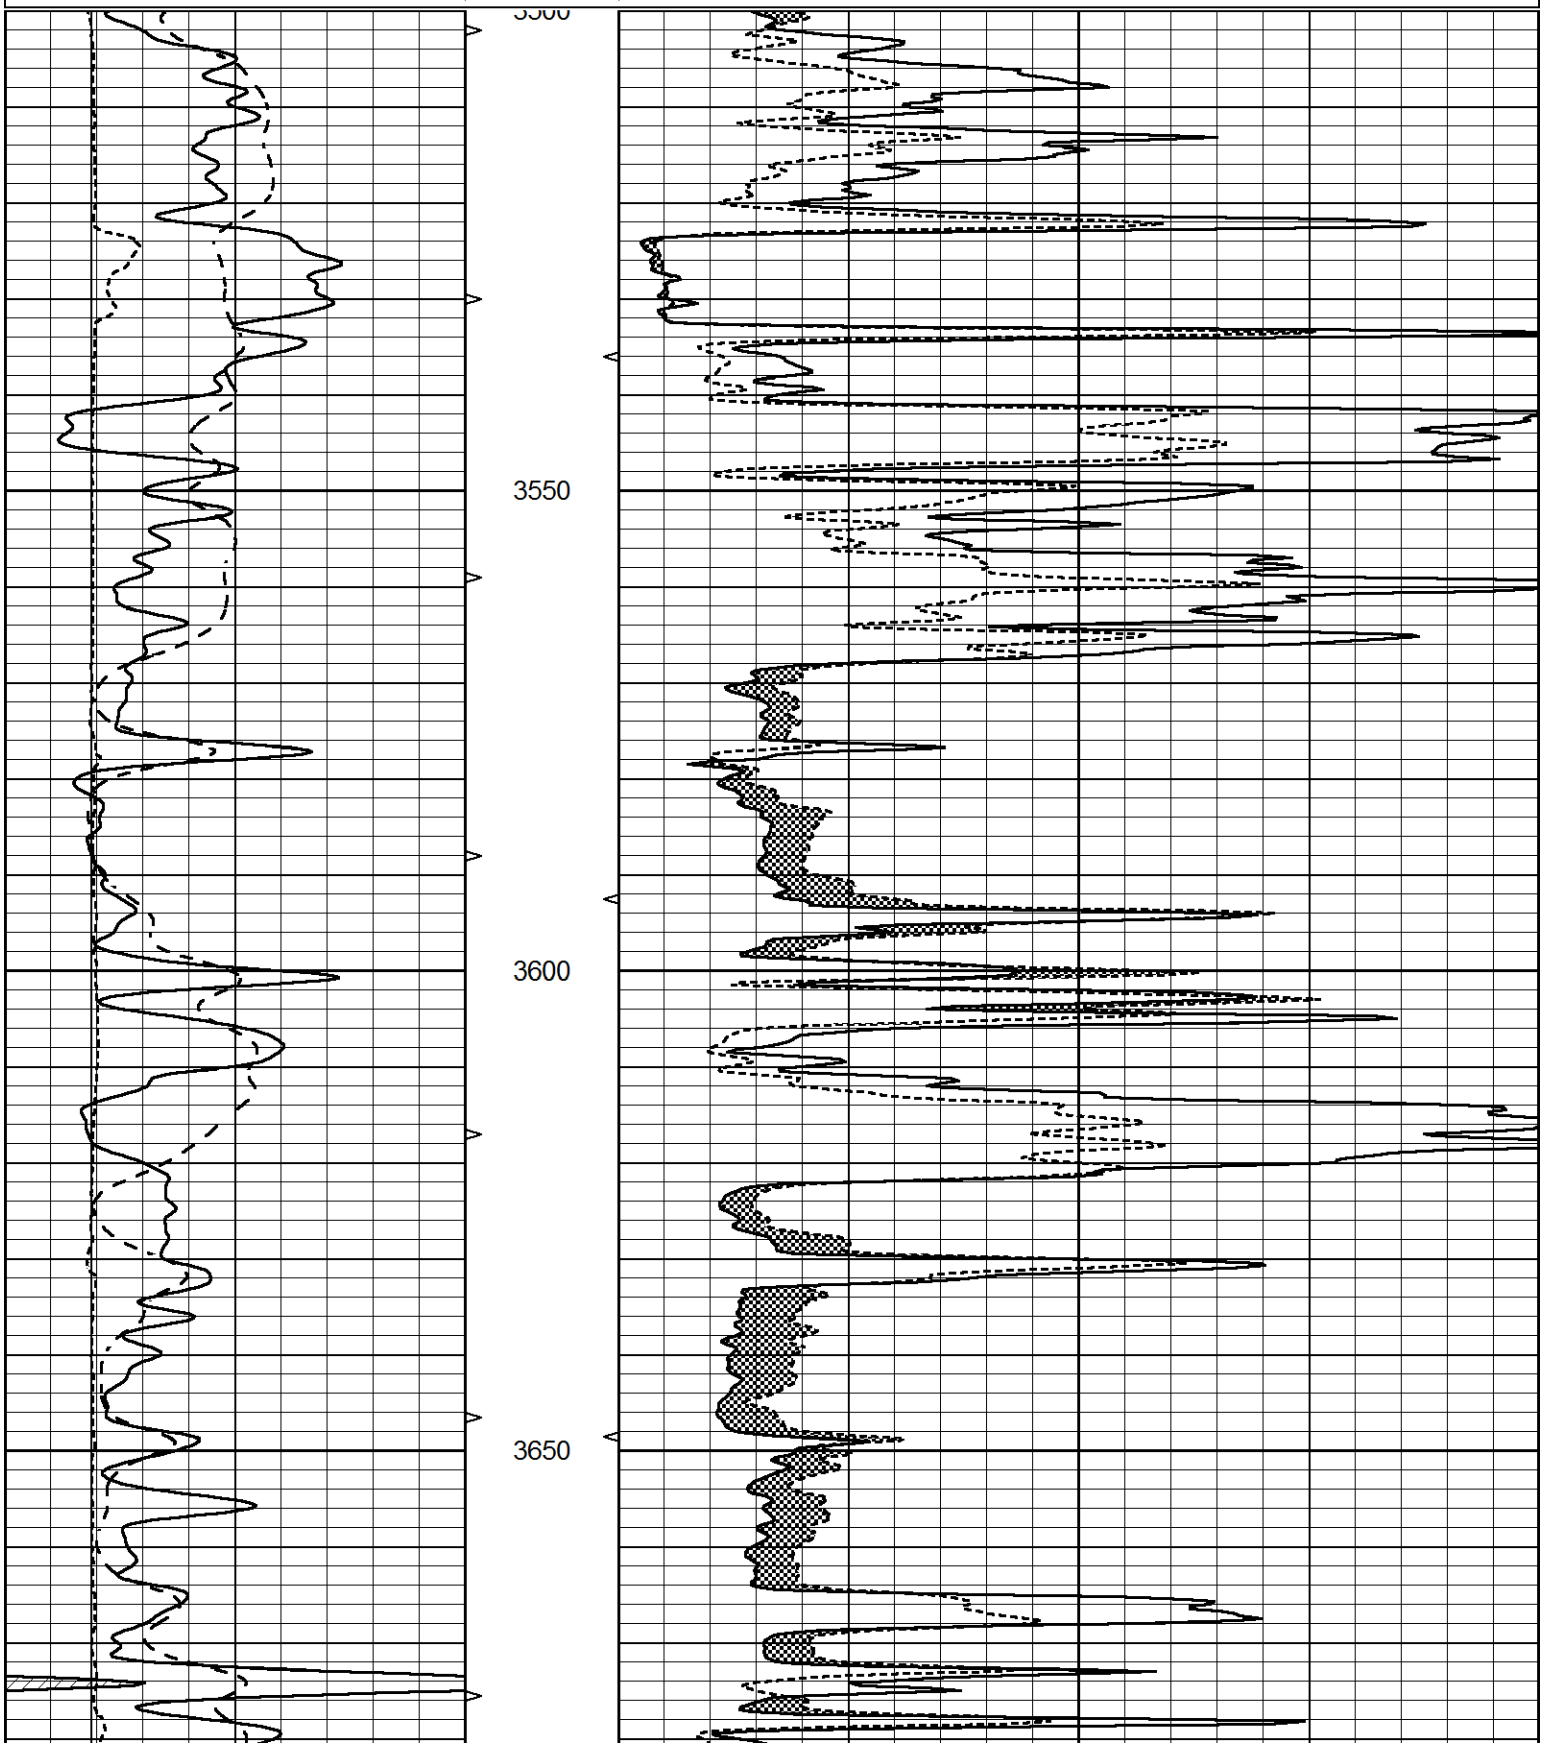


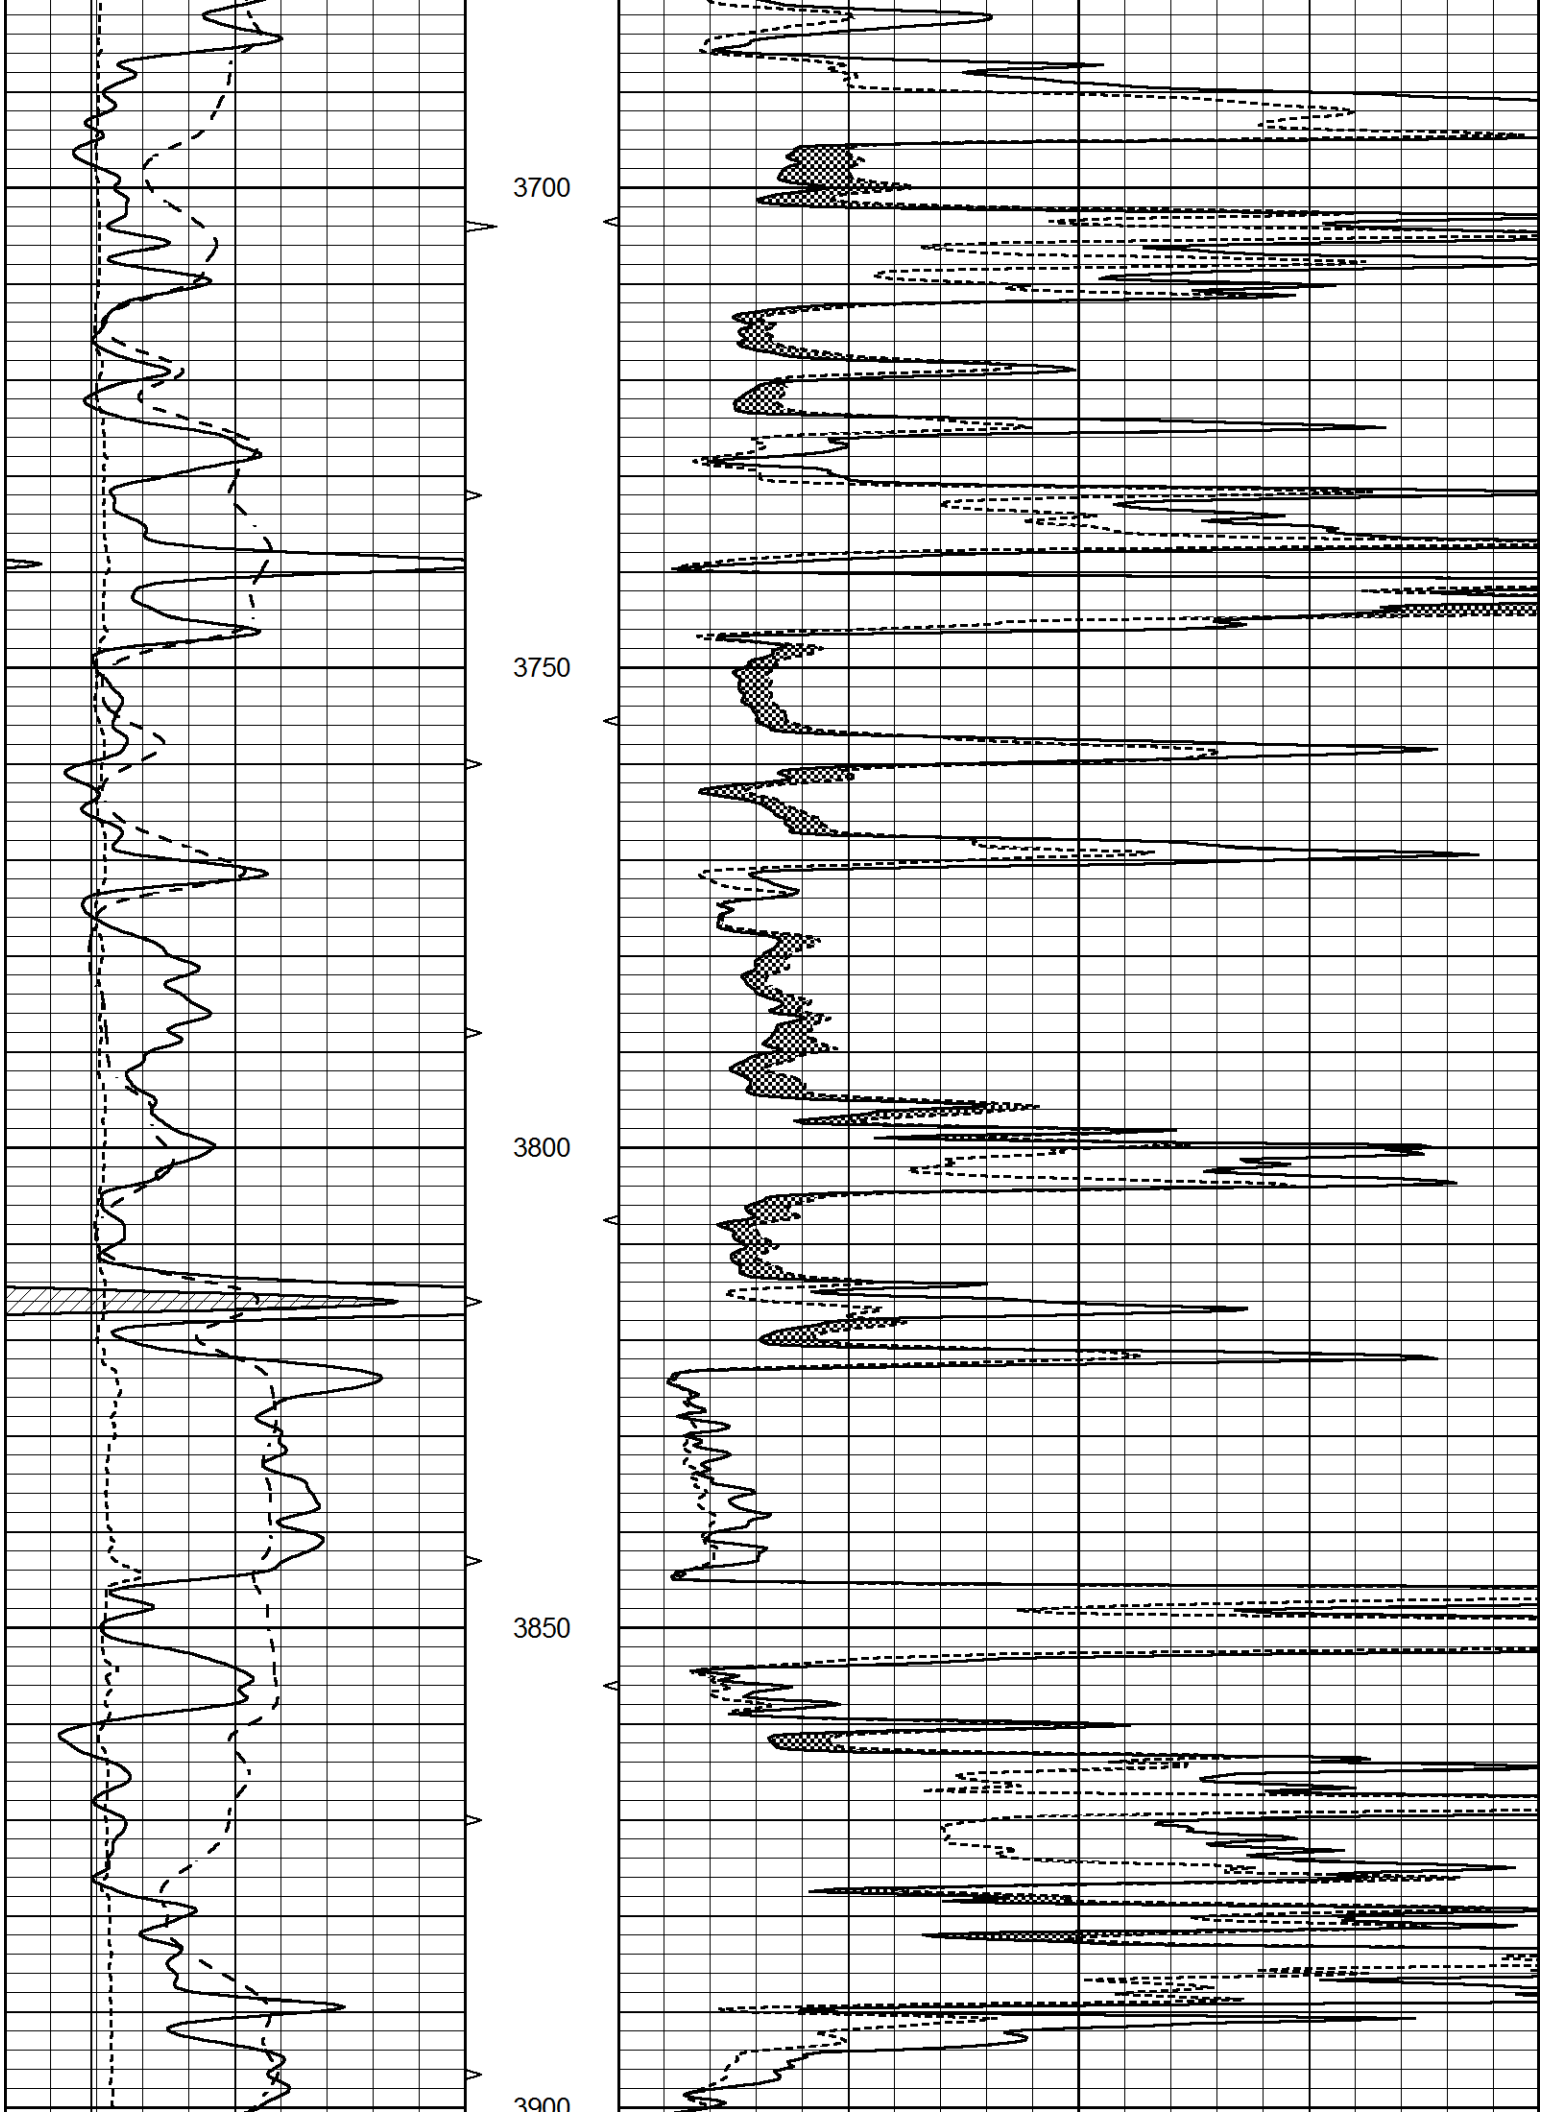
3700
3750
3800
3850
3900

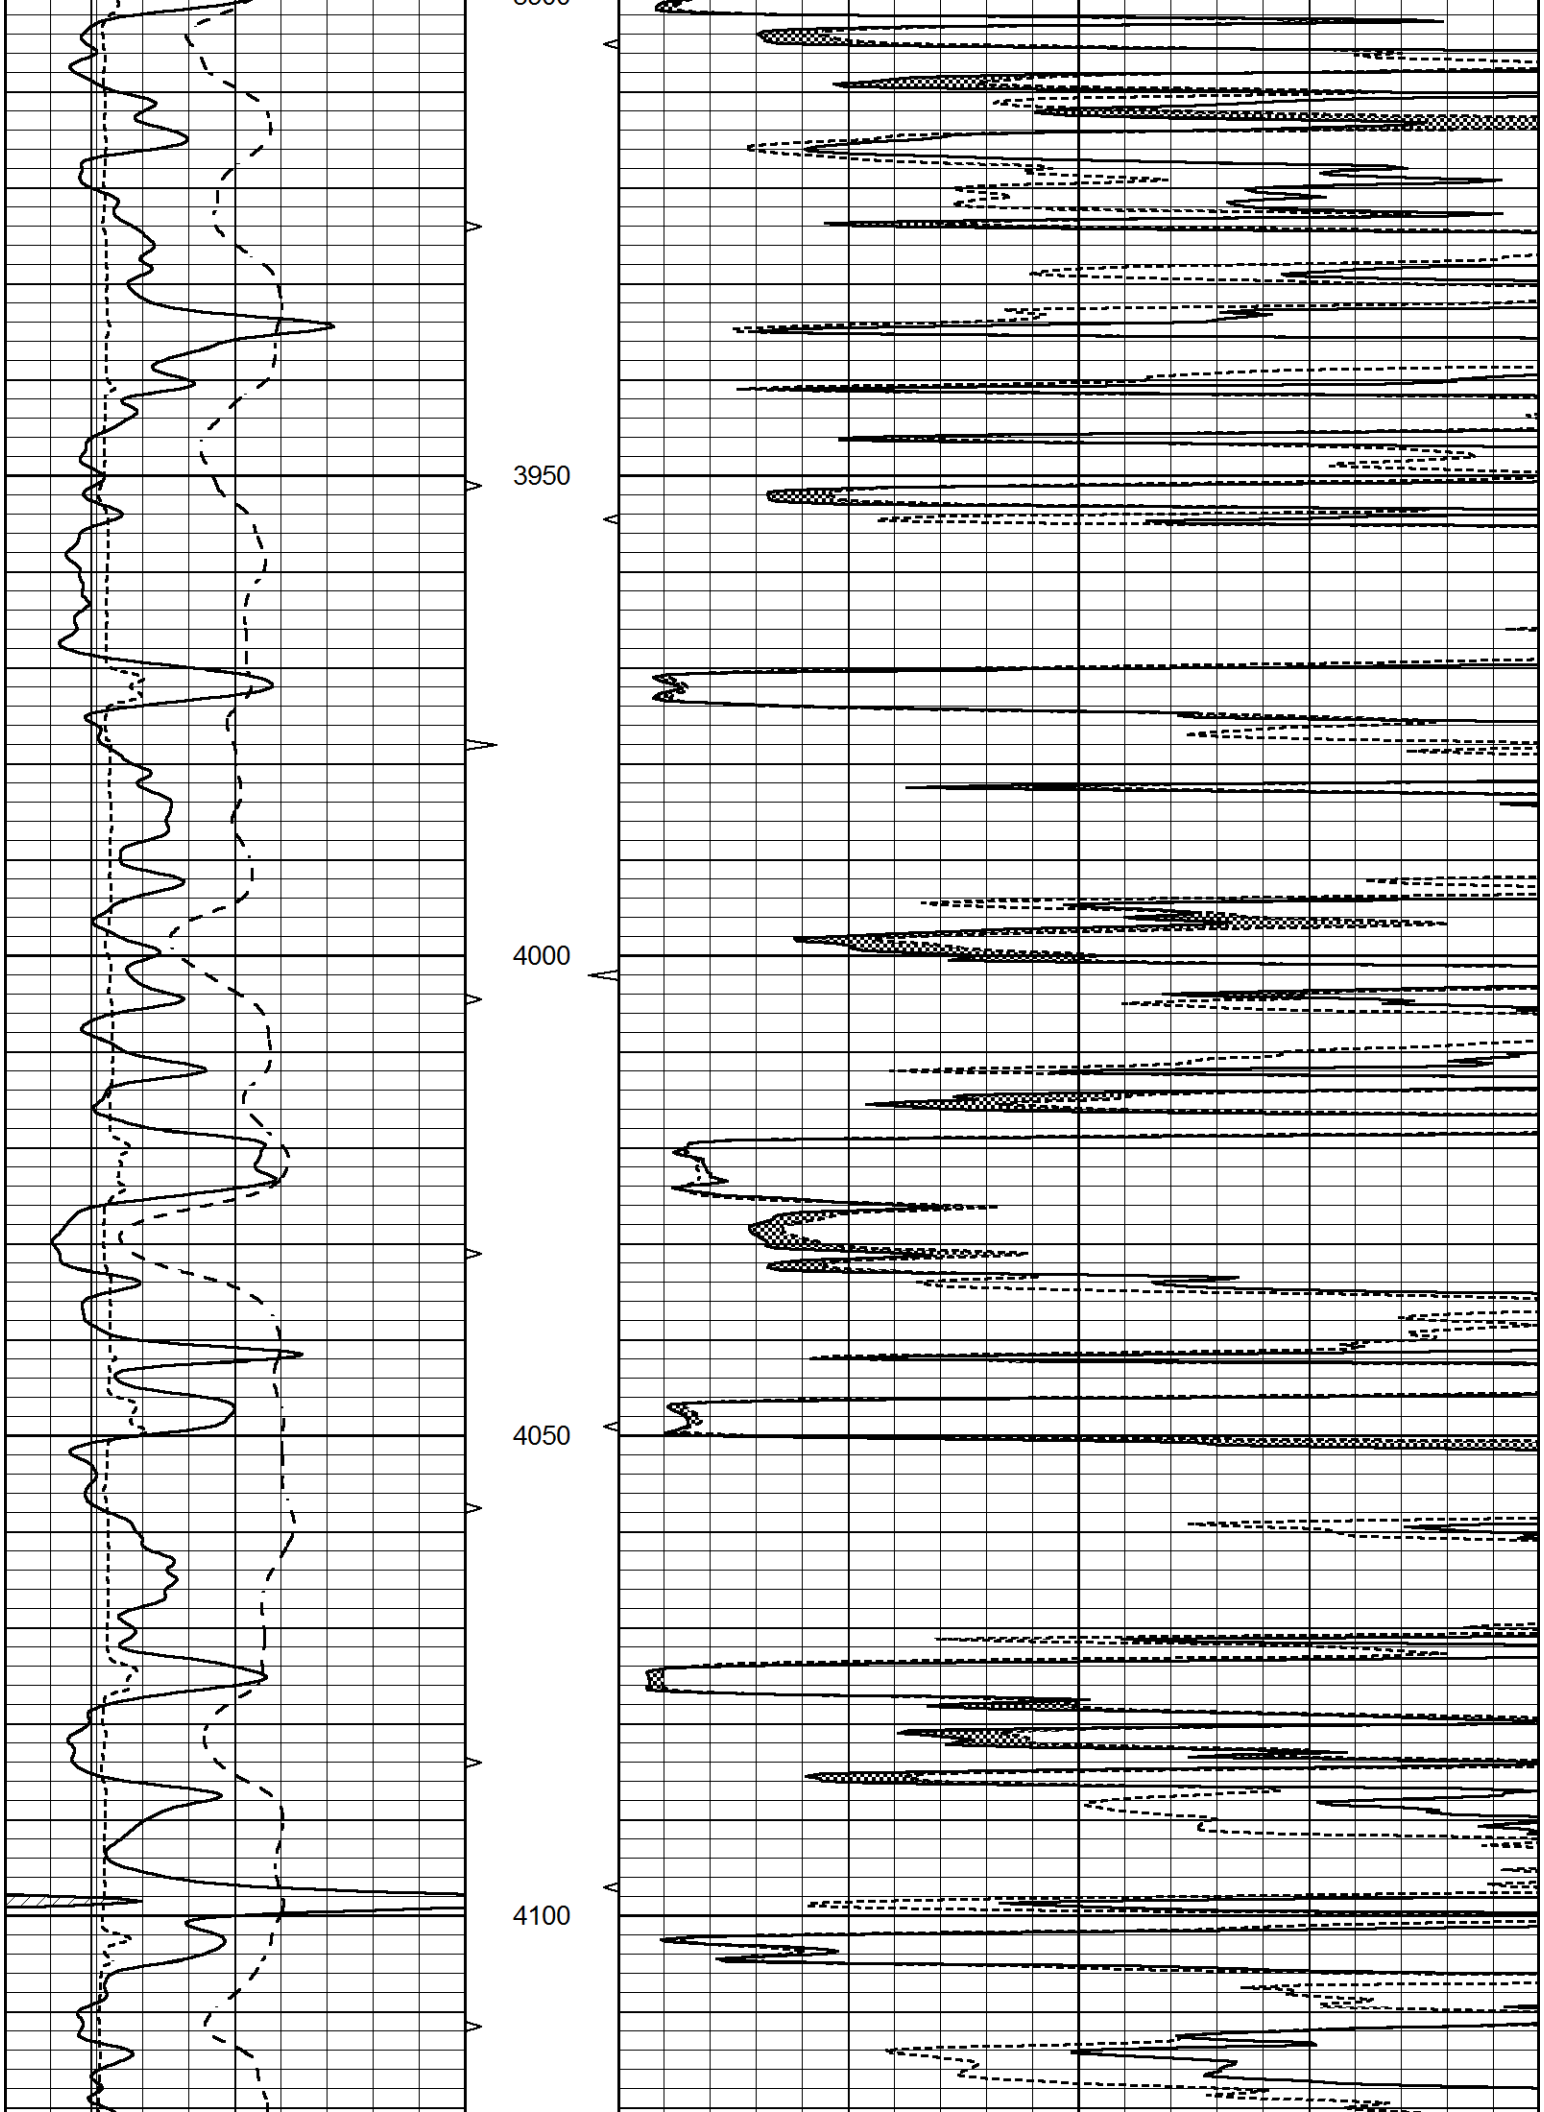
3950
4000
4050
4100

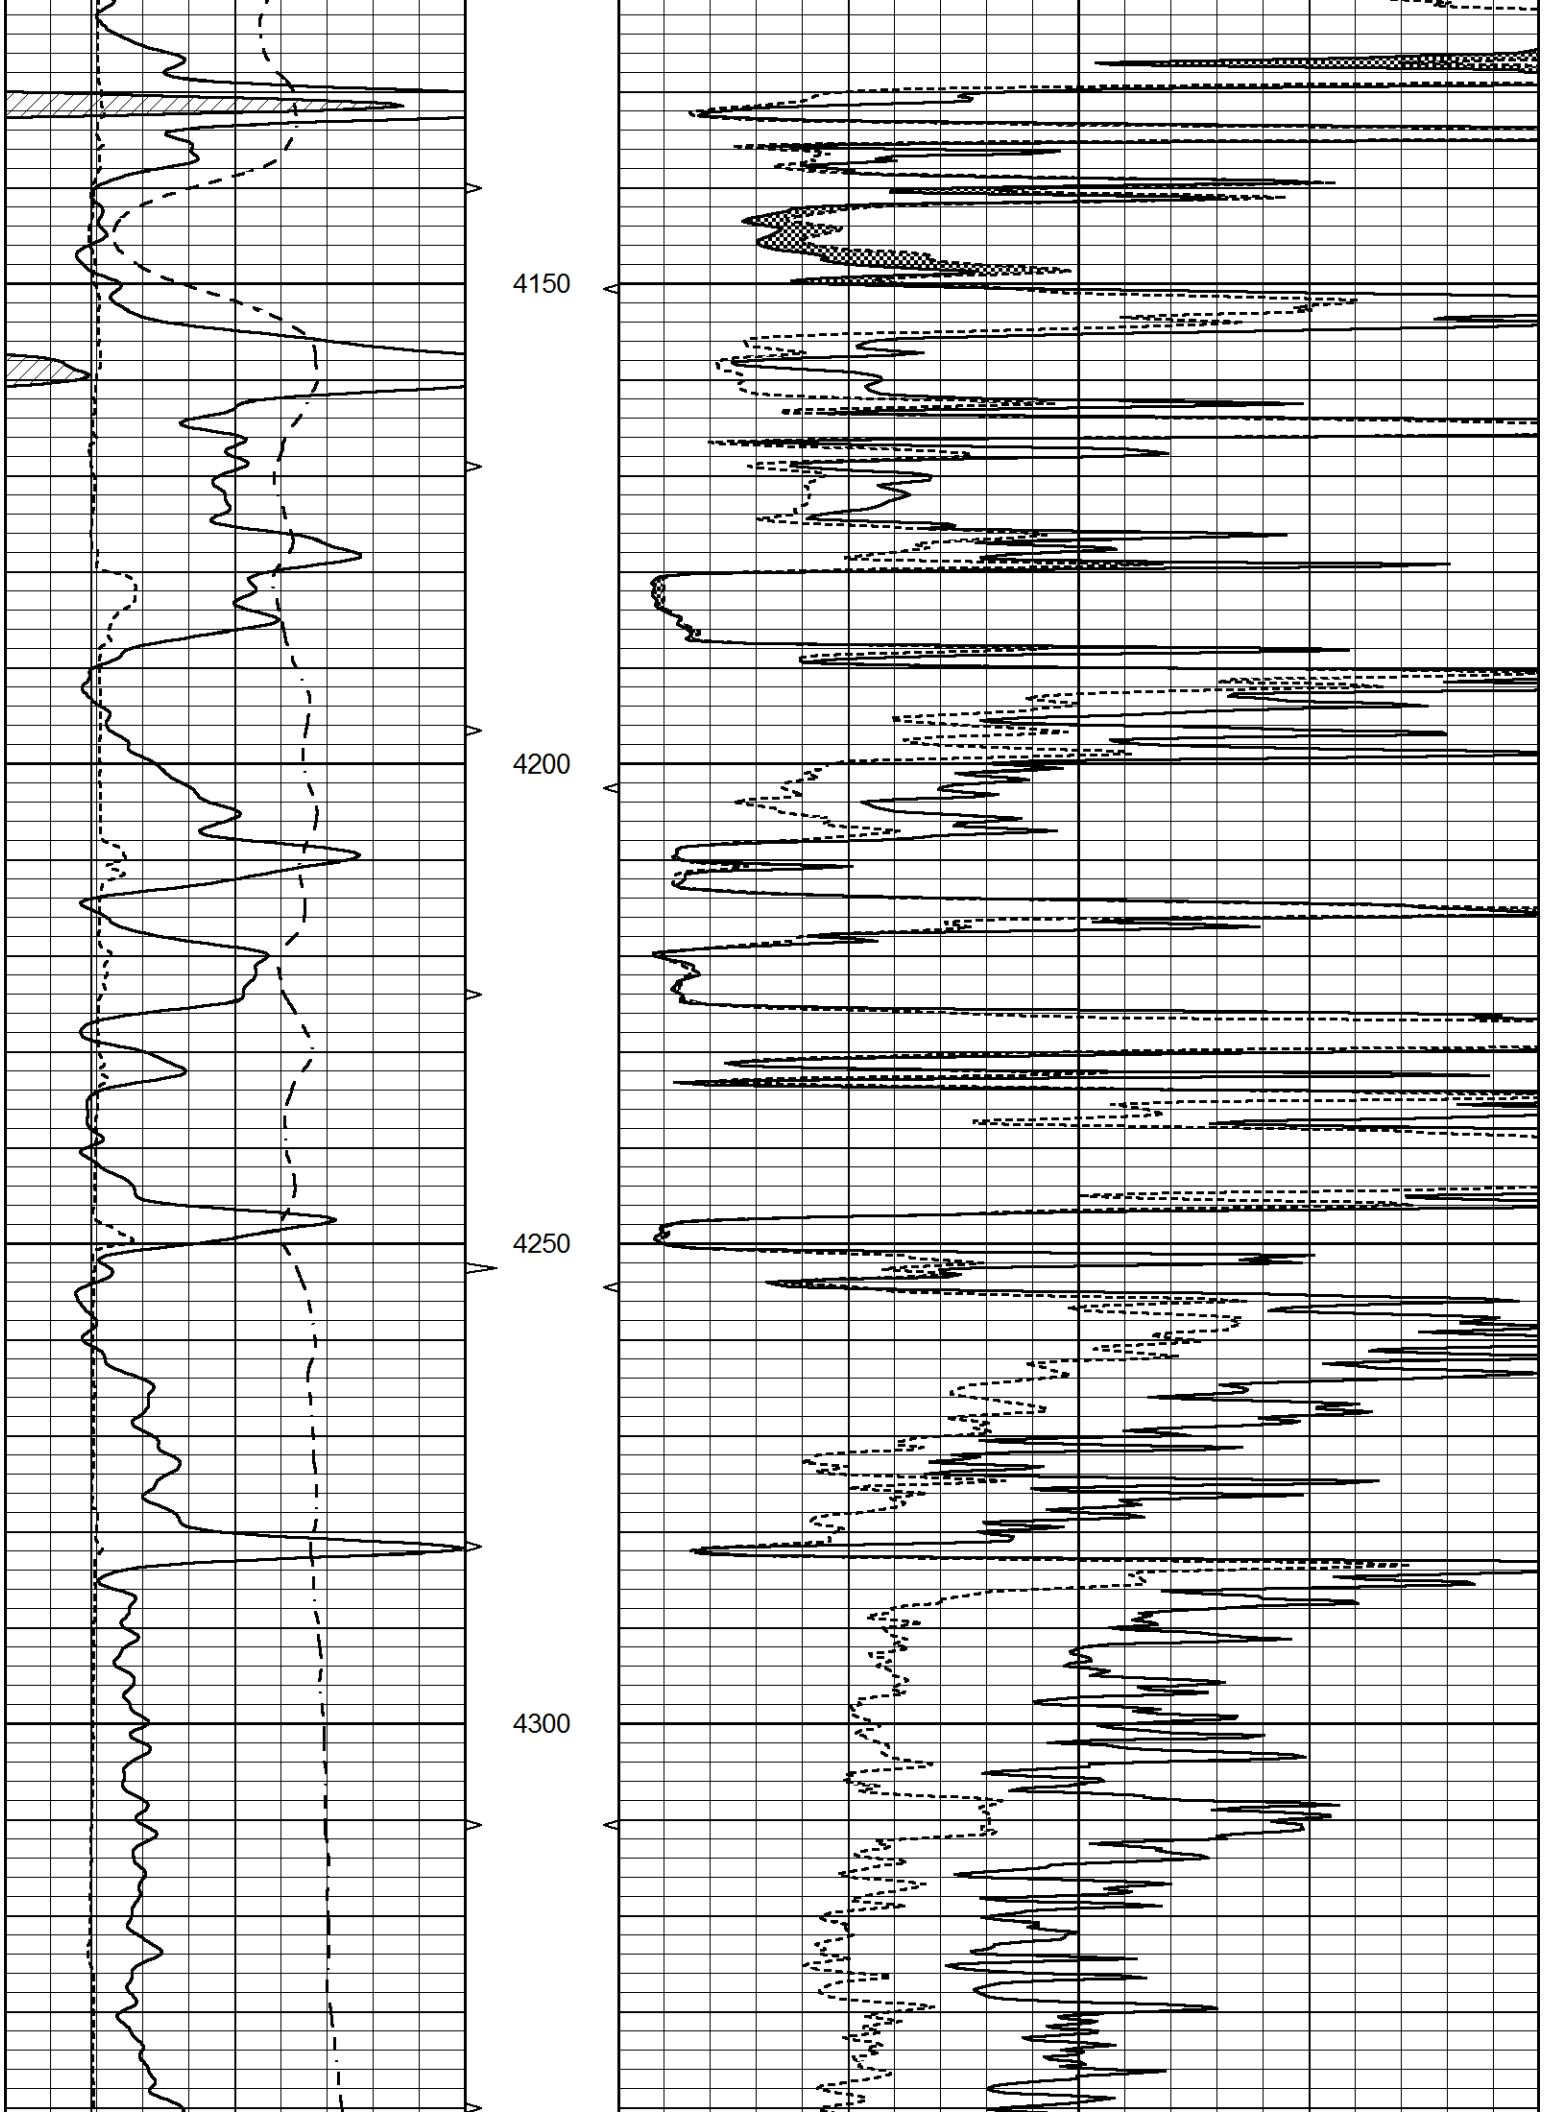

4150
4200
4250
4300

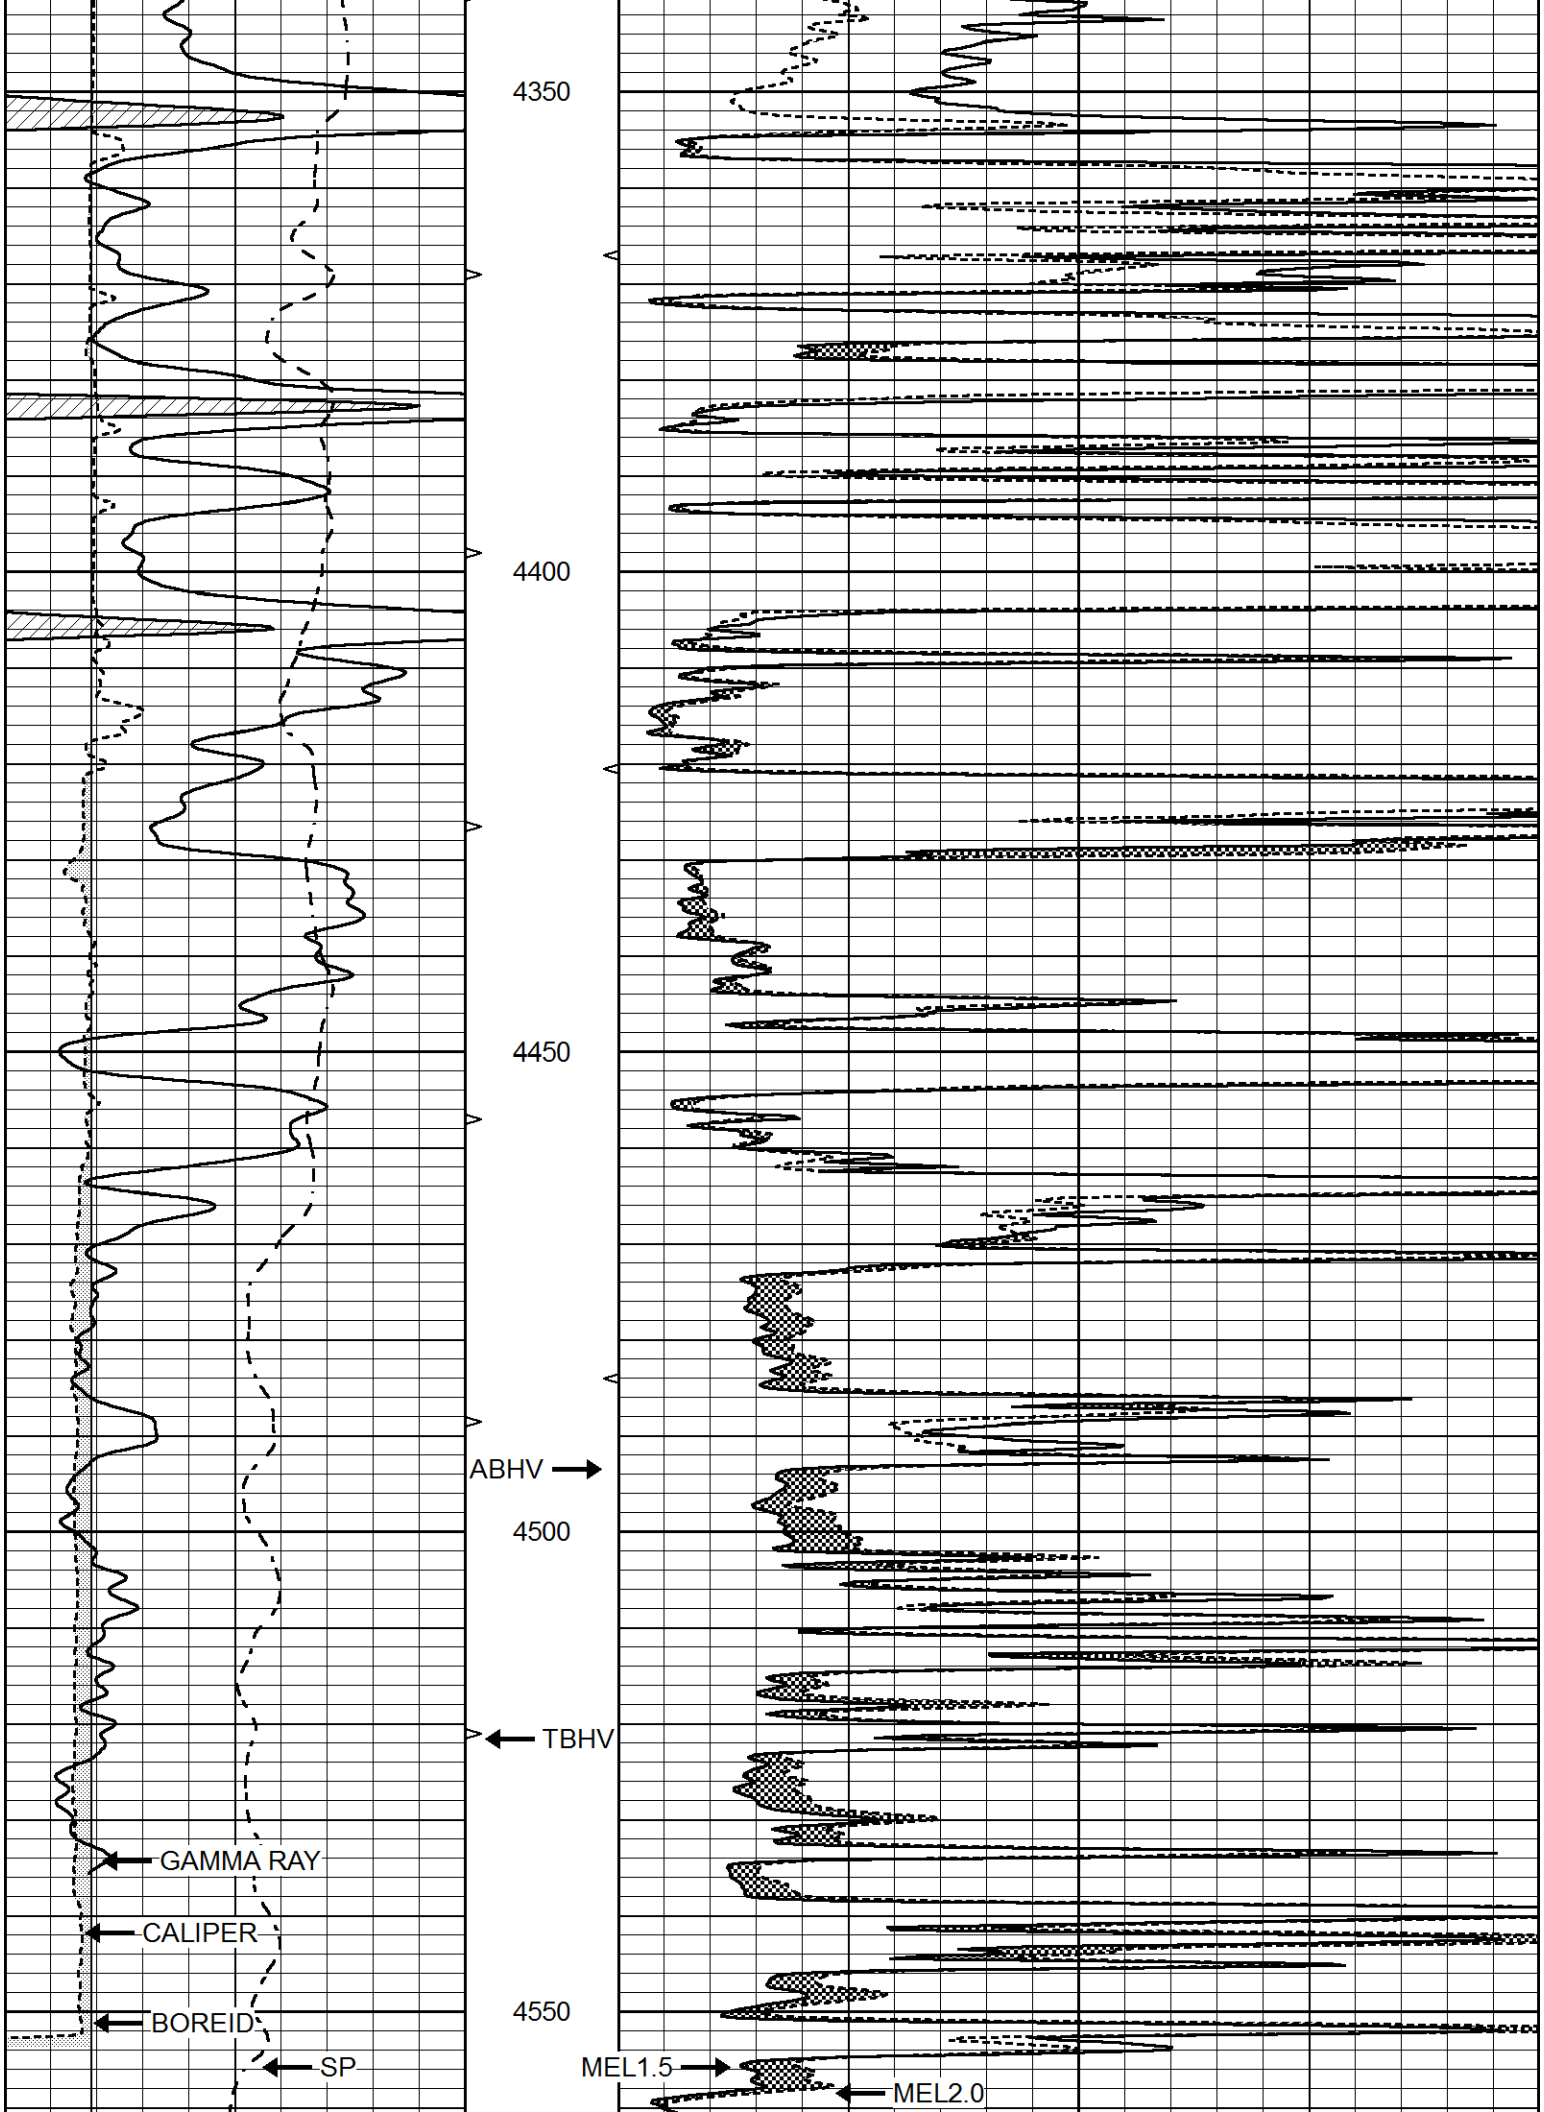

4350
4400
4450
ABHV
4500
TBHV
GAMMA RAY
CALIPER
BOREID
SP
4550
MEL1.5
MEL2.0

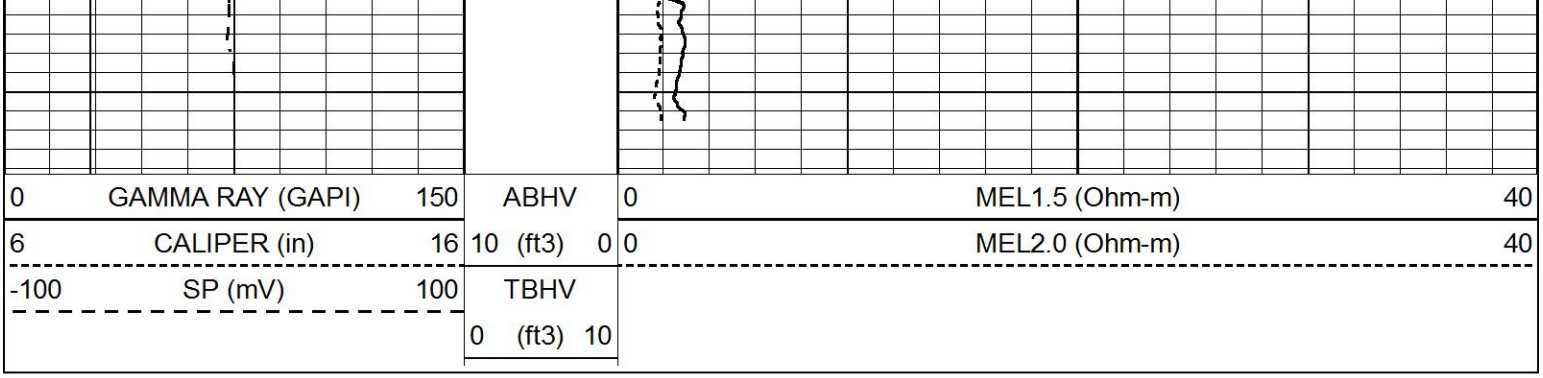

REPEAT SECTION

Database File	5884ddn.db
Dataset Pathname	pass4.1
Presentation Format	_micro
Dataset Creation	Tue Oct 12 09:16:48 2021
Charted by	Depth in Feet scaled 1:240

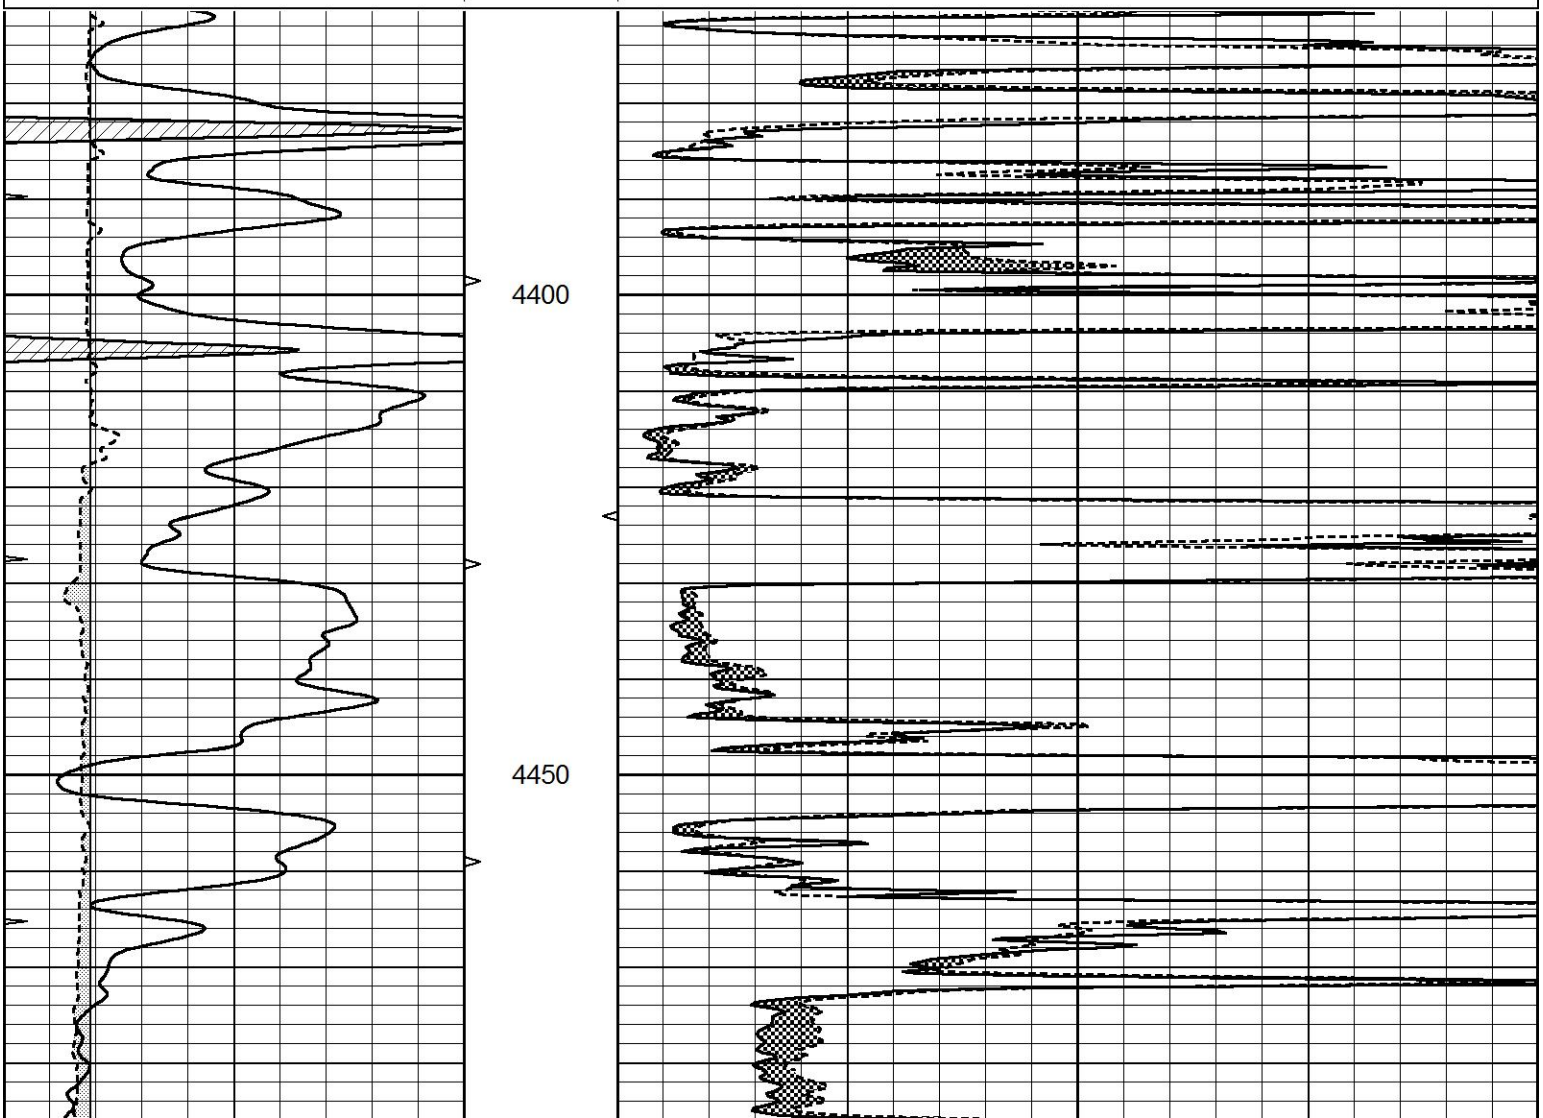

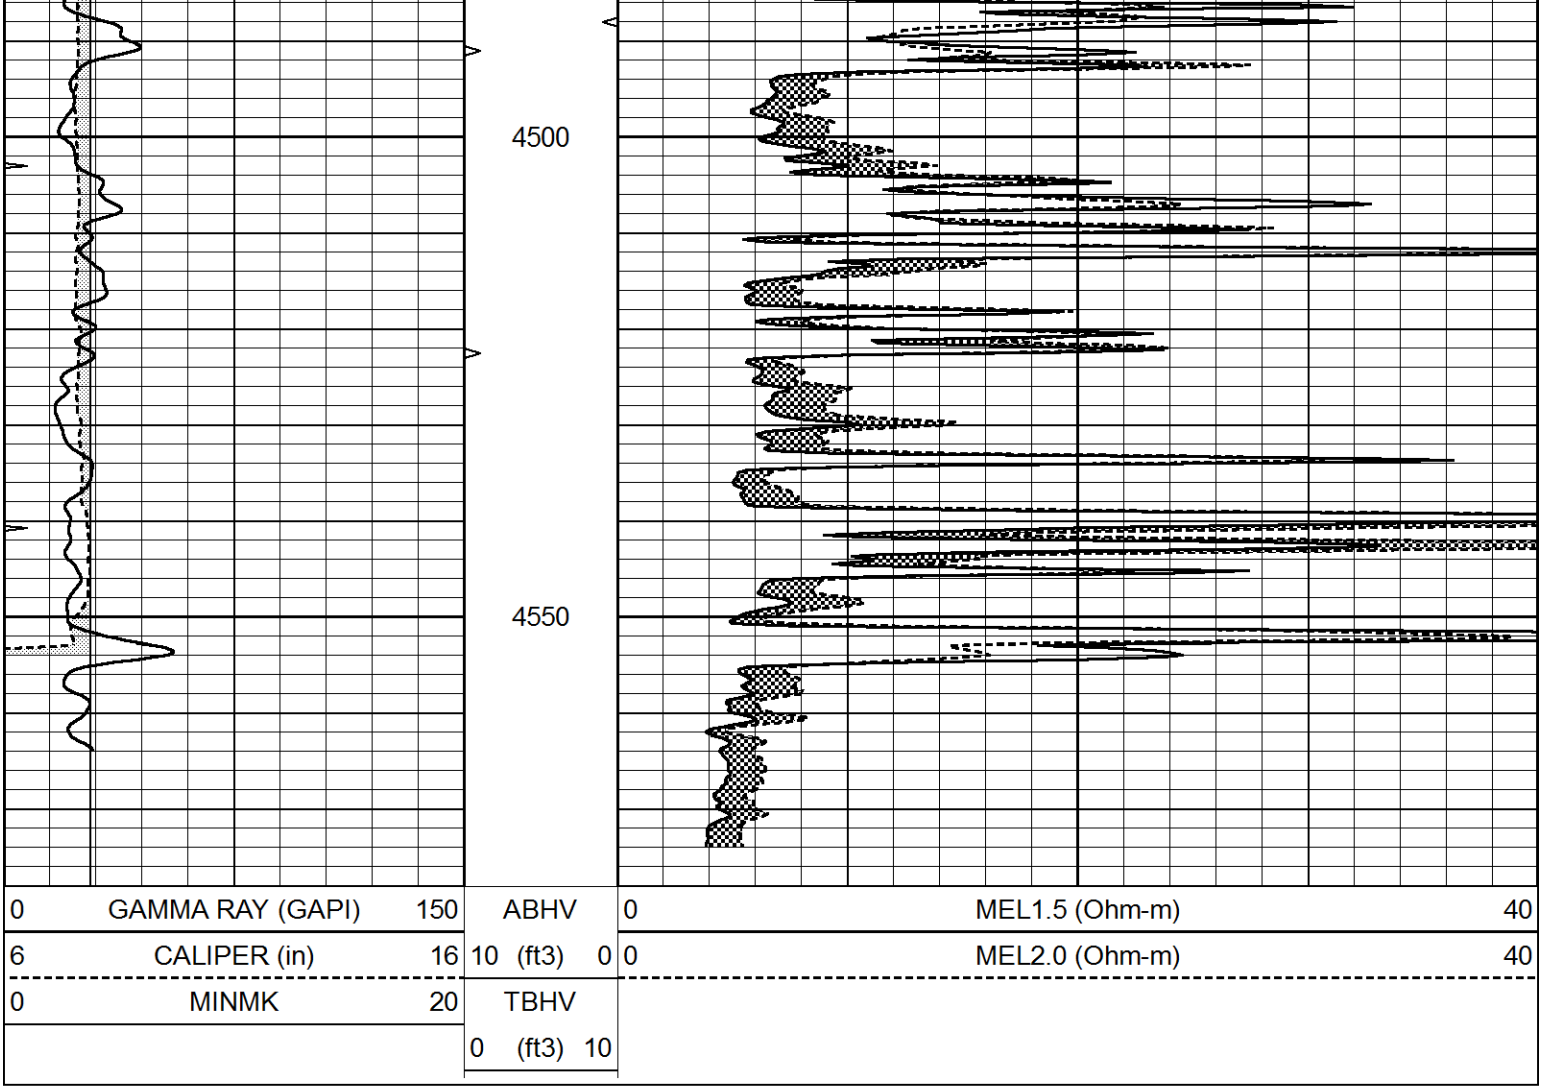

Calibration Report

Database File	5884ddn.db
Dataset Pathname	pass4.1
Dataset Creation	Tue Oct 12 09:16:48 2021

MICRO Calibration Report

Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Thu Aug 05 13:03:33 2021	
Caliper Calibration:	Gain=2.815	Offset=4.552
	Low Cal	High Cal
References	8.500	13.500
Readings	0.887	2.663
1.5" Calibration:	Gain=36.134	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832
2" Calibration:	Gain=38.000	Offset=0.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Fri Oct 01 08:18:05 2021	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5500	GAPI/cps