MICRO LOG

Company VINCENT OIL CORPORATION
Well LIX #1-8
Field
County FORD State KANSAS

Location: API # : 15-057-21056-0000

1874' FNL & 1895' FEL

SEC 8 TWP 26S RGE 24W

Other Services
CDL/CNL/PE
DIL/SON

Elevation
K.B. 2544
D.F. 2542
G.L. 2532

Permanent Datum GROUND LEVEL Elevation 2532
Log Measured From KELLY BUSHING 12' A.G.L
Drilling Measured From KELLY BUSHING

Date	9/23/21		
Run Number	TWO		
Depth Driller	5070		
Depth Logger	5073		
Bottom Logged Interval	5055		
Top Log Interval	4100		
Casing Driller	8 5/8" @ 396		
Casing Logger	396		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2900 PPM	
Density / Viscosity	9.2/60		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10 @ 85F		
Rmf @ Meas. Temp	0.82 @ 85F		
Rmc @ Meas. Temp	1.32 @ 85F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	0.74 @ 126F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	126F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	TOM DUDGEON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS

WRIGHT, KS. - 3 WEST TO RD. 114 - 1 1/2 NORTH - WEST INTO

MAIN SECTION

Database File	5856pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Thu Sep 23 21:21:26 2021
Charted by	Depth in Feet scaled 1:240

0 GAMMA RAY (GAPI) 150	ABHV	0 MEL1.5 (Ohm-m) 40
6 CALIPER (in) 16	10 (ft3) 0	0 MEL2.0 (Ohm-m) 40
	TBHV	
	0 (ft3) 10	

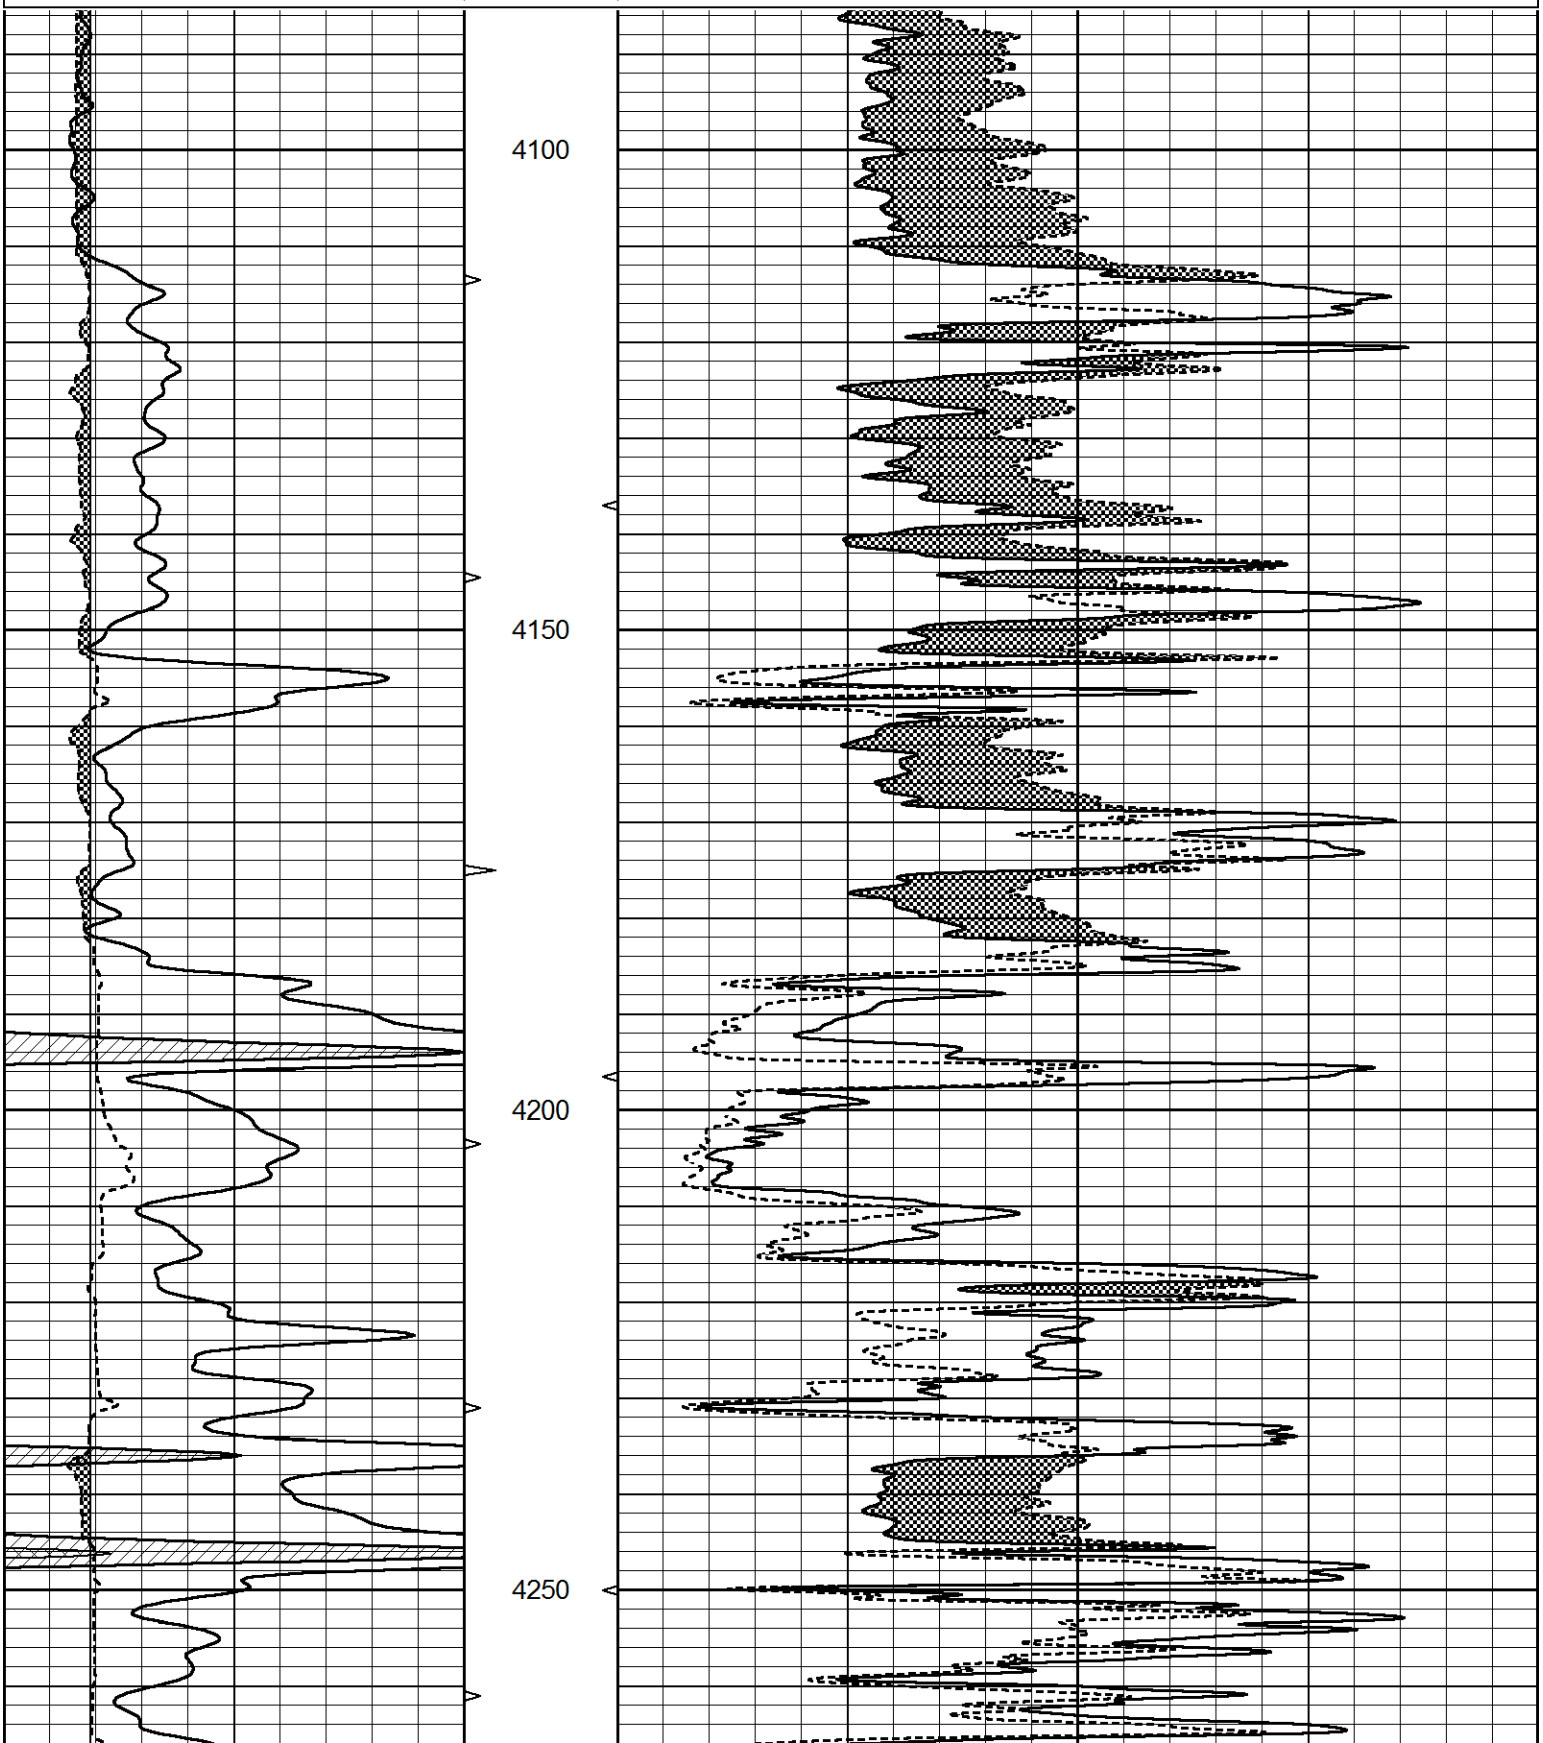

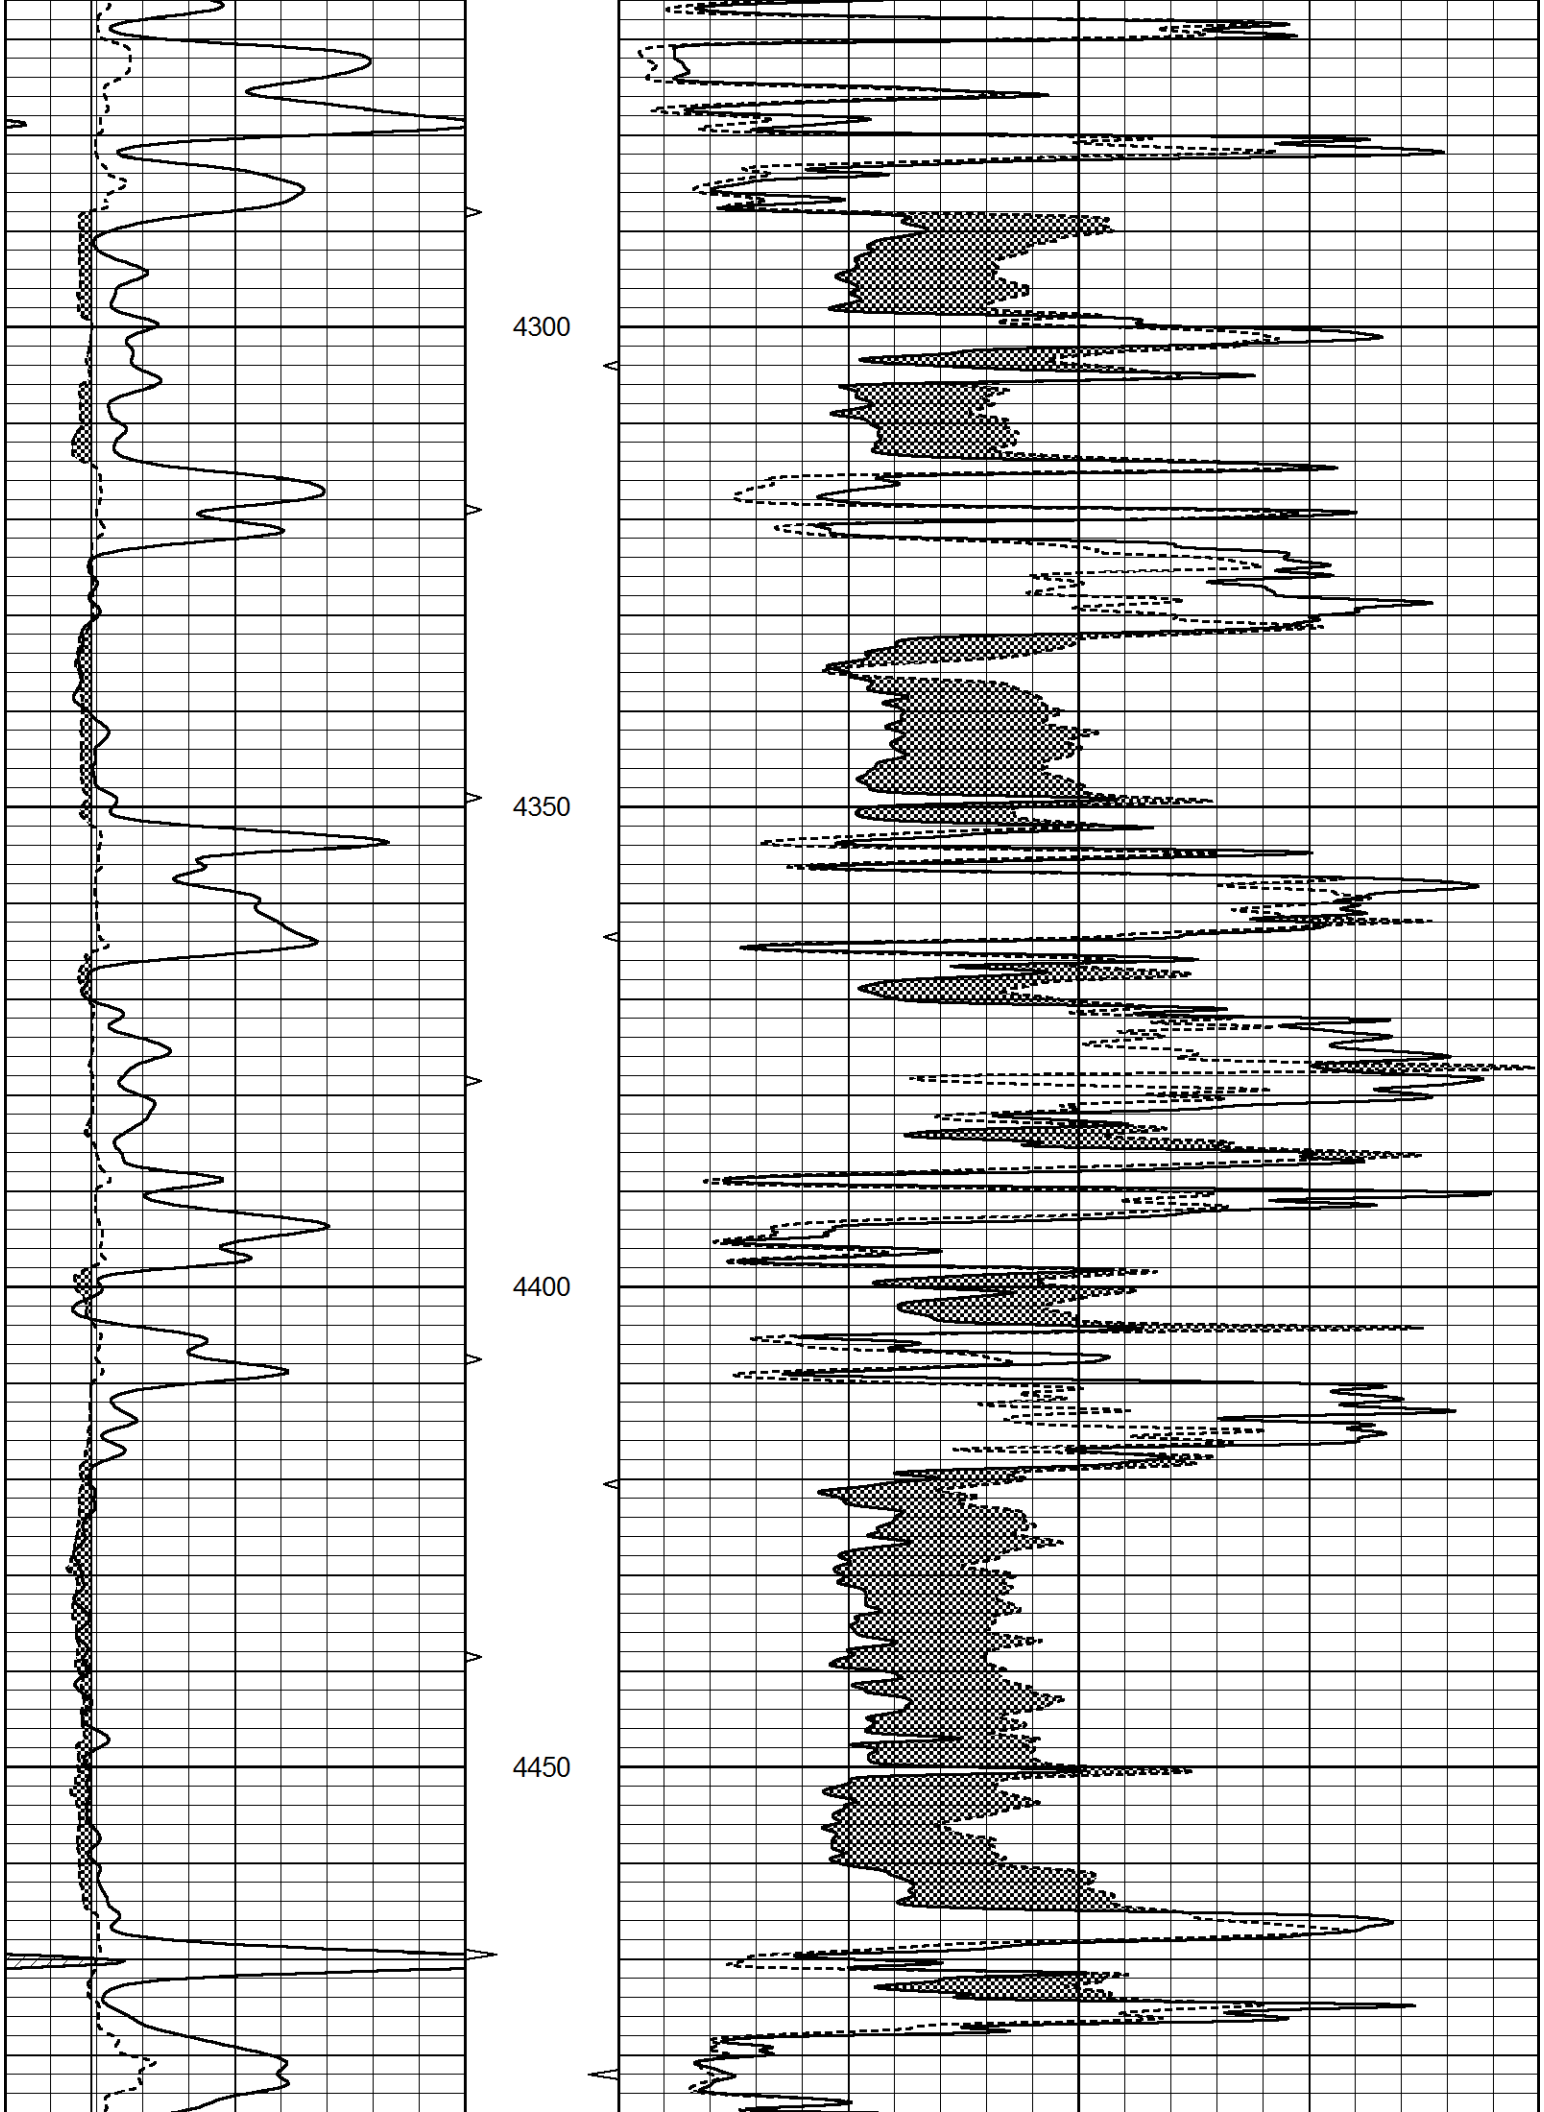
4300
4350
4400
4450

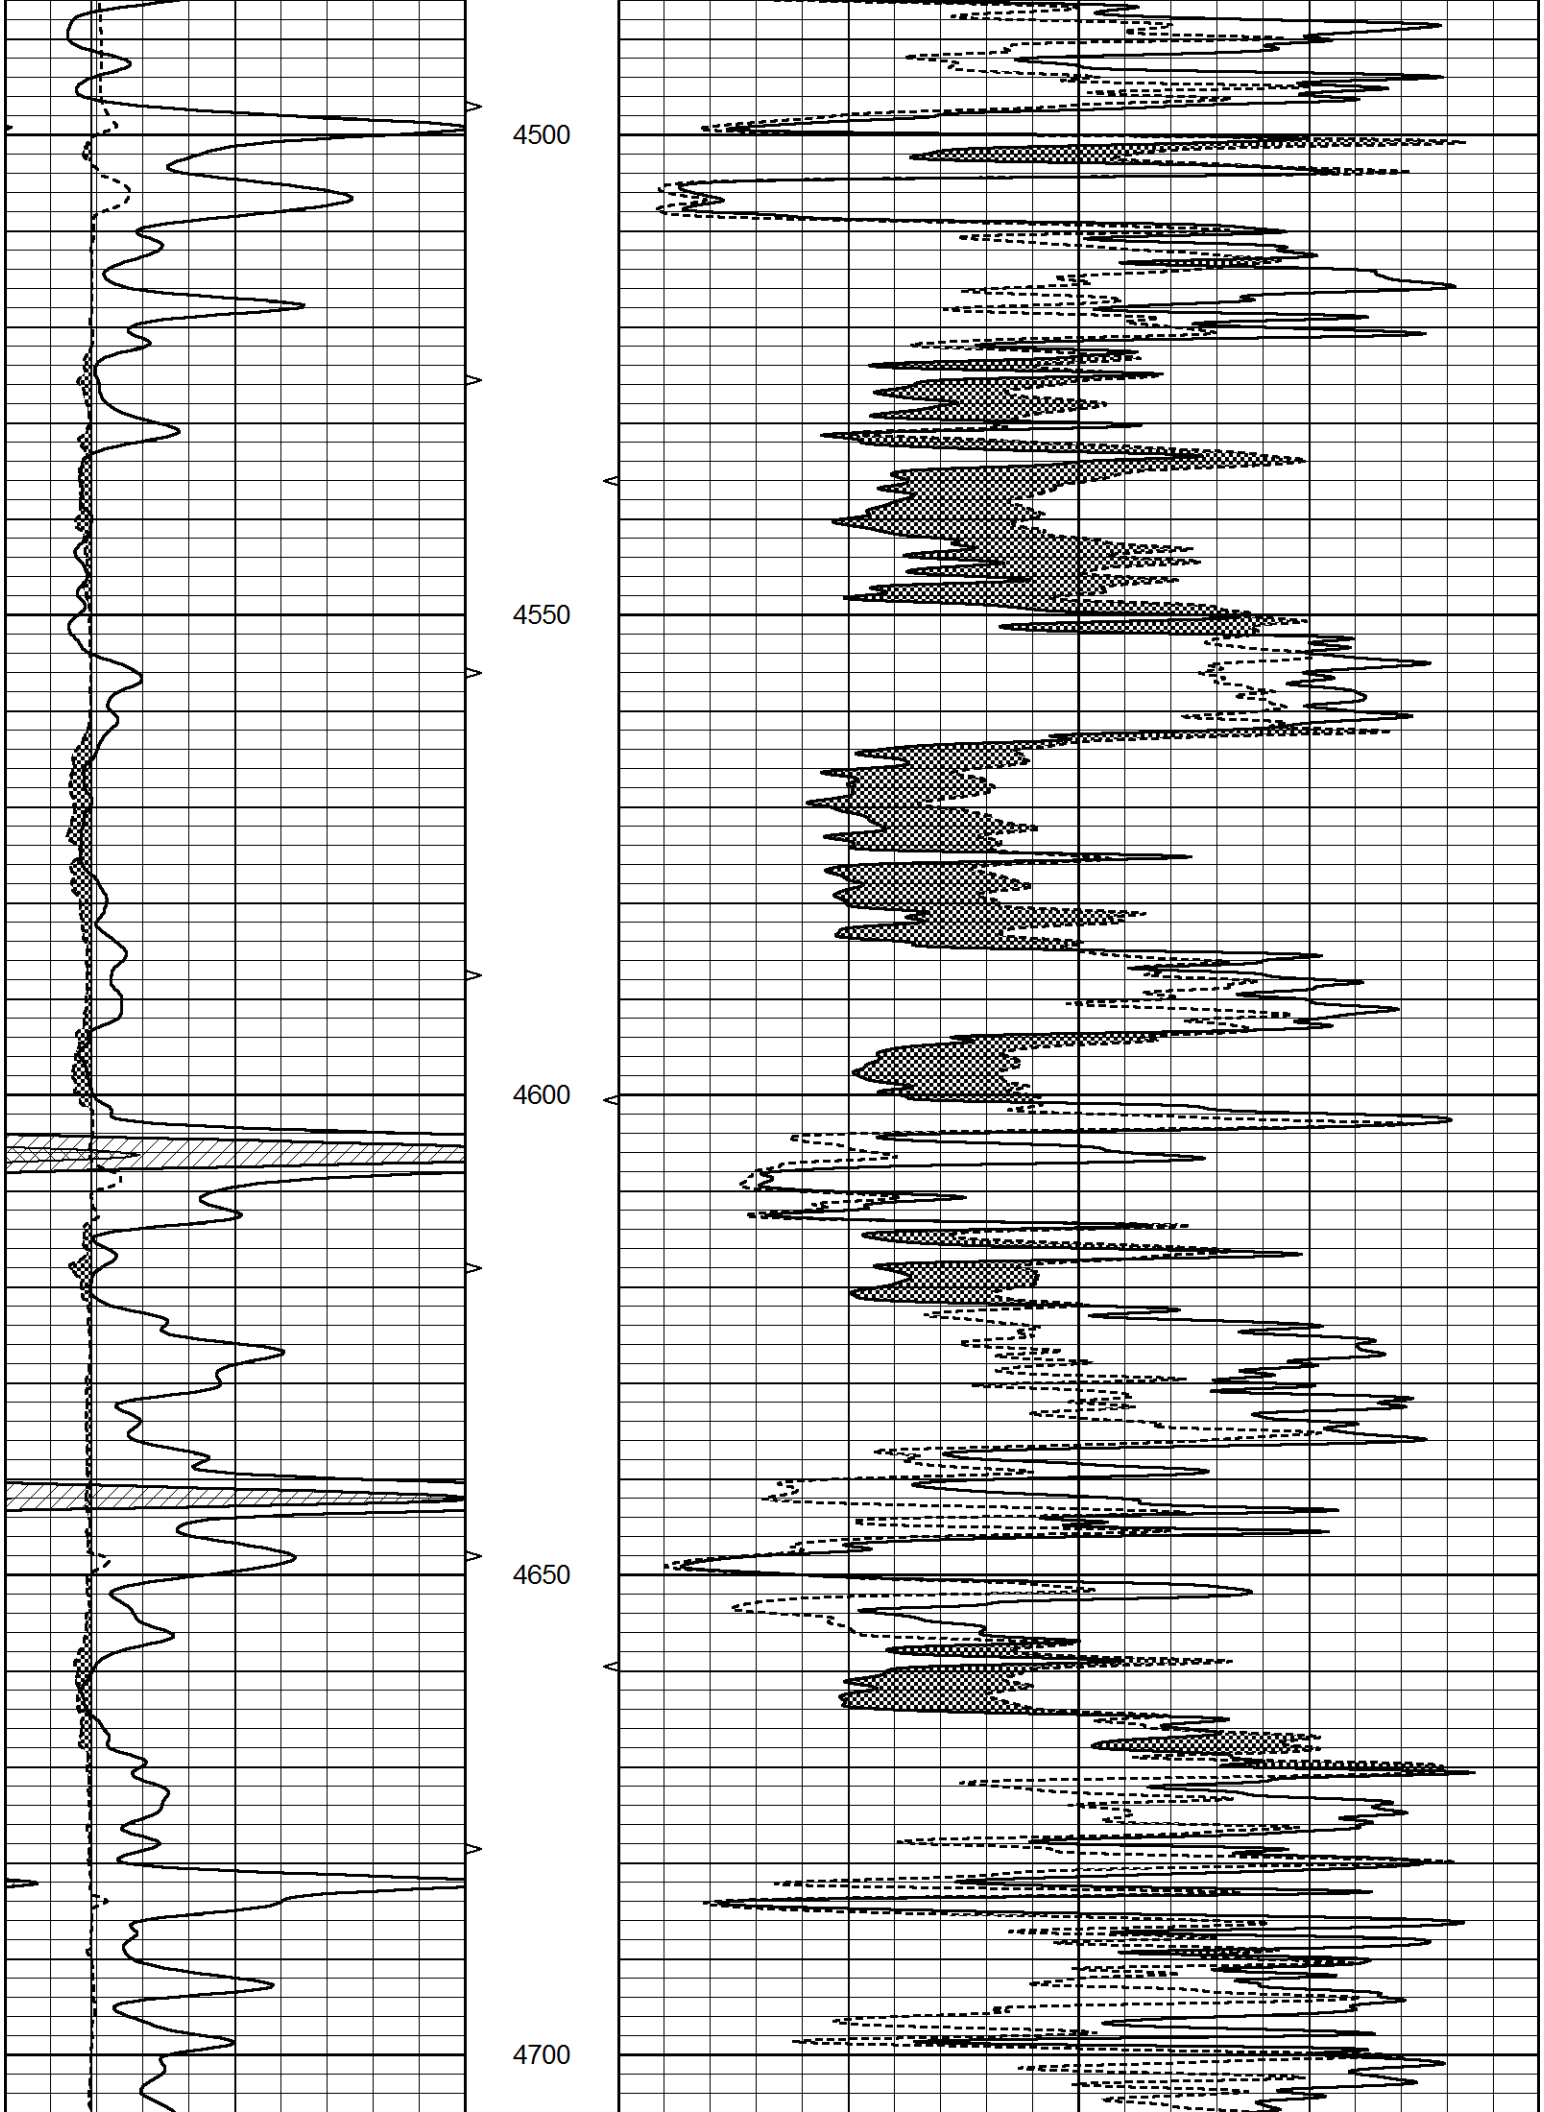
4500
4550
4600
4650
4700

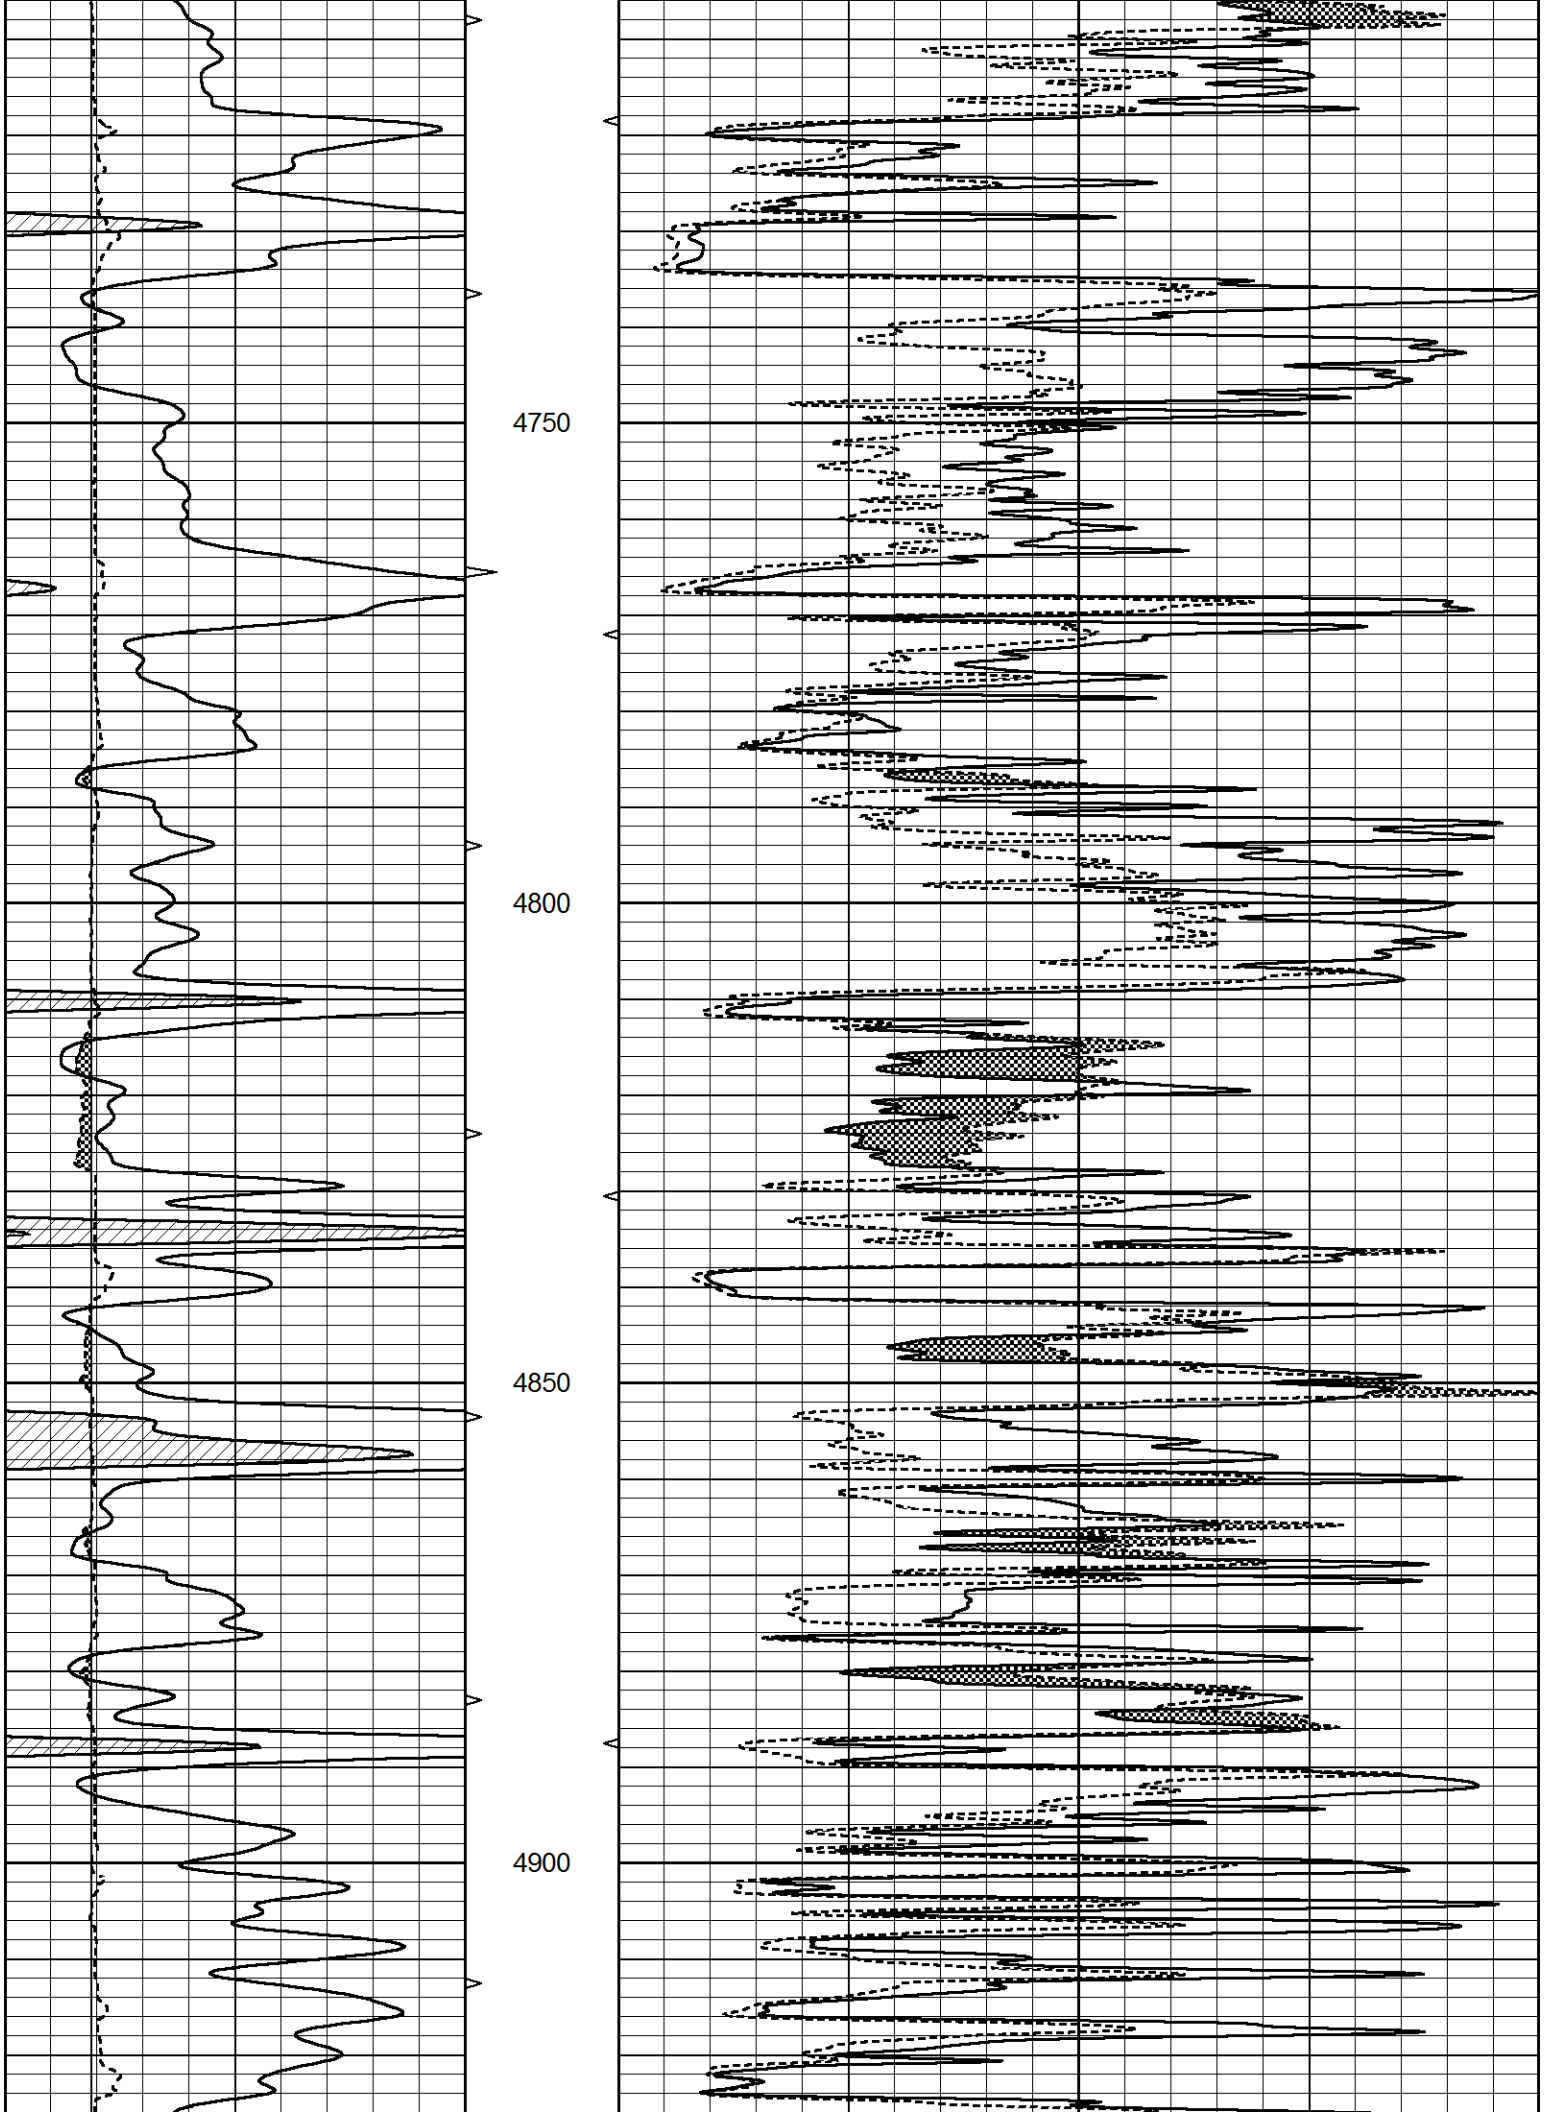
4750
4800
4850
4900

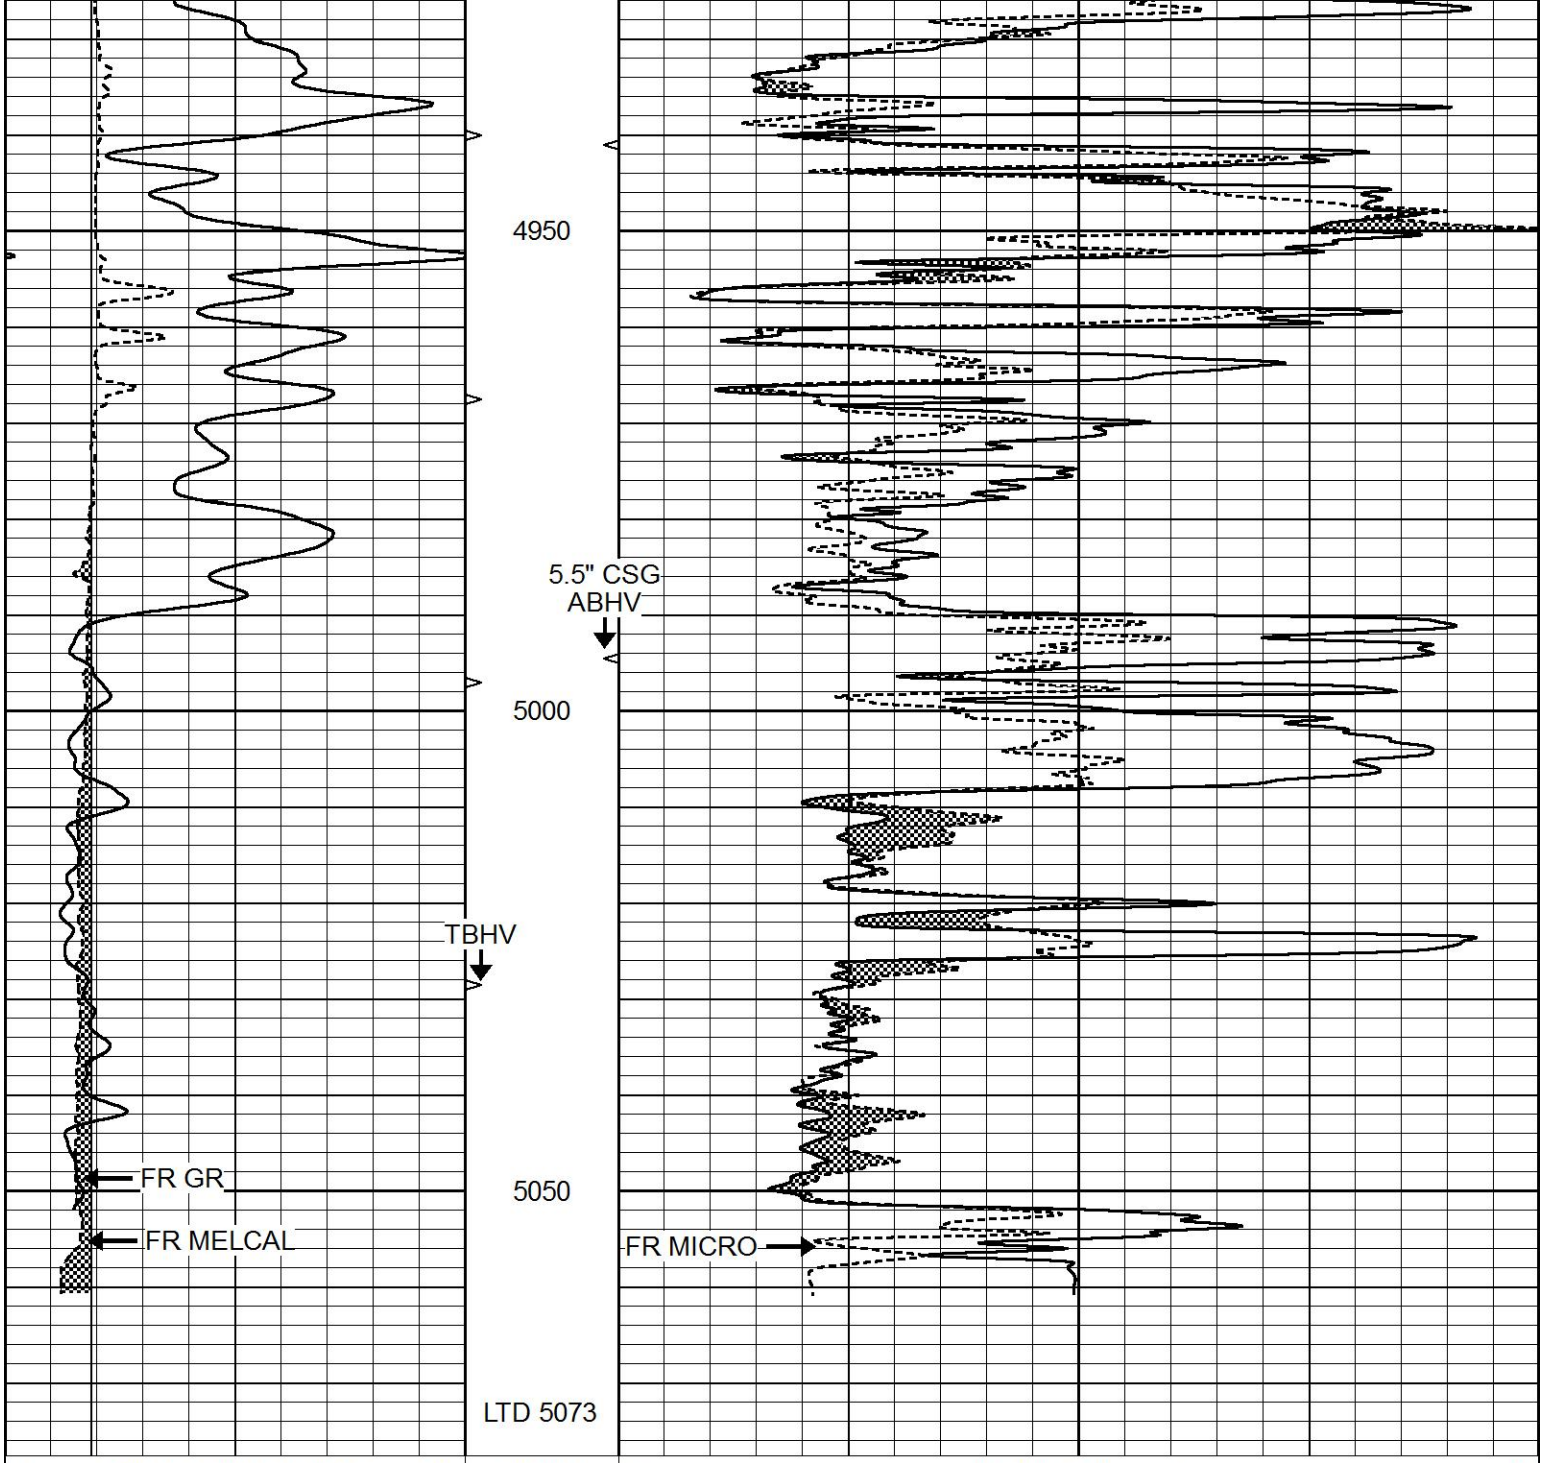

REPEAT SECTION

Database File	5856pe.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Thu Sep 23 21:14:24 2021
Charted by	Depth in Feet scaled 1:240

0 GAMMA RAY (GAPI) 150
6 CALIPER (in) 16
ABHV
10 (ft3) 0
TBHV
0 (ft3) 10
0 MEL1.5 (Ohm-m) 40
0 MEL2.0 (Ohm-m) 40

6	CALIPER (in) 16	10 (ft3) 0	TBHV 0 (ft3) 10	0	MEL2.0 (Ohm-m) 40

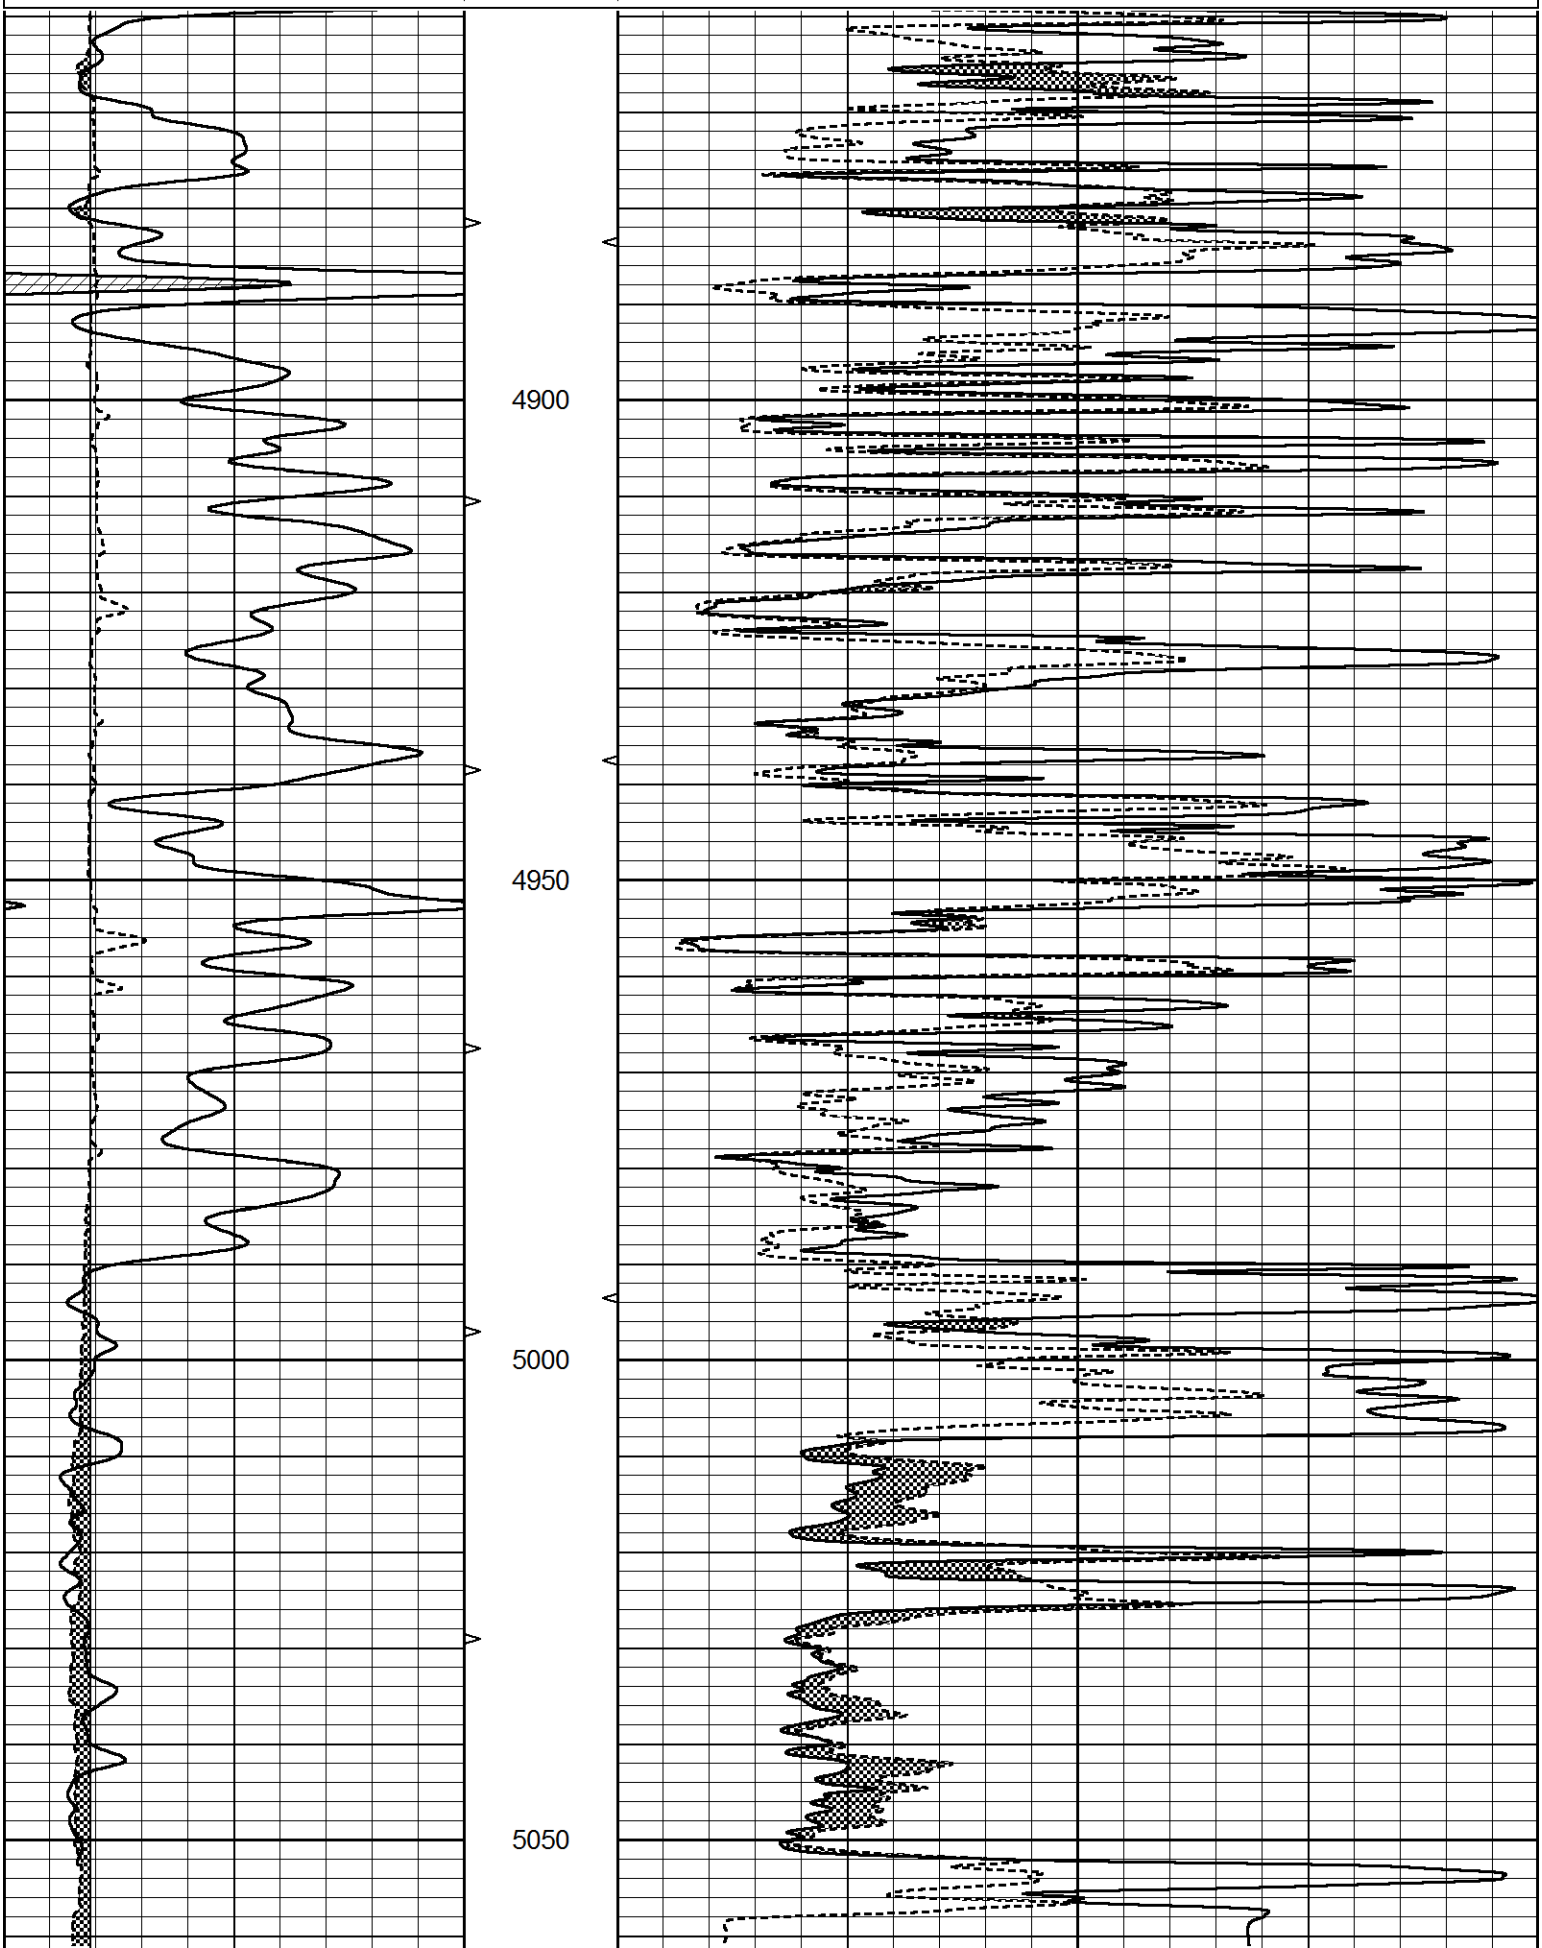

0	GAMMA RAY (GAPI) 150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in) 16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
		TBHV			
		0 (ft3) 10			

Calibration Report

Database File 5856pe.db
Dataset Pathname pass5.1
Dataset Creation Thu Sep 23 21:14:24 2021

MICRO_USR Calibration Report

Serial Number: 070910
Tool Model: ProbeL
Performed: Fri Aug 27 11:31:29 2021

Caliper Calibration: Gain=7.192 Offset=2.802

	Low Cal	High Cal
References	8.000	14.000
Readings	0.723	1.557

1.5" Calibration: Gain=50.000 Offset=-0.567

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.335

2" Calibration: Gain=85.000 Offset=-2.400

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model: 070910-ProbeL
Performed: (Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1
Performed: Fri Oct 30 21:32:56 2020

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps