

MICRO LOG

Company	PALOMINO PETROLEUM, INC.	
Well	SWEET EMOTION #1	
Field	DARR CREEK NORTHWEST	
County	LANE	State KANSAS
Location:	API # : 15-101-22662-0000	
Permanent Datum	SEC 16 TWP 19S RGE 27W	Other Services CDL/CNL DIL
Log Measured From	GROUND LEVEL Elevation 2719	Elevation K.B. 2730 D.F. 2728 G.L. 2719
Drilling Measured From	KELLY BUSHING 11' A.G.L. KELLY BUSHING	
Date	1/4/22	
Run Number	TWO	
Depth Driller	4760	
Depth Logger	4762	
Bottom Logged Interval	4760	
Top Log Interval	3700	
Casing Driller	8 5/8" @ 222	
Casing Logger	222	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3500PPM
Density / Viscosity	9.5@62	
pH / Fluid Loss	11.0/8.0	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.0@62F	
Rmf @ Meas. Temp	.75@62F	
Rmc @ Meas. Temp	1.2@62F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.50@123F	
Time Circulation Stopped	2 HOURS	
Time Logger on Bottom	////	
Maximum Recorded Temperature	123F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	JASON CAPPELLUCCI	TJ DREILING
Witnessed By	RYAN SEIB	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
WEST OF BEELER KS TO TURKEY RED RD, SOUTH TO COUNTY RD 90,
1MILE WEST, NORTH INTO




MAIN SECTION

Database File	6073ddn.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Tue Jan 04 07:57:08 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

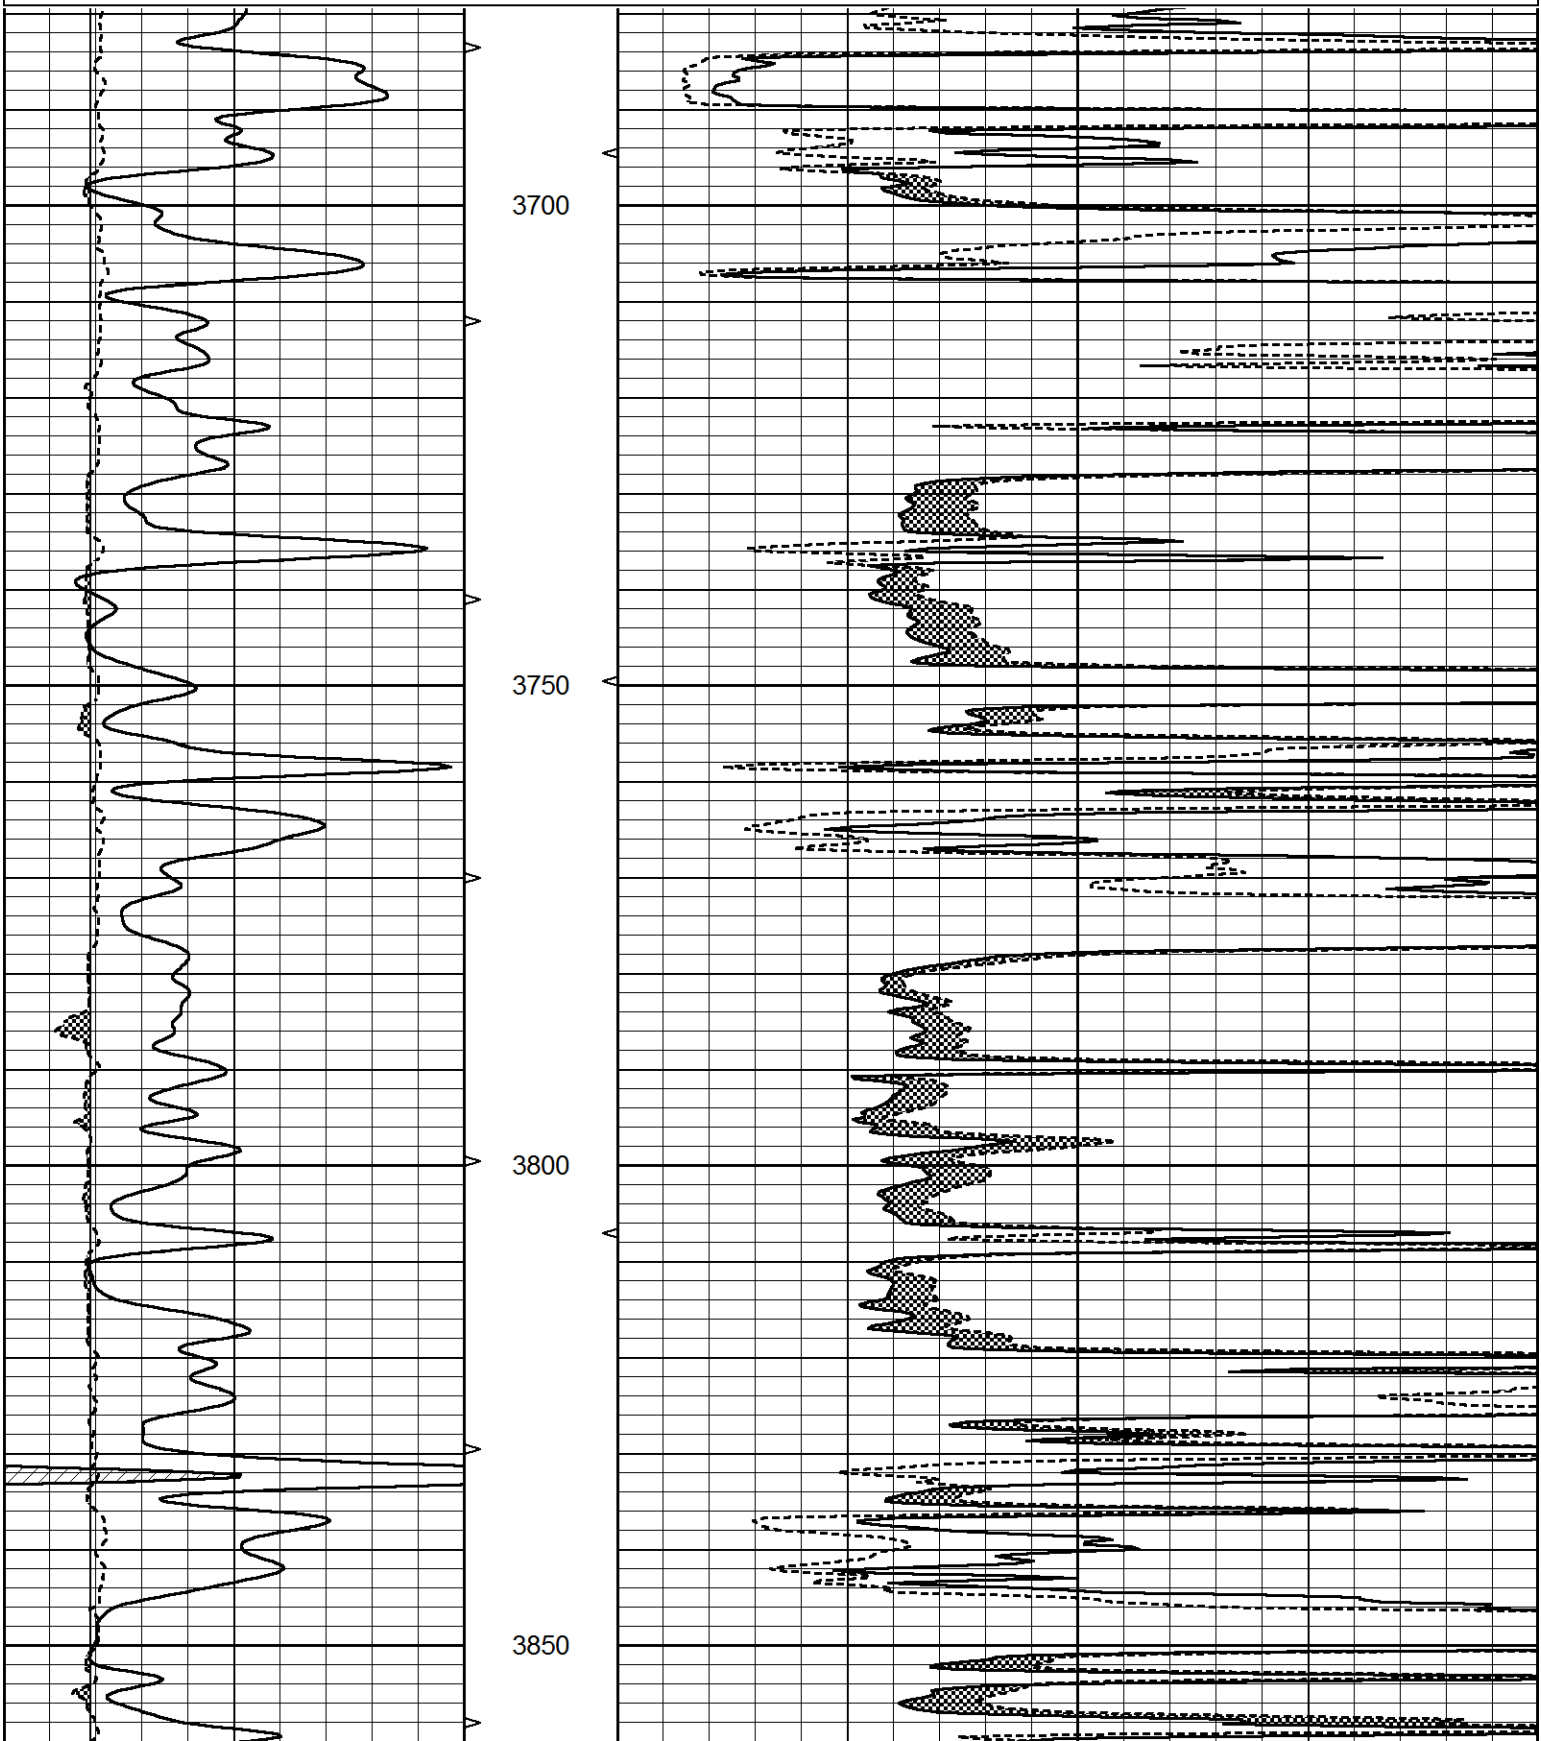

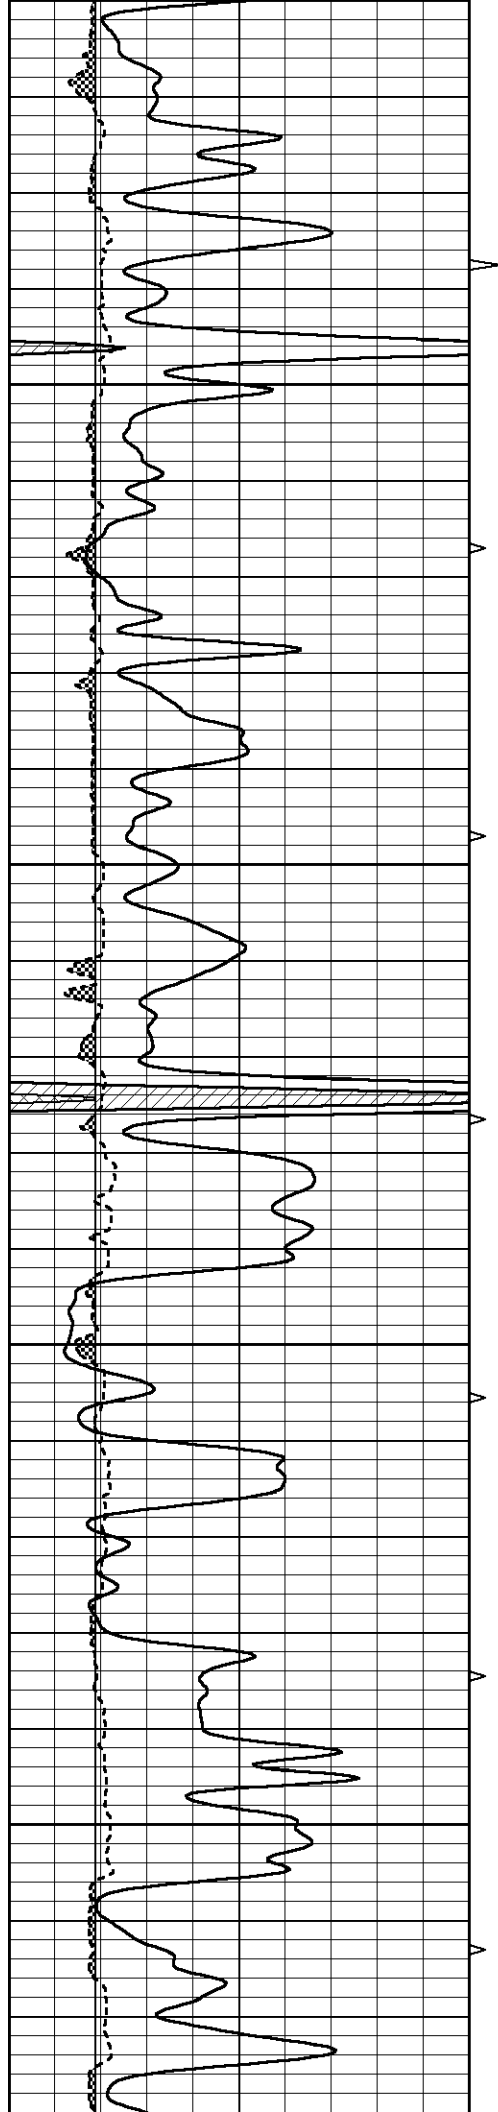



3900


3950

4000

4050

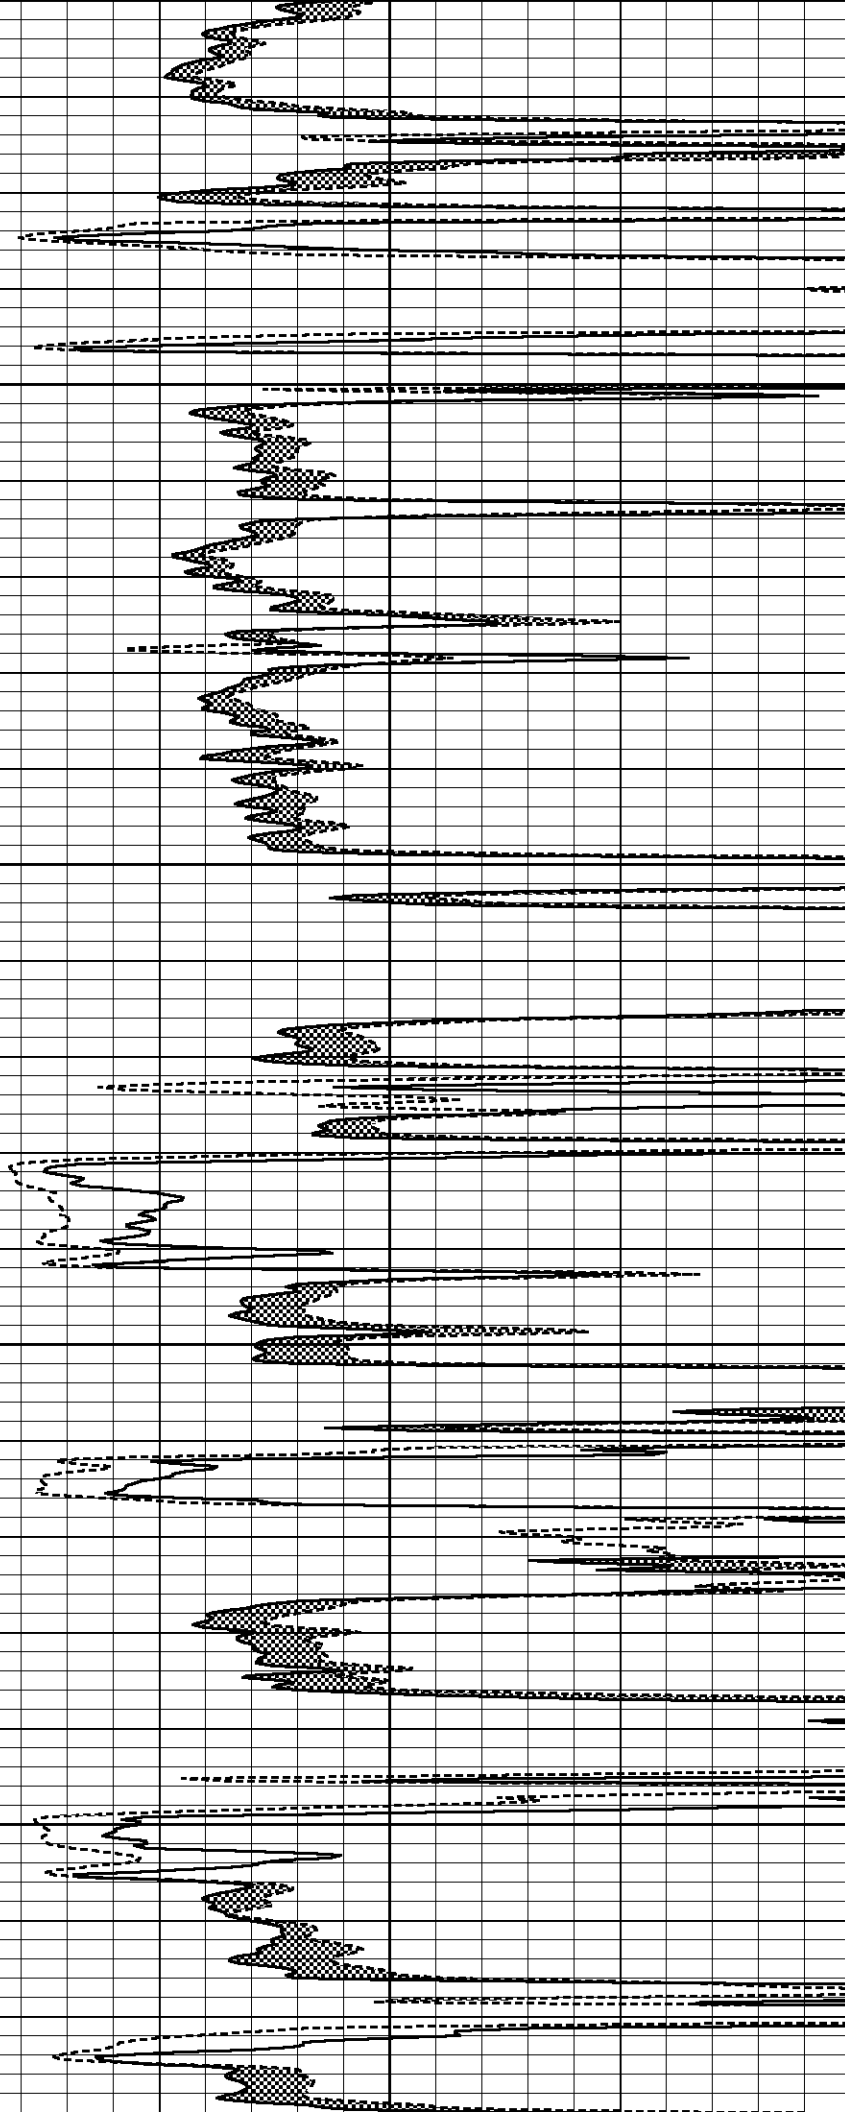

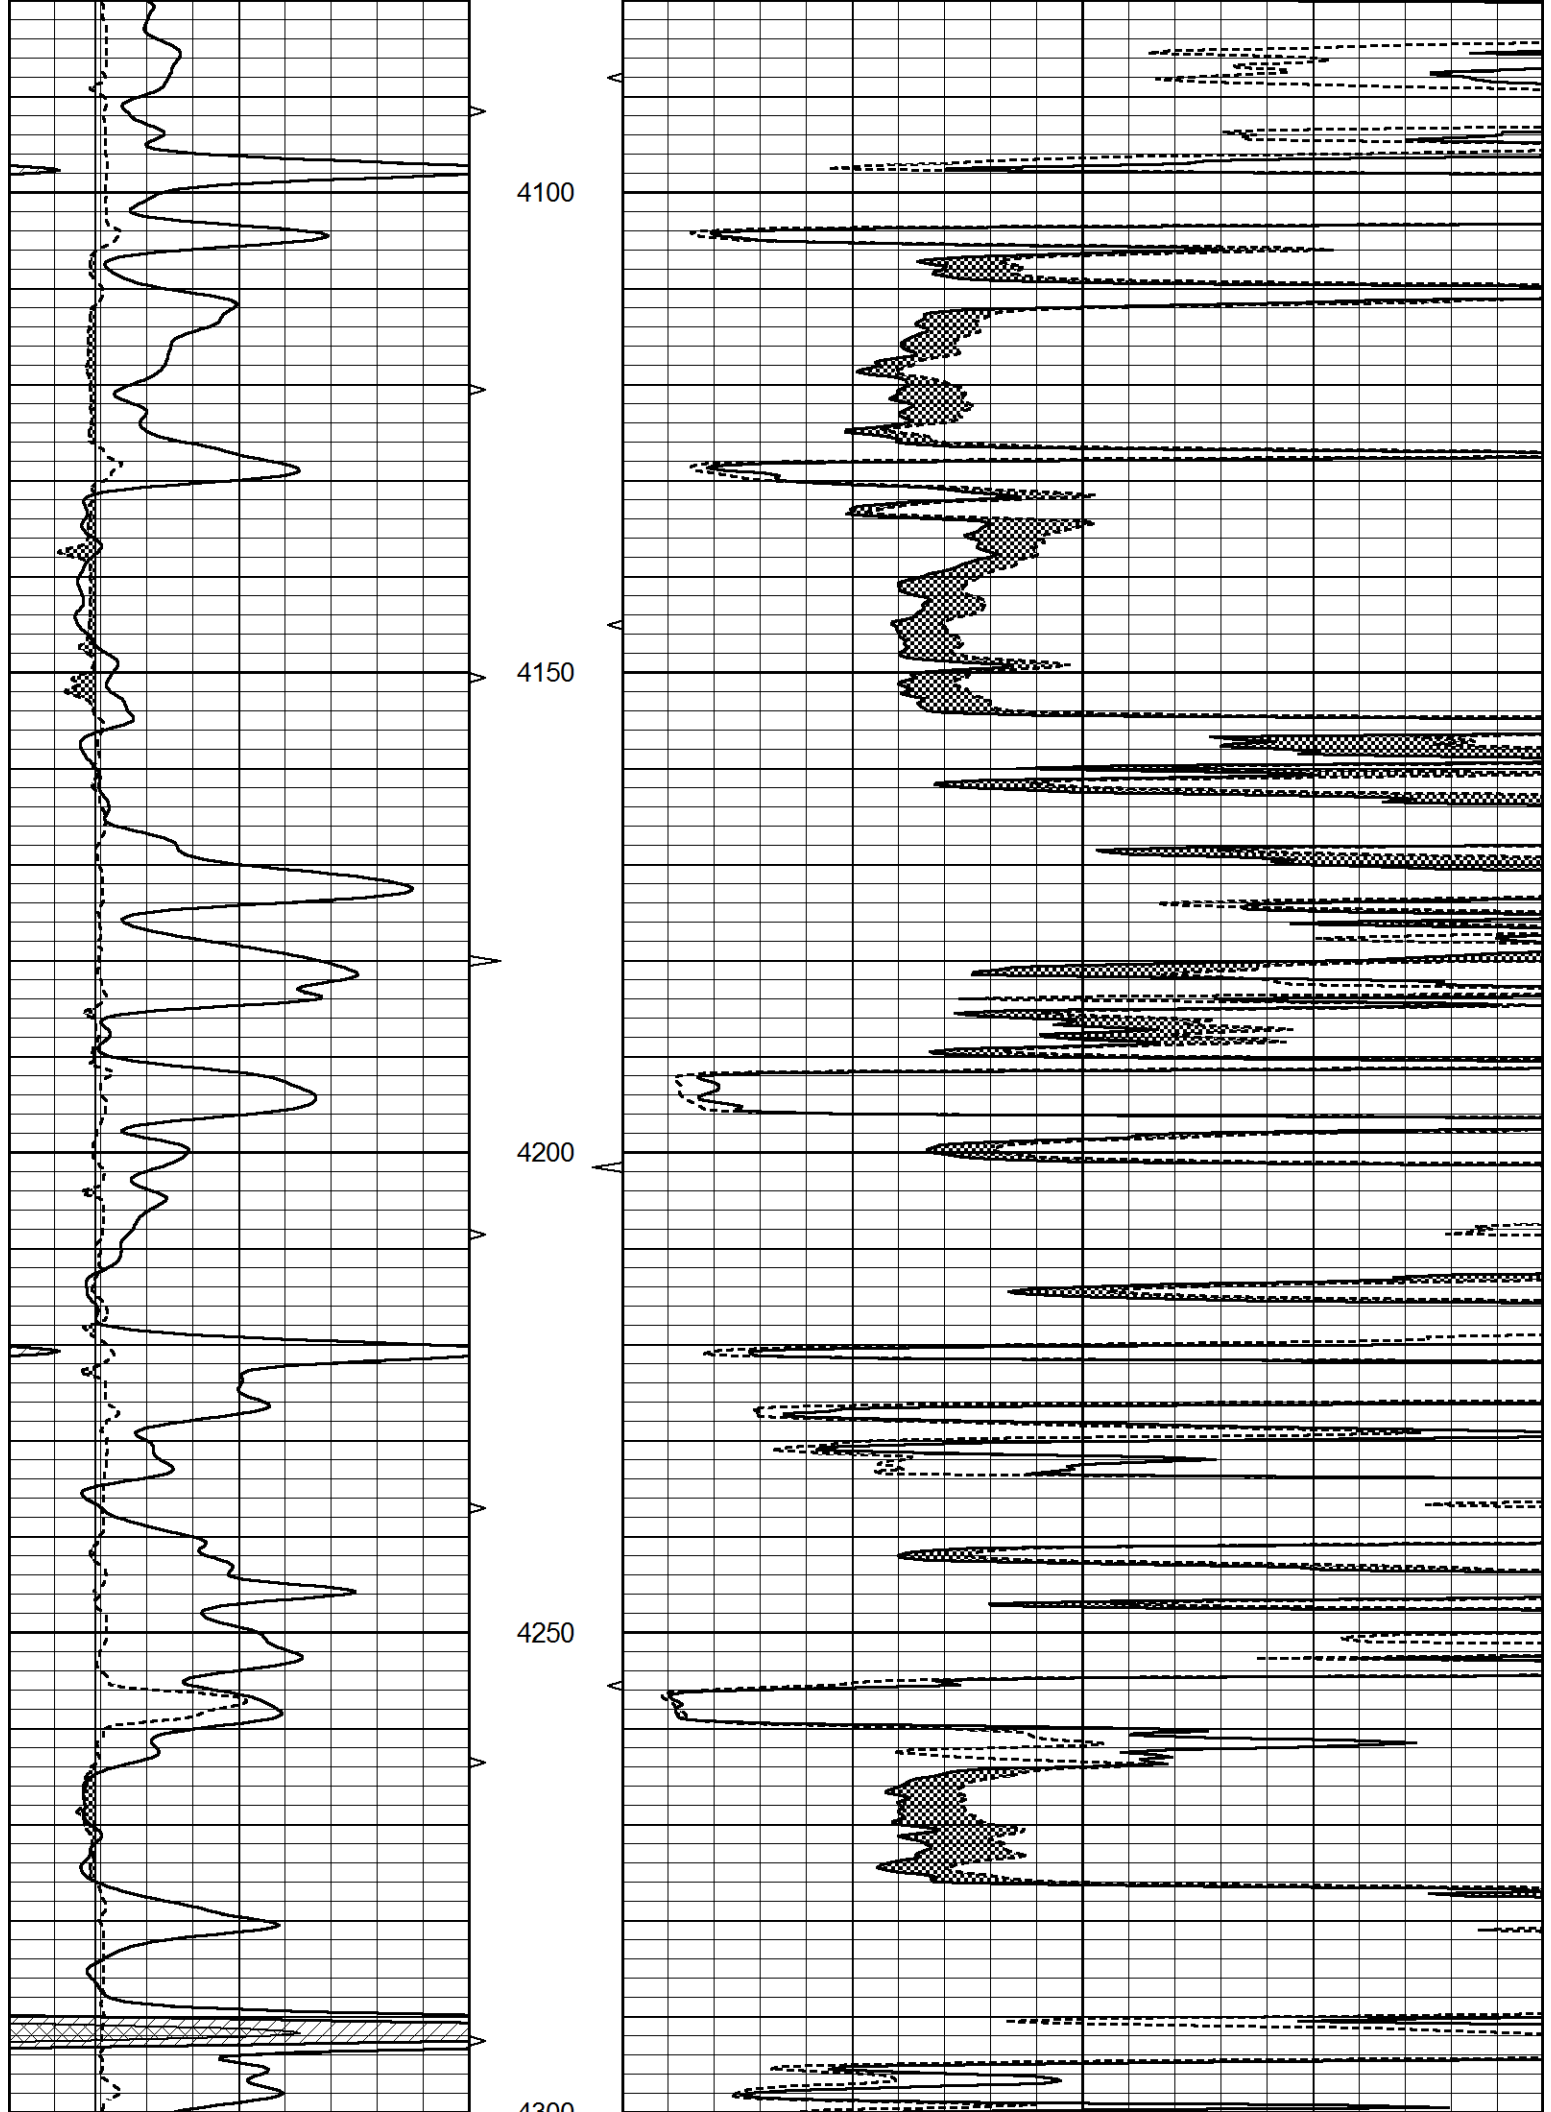

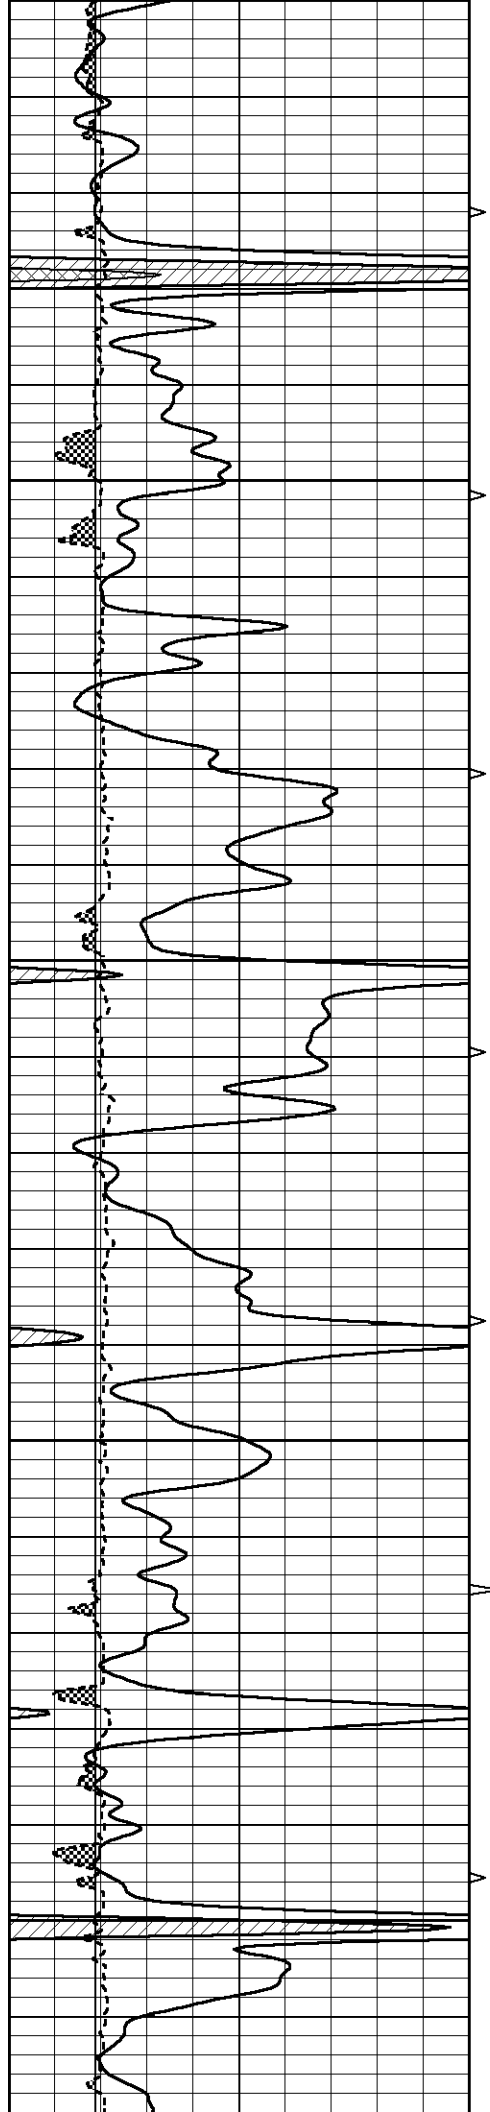


4300


4350


4400

4450

4500


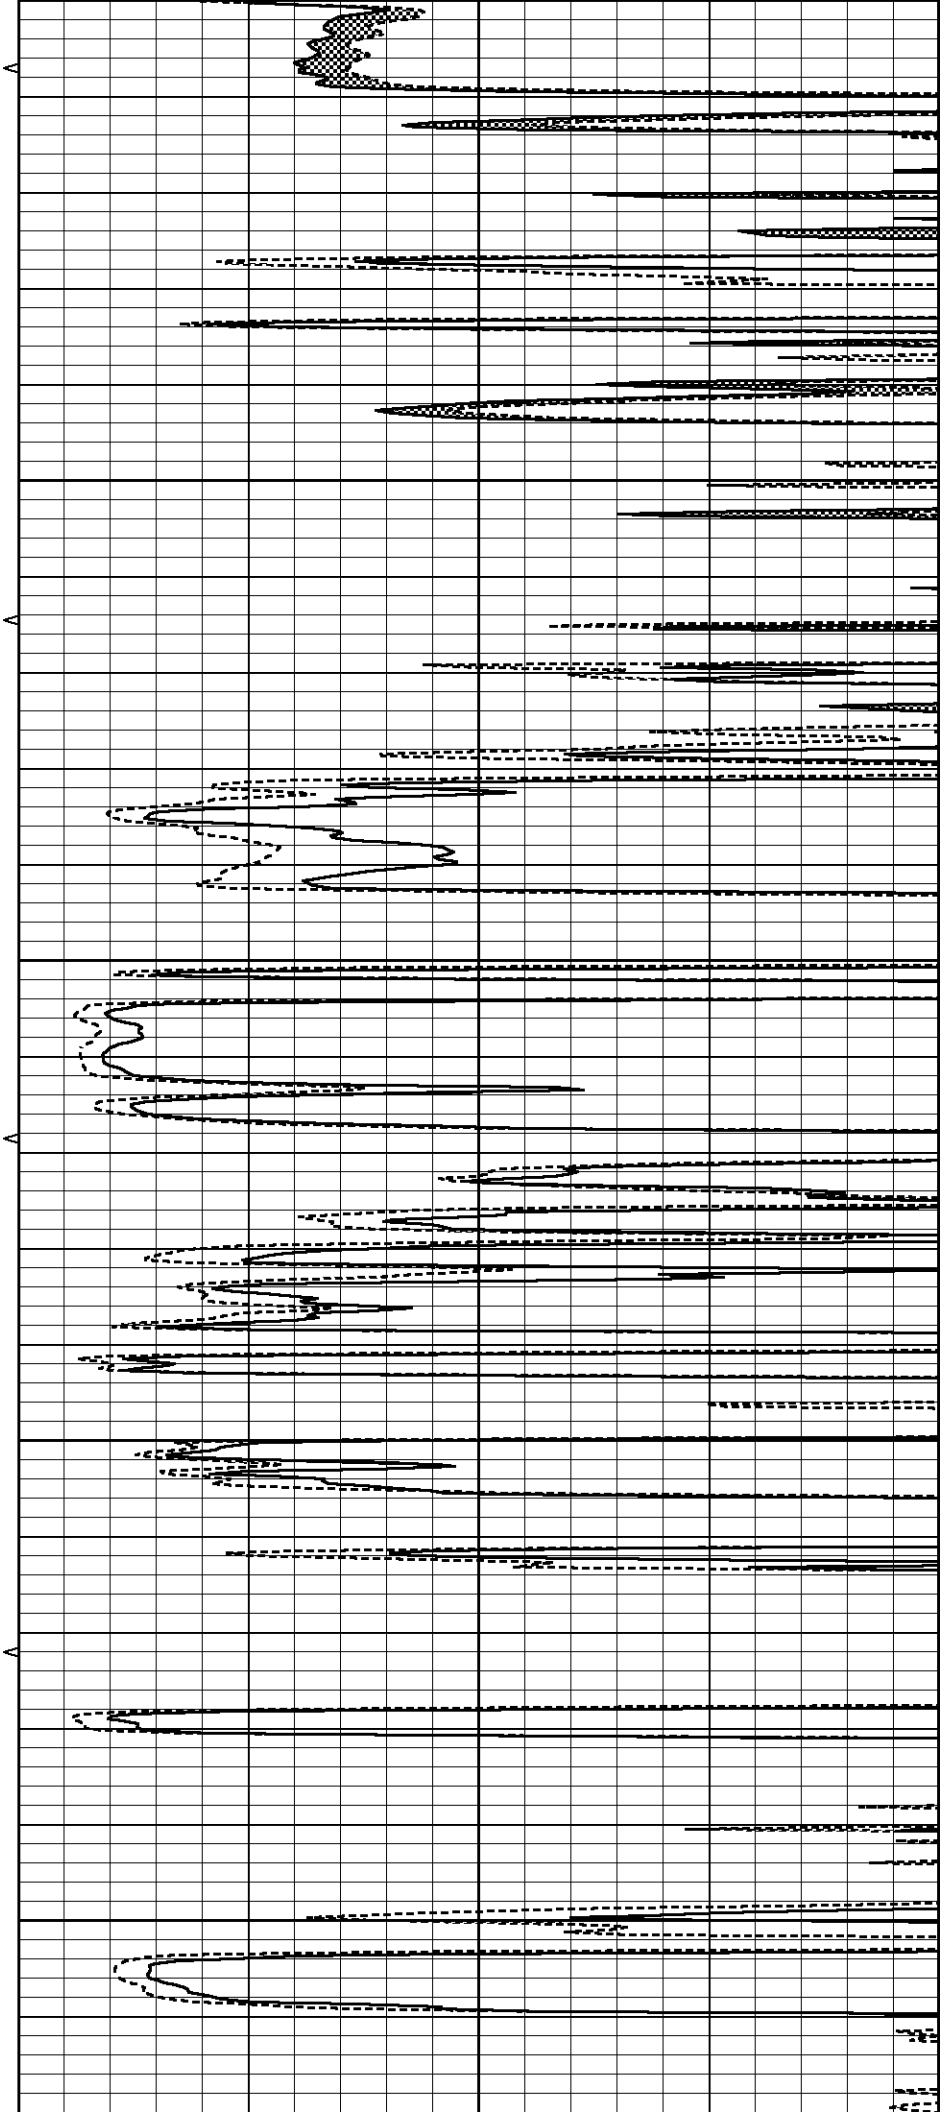


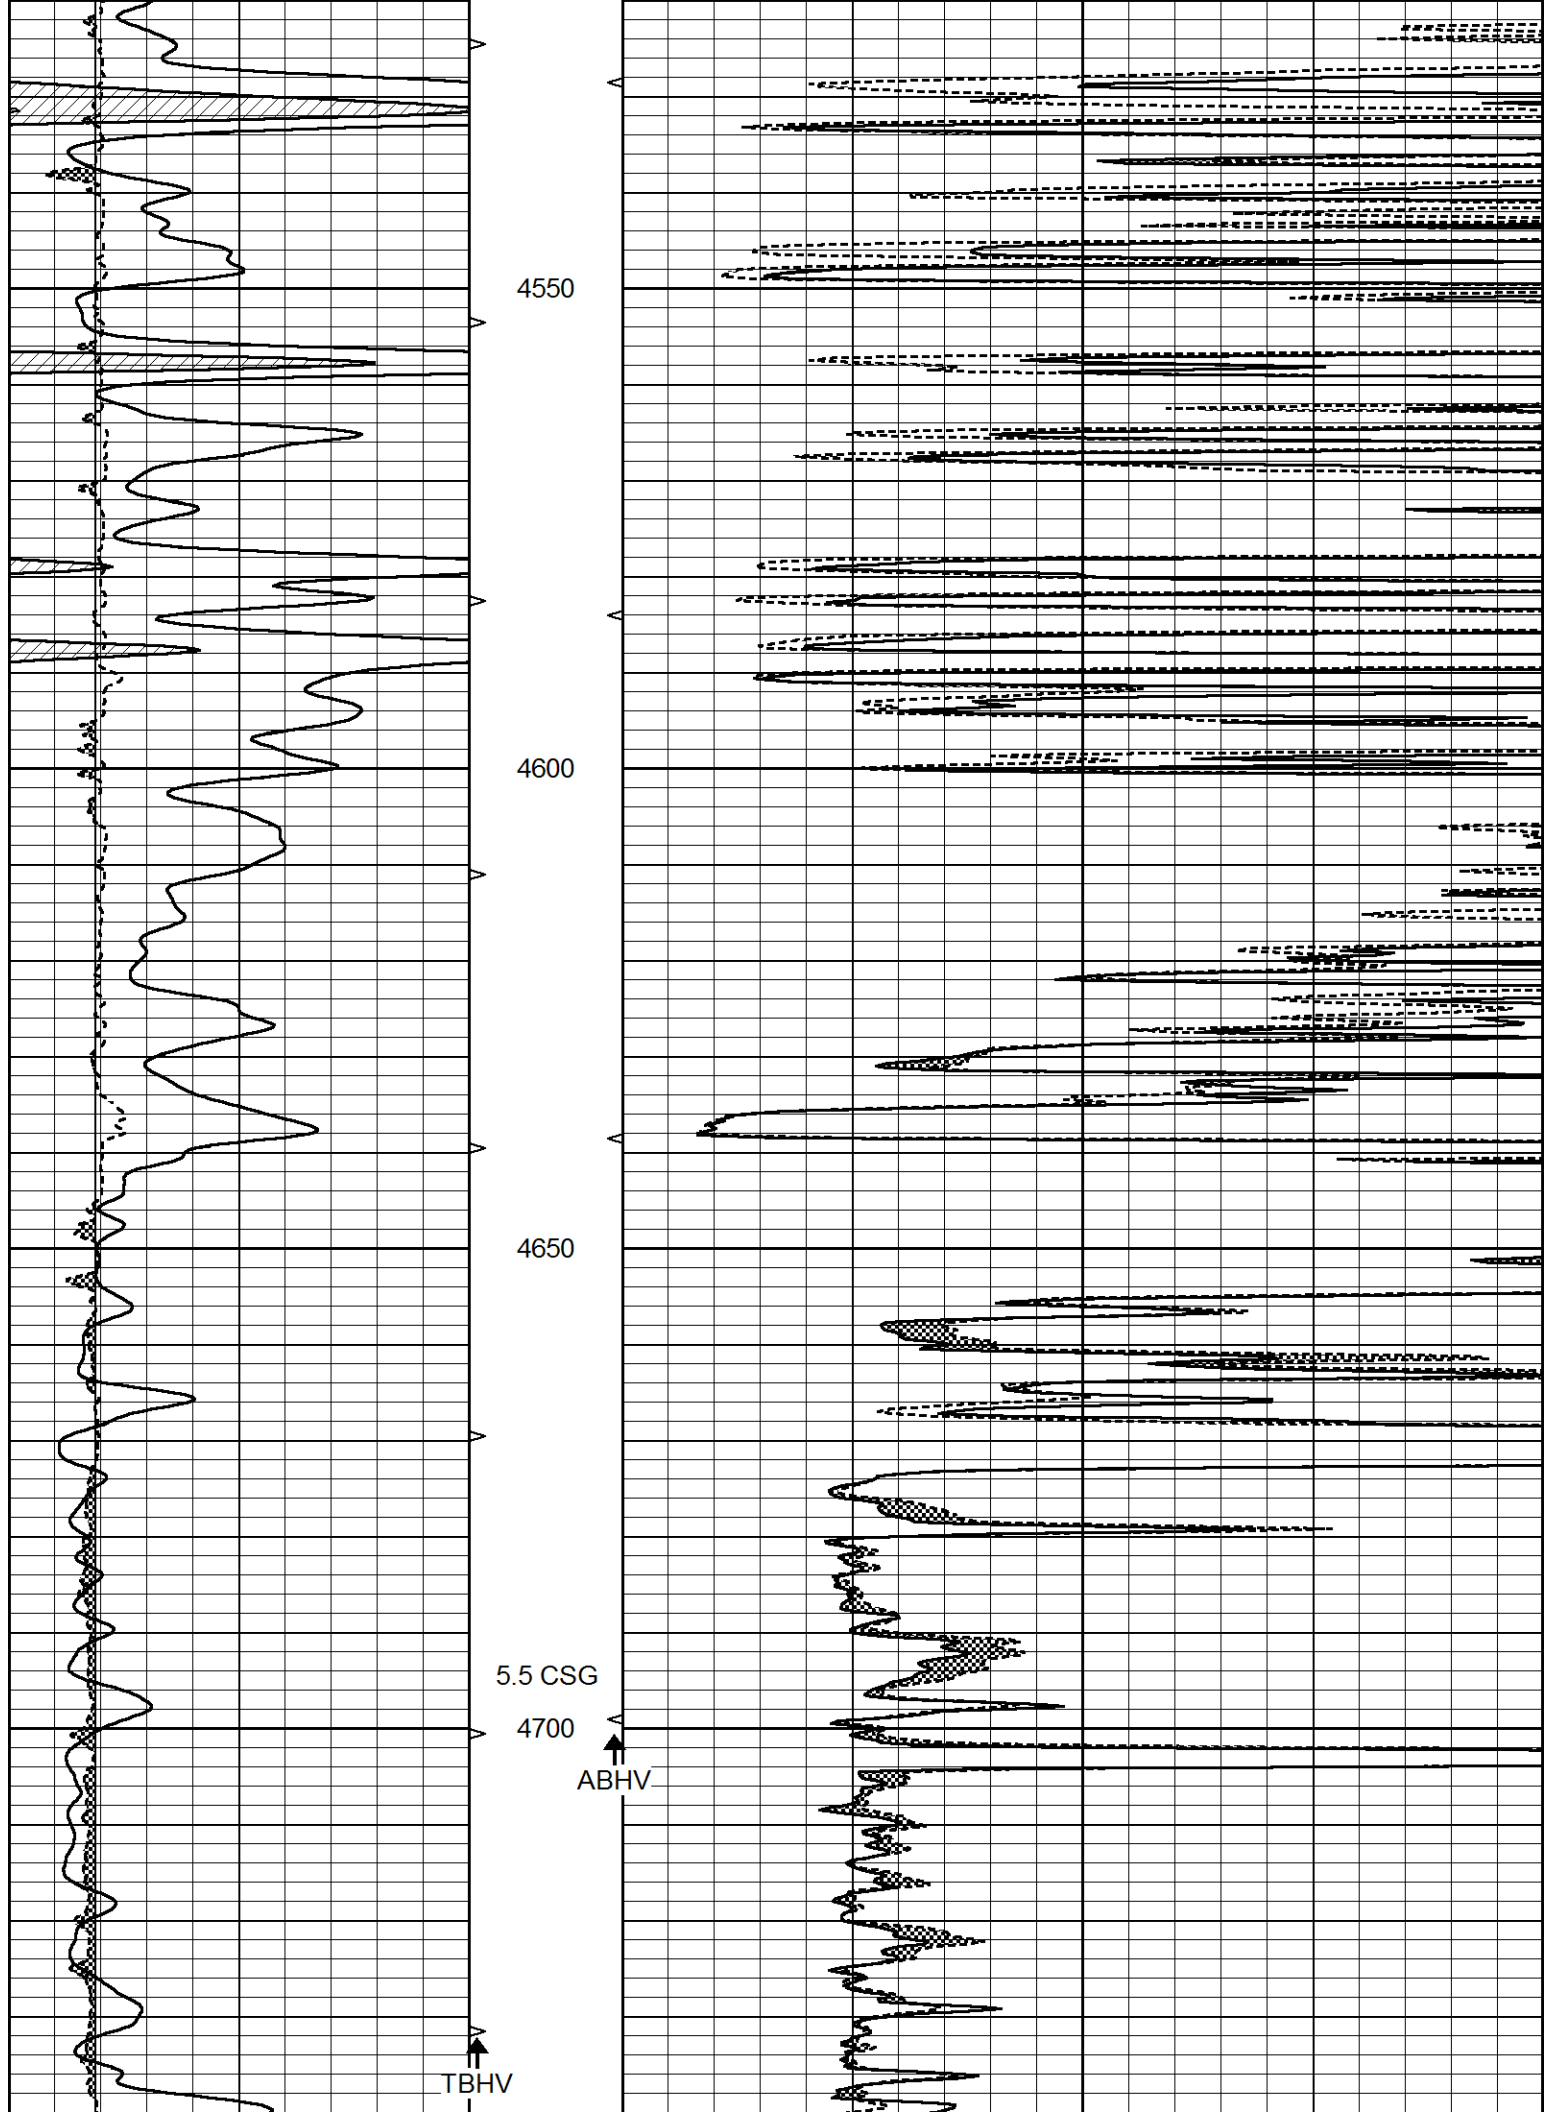


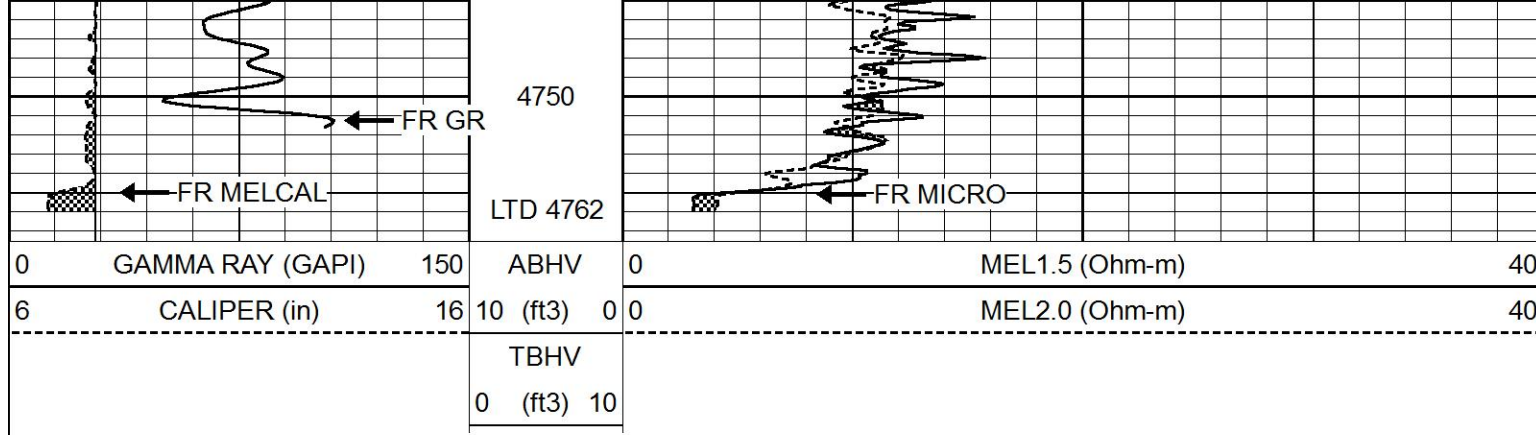

REPEAT SECTION

Database File 6073ddn.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Tue Jan 04 07:43:16 2022
 Charted by Depth in Feet scaled 1:240

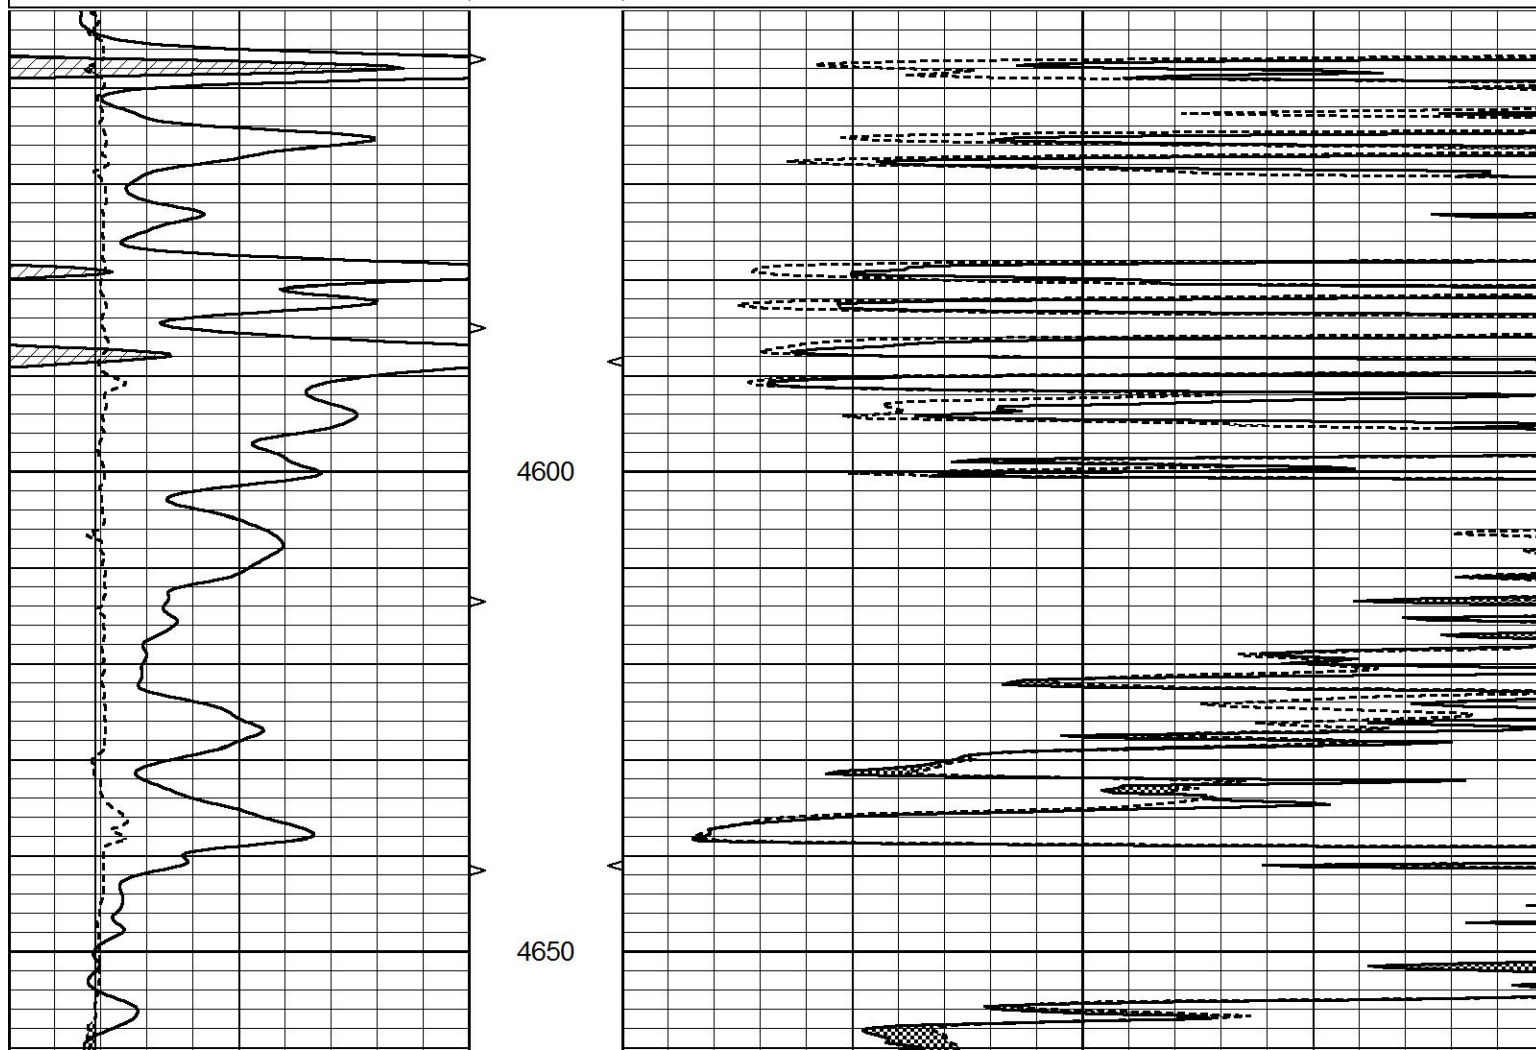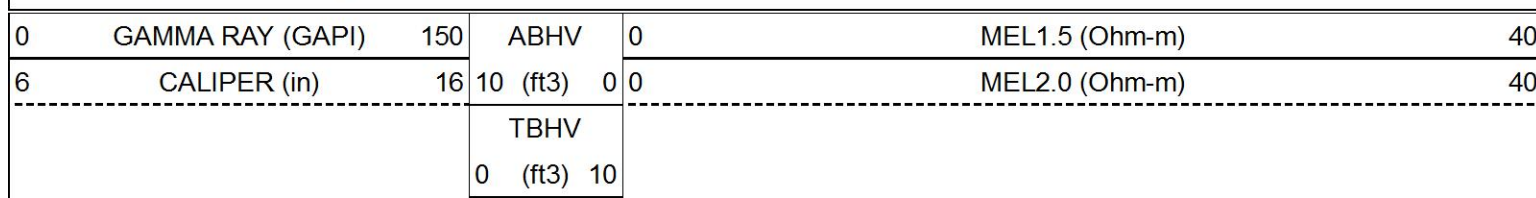

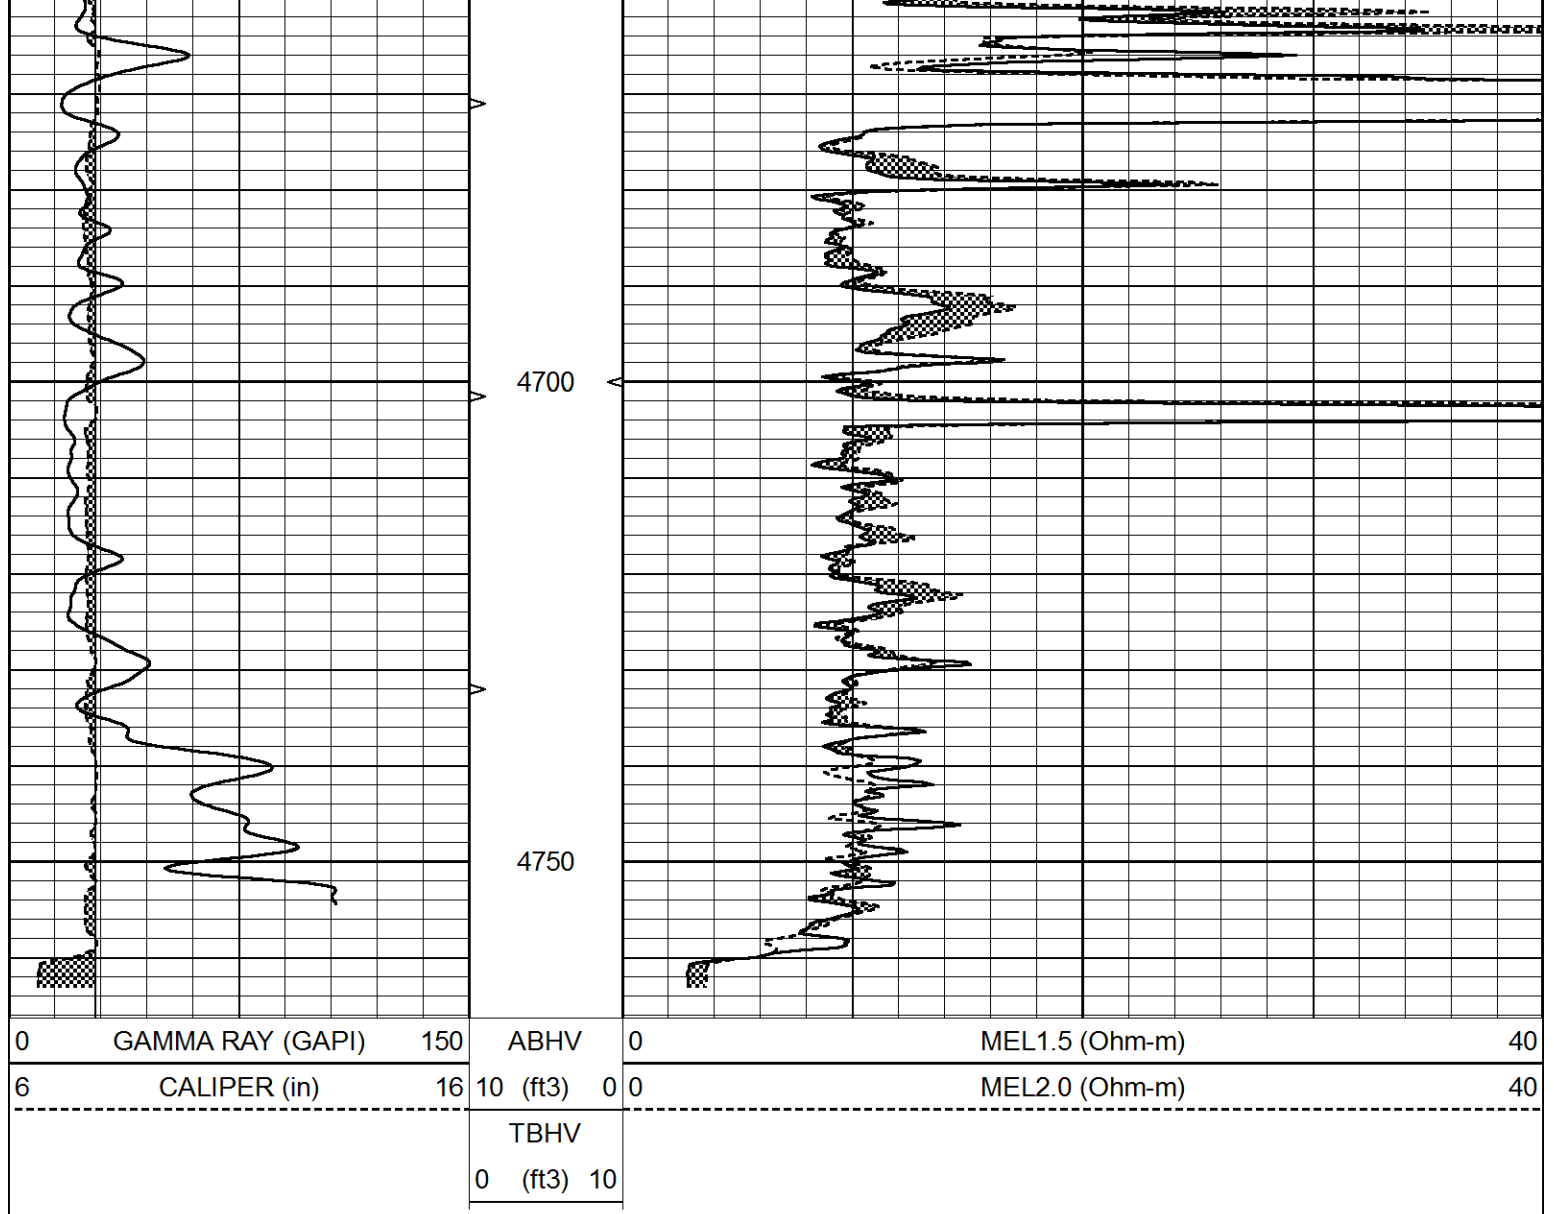

Calibration Report			
Database File	6073ddn.db		
Dataset Pathname	pass5.1		
Dataset Creation	Tue Jan 04 07:43:16 2022		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	Probel		
Performed:	Tue Dec 21 16:59:08 2021		
Caliper Calibration:	Gain=3.755	Offset=1.950	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.451	3.049	
1.5" Calibration:	Gain=55.000	Offset=-0.700	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=50.000	Offset=-0.650	
References	Low Cal	High Cal	
	0.000	20.000	

Readings			0.021	0.810				
Microlog Calibration Report								
Serial-Model: Performed:			070911-ProbeL Sat Apr 11 01:13:01 2015					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Fri Oct 30 21:32:56 2020					
Calibrator Value:			1.0		GAPI			
Background Reading:			0.0		cps			
Calibrator Reading:			1.0		cps			
Sensitivity:			0.2700		GAPI/cps			