



QUAD COMBO LOG

Company BEREXCO, LLC.

Well WALKER UNIT #7-29

Field CONGDON NORTH

County FINNEY State KANSAS

Location: API # : 15-055-22544-0000

1849' FNL & 1780' FWL
SE - NW - SE - NW

SEC 29 TWP 23S RGE 32W

Permanent Datum GROUND LEVEL Elevation 2842
Log Measured From KELLY BUSHING 9' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/MEL/SON
Elevation
K.B. 2851
D.F. 2849
G.L. 2842

Date 1/13/22

Run Number ONE

Depth Driller 4950

Depth Logger 4946

Bottom Logged Interval 4944

Top Log Interval 3700

Casing Driller 8 5/8" @ 1717'

Casing Logger 1677

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD CHLORIDES 3,800 PPM

Density / Viscosity 9.3/65

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.20@58F

Rmf @ Meas. Temp .900@58F

Rmc @ Meas. Temp 1.44@58F

Source of Rmf / Rmc MEASURED

Rm @ BHT .557@125F

Time Circulation Stopped 3 HOURS

Time Logger on Bottom 1:30 A.M.

Maximum Recorded Temperature 125F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By PETE VOLLMER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-055-22544-0000

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS


GARDEN CITY, KS., 3N. ON HWY 83 TO "LOWE RD.", 1E. TO "THIRD ST.", 1/2S., E. INTO





MAIN SECTION


Database File		5934pe.db							
Dataset Pathname		pass4.1L							
Presentation Format		obrcompcol							
Dataset Creation		Thu Jan 13 06:48:17 2022							
Charted by		Depth in Feet scaled 1:240							
0	Gamma Ray (GAPI)	150	MEL15	0.2	Deep Resistivity (Ohm-m)	200	30	Sonic Porosity (pu)	-10
-100	SP (mV)	100	(Ohm-m)	0.2	Medium Resistivity (Ohm-m)	200	30	CN Porosity (pu)	-10
-200	RxoRt	100	0 20	0.2	Shallow Resistivity (Ohm-m)	200	30	Density Porosity (pu)	-10
6	DCAL (in)	16	MEL20				0	PE	20
6	MELCAL (in)	16	(Ohm-m)				RHOC		
			0 20				-0.25 (g/cc) 0.25		

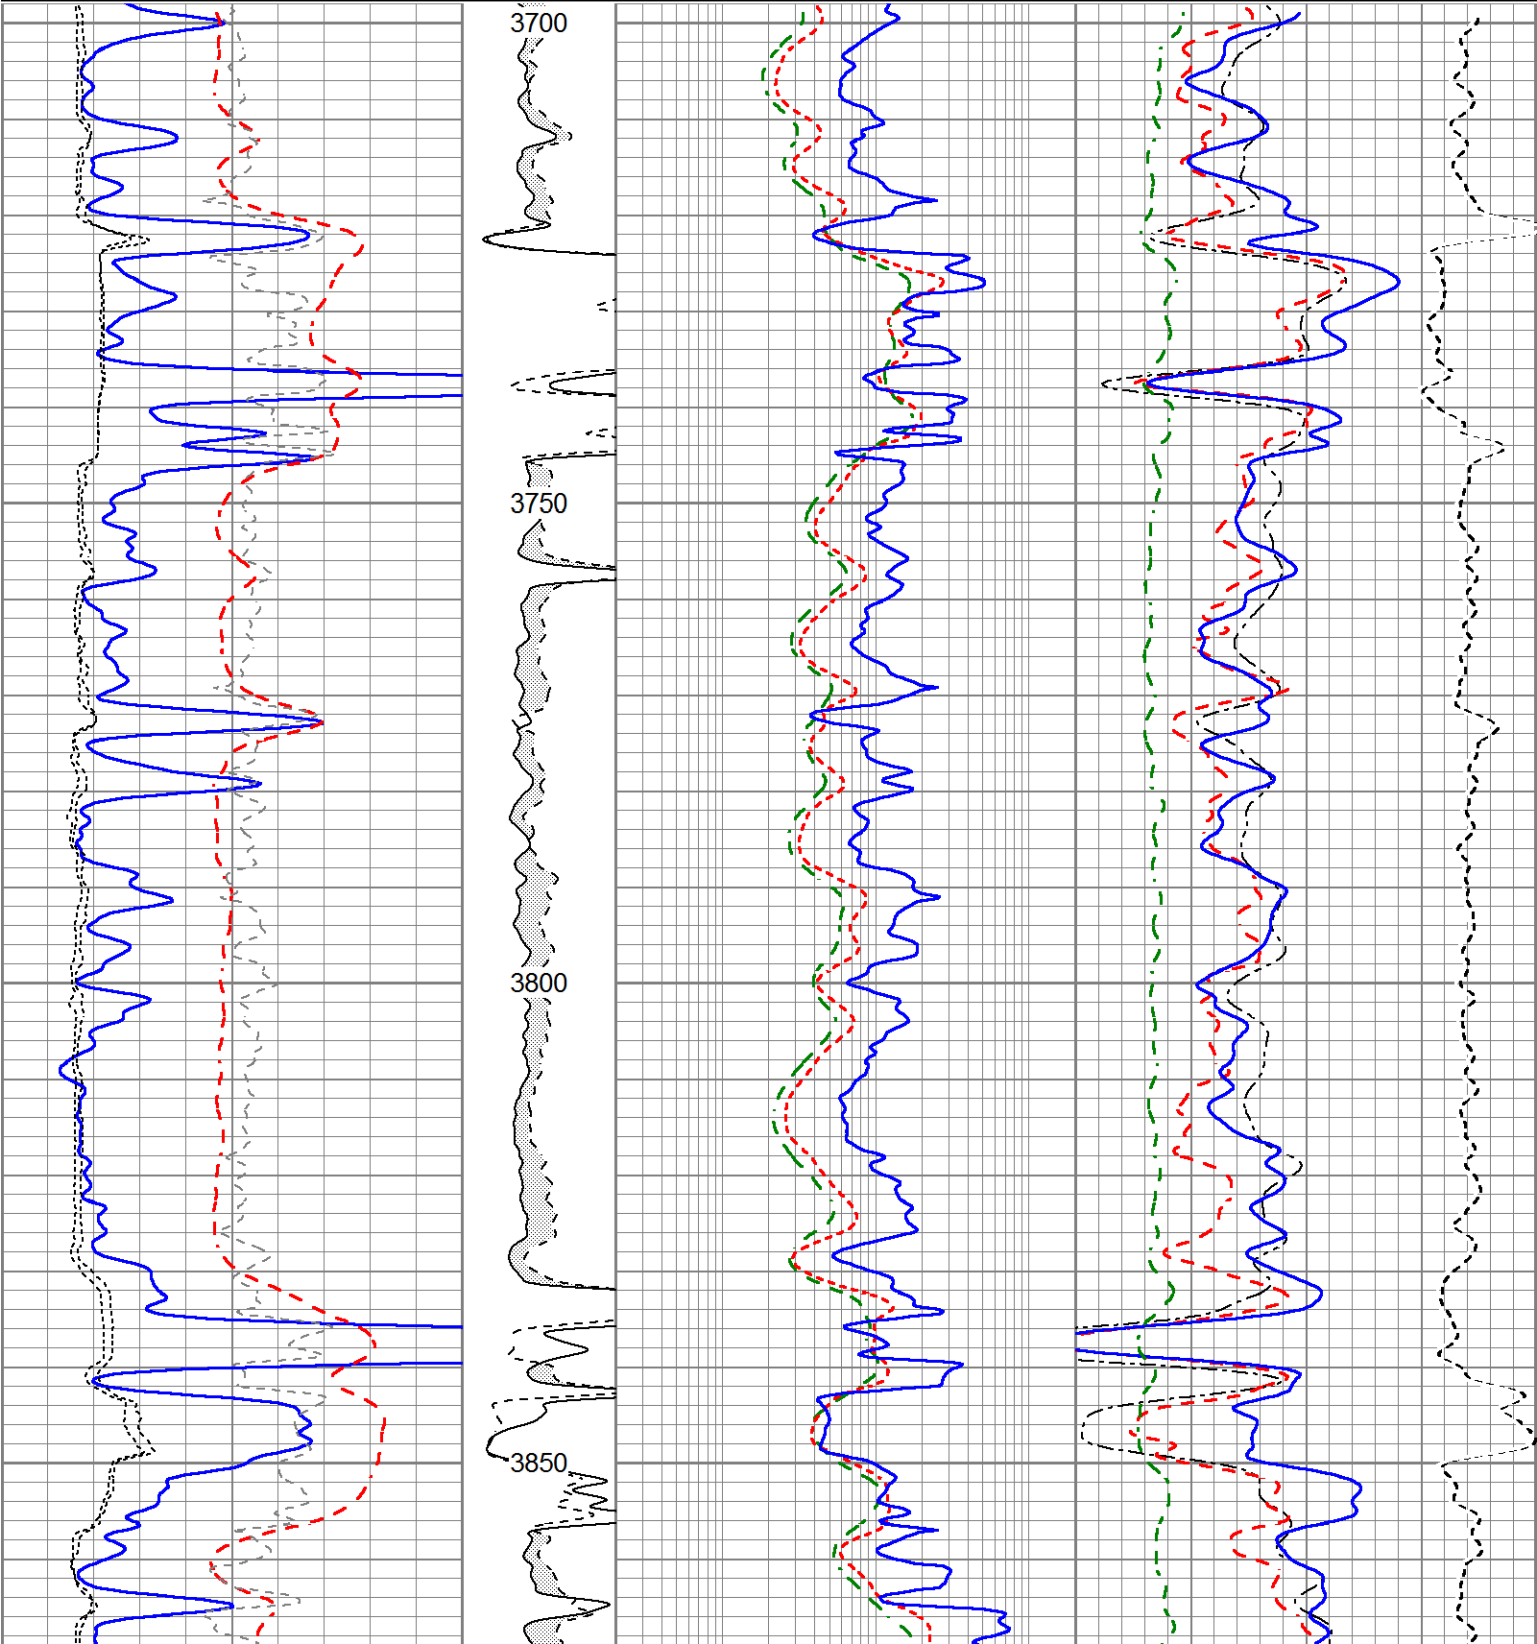


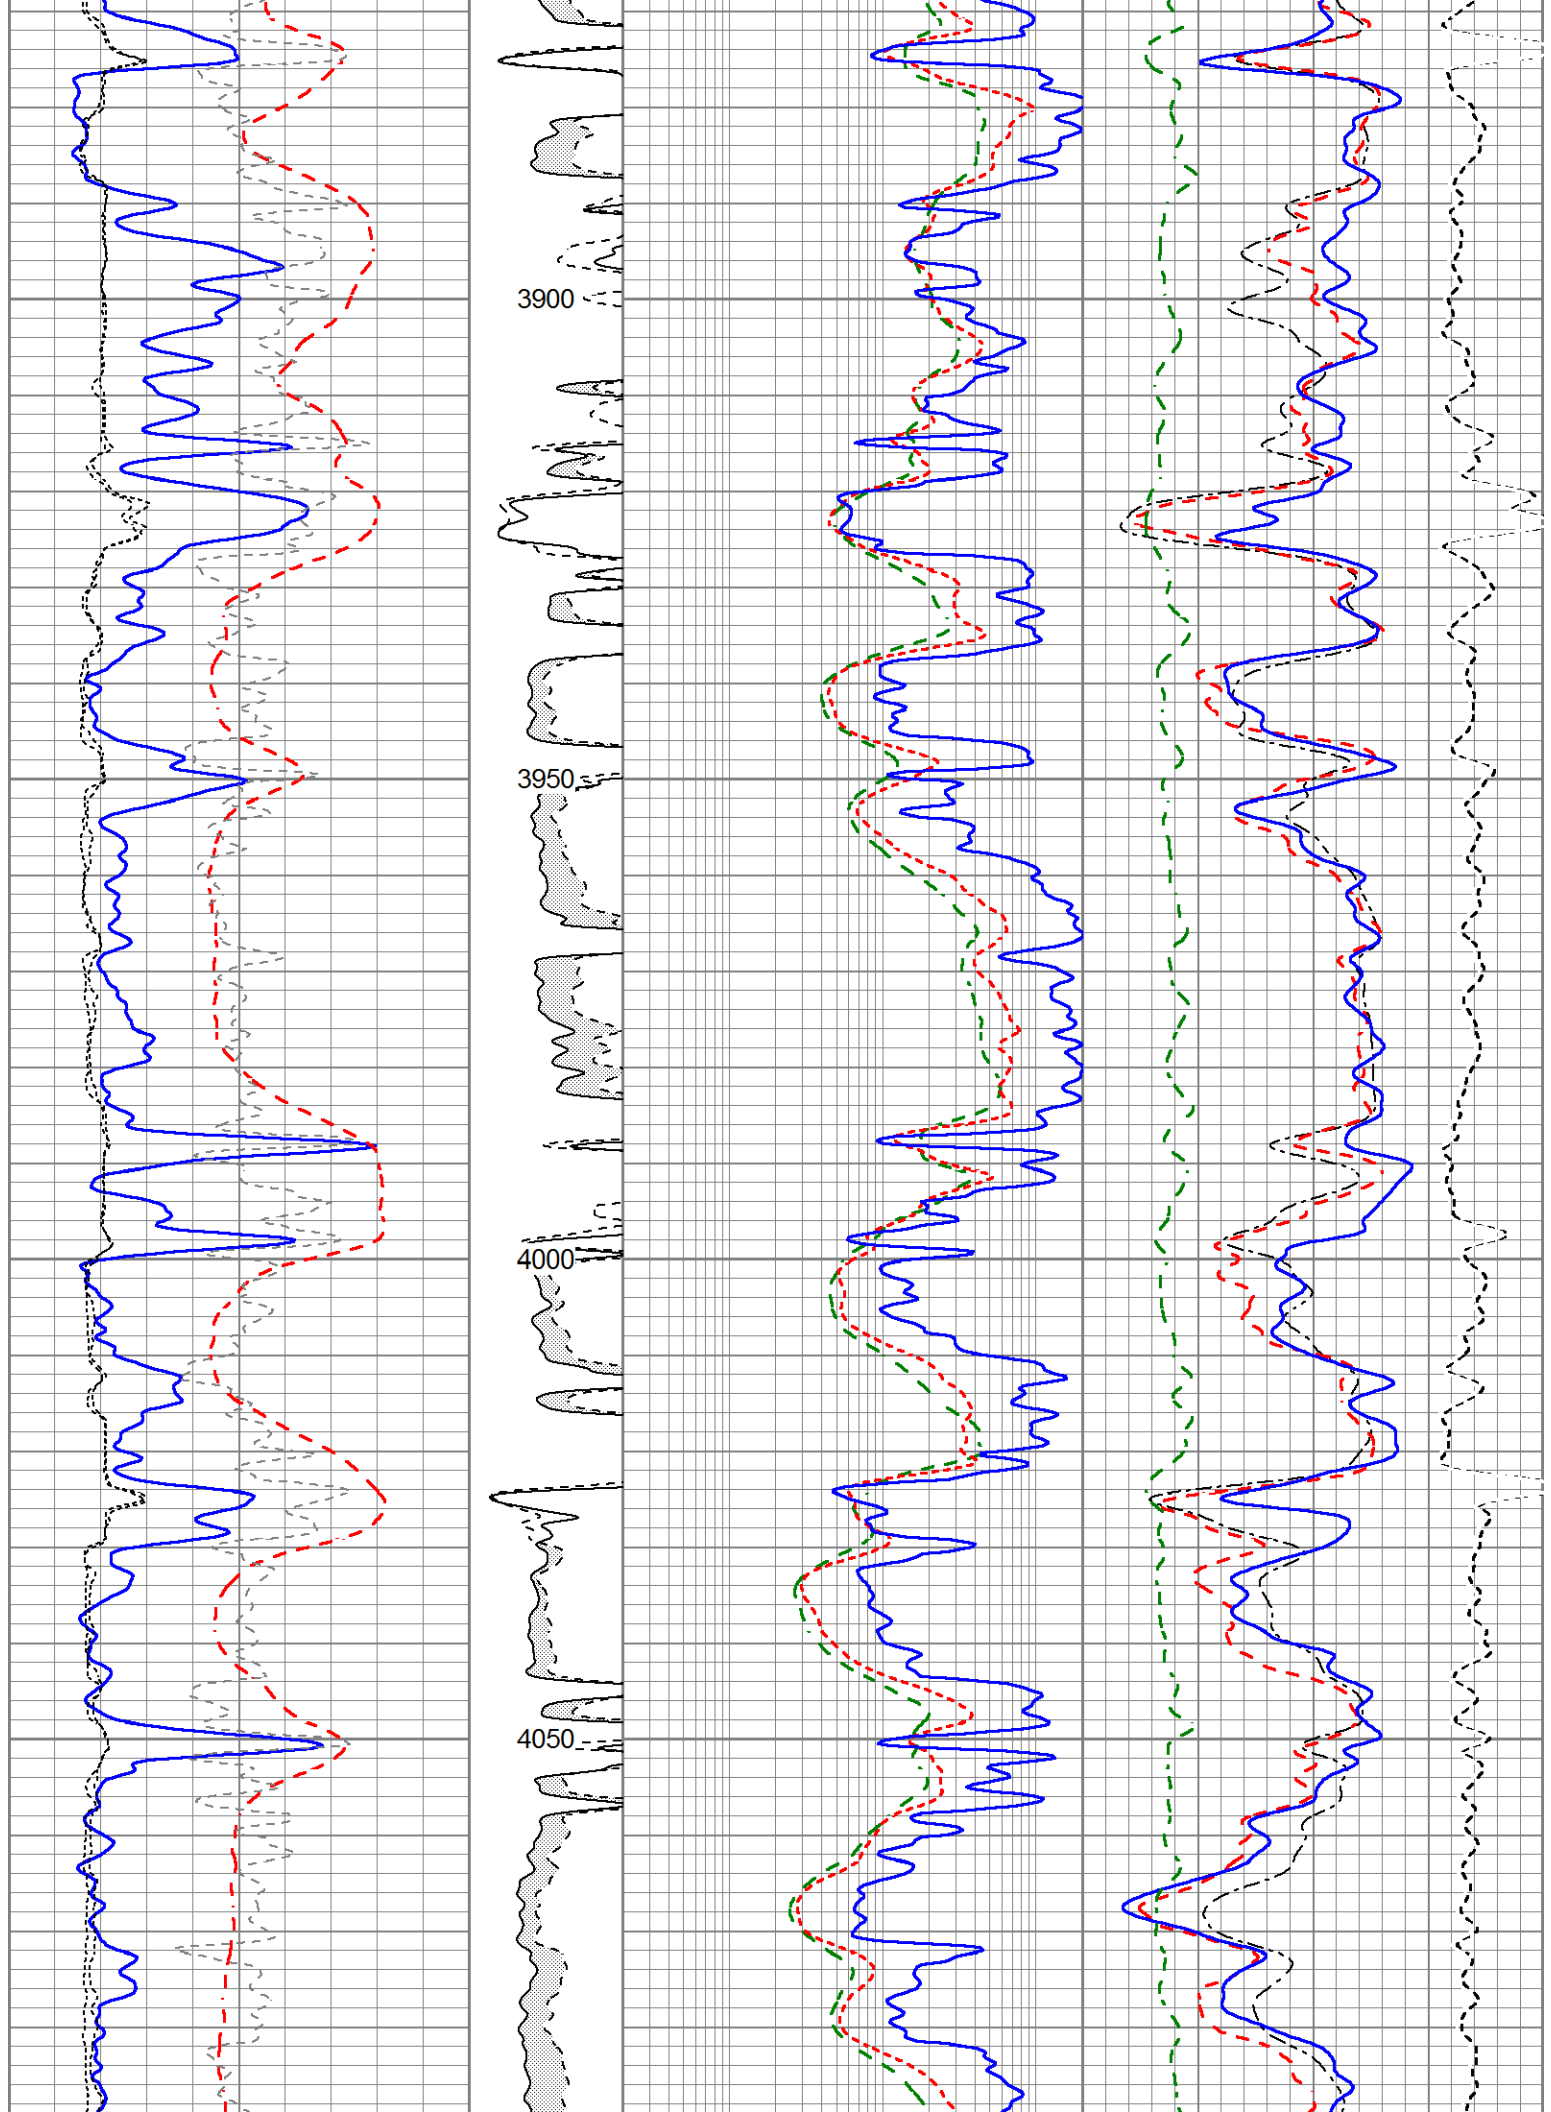

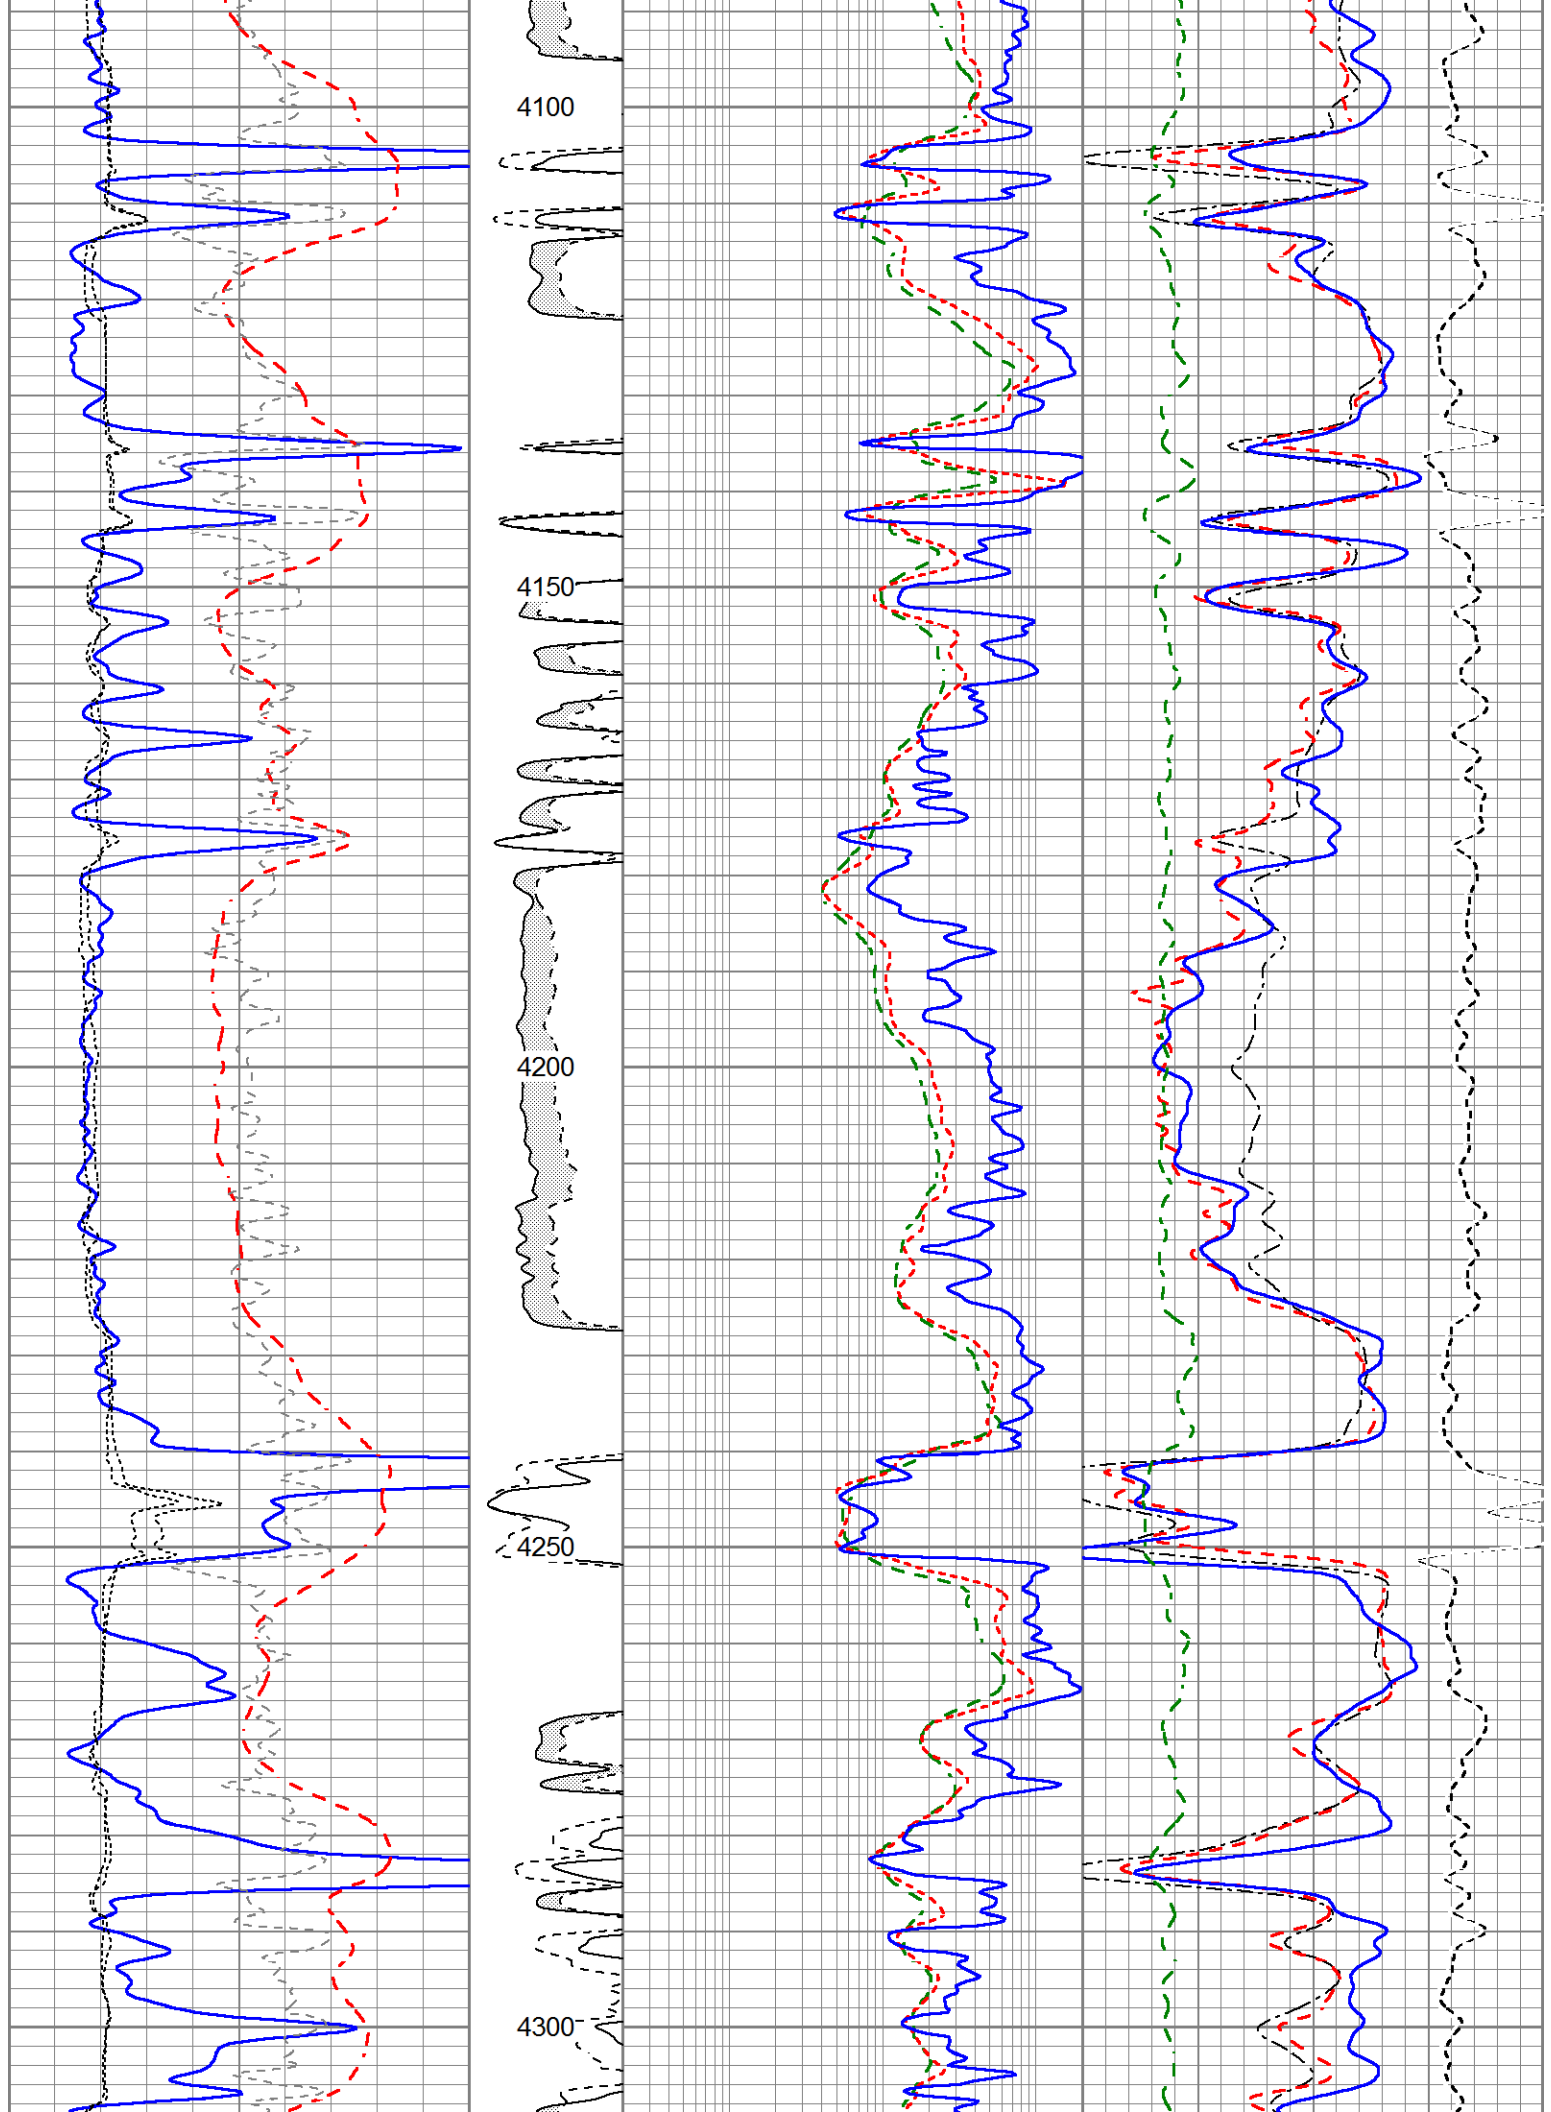

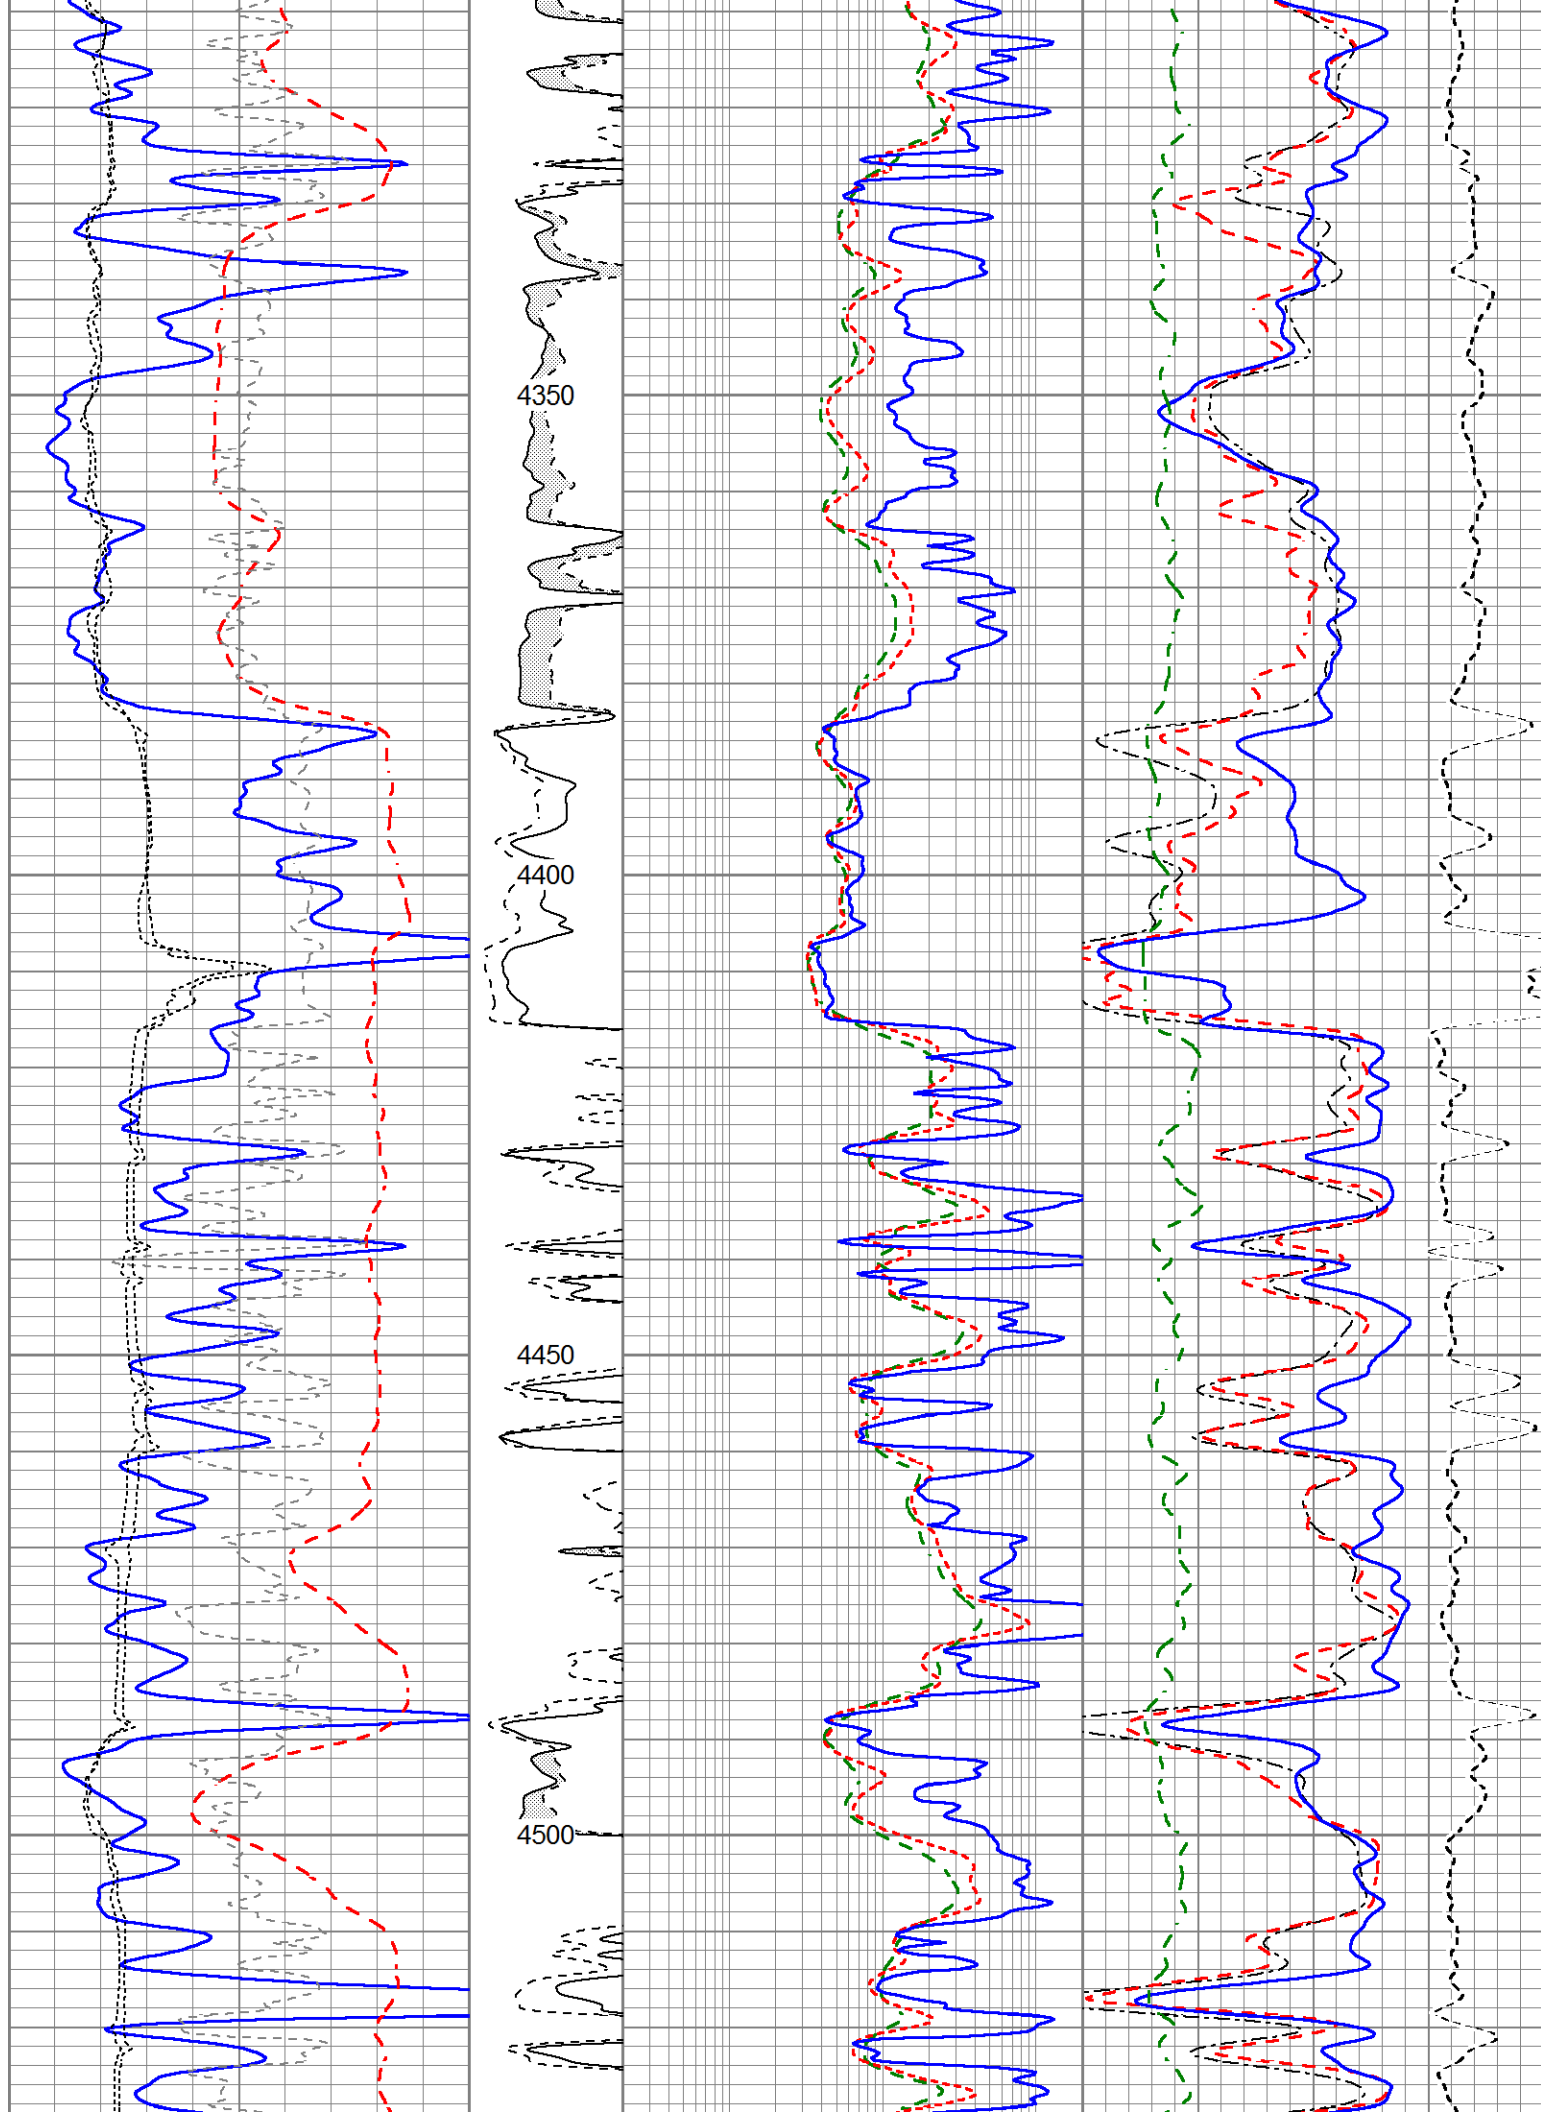

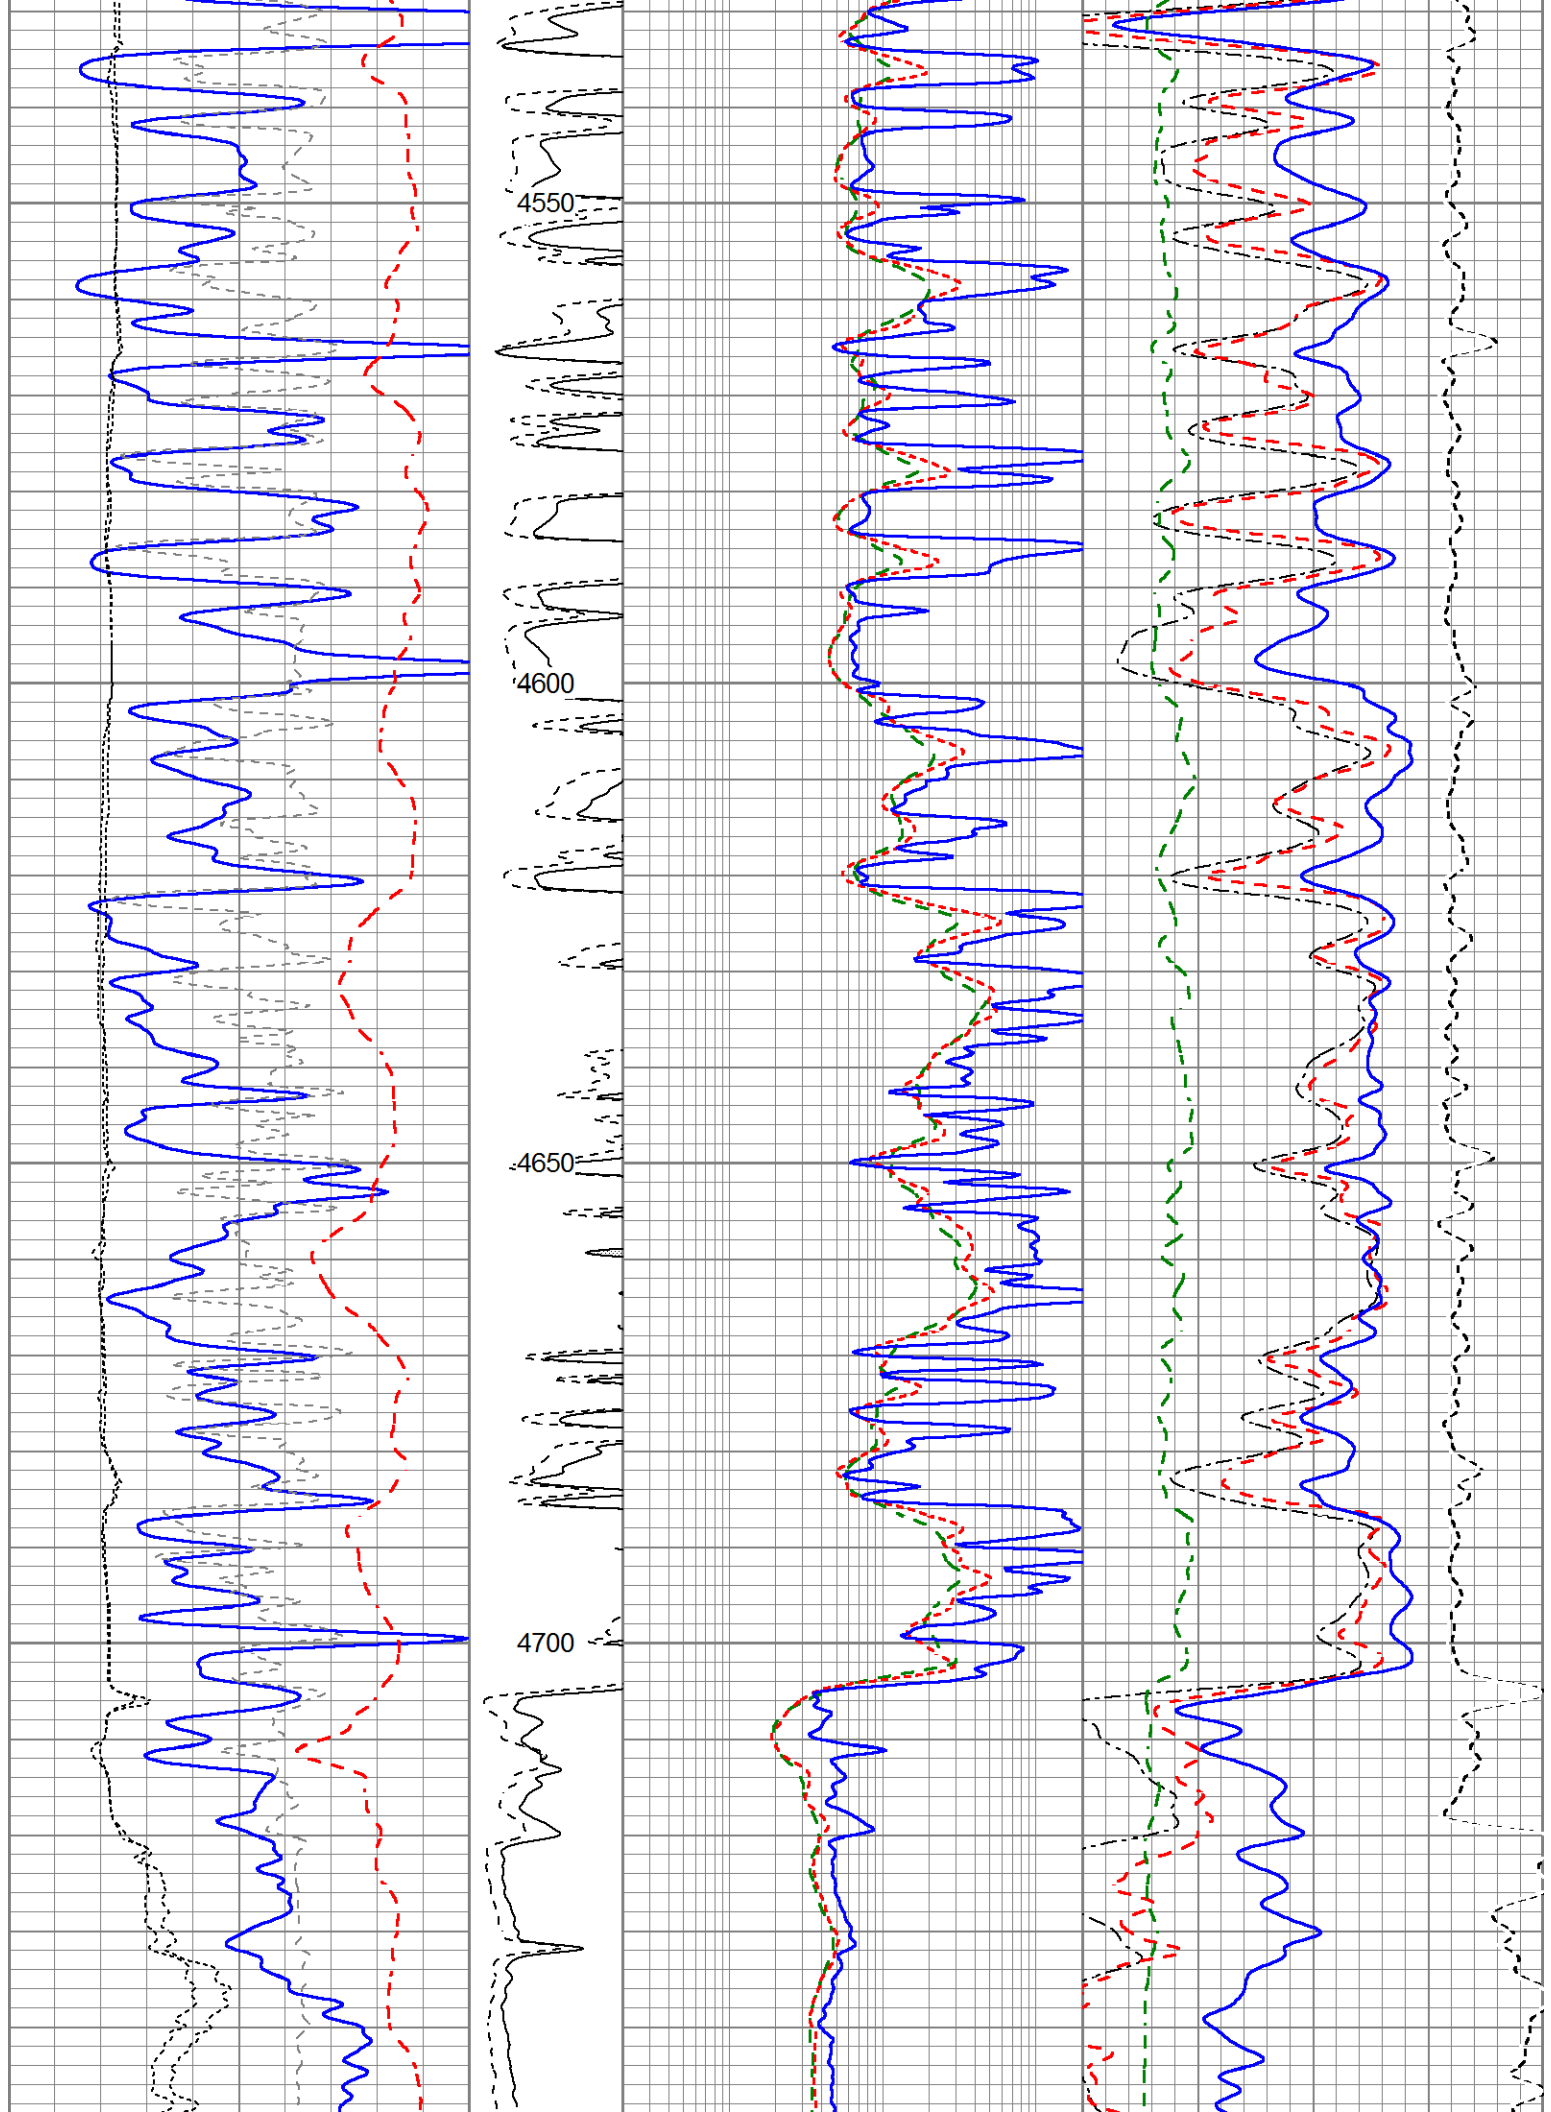

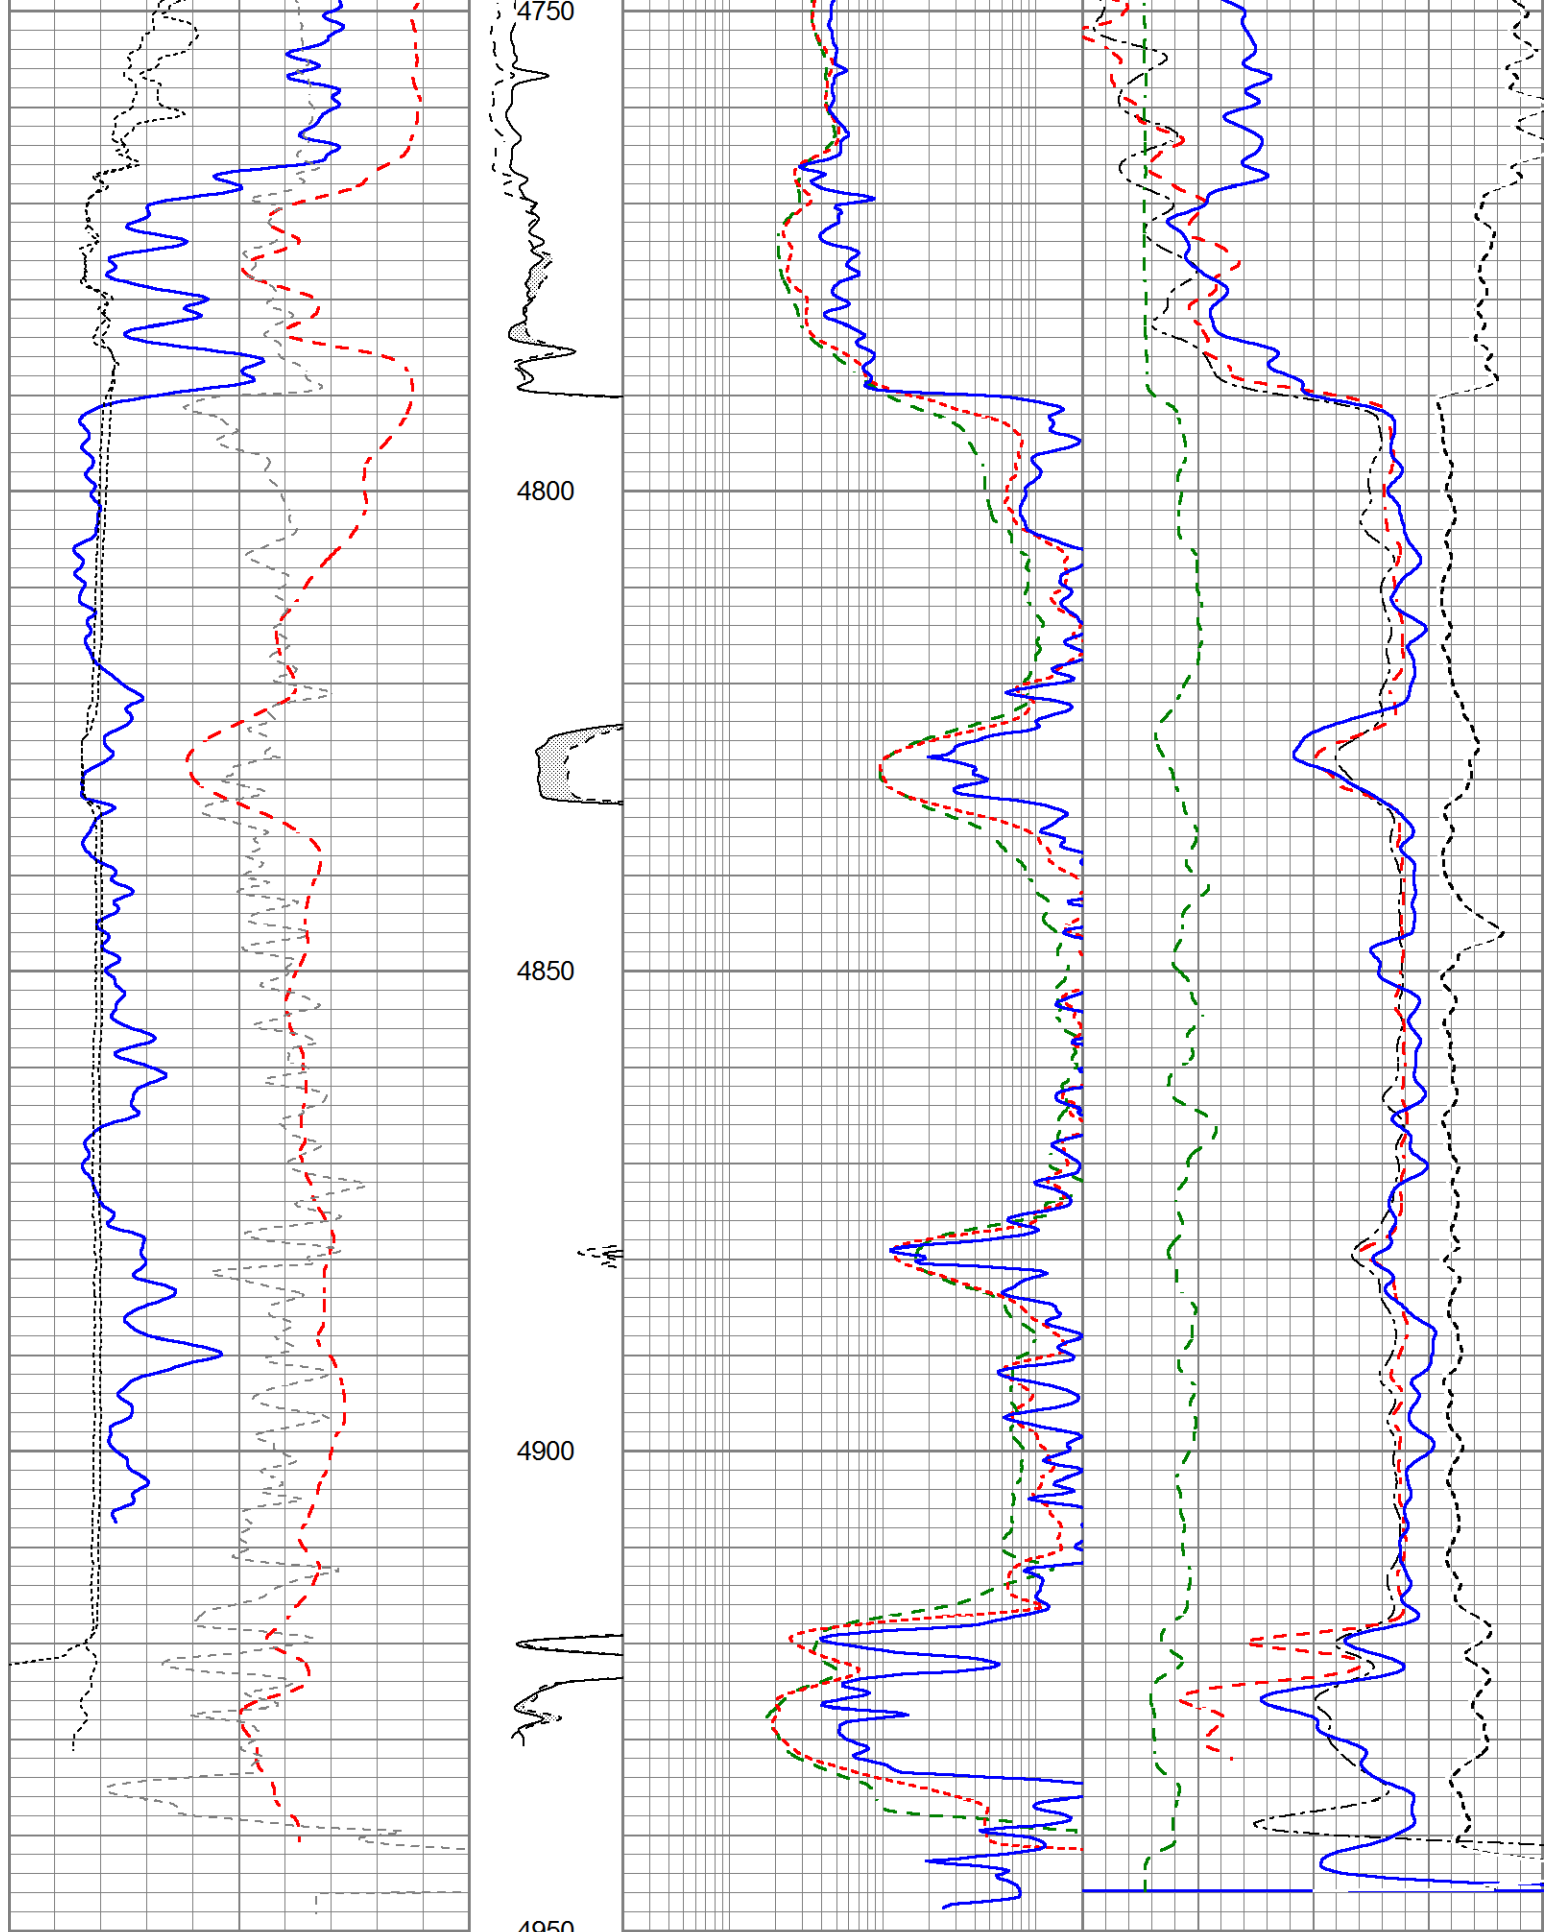

0	Gamma Ray (GAPI)	150	MEL15 (Ohm-m)	0.2	Deep Resistivity (Ohm-m)	200	30	Sonic Porosity (pu)	-10
-100	SP (mV)	100		0.2	Medium Resistivity (Ohm-m)	200	30	CN Porosity (pu)	-10
-200	RxoRt	100		0.2	Shallow Resistivity (Ohm-m)	200	30	Density Porosity (pu)	-10
6	DCAL (in)	16	MEL20				0	PE	20

6	MELCAL (in)	16	(Ohm-m)		RHOC
		0	20		-0.25 (g/cc) 0.25