

MICRO LOG

Company		RAYDON EXPLORATION, INC.	
Well		FANSHER FARMS #2-6	
Field		NA	
County		FINNEY	
State		KANSAS	
Location:		API # : 15-055-22548-0000	
Permanent Datum		GROUND LEVEL Elevation 2858	
Log Measured From		KELLY BUSHING 9' A.G.L	
Drilling Measured From		KELLY BUSHING	
SEC 6 TWP 23S RGE 32W		Elevation	
		K.B. 2867	
		D.F. 2865	
		G.L. 2858	
Date	1/28/22		
Run Number	TWO		
Depth Driller	5000		
Depth Logger	5000		
Bottom Logged Interval	4982		
Top Log Interval	3700		
Casing Driller	8 5/8" @ 1812		
Casing Logger	1812		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/42		
pH / Fluid Loss	10.0/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.20 @ 65F		
Rmf @ Meas. Temp	.90 @ 65F		
Rmc @ Meas. Temp	1.44 @ 65F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.62 @ 126F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	125F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI	TJ DREILING	
Witnessed By	ED GRIEVES		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


GARDEN CITY, KS. - NORTH TO 6 MILE RD. - 1/2 EAST TO THIRD ST. - 1 1/4 NORTH - WEST INTO

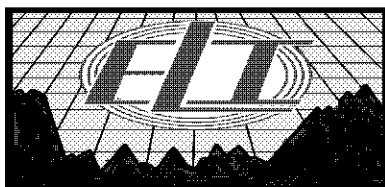


MAIN SECTION

Database File	6232pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Fri Jan 28 23:15:53 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

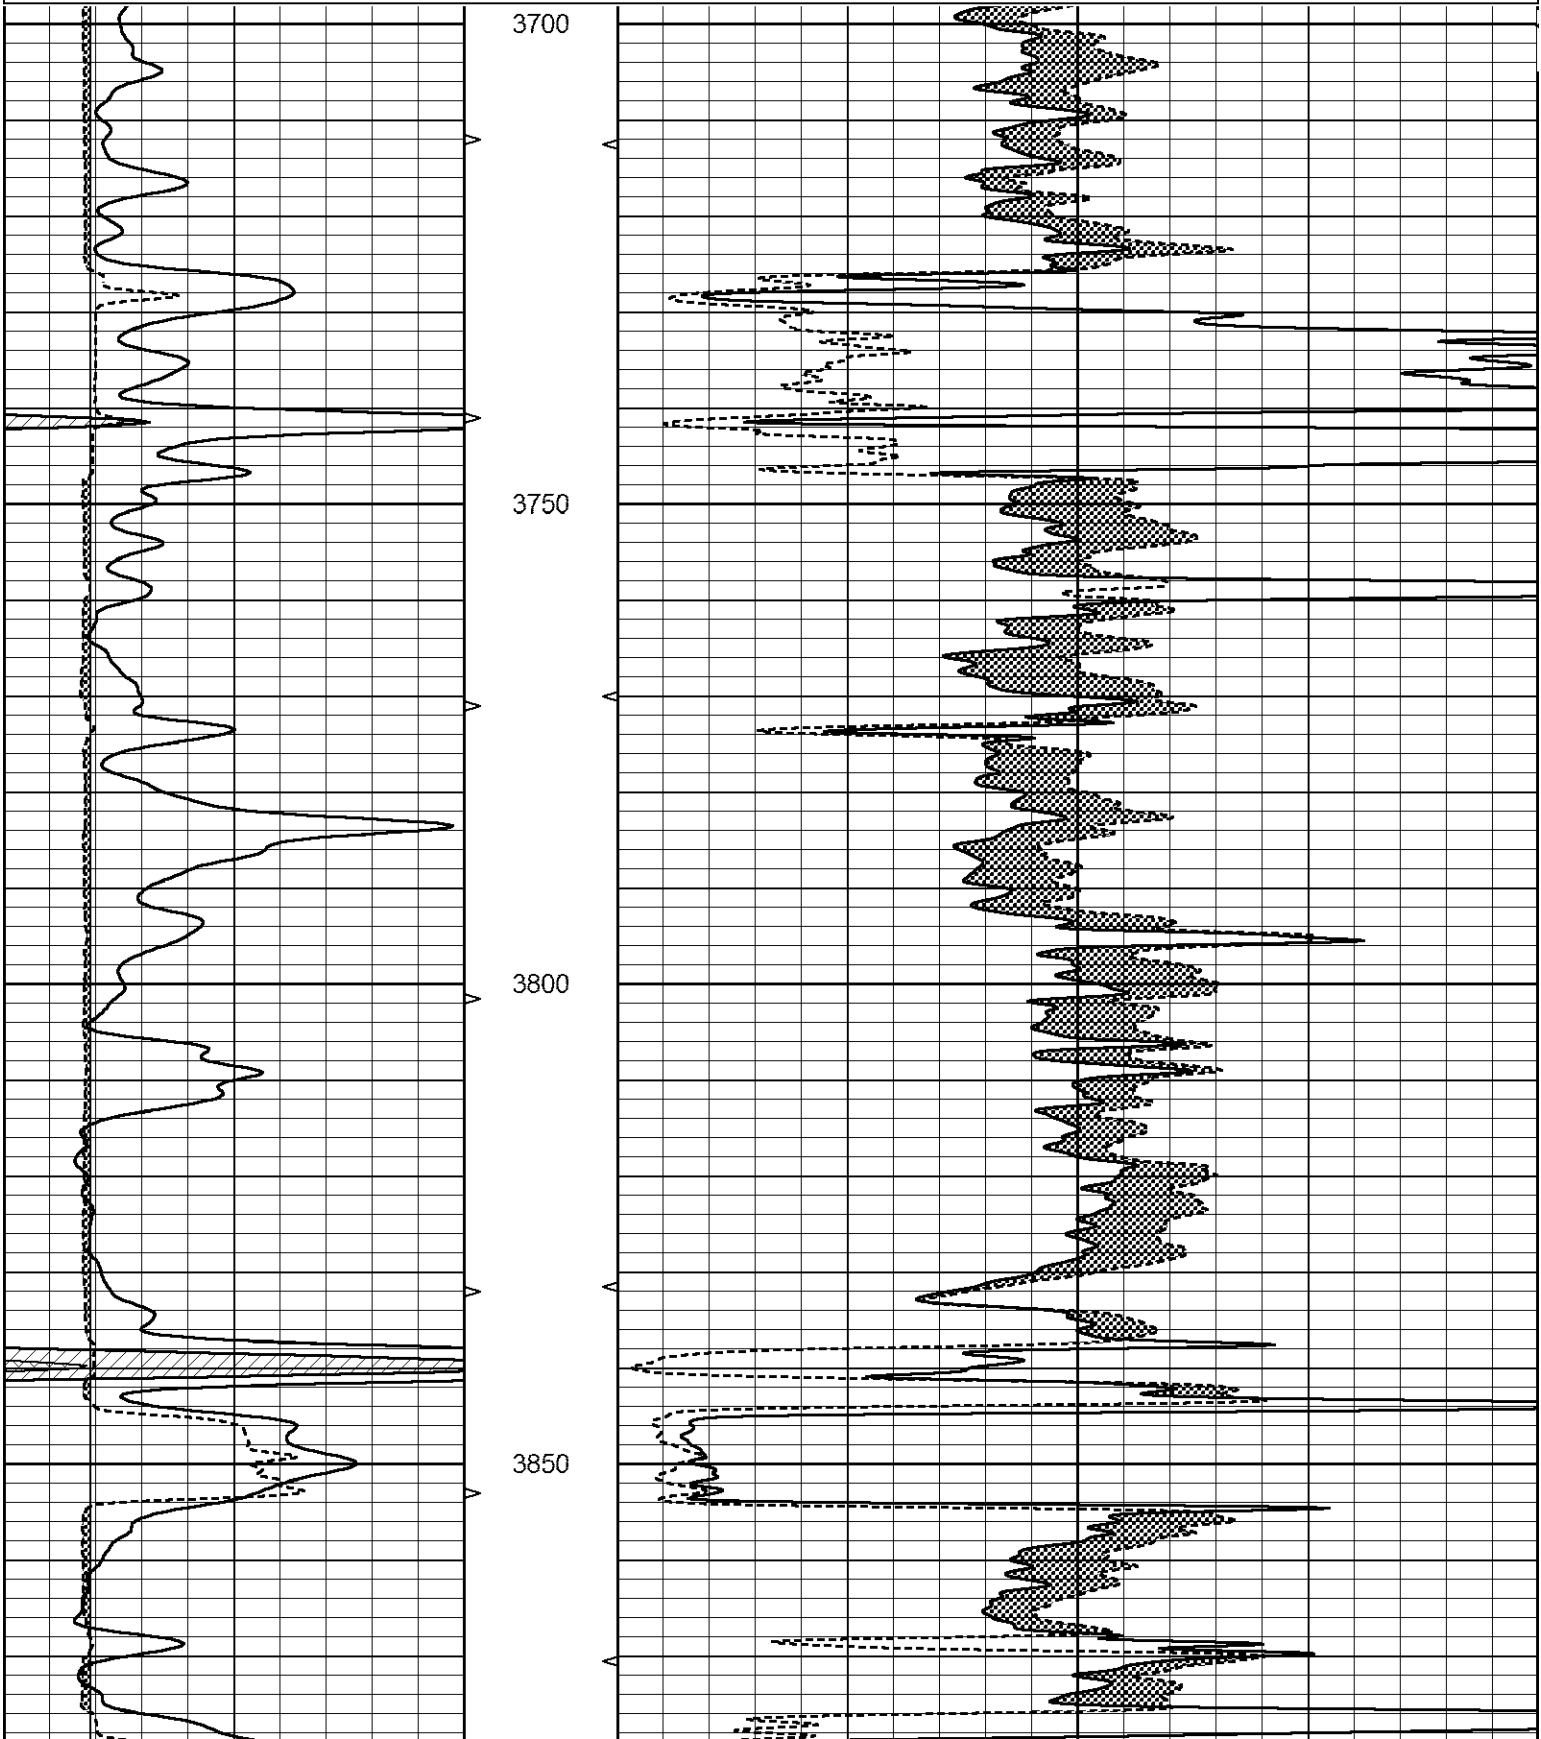

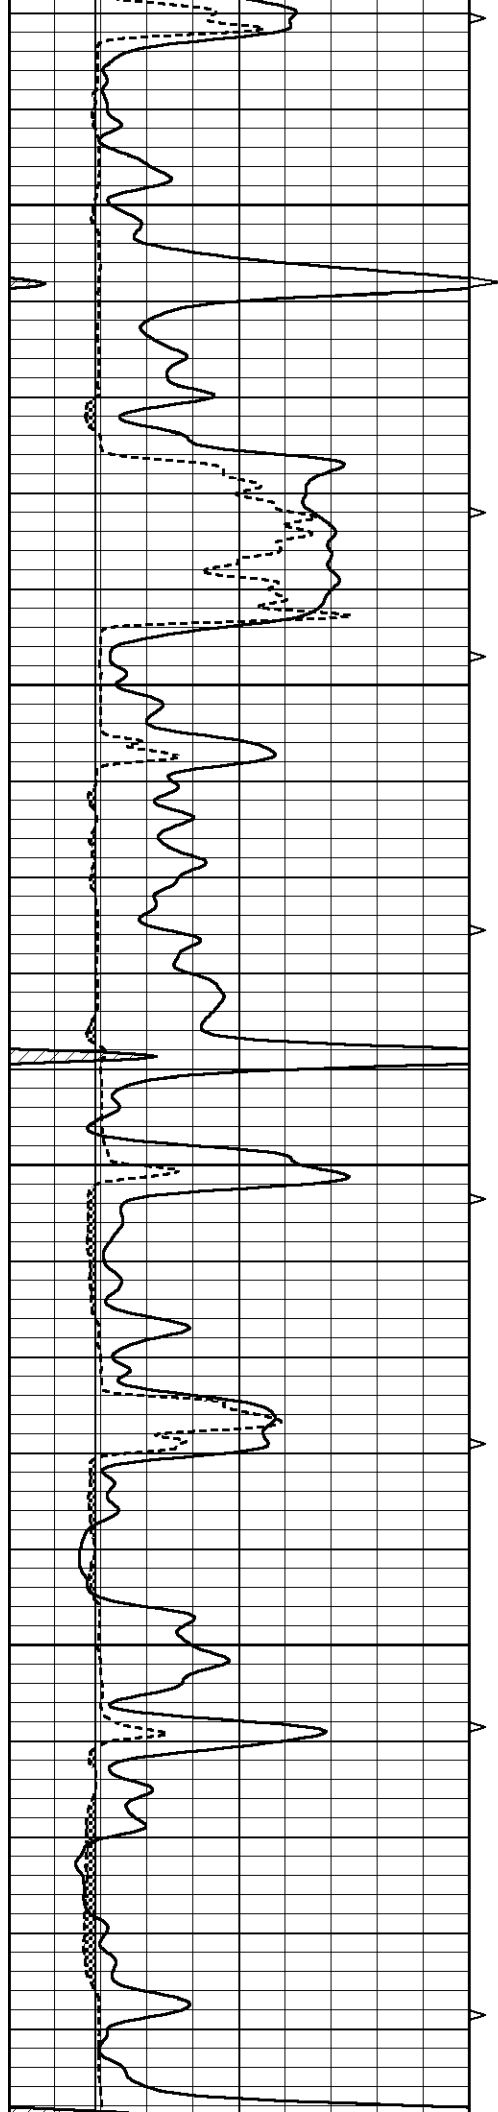



3900

3950

4000

4050

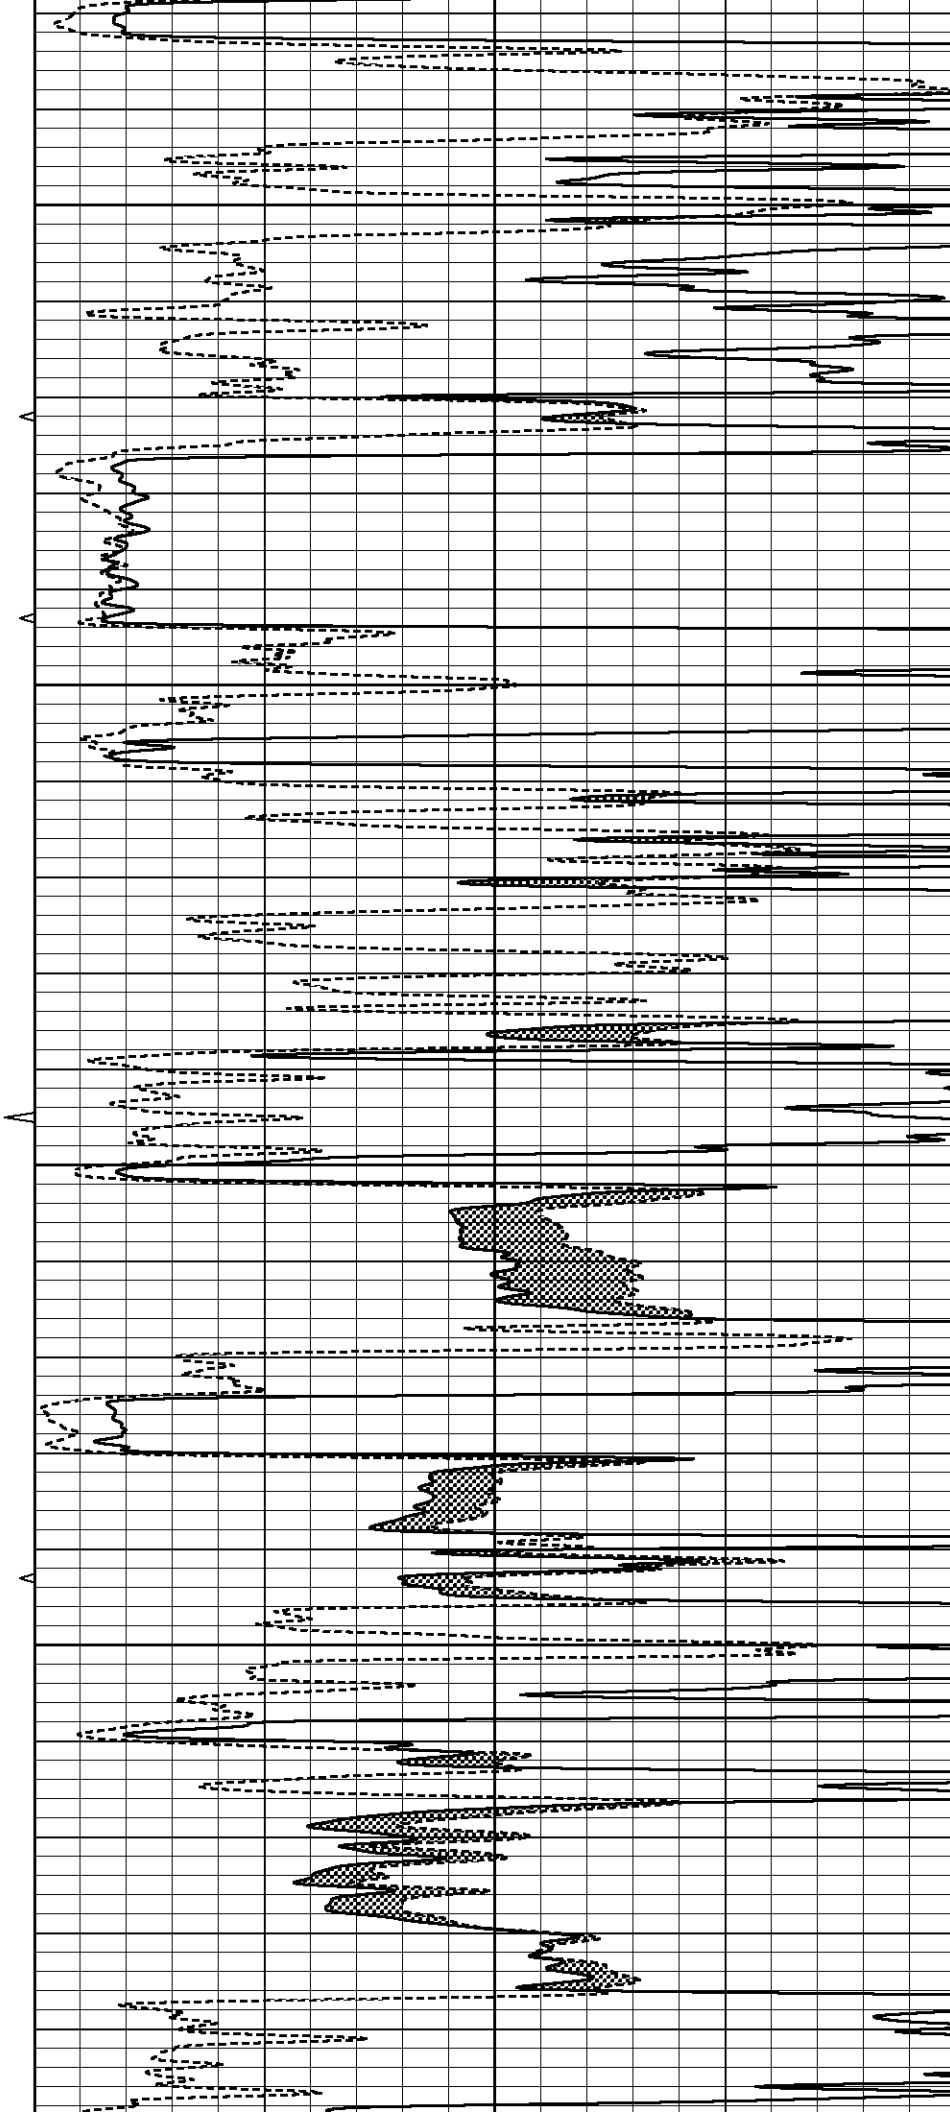

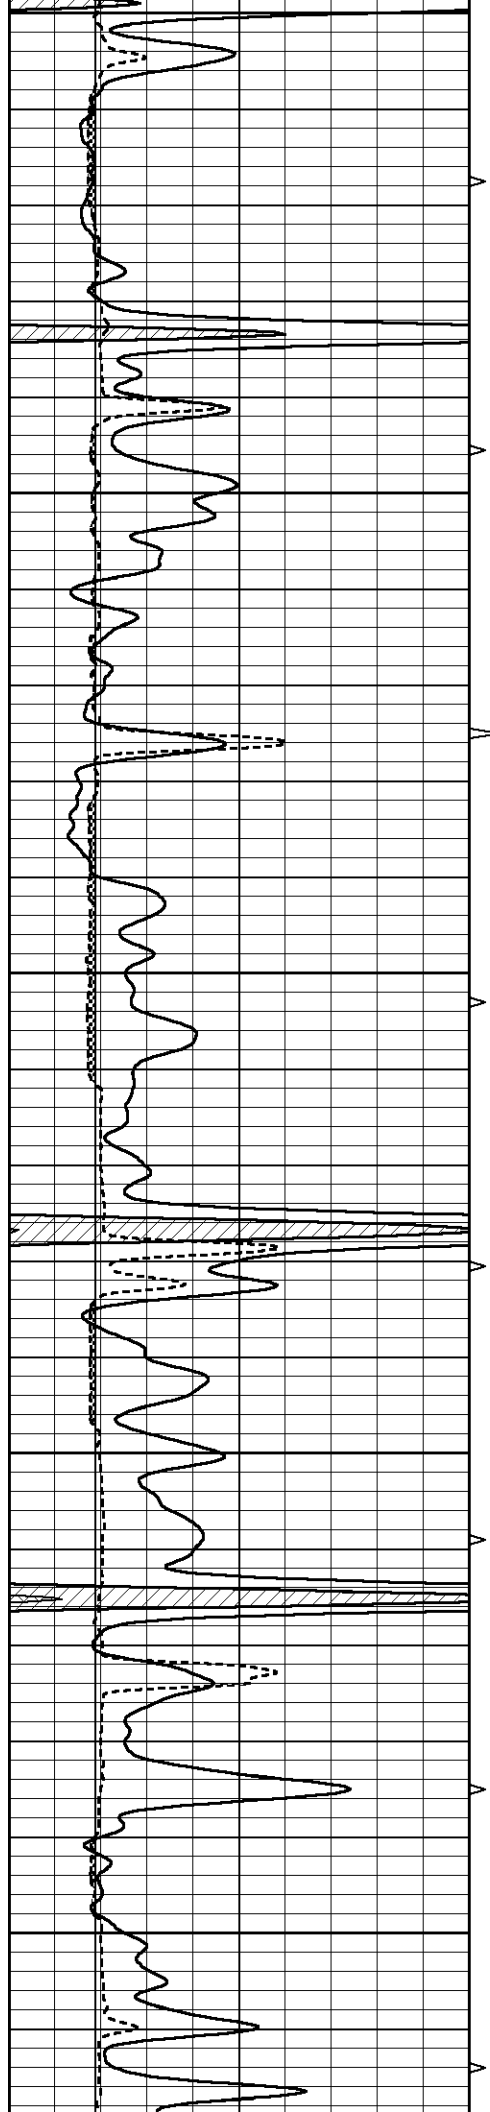


4100


4150

4200

4250

4300

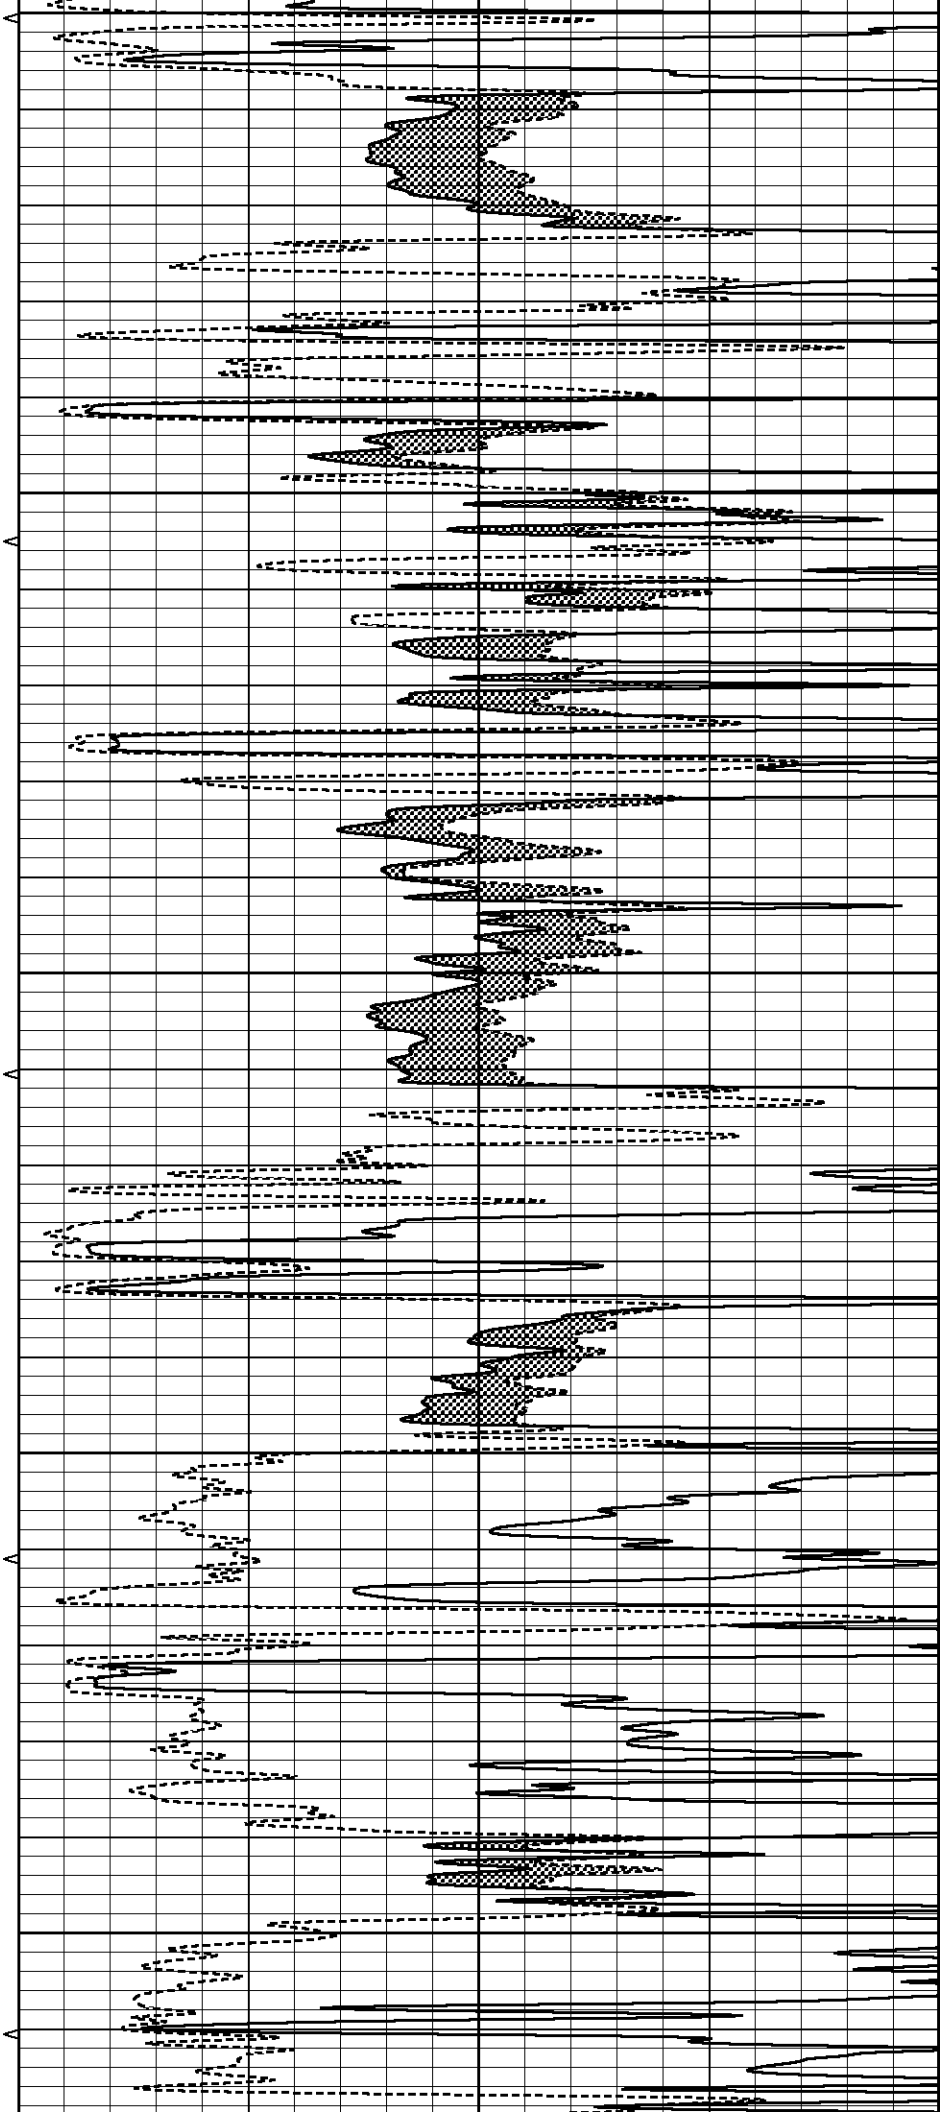

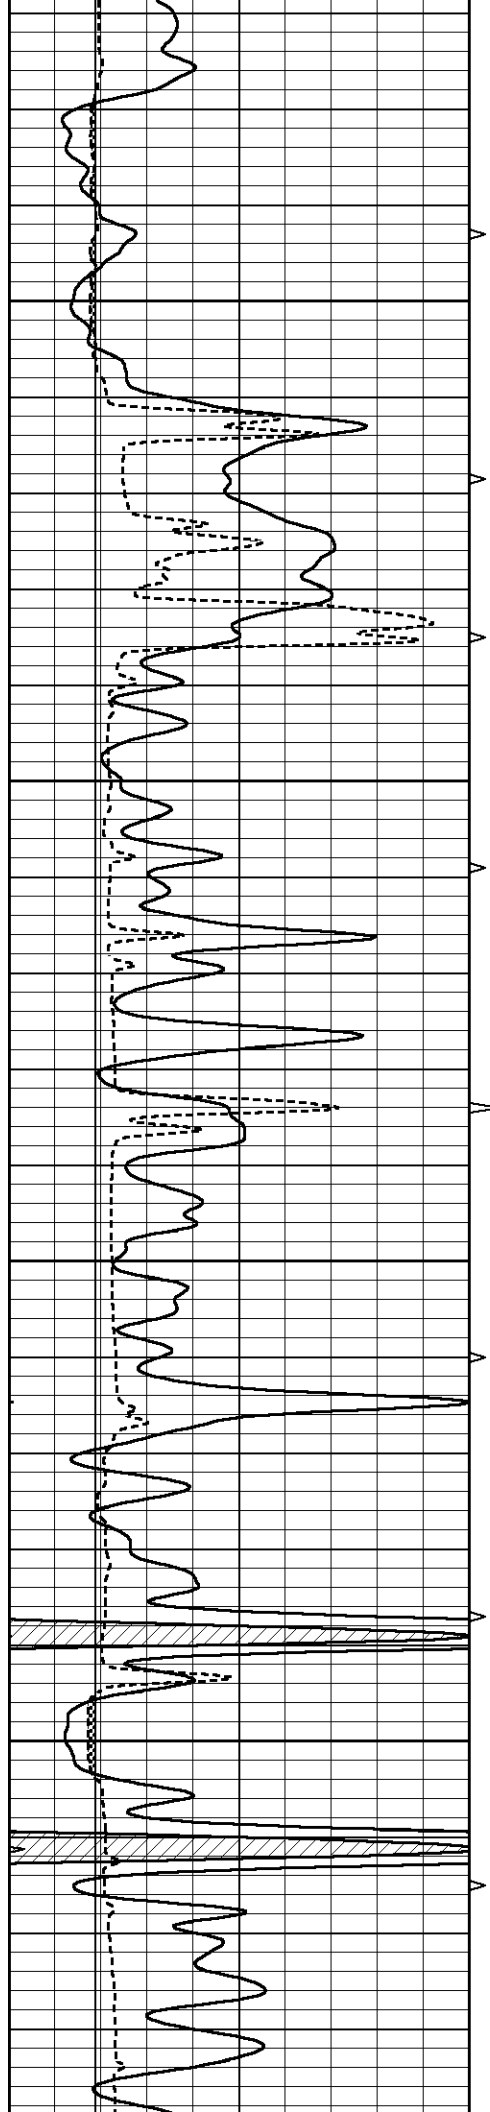



4350

4400

4450

4500

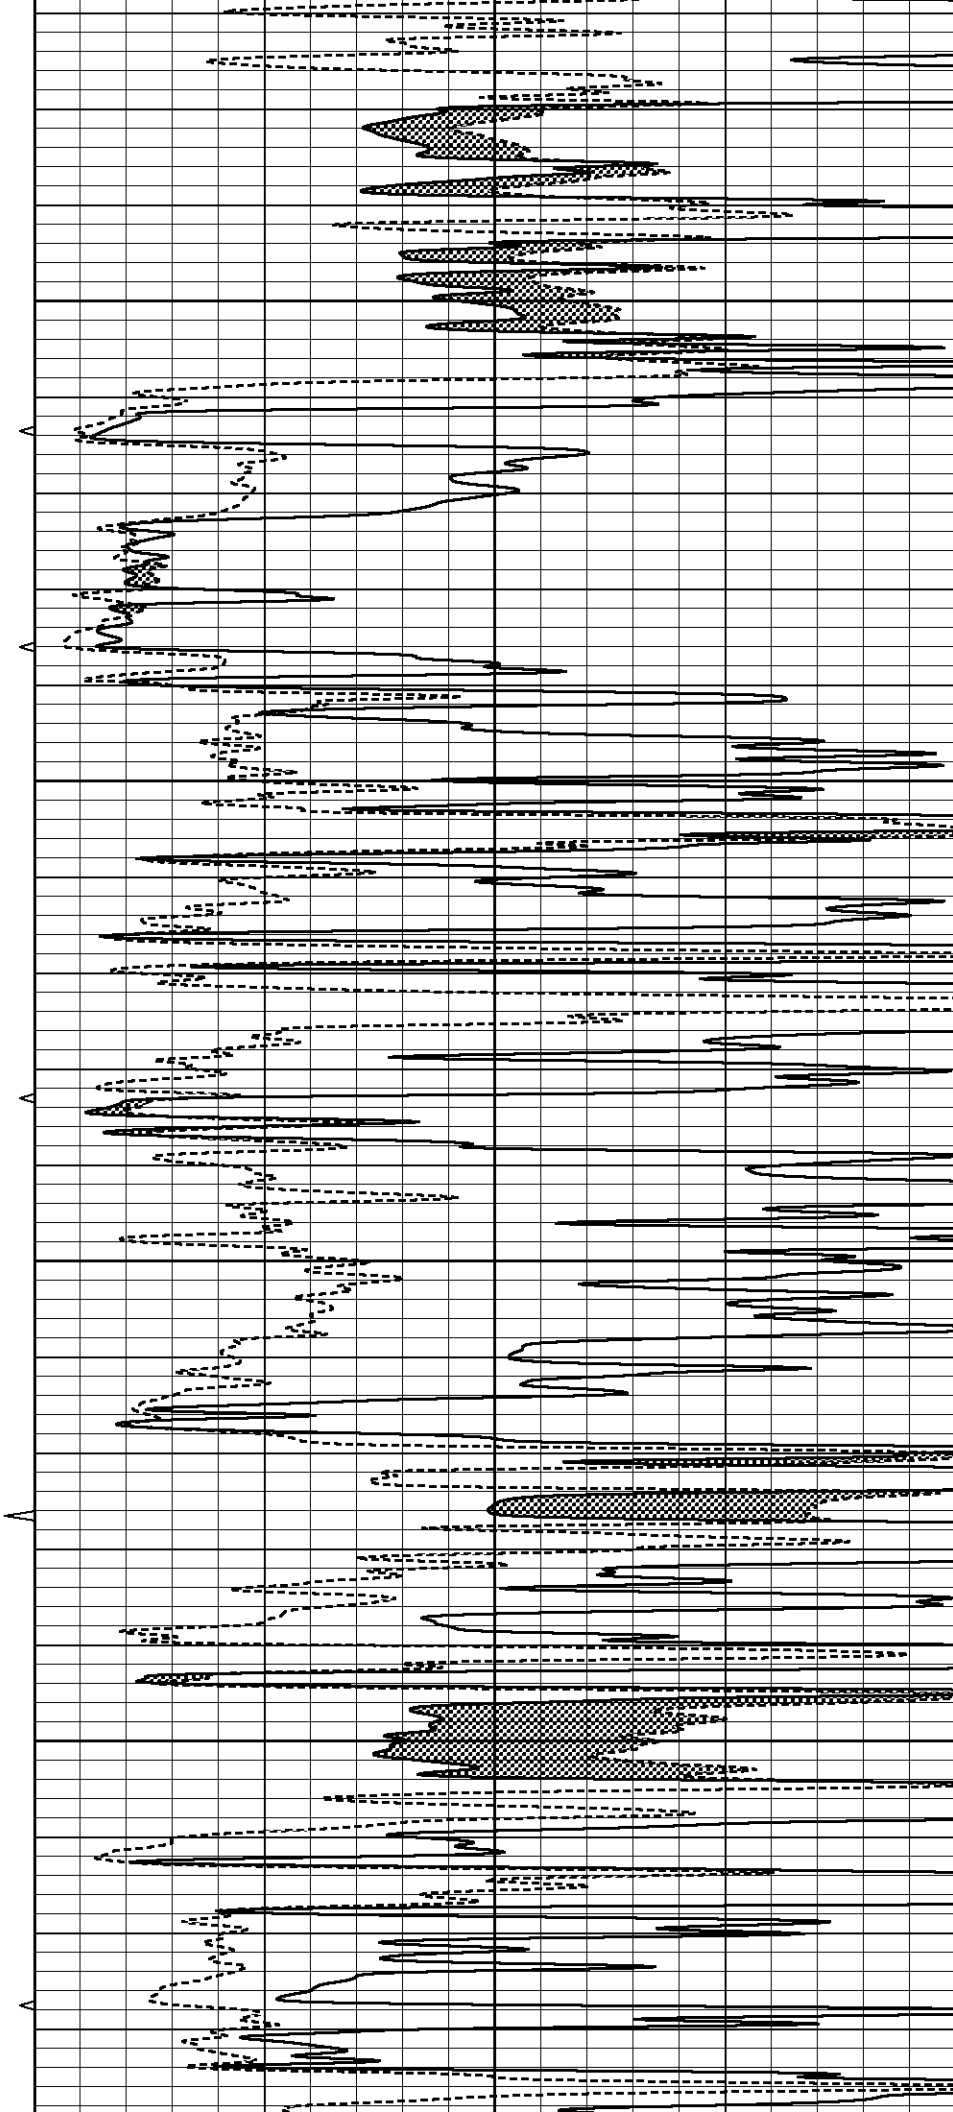

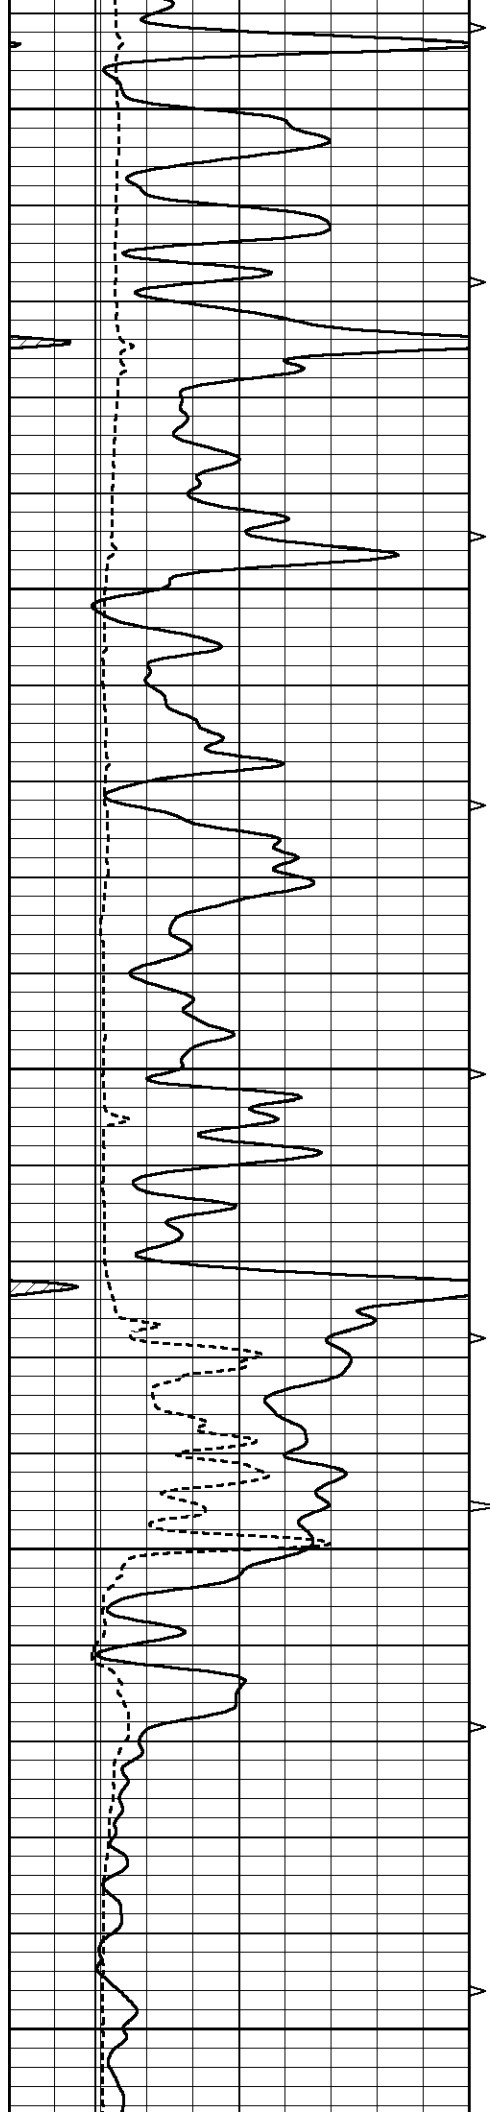


4550


4600


4650

4700

4750

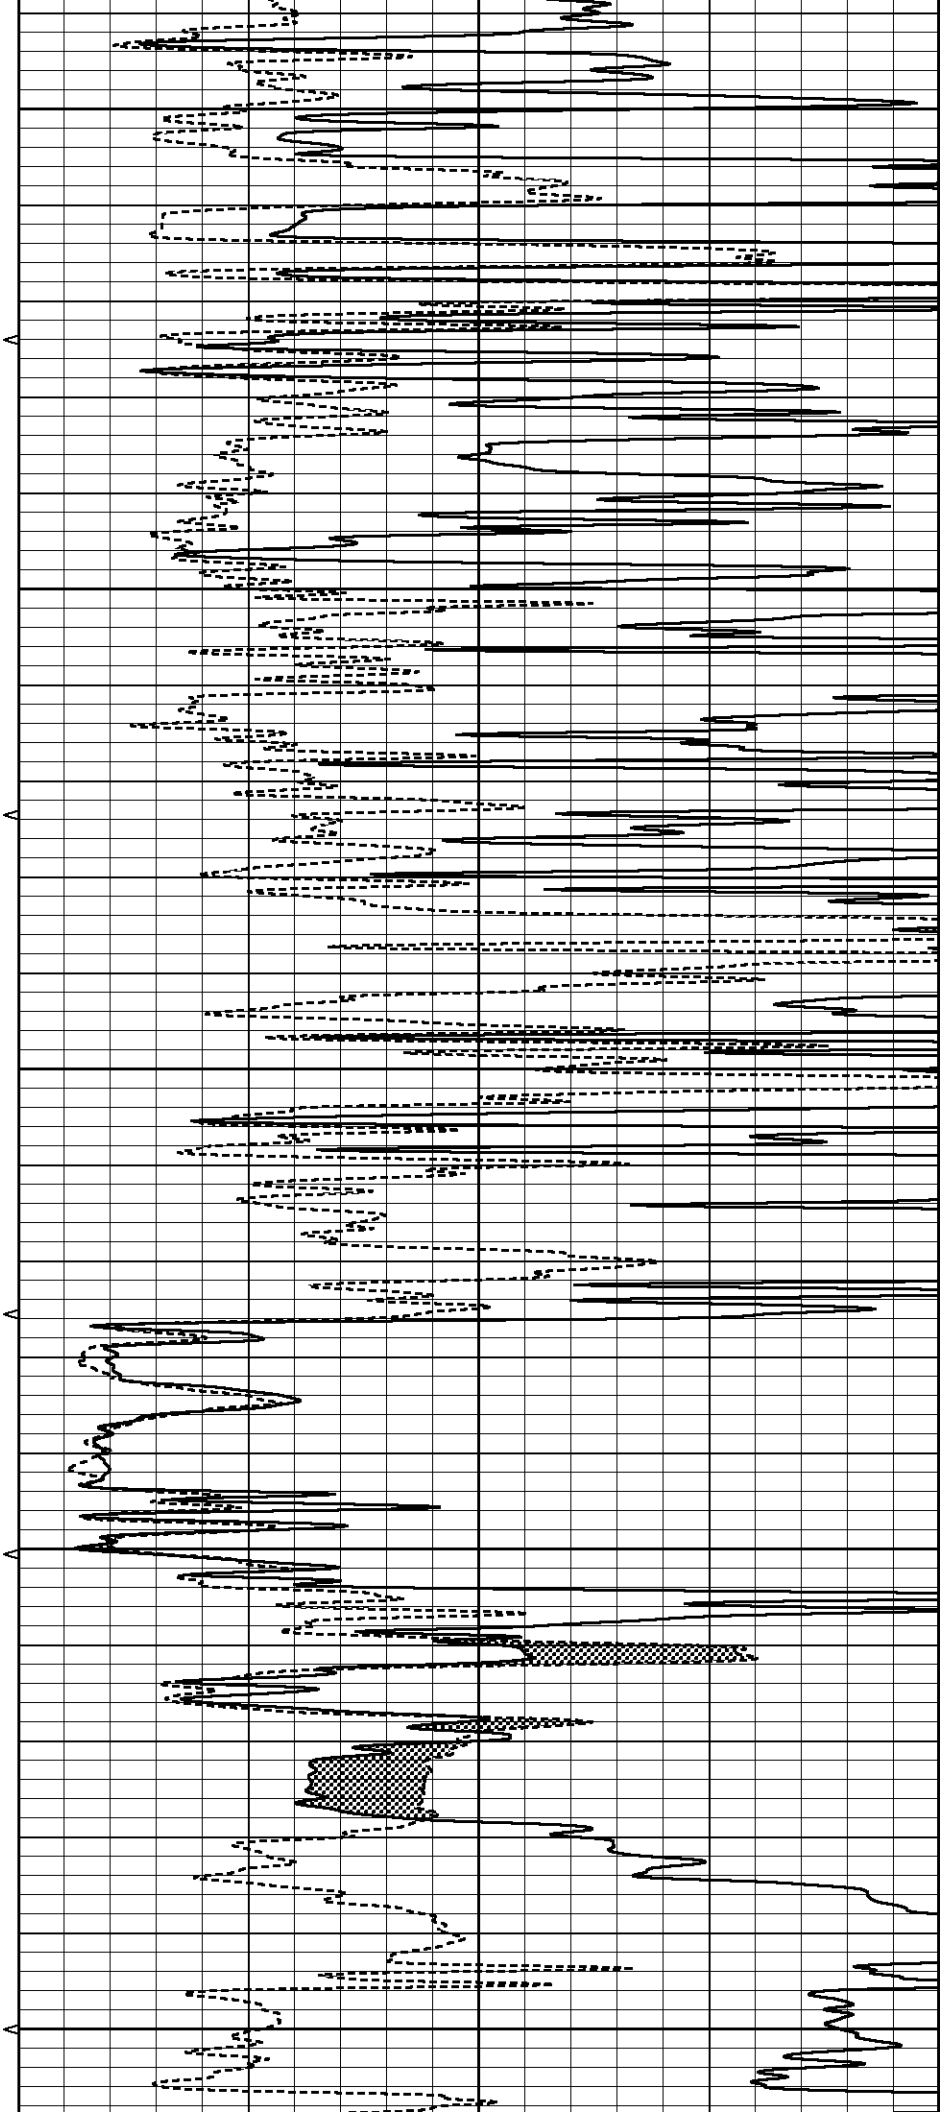

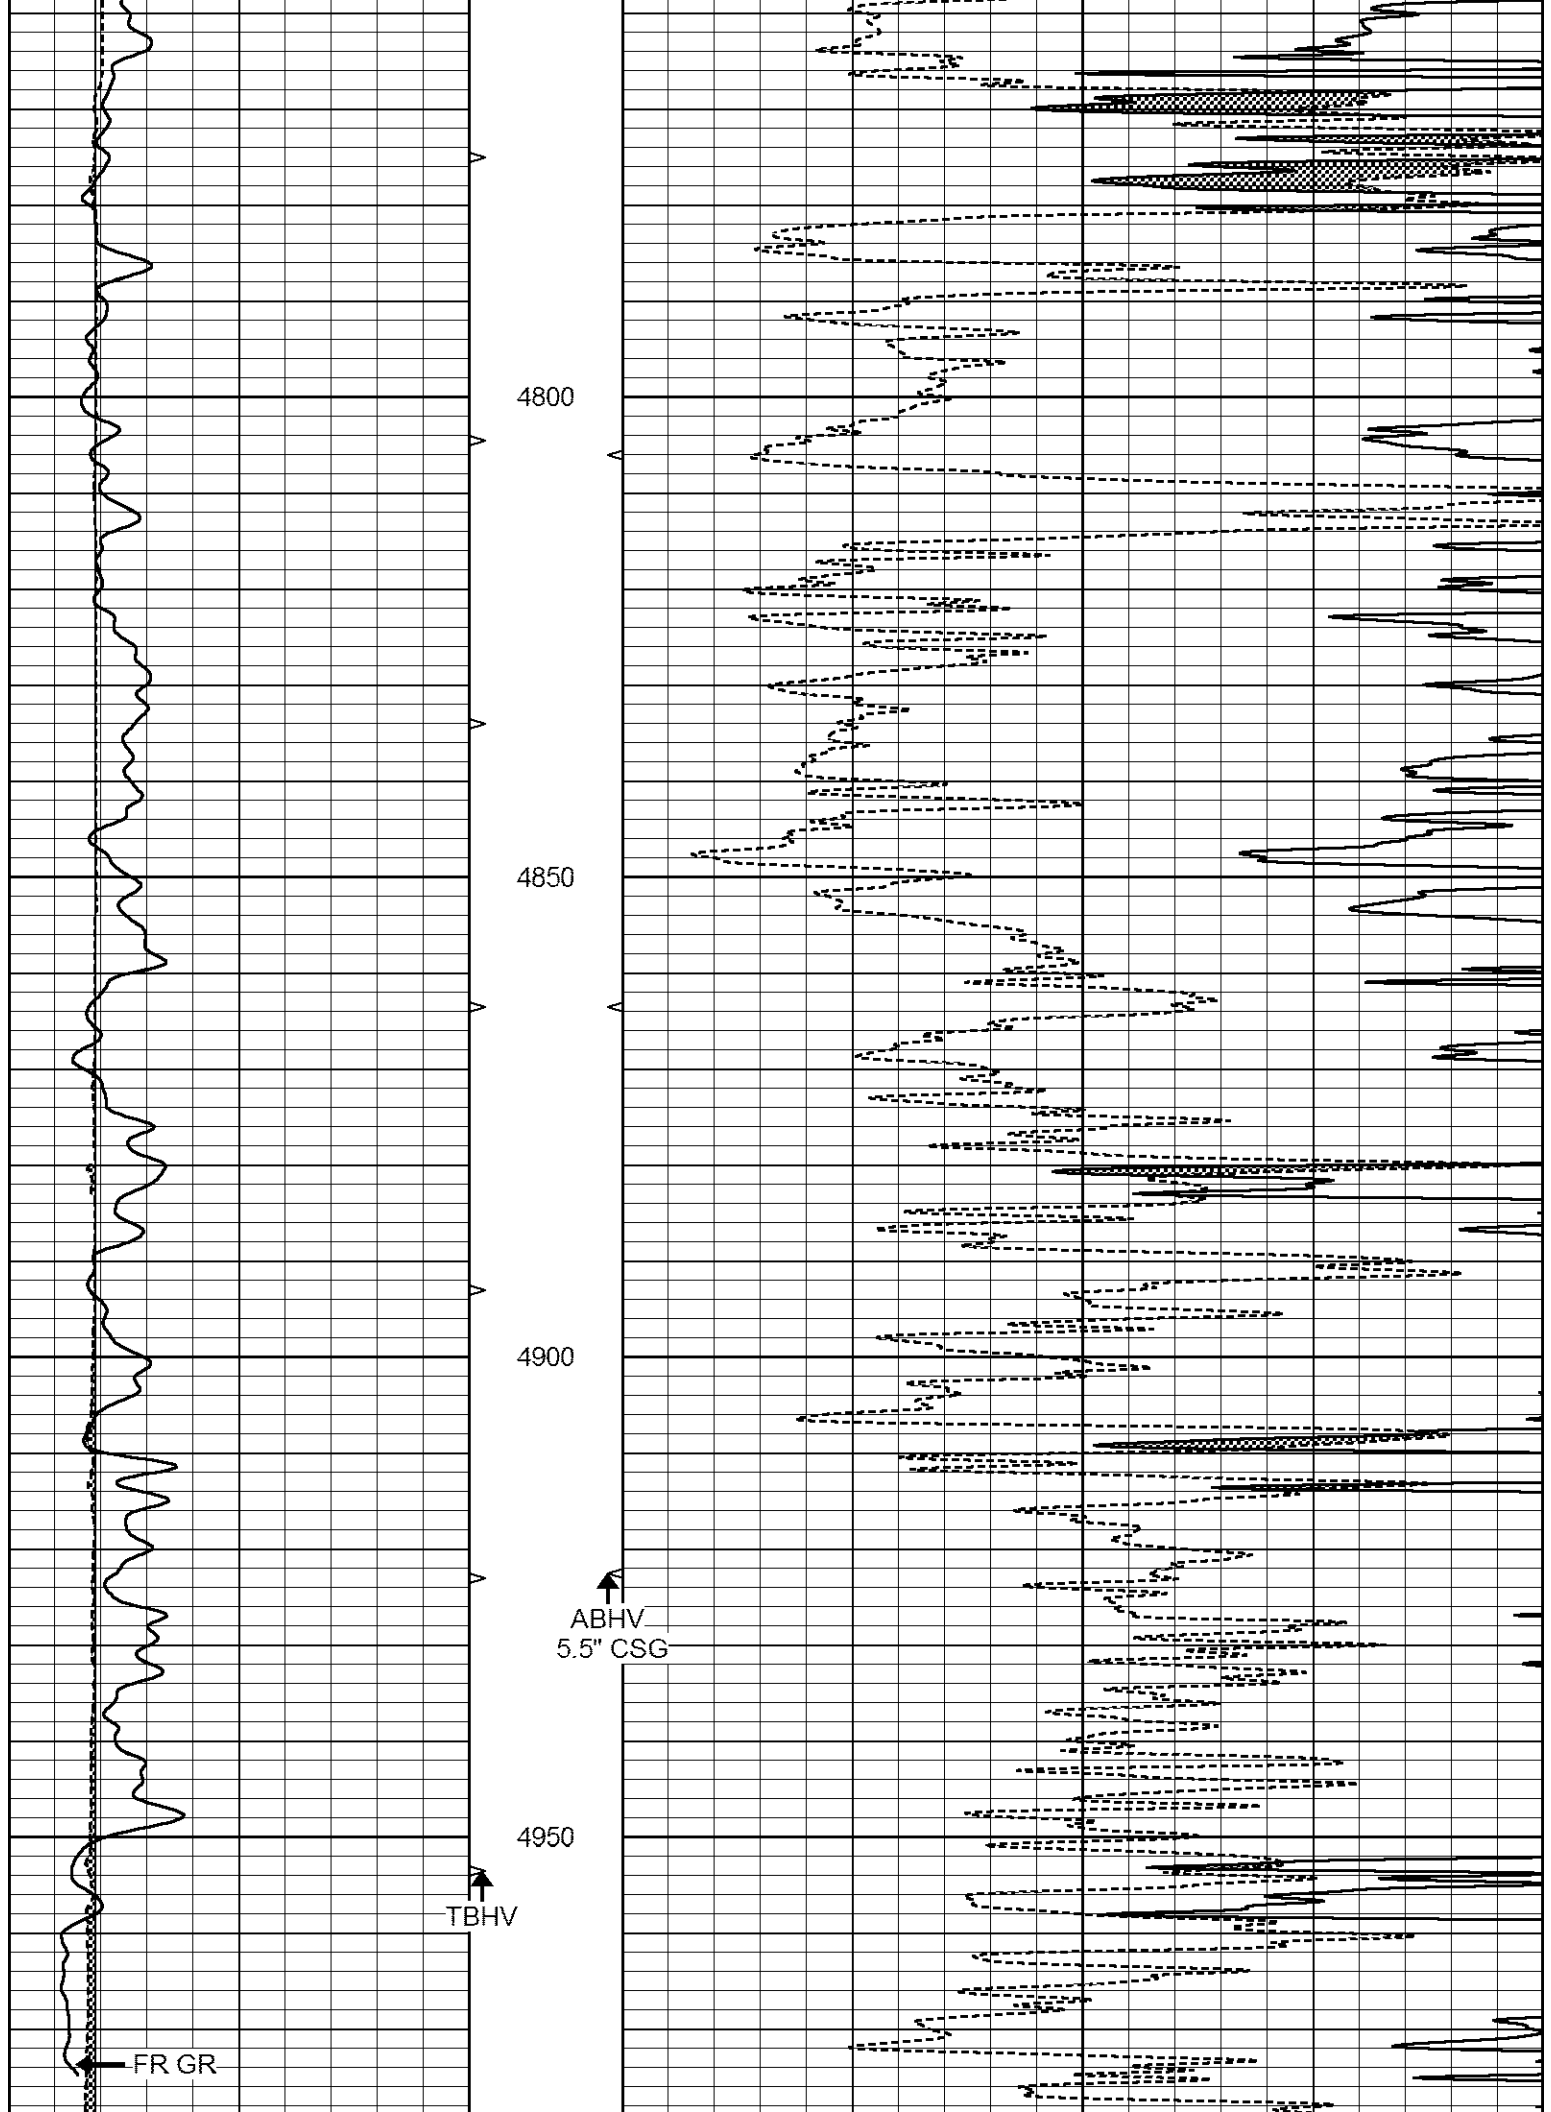


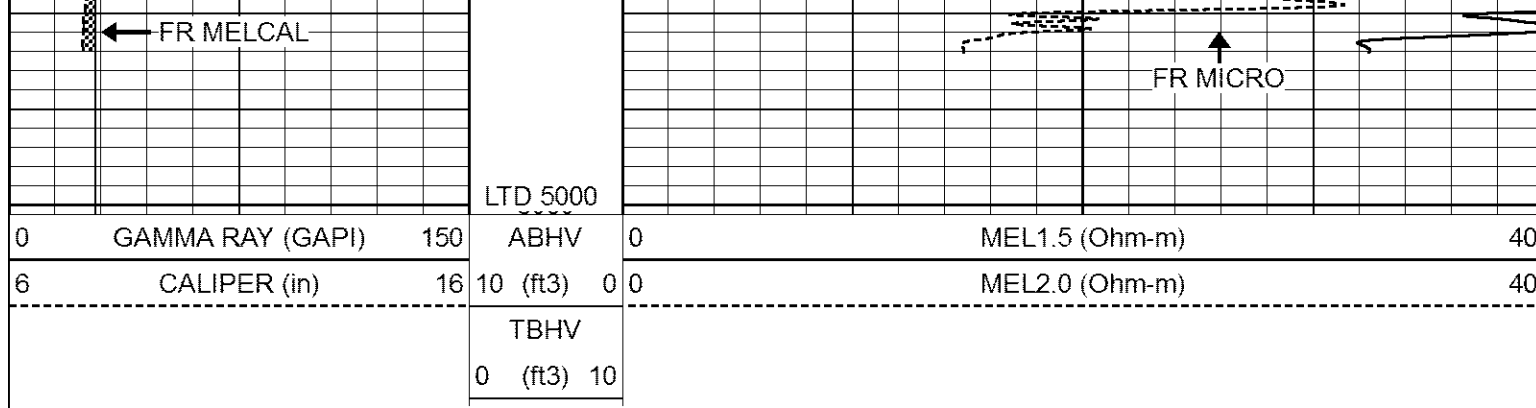


REPEAT SECTION

Database File 6232pe.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Fri Jan 28 22:58:34 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

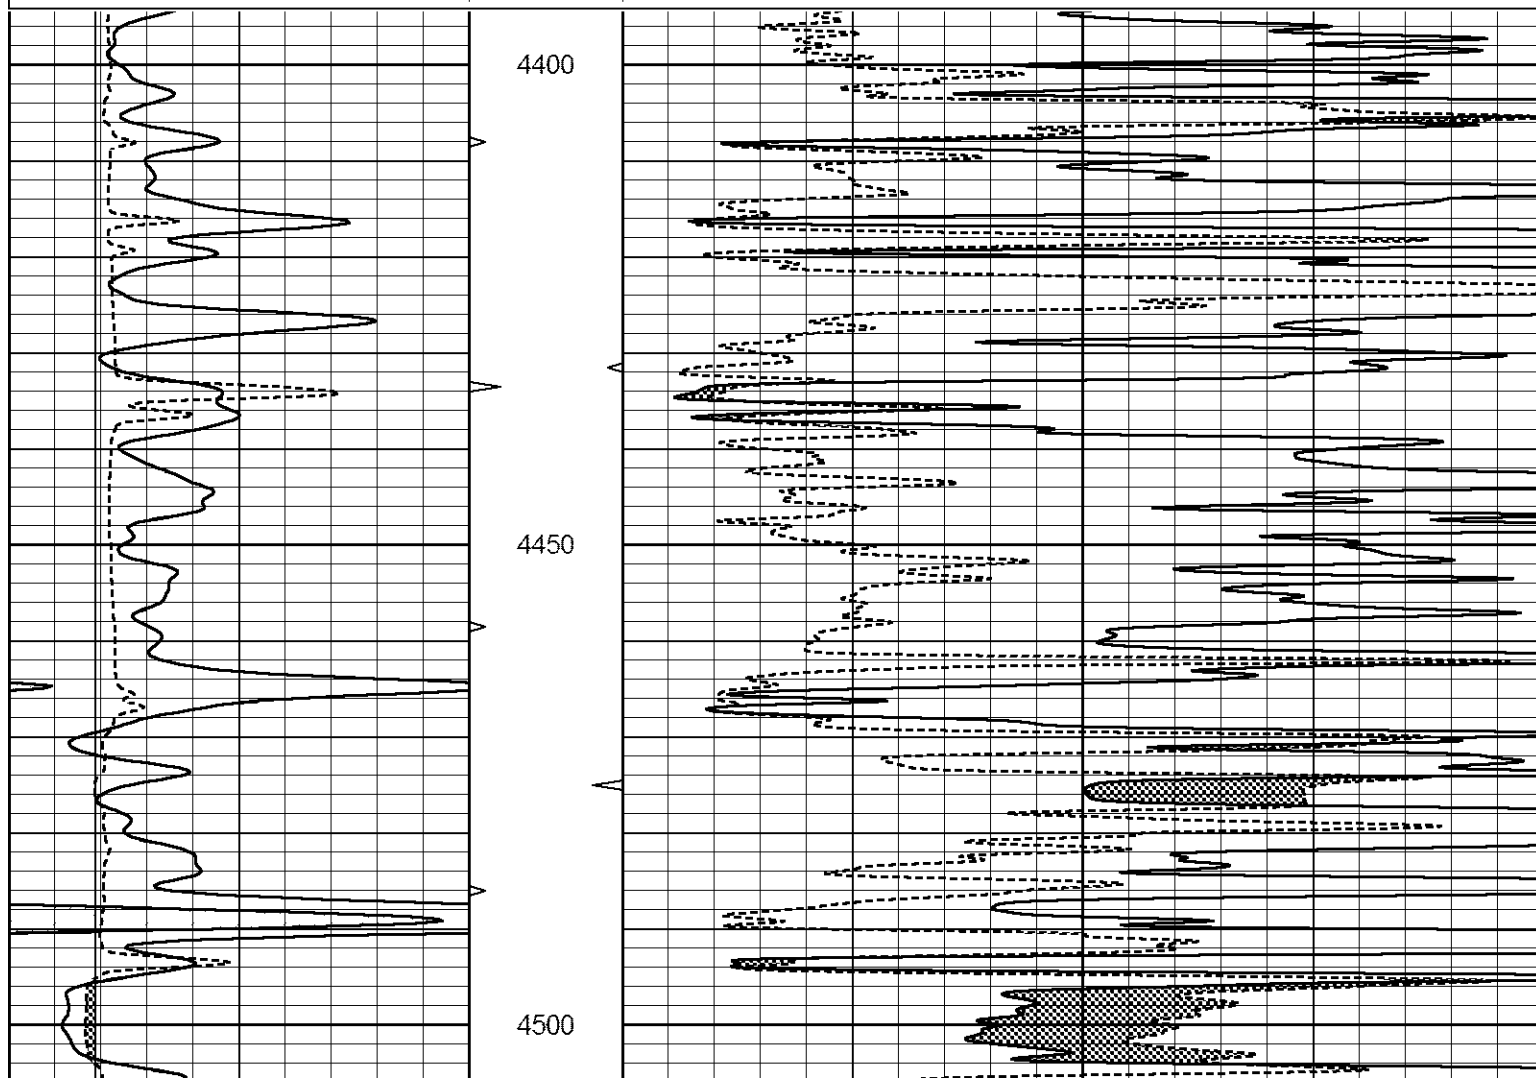

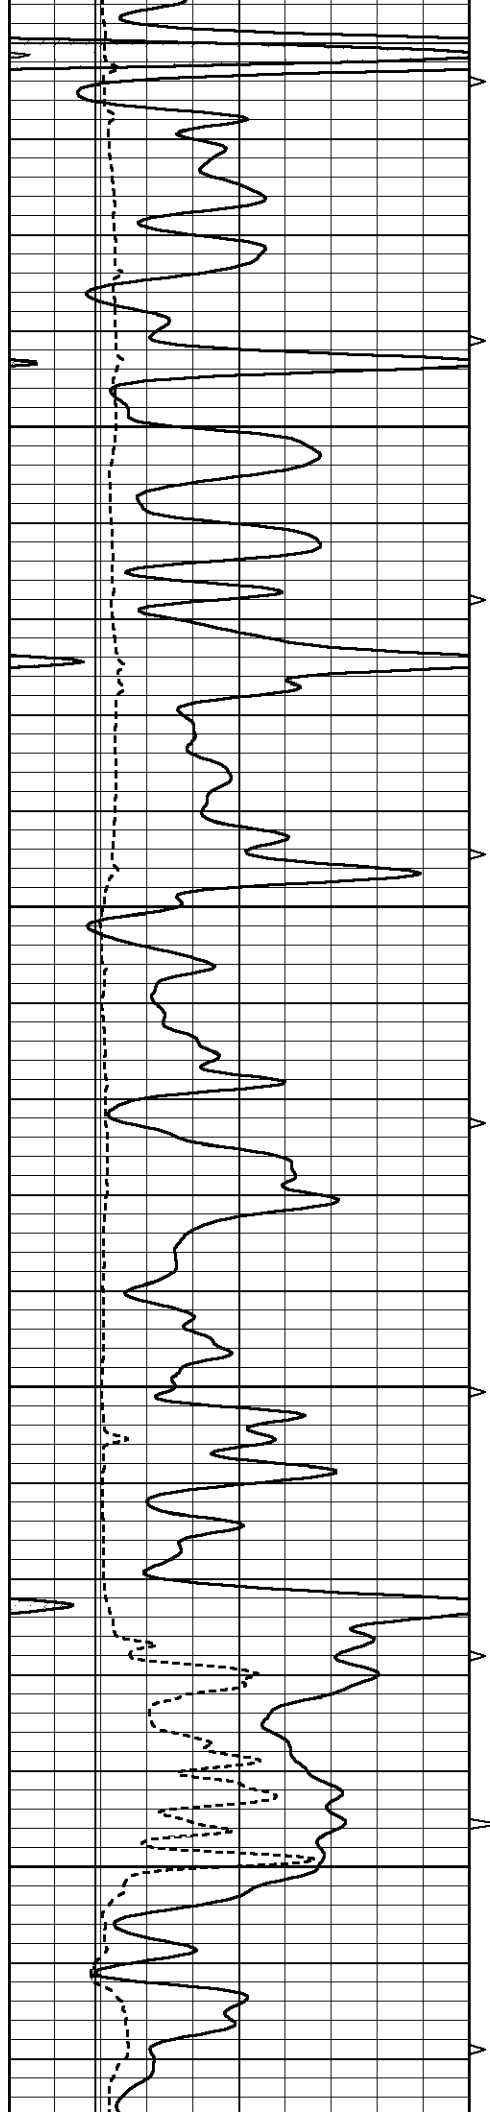



4550

4600

4650

4700

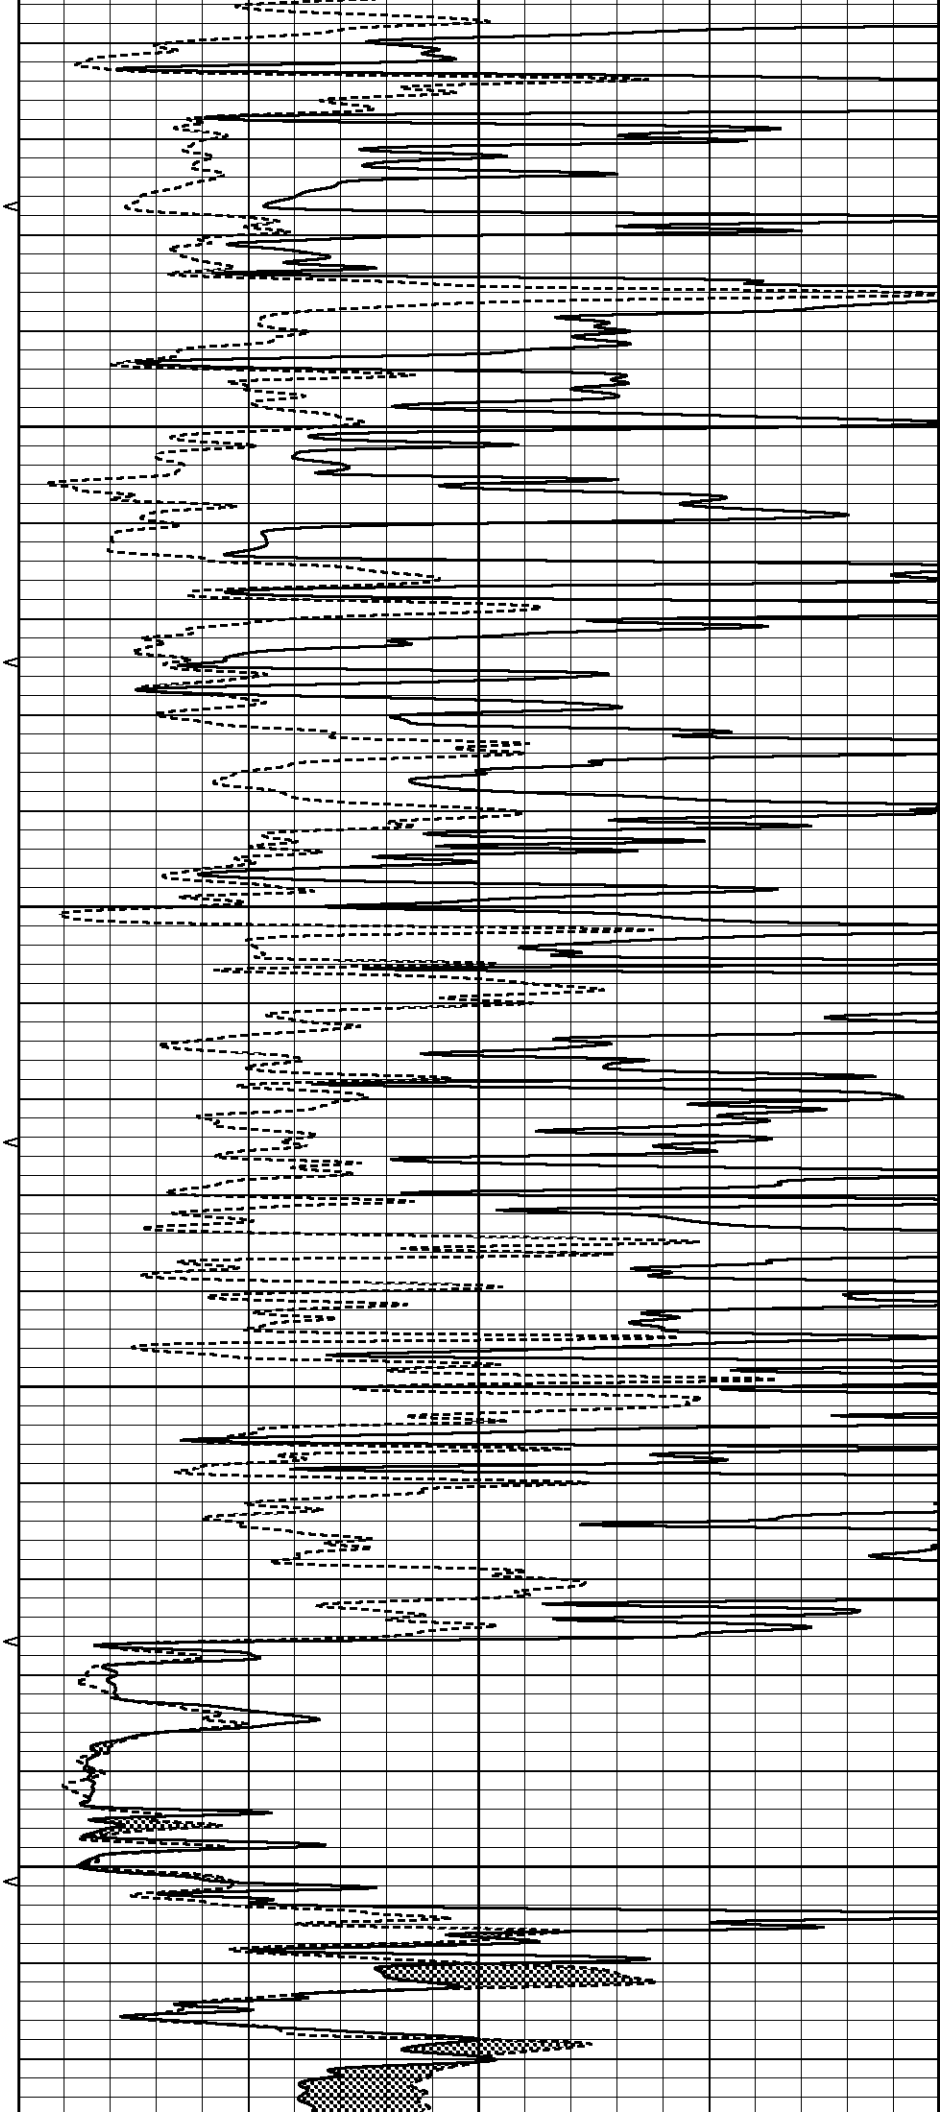

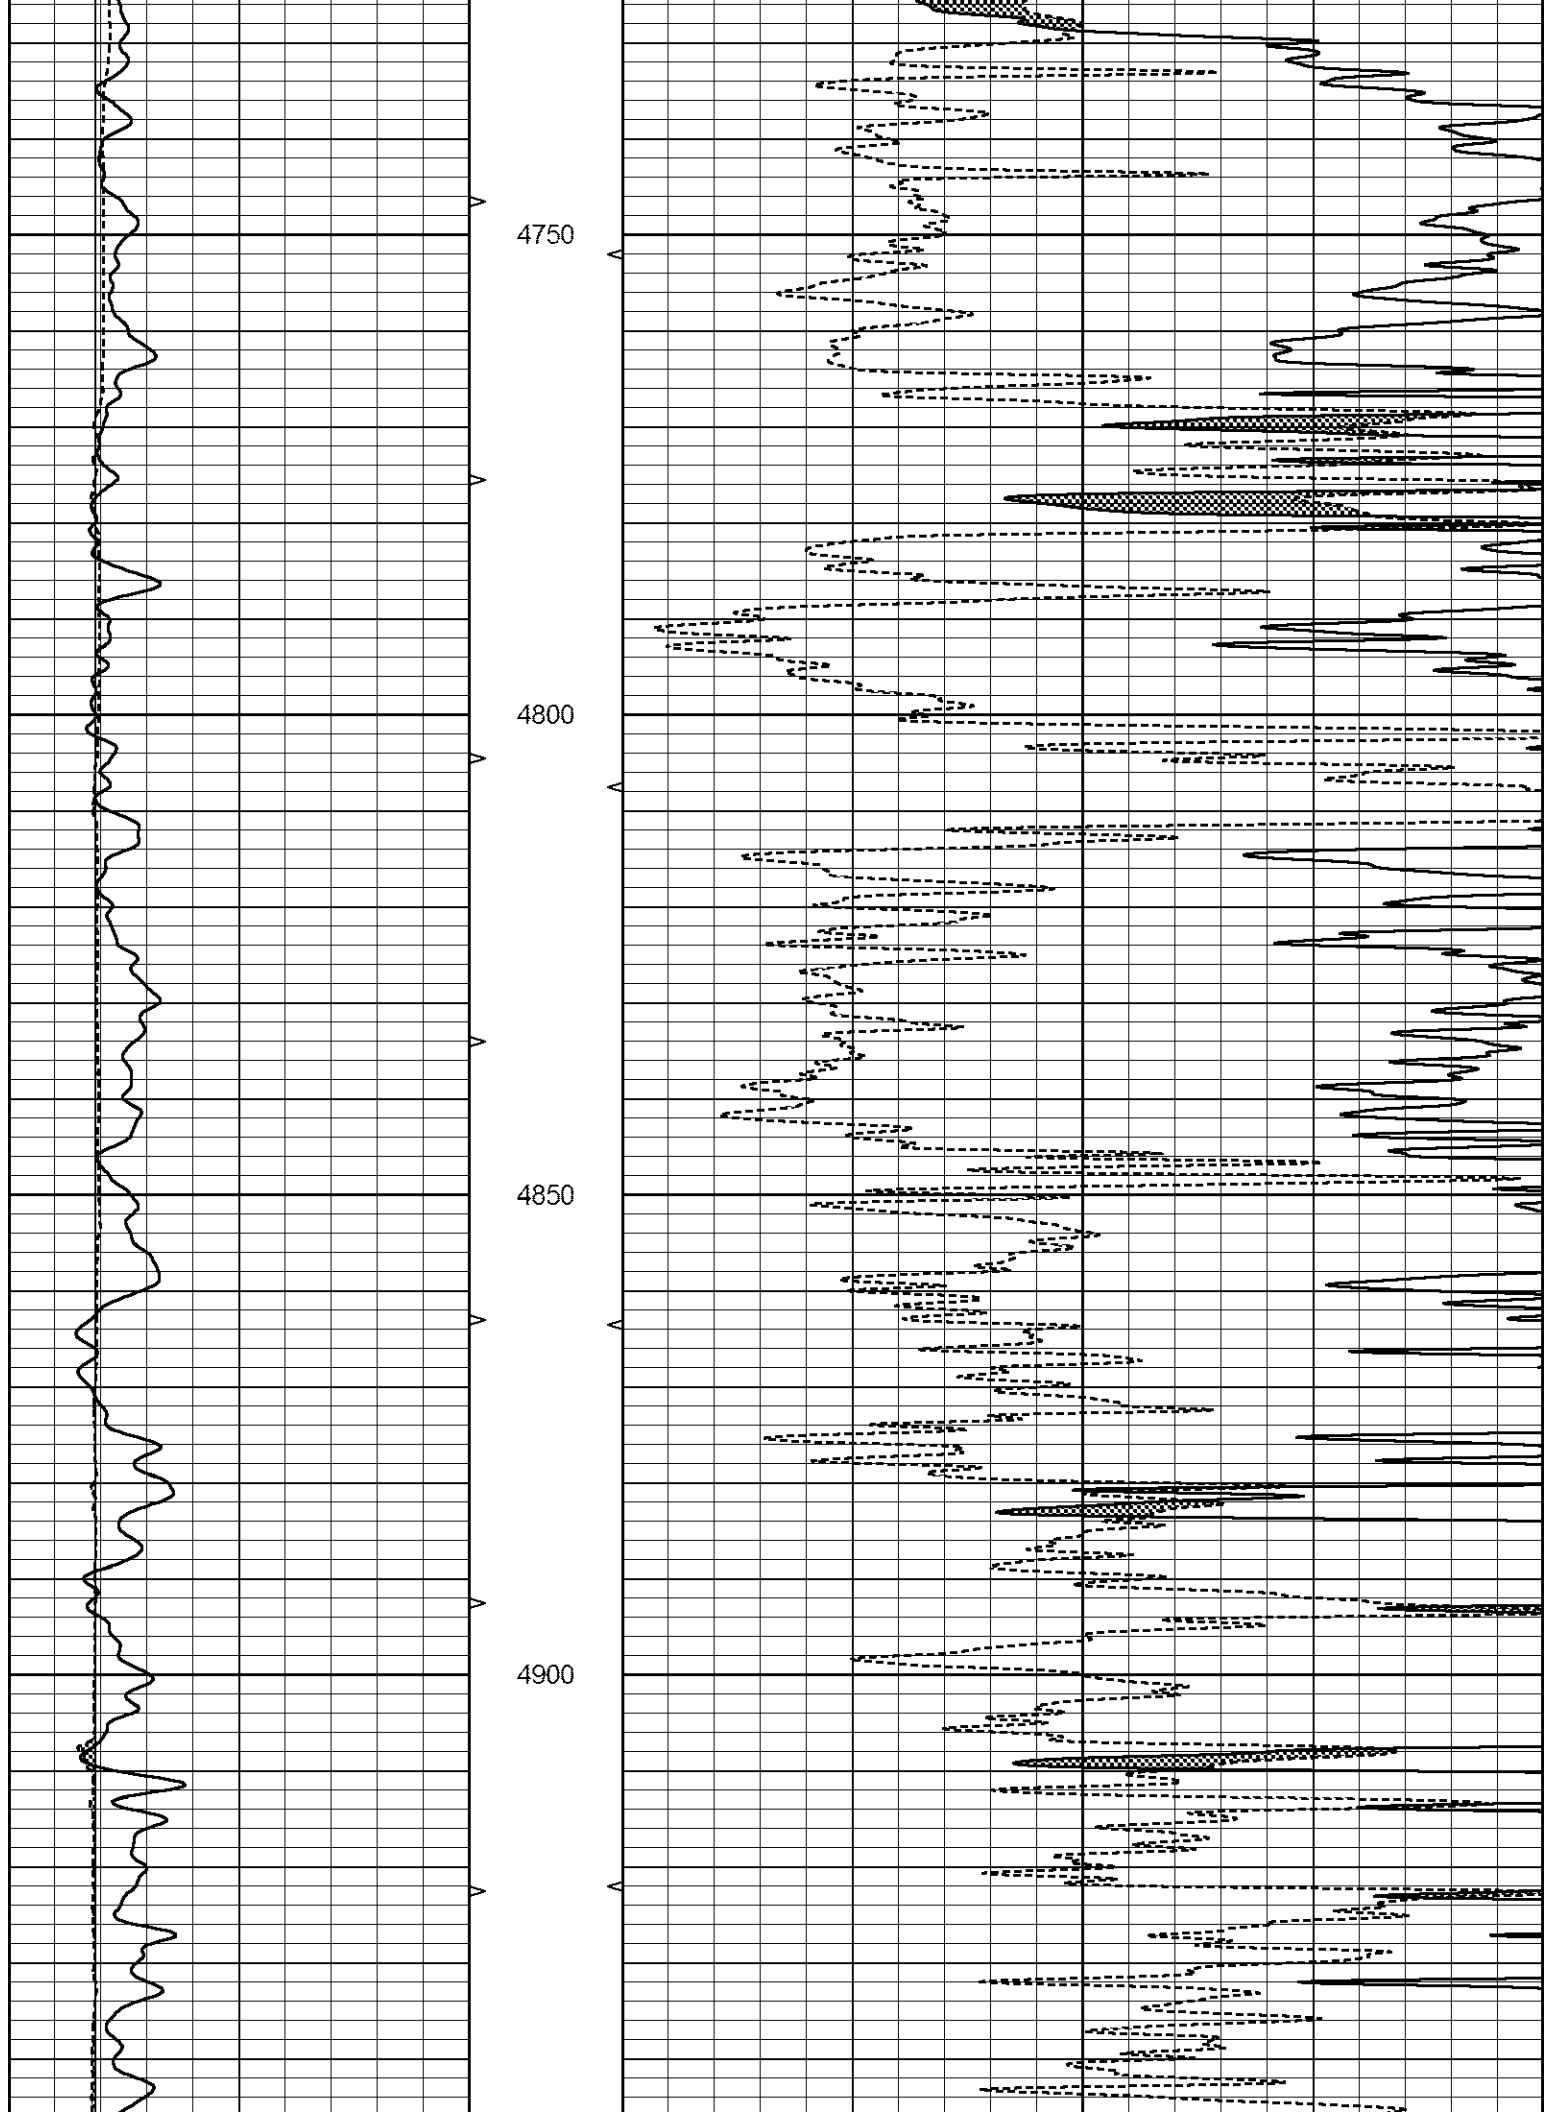

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps