



MICRO LOG

Company	RJM OIL COMPANY
Well	REDETZKE #3
Field	BEAVER SOUTH
County	BARTON
State	KANSAS
Location:	API # : 15-009-26355-0000 1275' FNL & 846' FWL SW - SE - NW - NW
Permanent Datum	GROUND LEVEL Elevation 1902
Log Measured From	KELLY BUSHING 10' A.G.L.
Drilling Measured From	KELLY BUSHING
SEC 34 TWP 16S RGE 12W	Elevation K.B. 1912 D.F. 1910 G.L. 1902
Date	5/24/22
Run Number	TWO
Depth Driller	3430
Depth Logger	3430
Bottom Logged Interval	3428
Top Log Interval	2600
Casing Driller	8 5/8"@396'
Casing Logger	396396
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.1/42
pH / Fluid Loss	9.5/9.6
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.900@65F
Rmf @ Meas. Temp	.675@65F
Rmc @ Meas. Temp	1.08@65F
Source of Rmf / Rmc	MEASURED
Rm @ BHT	.527@111F
Time Circulation Stopped	3.5 HOURS
Time Logger on Bottom	5.30 P.M.
Maximum Recorded Temperature	111F
Equipment Number	8916
Location	HAYS, KANSAS
Recorded By	JEFF LUEBBERS
Witnessed By	STEVE MURPHY

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
BEAVER, KS., 1E. TO "70 AVE.", 1 1/4 S., E. INTO






MAIN SECTION


Database File	6555ddn.db
Dataset Pathname	pass6.1M
Presentation Format	_micro
Dataset Creation	Tue May 24 18:37:48 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

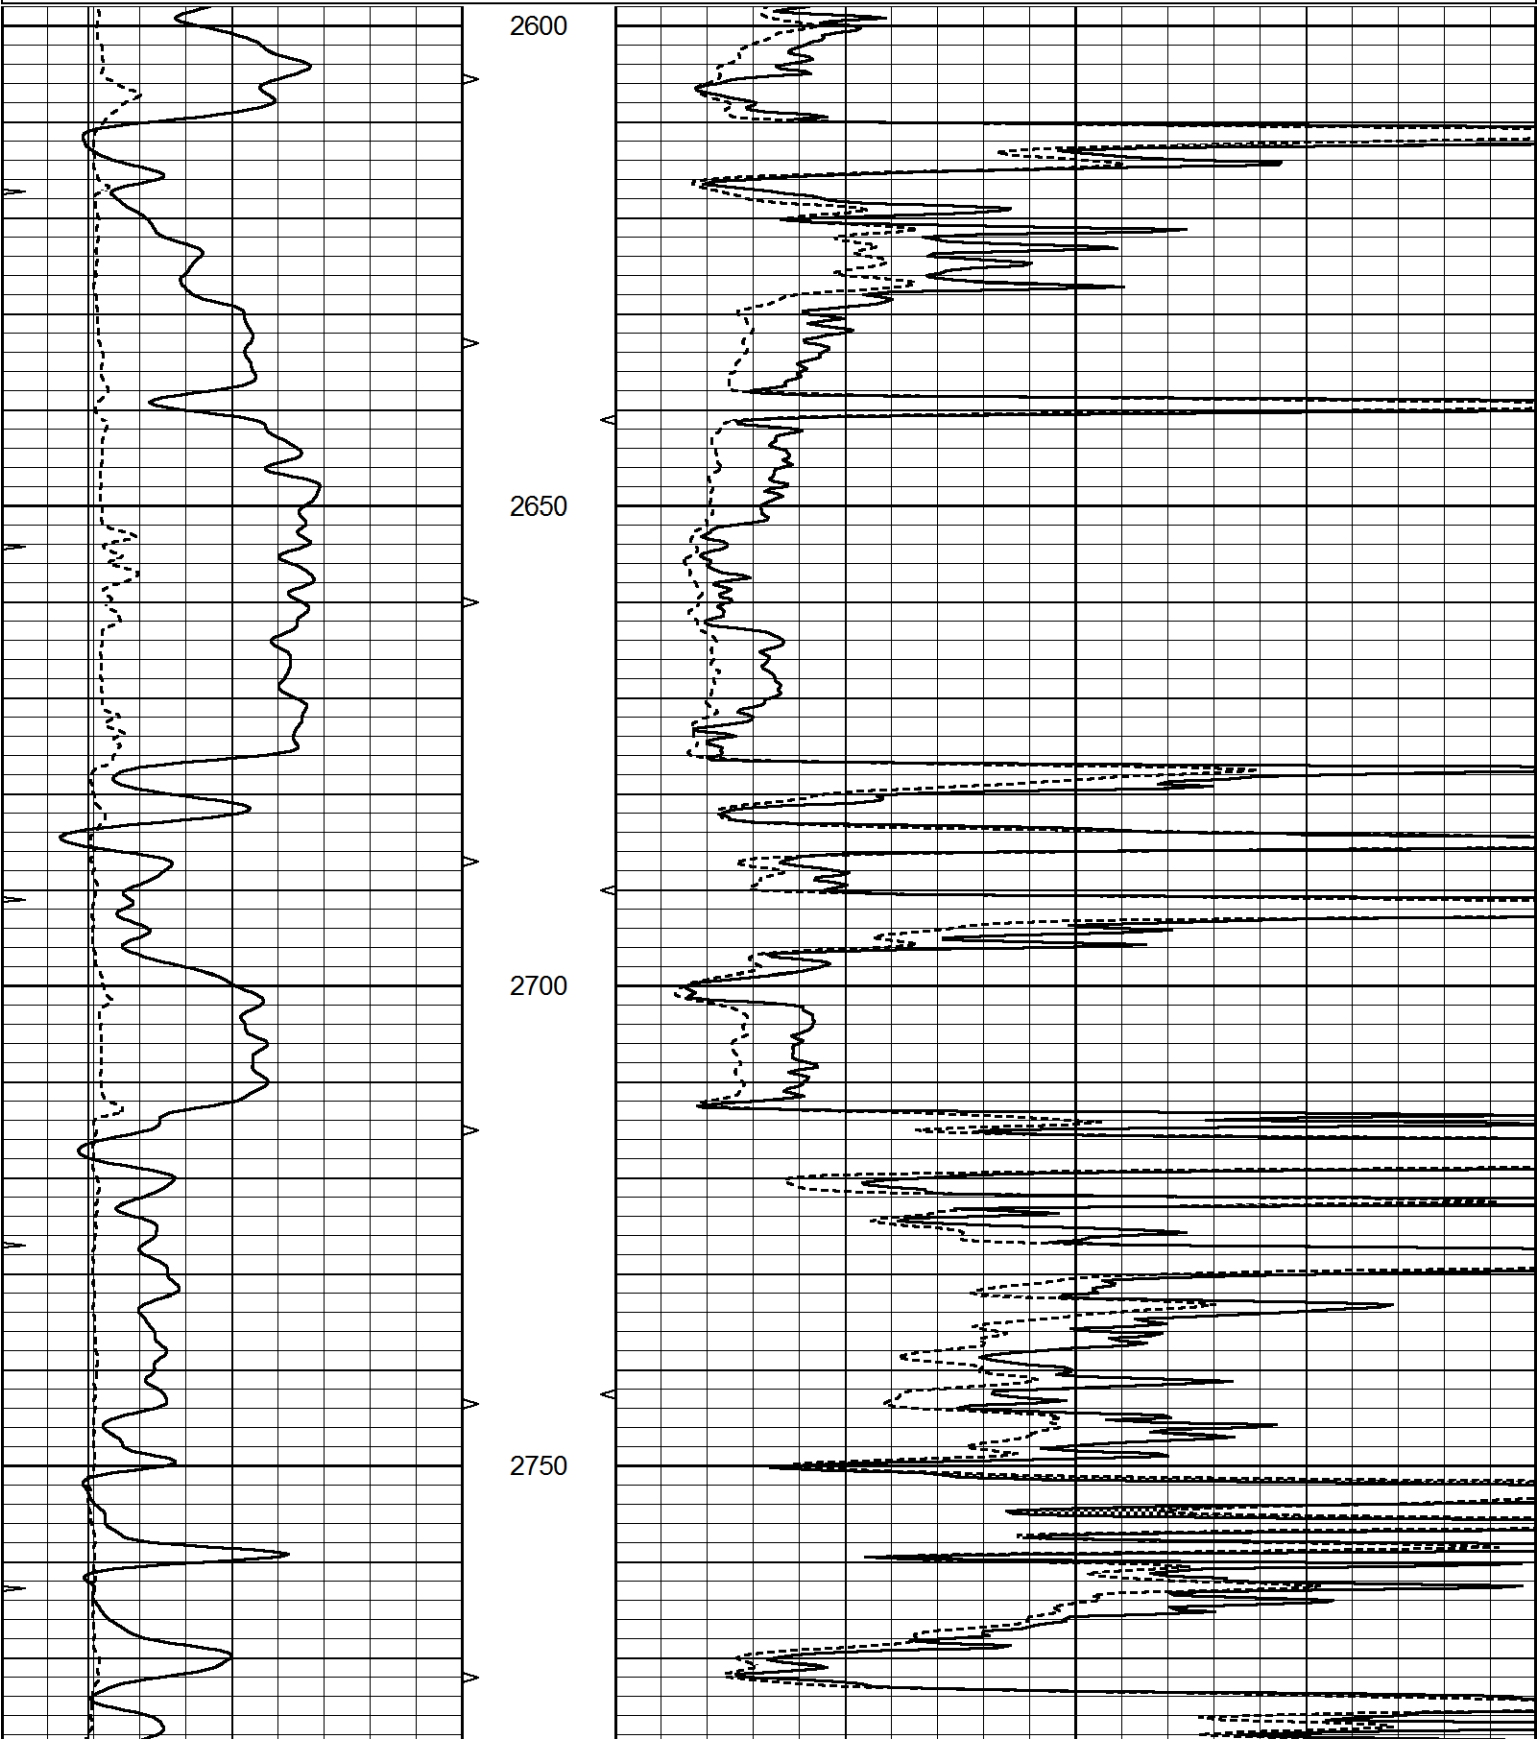

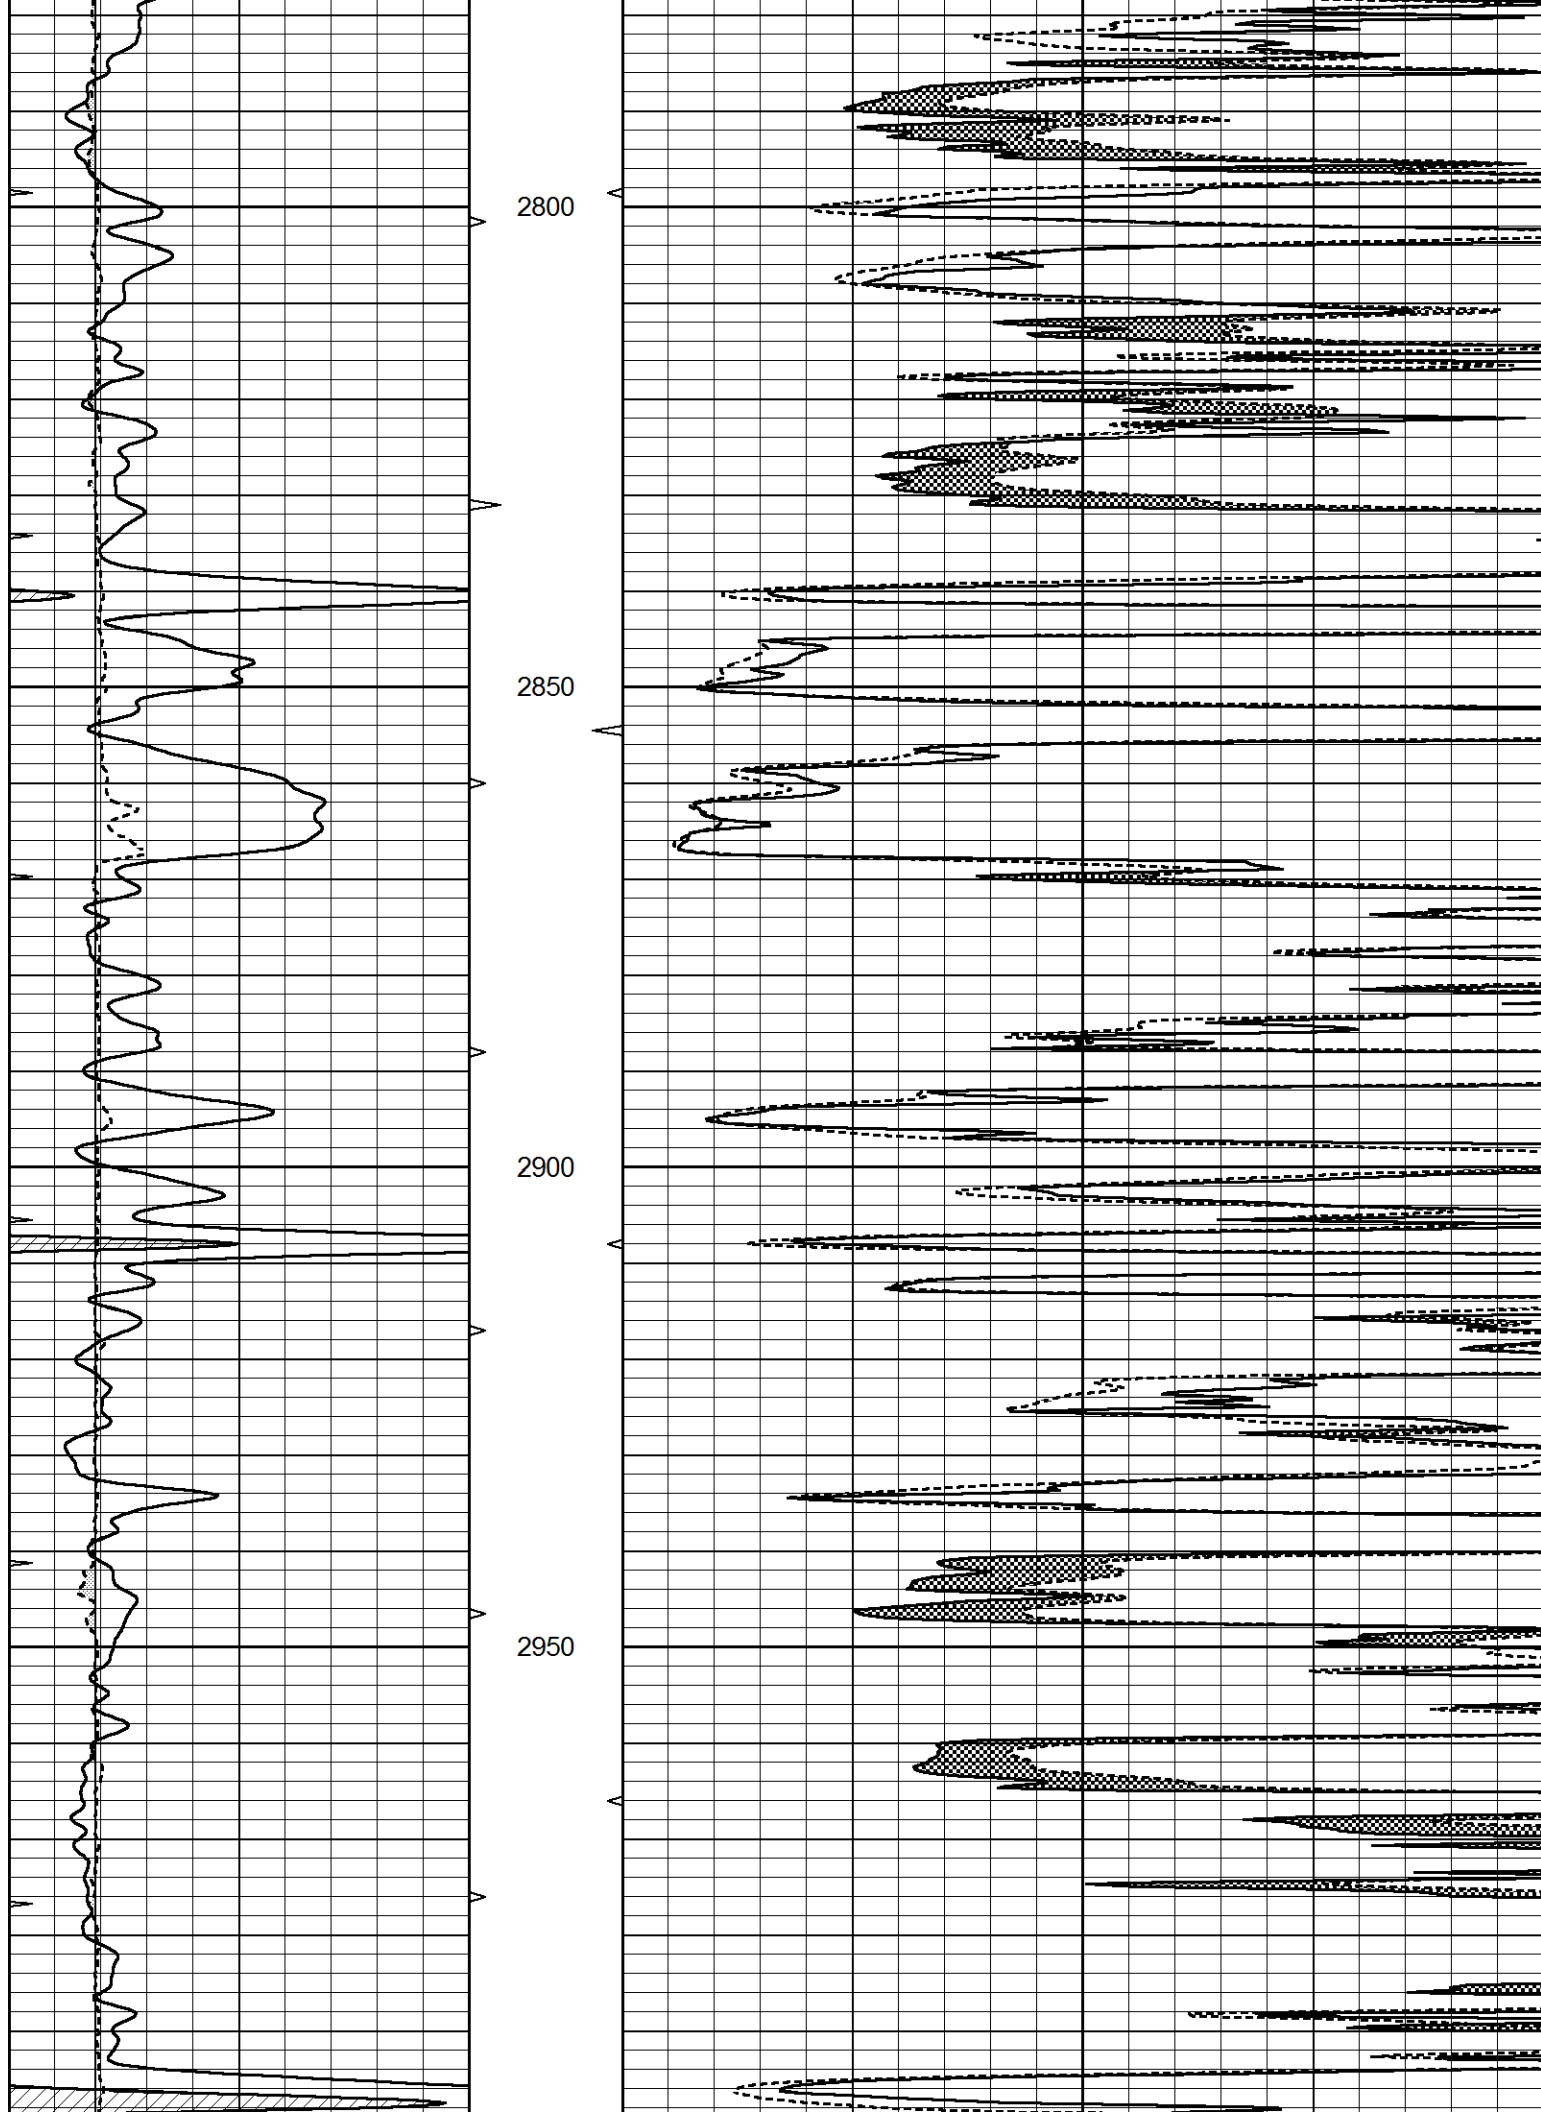

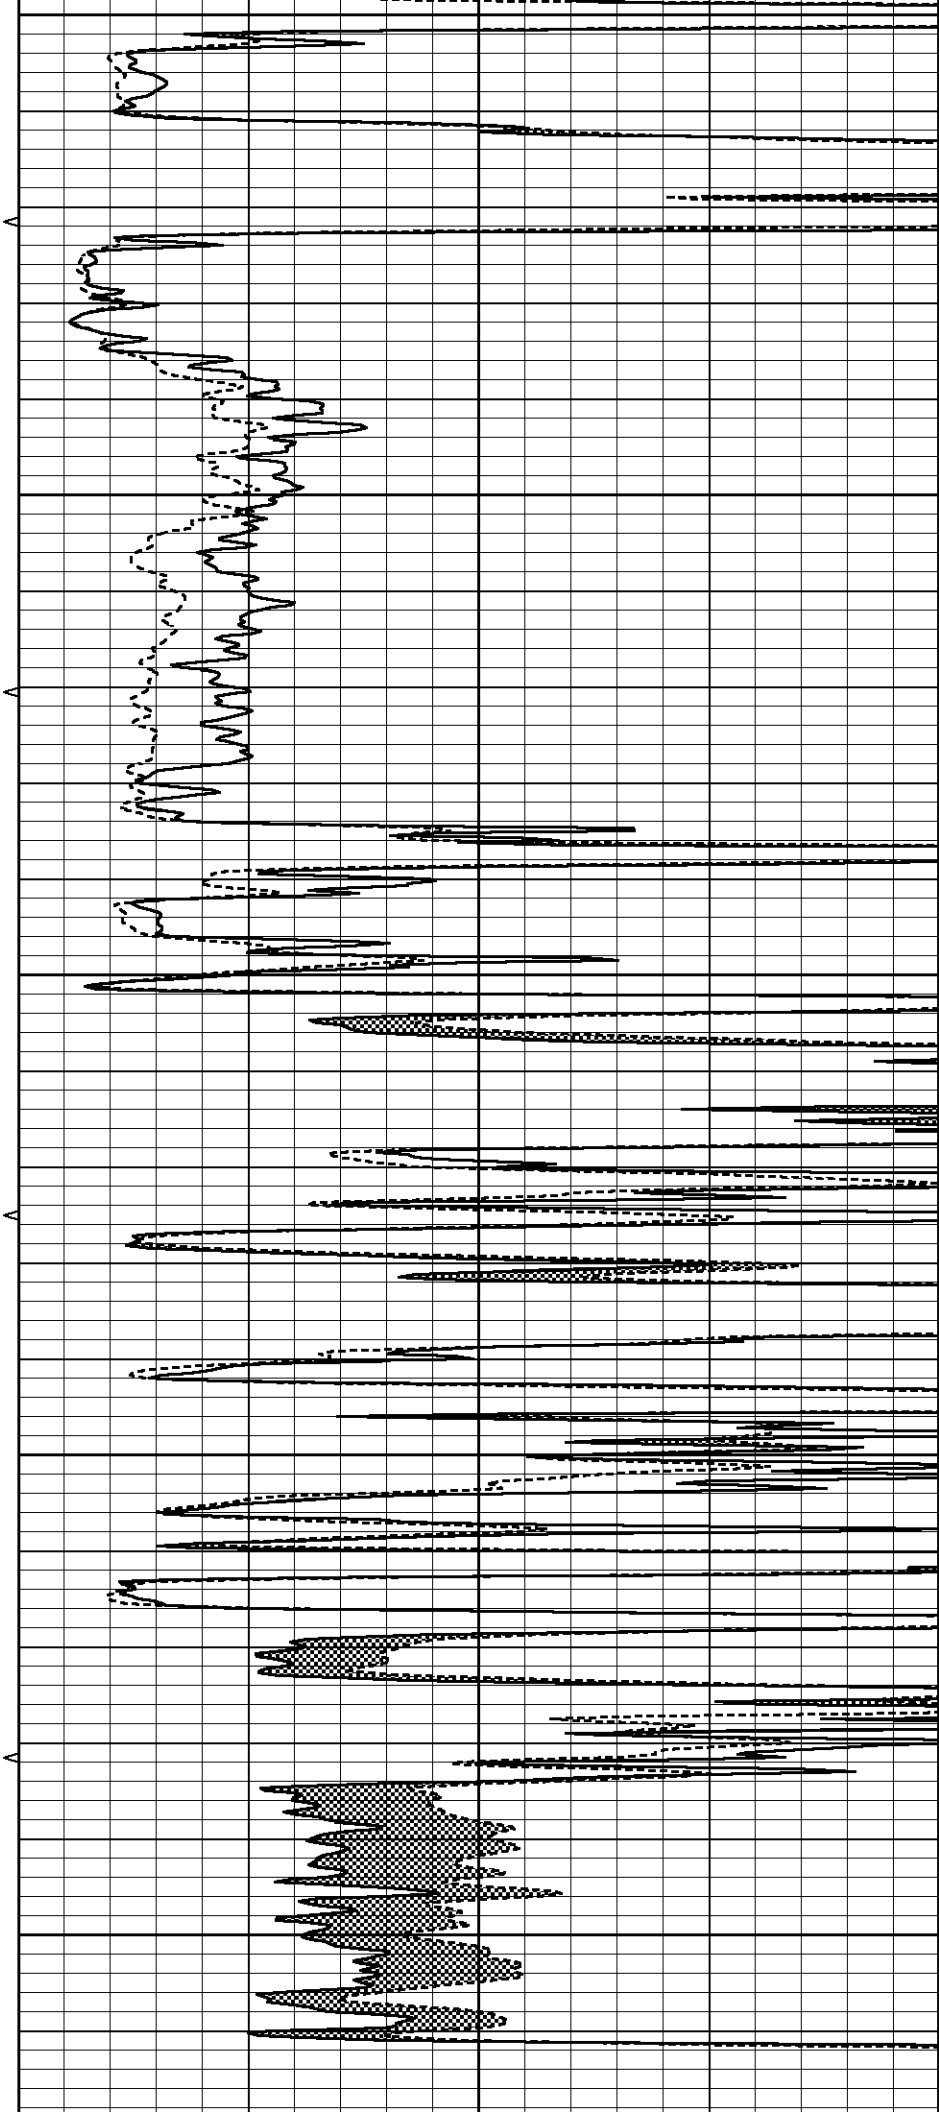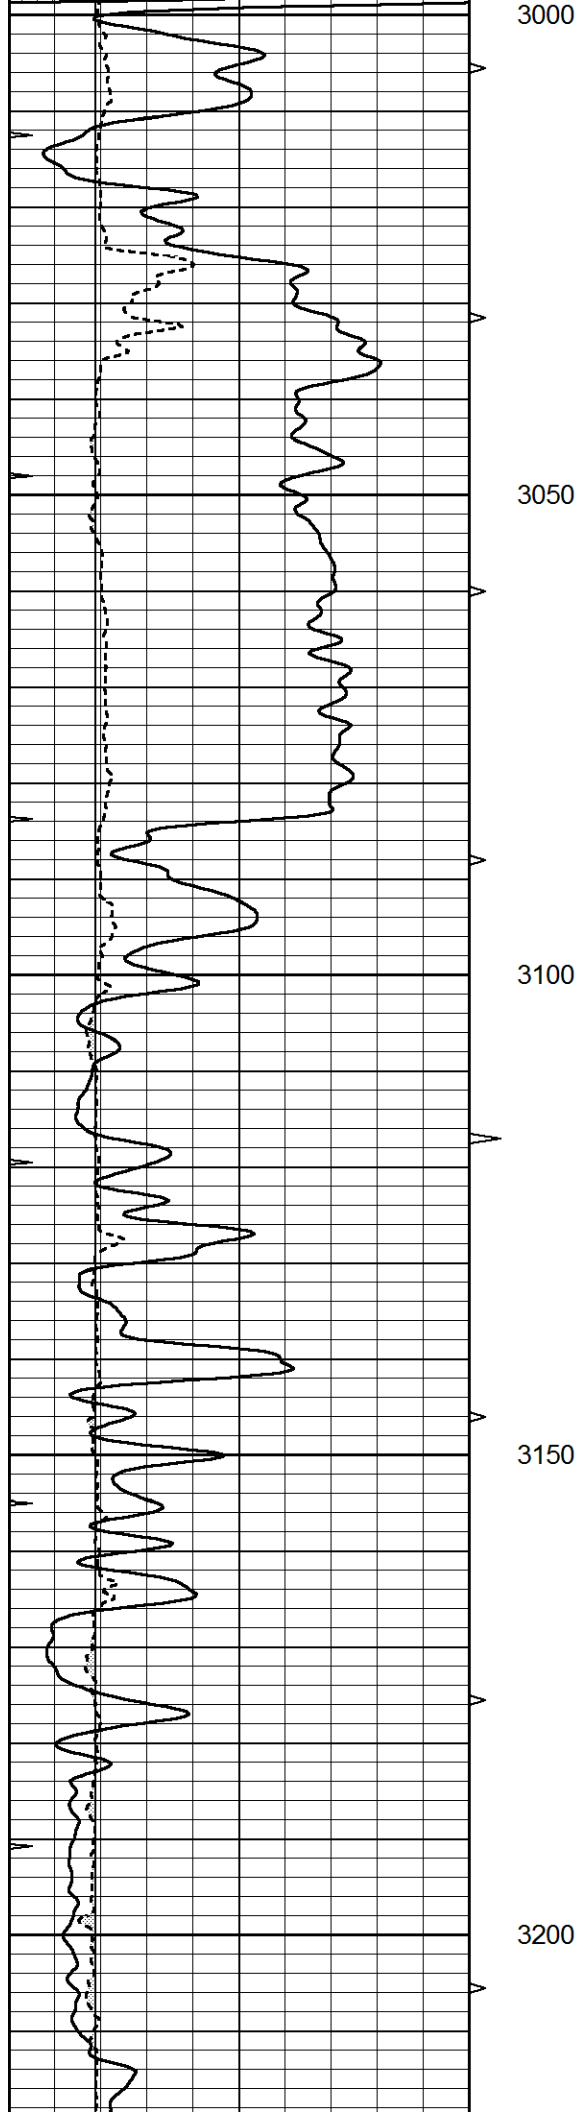

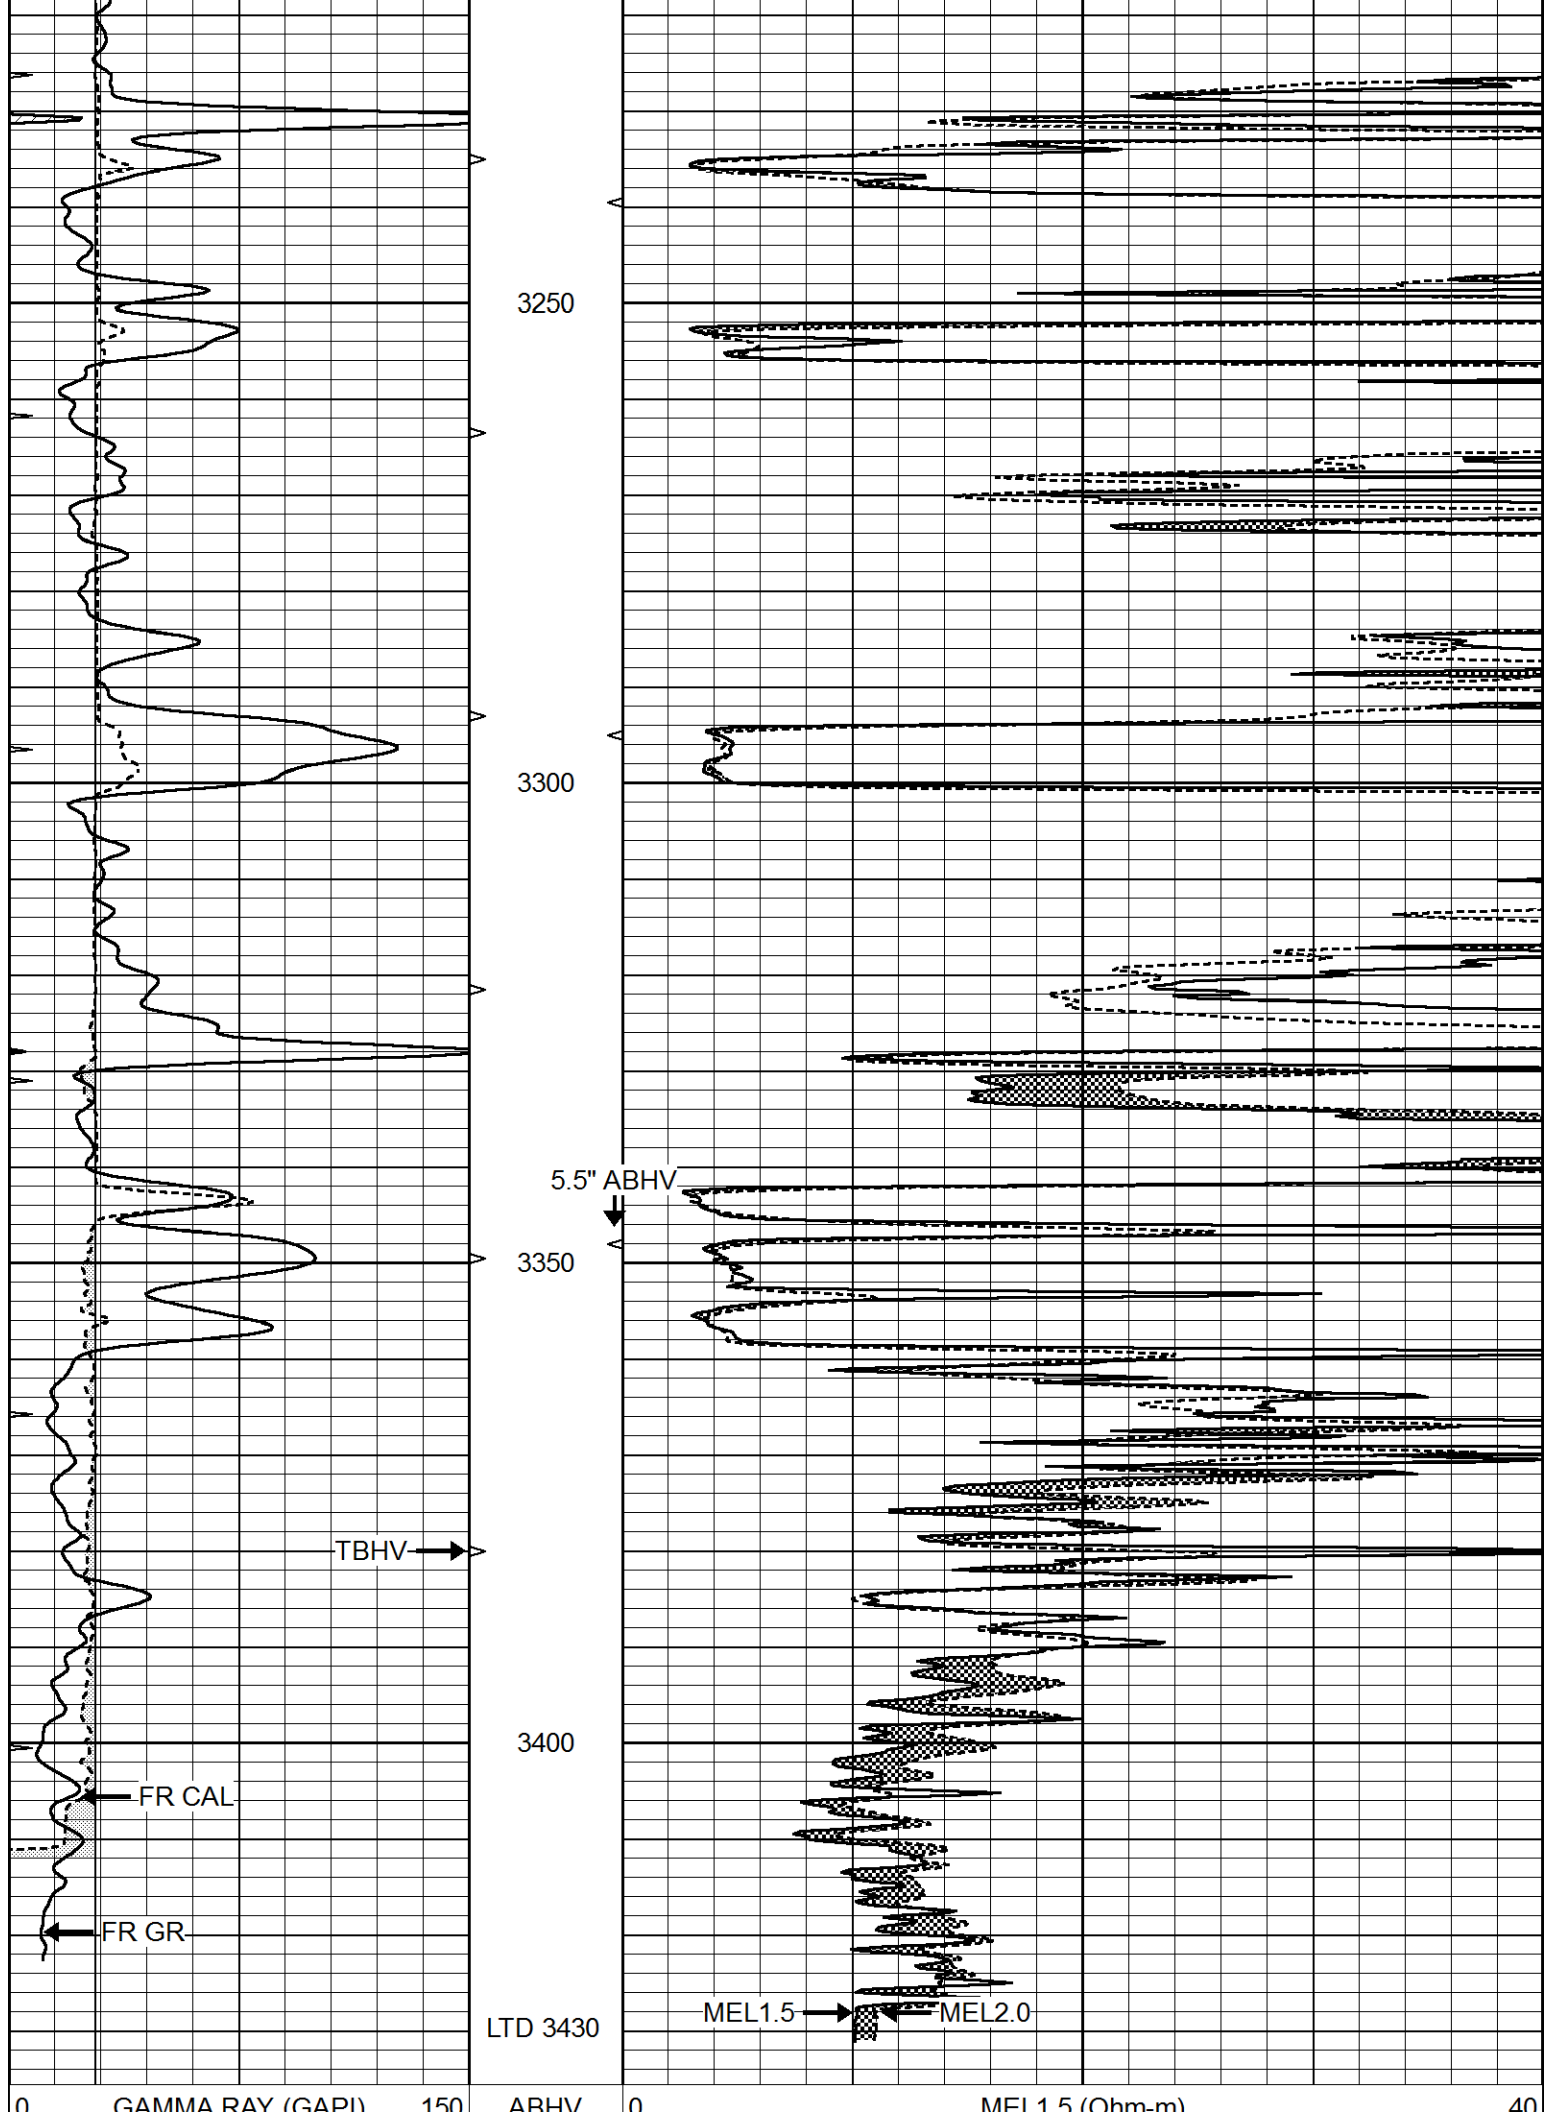


6	GAMMA RAY (GAPI)	16	10	0	0	MEL1.5 (Ohm-m)	40
0	CALIPER (in)	20	TBHV				
	MINMK		0	(ft3)	10		




REPEAT SECTION

Database File 6555ddn.db
 Dataset Pathname pass5.1R
 Presentation Format _micro
 Dataset Creation Tue May 24 18:26:26 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

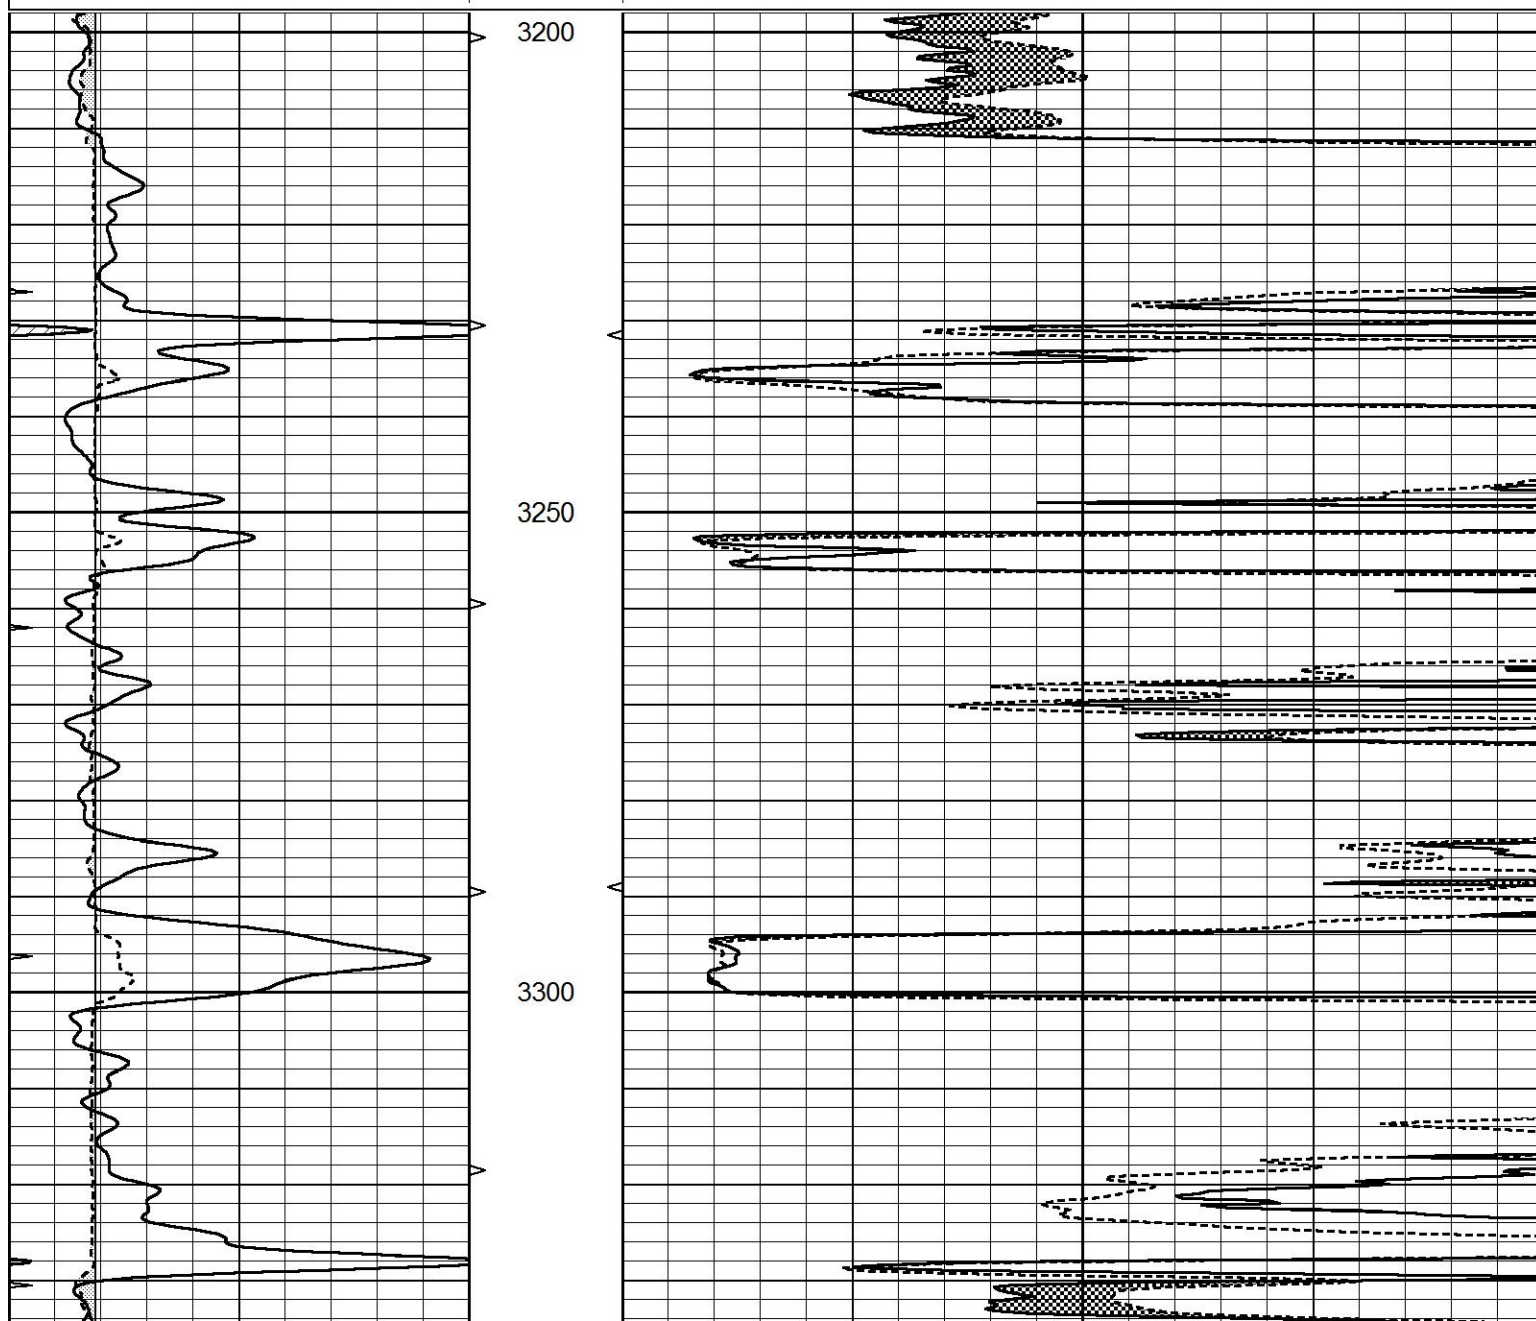

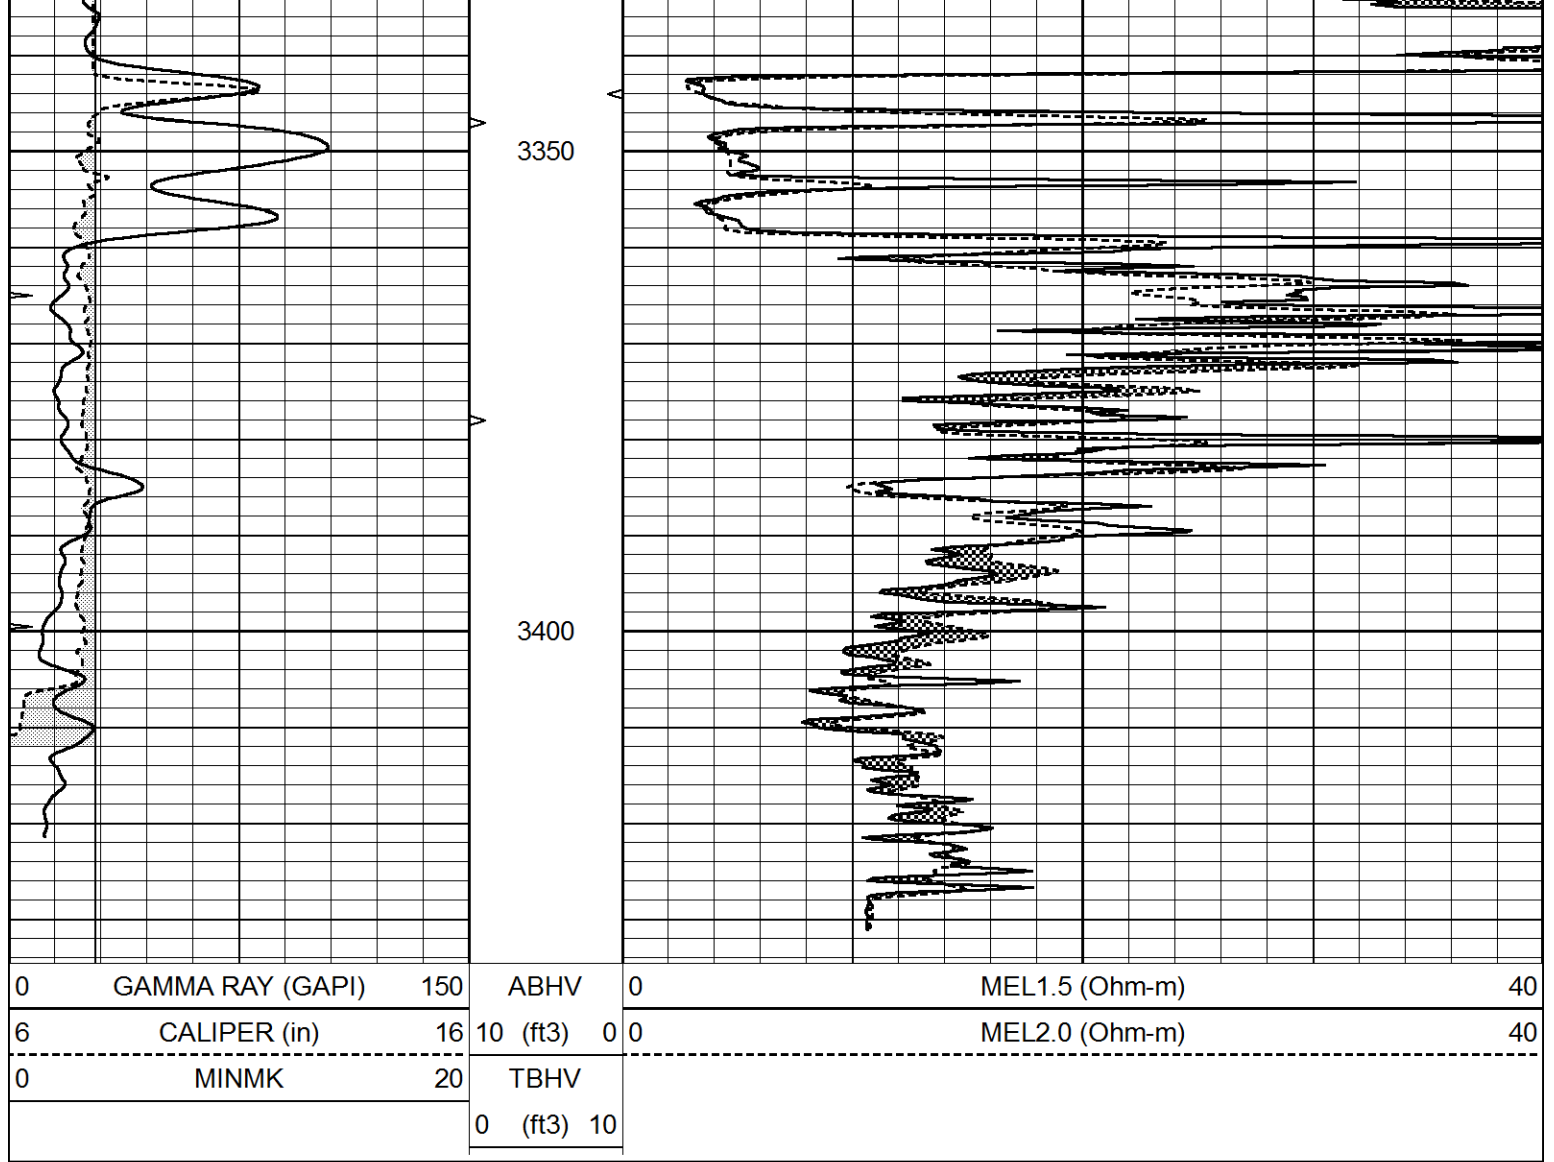

Calibration Report			
Database File	6555ddn.db		
Dataset Pathname	pass6.1M		
Dataset Creation	Tue May 24 18:37:48 2022		
MICRO Calibration Report			
Serial Number:	MICRO5		
Tool Model:	PROBE		
Performed:	Tue May 24 18:13:00 2022		
Caliper Calibration:	Gain=3.556	Offset=-9.600	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	4.950	7.200	
1.5" Calibration:	Gain=40.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.015	1.007	
2" Calibration:	Gain=65.000	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.008	0.908	

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Tue May 24 18:19:51 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5400	GAPI/cps