



MICRO LOG

Company BASIN OPERATING SERVICES, LLC.				Company BASIN OPERATING SERVICES, LLC.			
Well WINDHOLZ #25-1				Well WINDHOLZ #25-1			
Field MONG				Field MONG			
County TREGO				County TREGO			
State KANSAS				State KANSAS			
Location:		API # : 15-195-23172-0000		Other Services CDL/CNL/PE DIL/SONIC			
SEC 25 TWP 11S RGE 23W				Elevation			
Permanent Datum	GROUND LEVEL	Elevation	2370	K.B. 2378			
Log Measured From	KELLY BUSHING 8' A.G.L			D.F. 2376			
Drilling Measured From	KELLY BUSHING			G.L. 2370			
Date	4/12/24						
Run Number	TWO						
Depth Driller	4085						
Depth Logger	4080						
Bottom Logged Interval	4064						
Top Log Interval	3300						
Casing Driller	8.625@284						
Casing Logger	284						
Bit Size	7.785						
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,400 PPM					
Density / Viscosity	9.3/59						
pH / Fluid Loss	10.5/6.4						
Source of Sample	FLOWLINE						
Rm @ Meas. Temp	.750@57F						
Rmf @ Meas. Temp	.563@57F						
Rmc @ Meas. Temp	.900@57F						
Source of Rmf / Rmc	MEASUREMENT						
Rm @ BHT	117F						
Time Circulation Stopped	3 HOURS						
Time Logger on Bottom	8:15 A.M.						
Maximum Recorded Temperature	117F						
Equipment Number	922339						
Location	HAYS, KANSAS						
Recorded By	JEFF LUEBBERS	JEREMEY PASEK					
Witnessed By	ED GRIEVES	TROY JOHNSON		TIM HEDRICK			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-195-23172-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
WAKEENEY, KS. & OLD 40, 3E. TO "RD. 290", 3N. TO GATE, FOLLOW TRAIL W. & N., E. INTO




MAIN SECTION

Database File	8486pe.db
Dataset Pathname	pass6.2
Presentation Format	_micro
Dataset Creation	Fri Apr 12 09:37:02 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)		40	
6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)		40
0	MINMK	20	TBHV			0	LTEN (lb)	5000
			0 (ft3)	10				

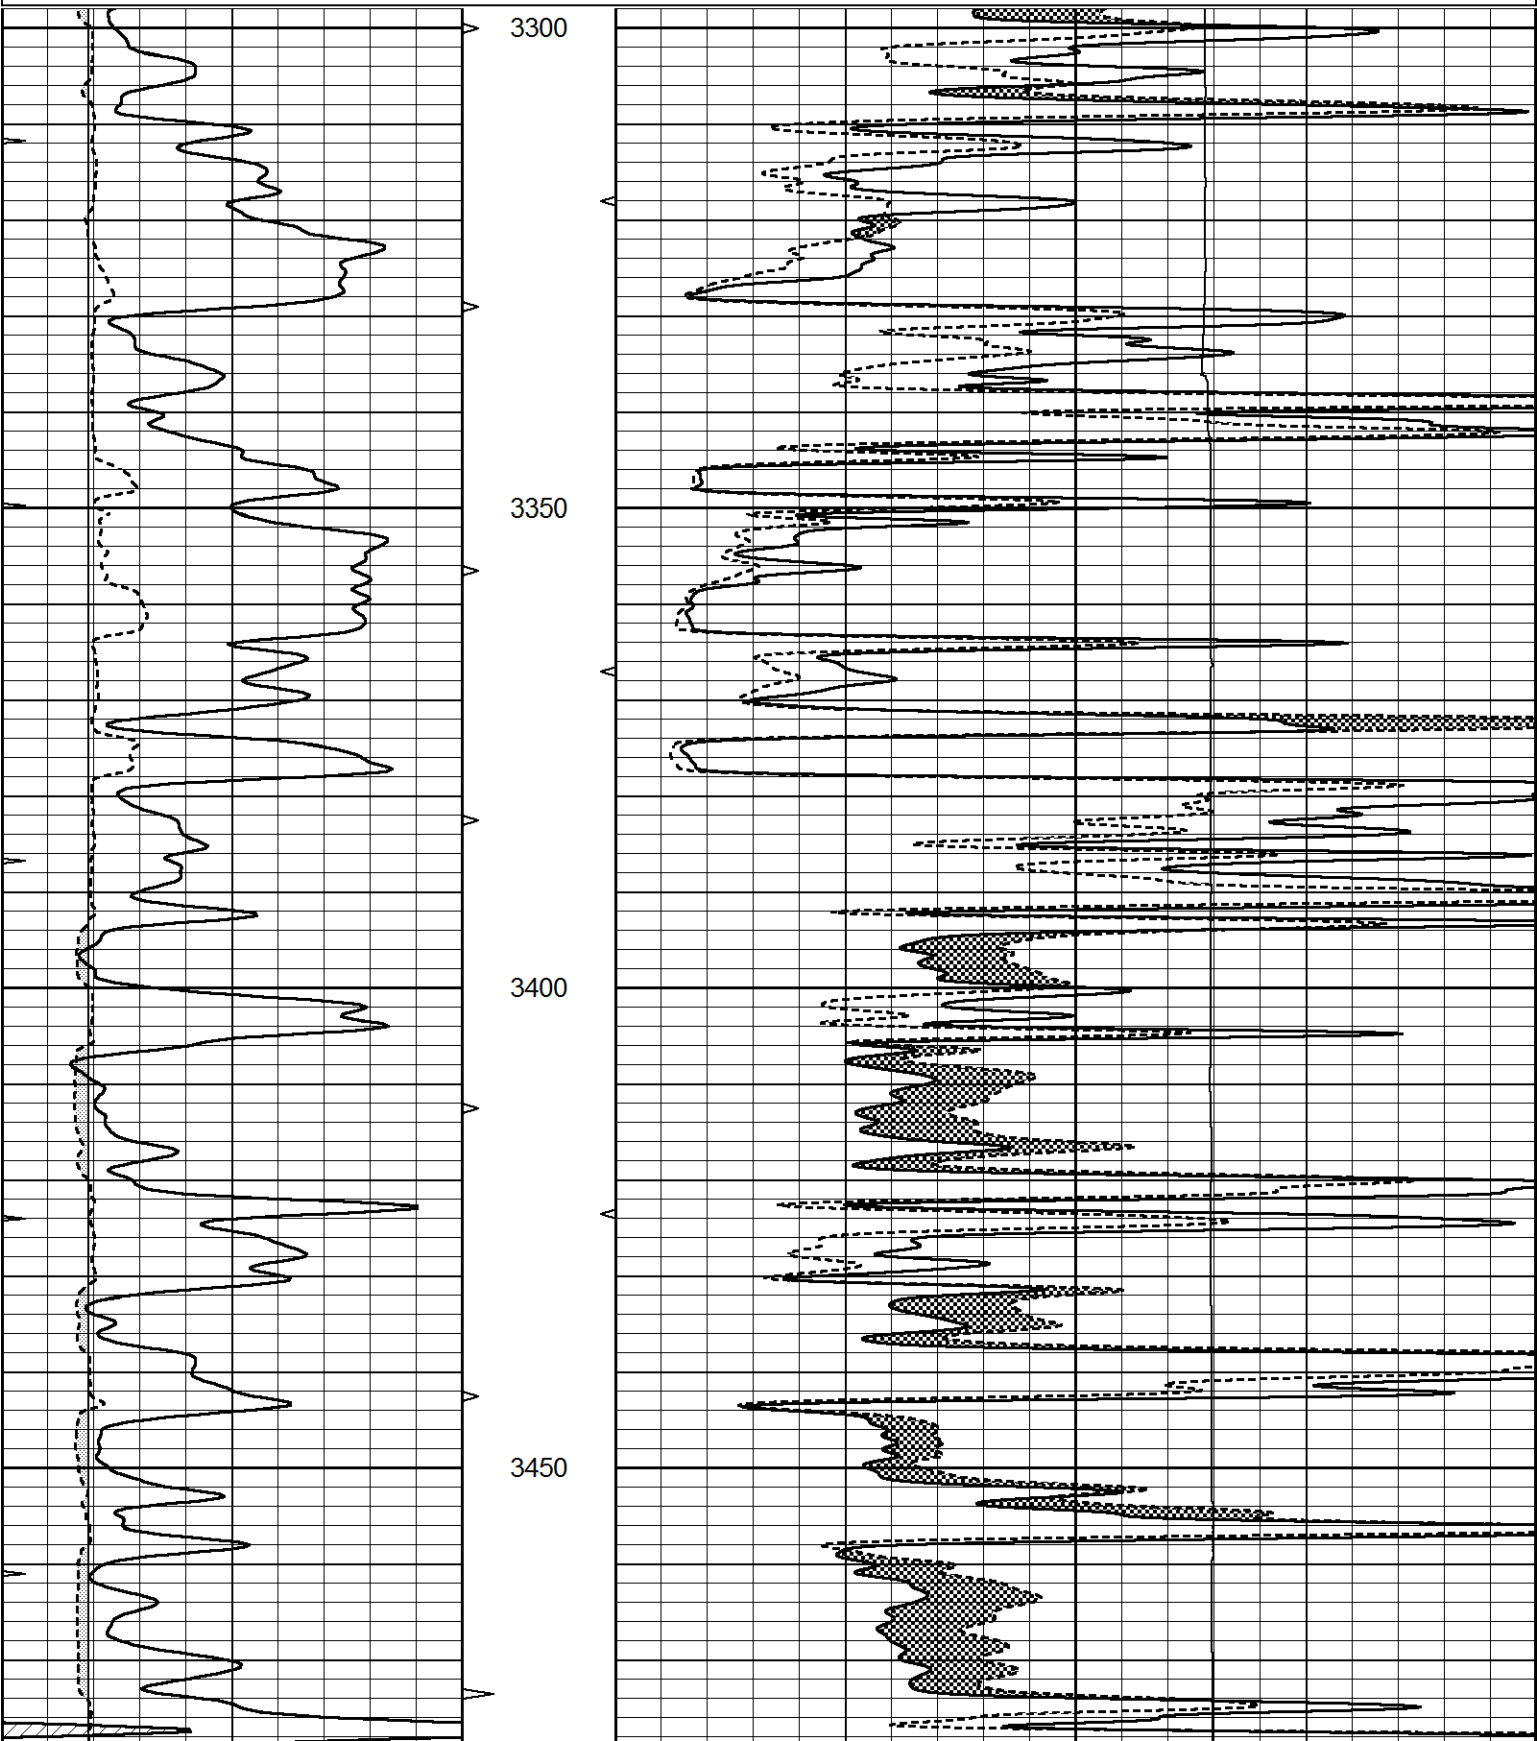

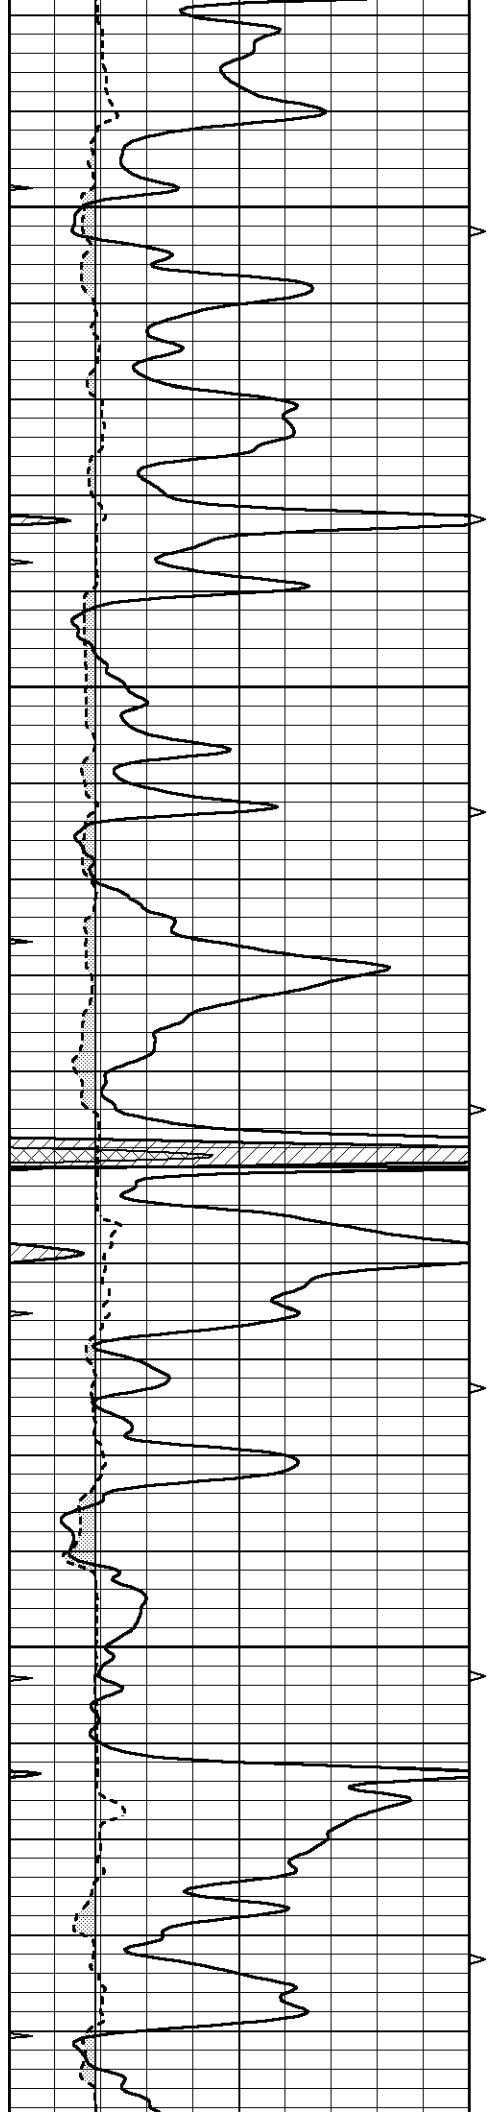



3500

3550

3600

3650

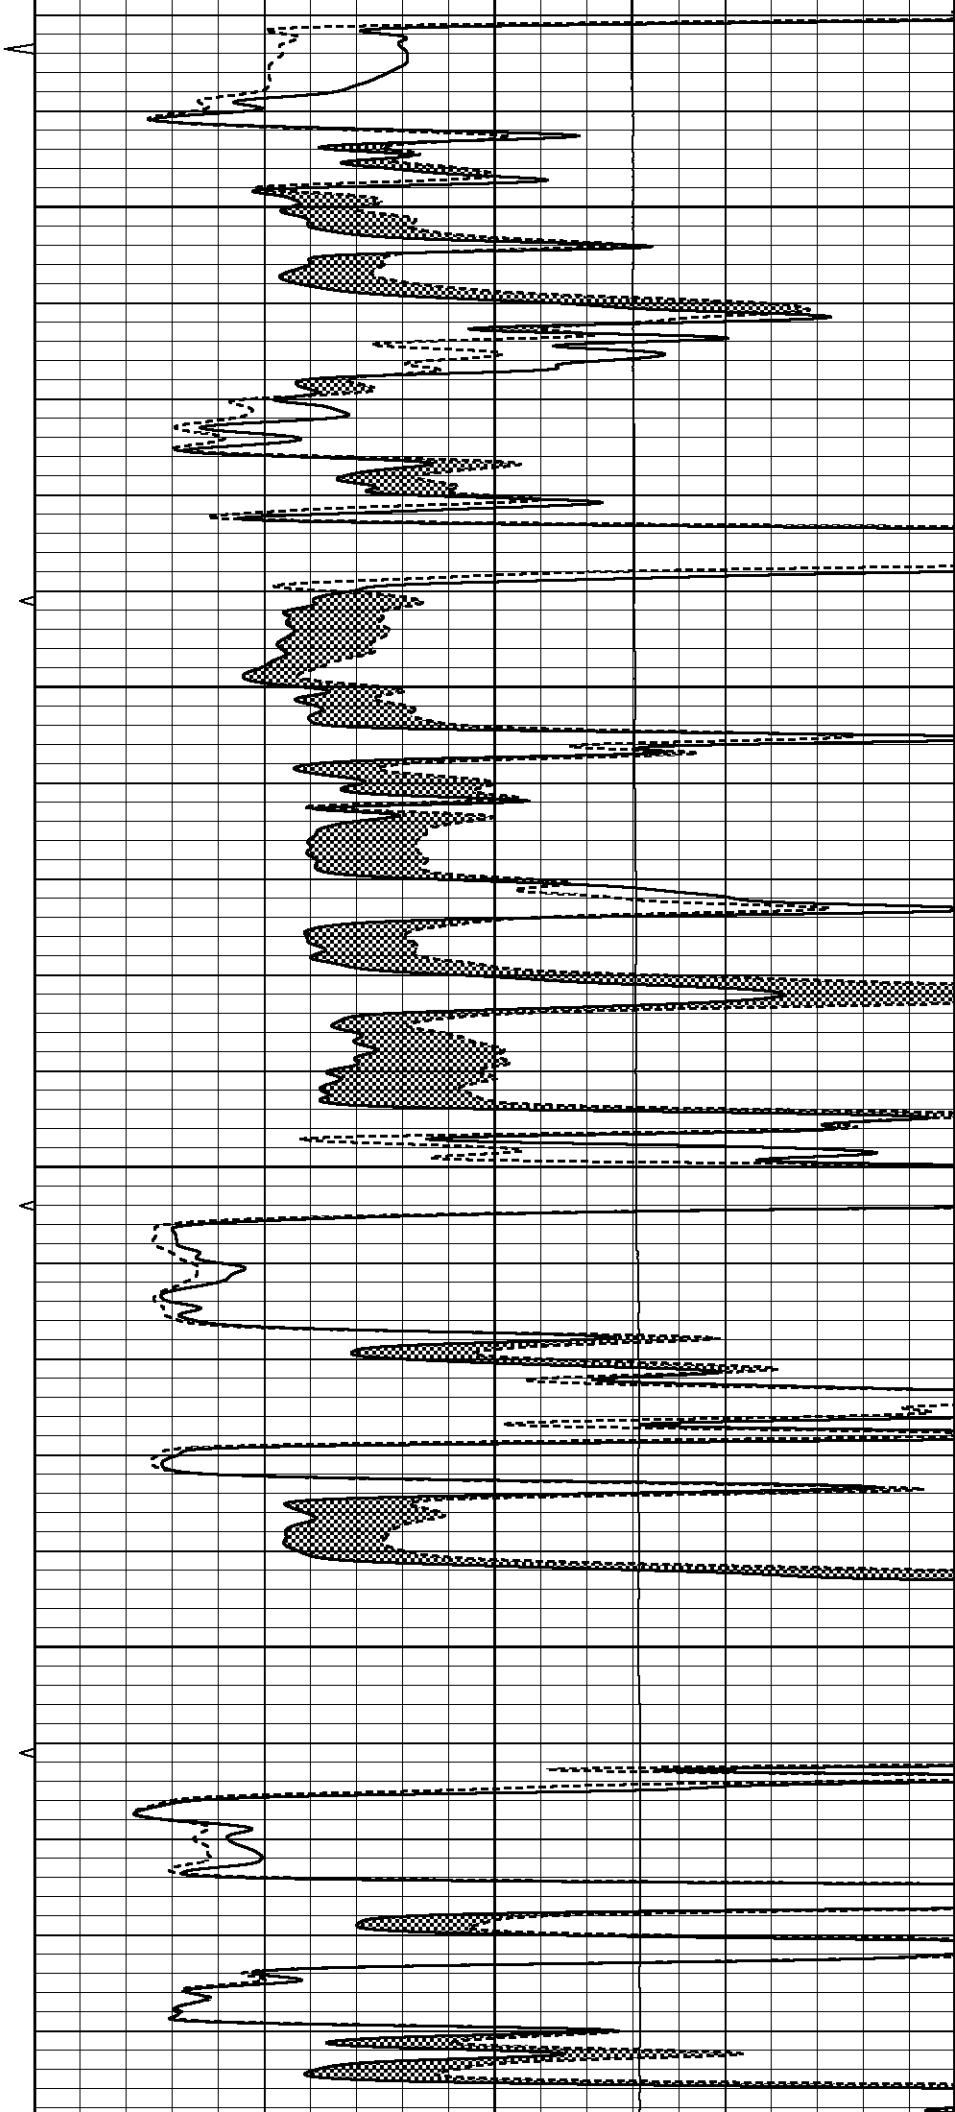

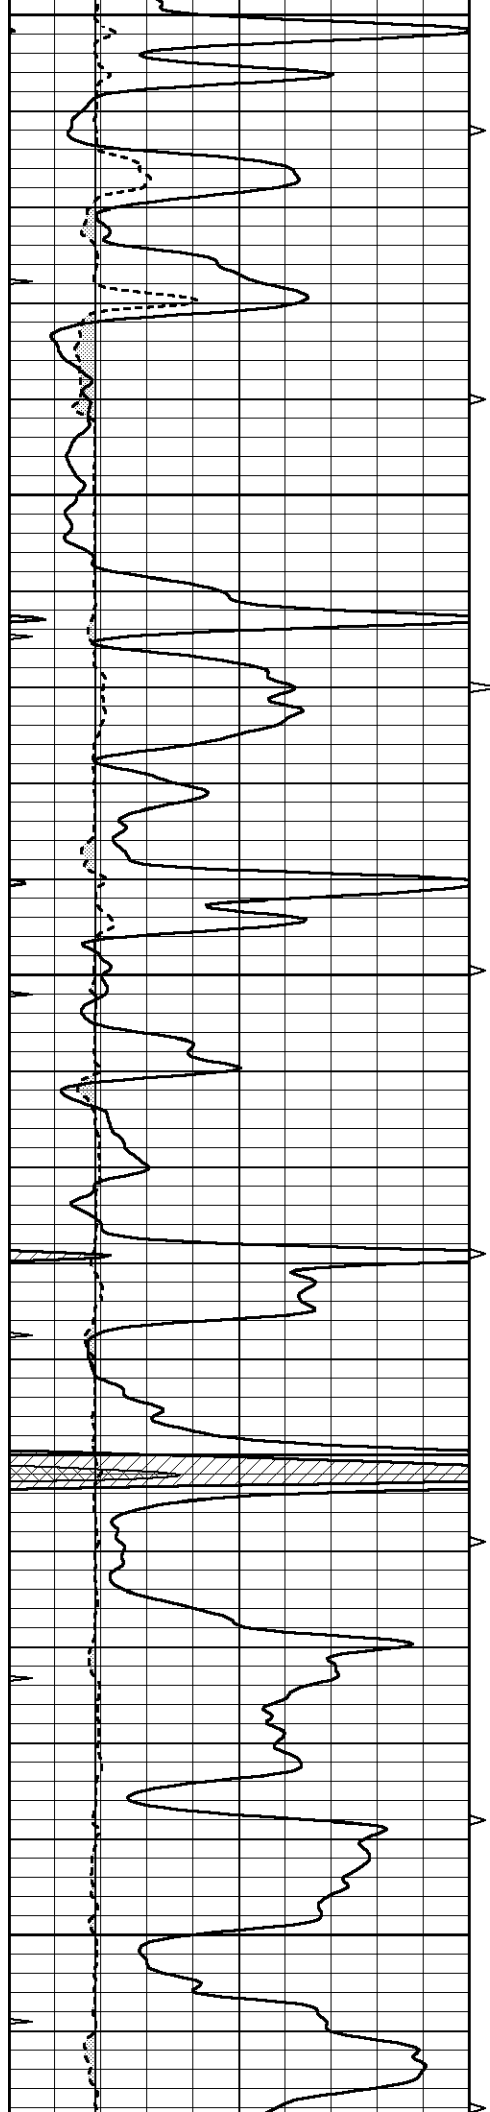


3700


3750

3800

3850


3900

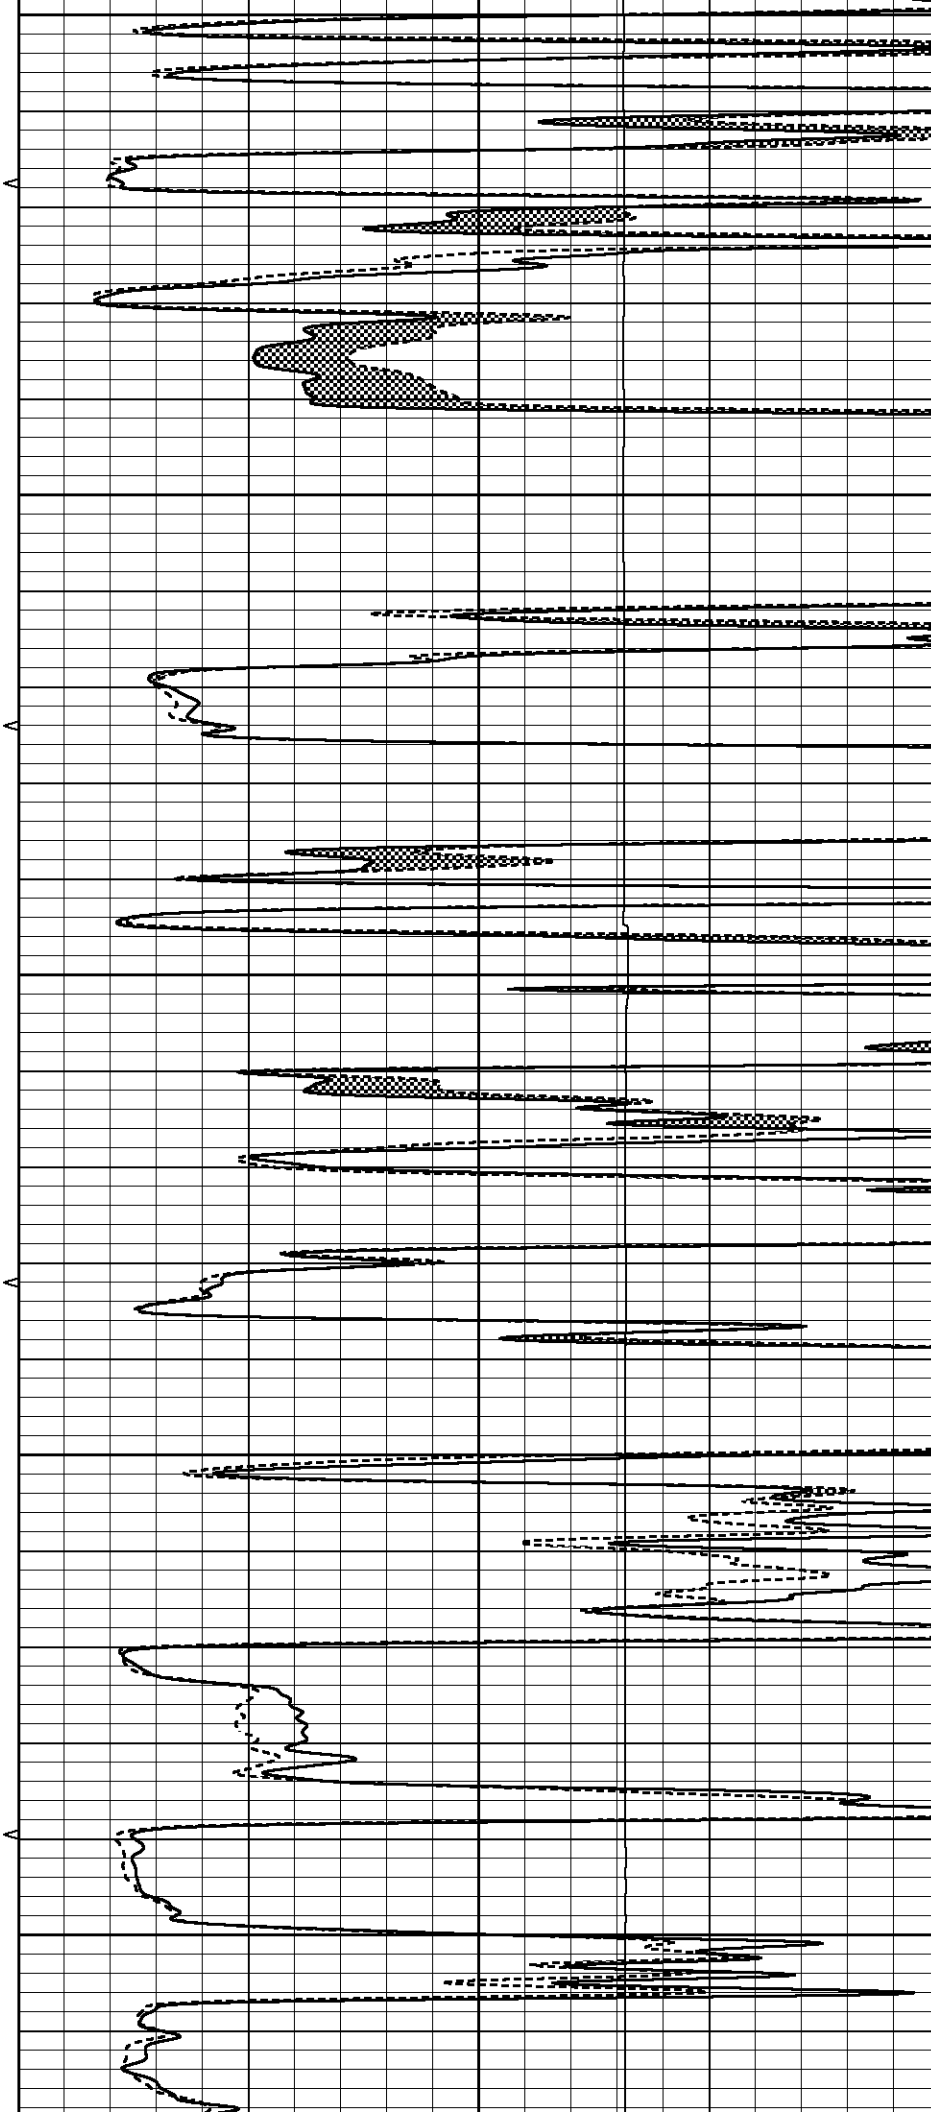


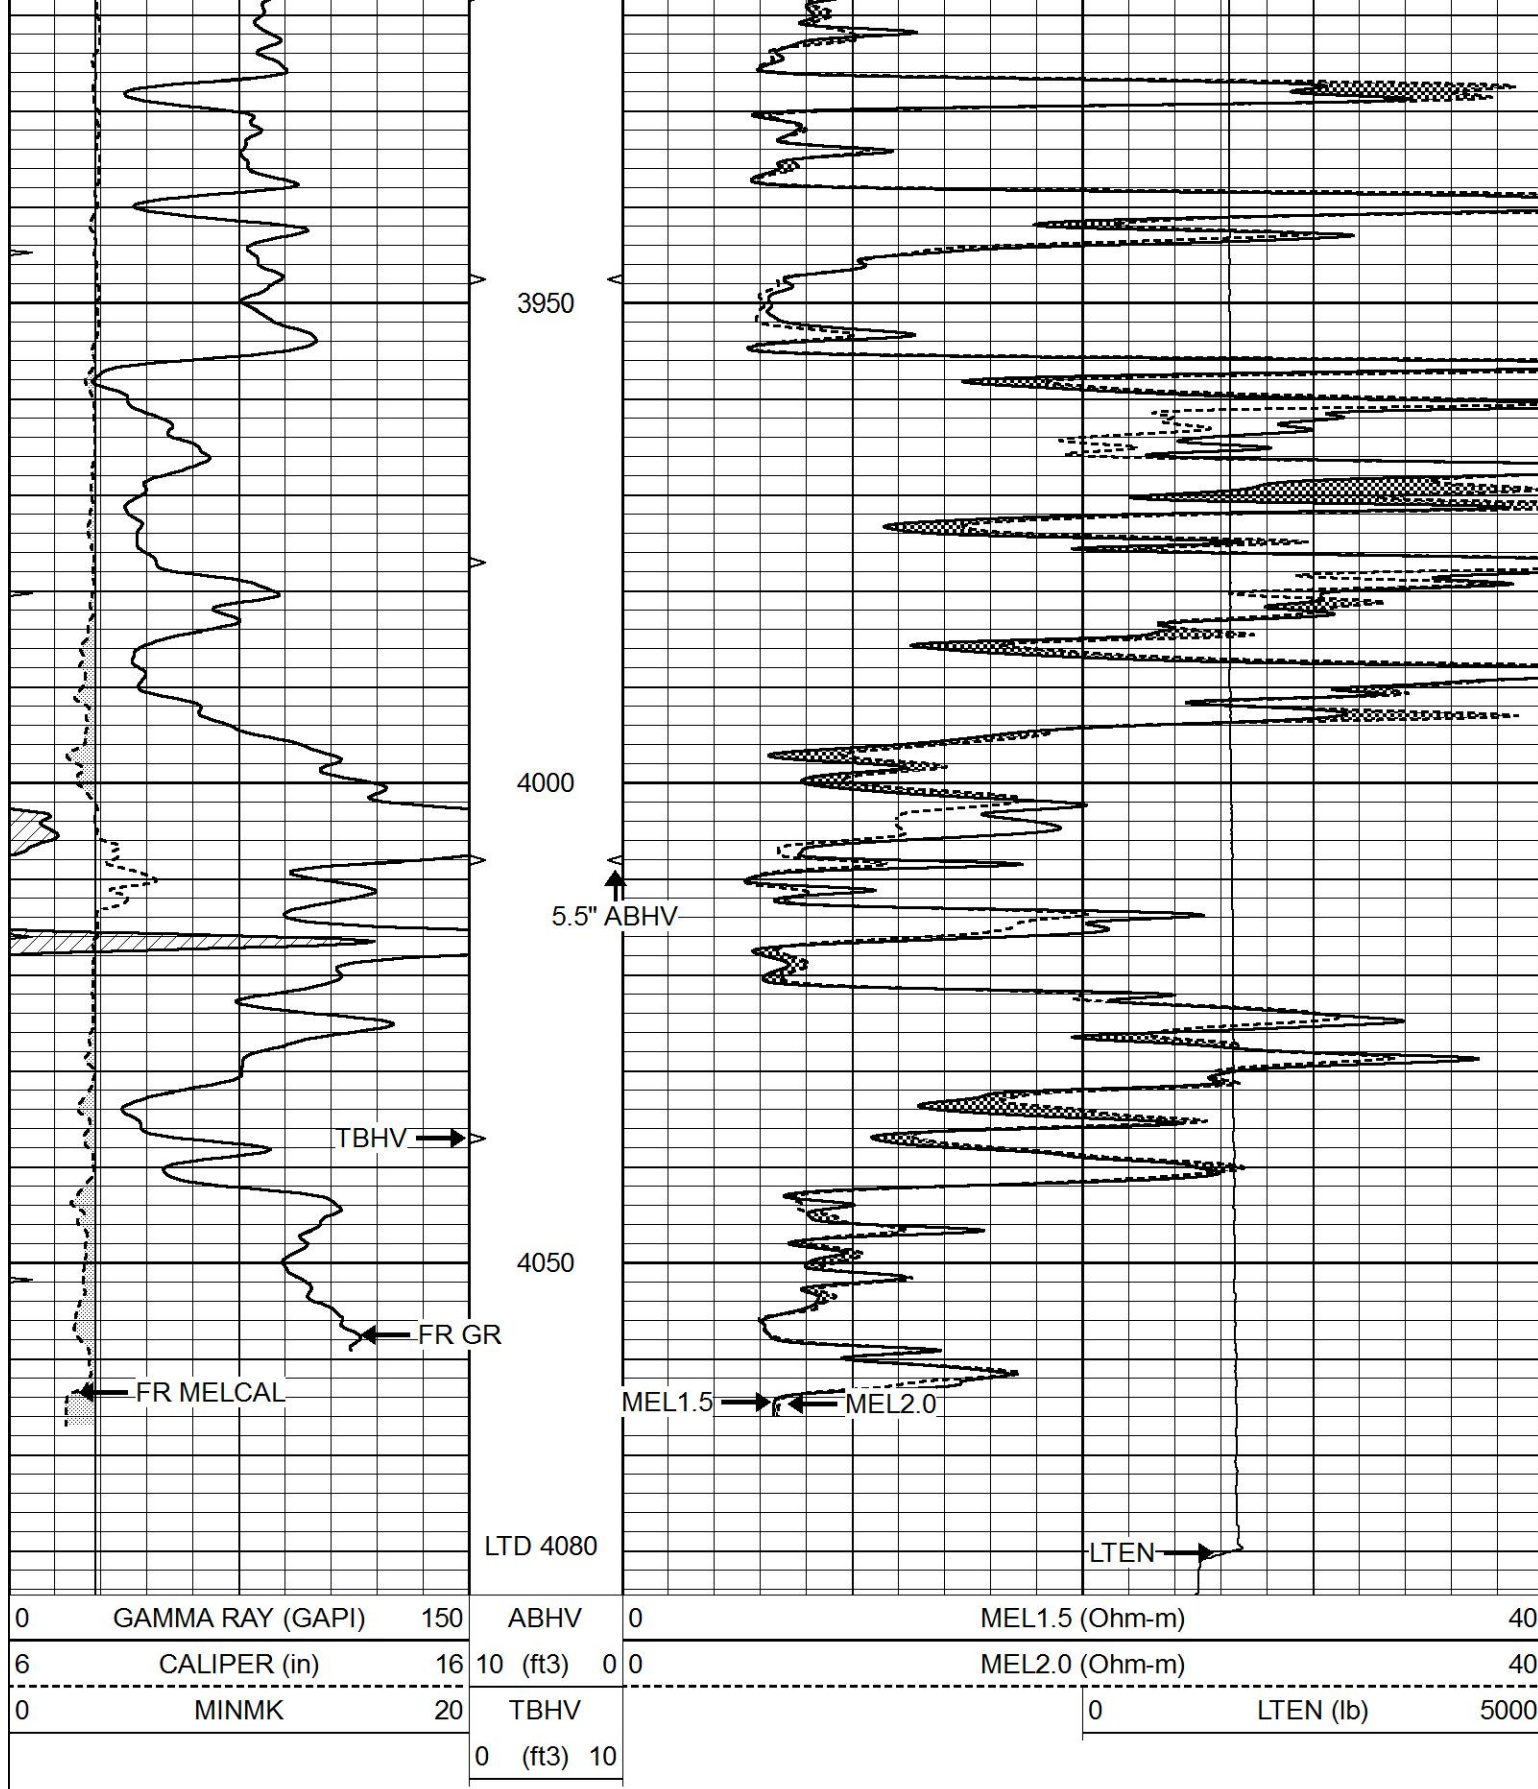

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV		0	LTEN (lb) 5000
			0 (ft3) 10			

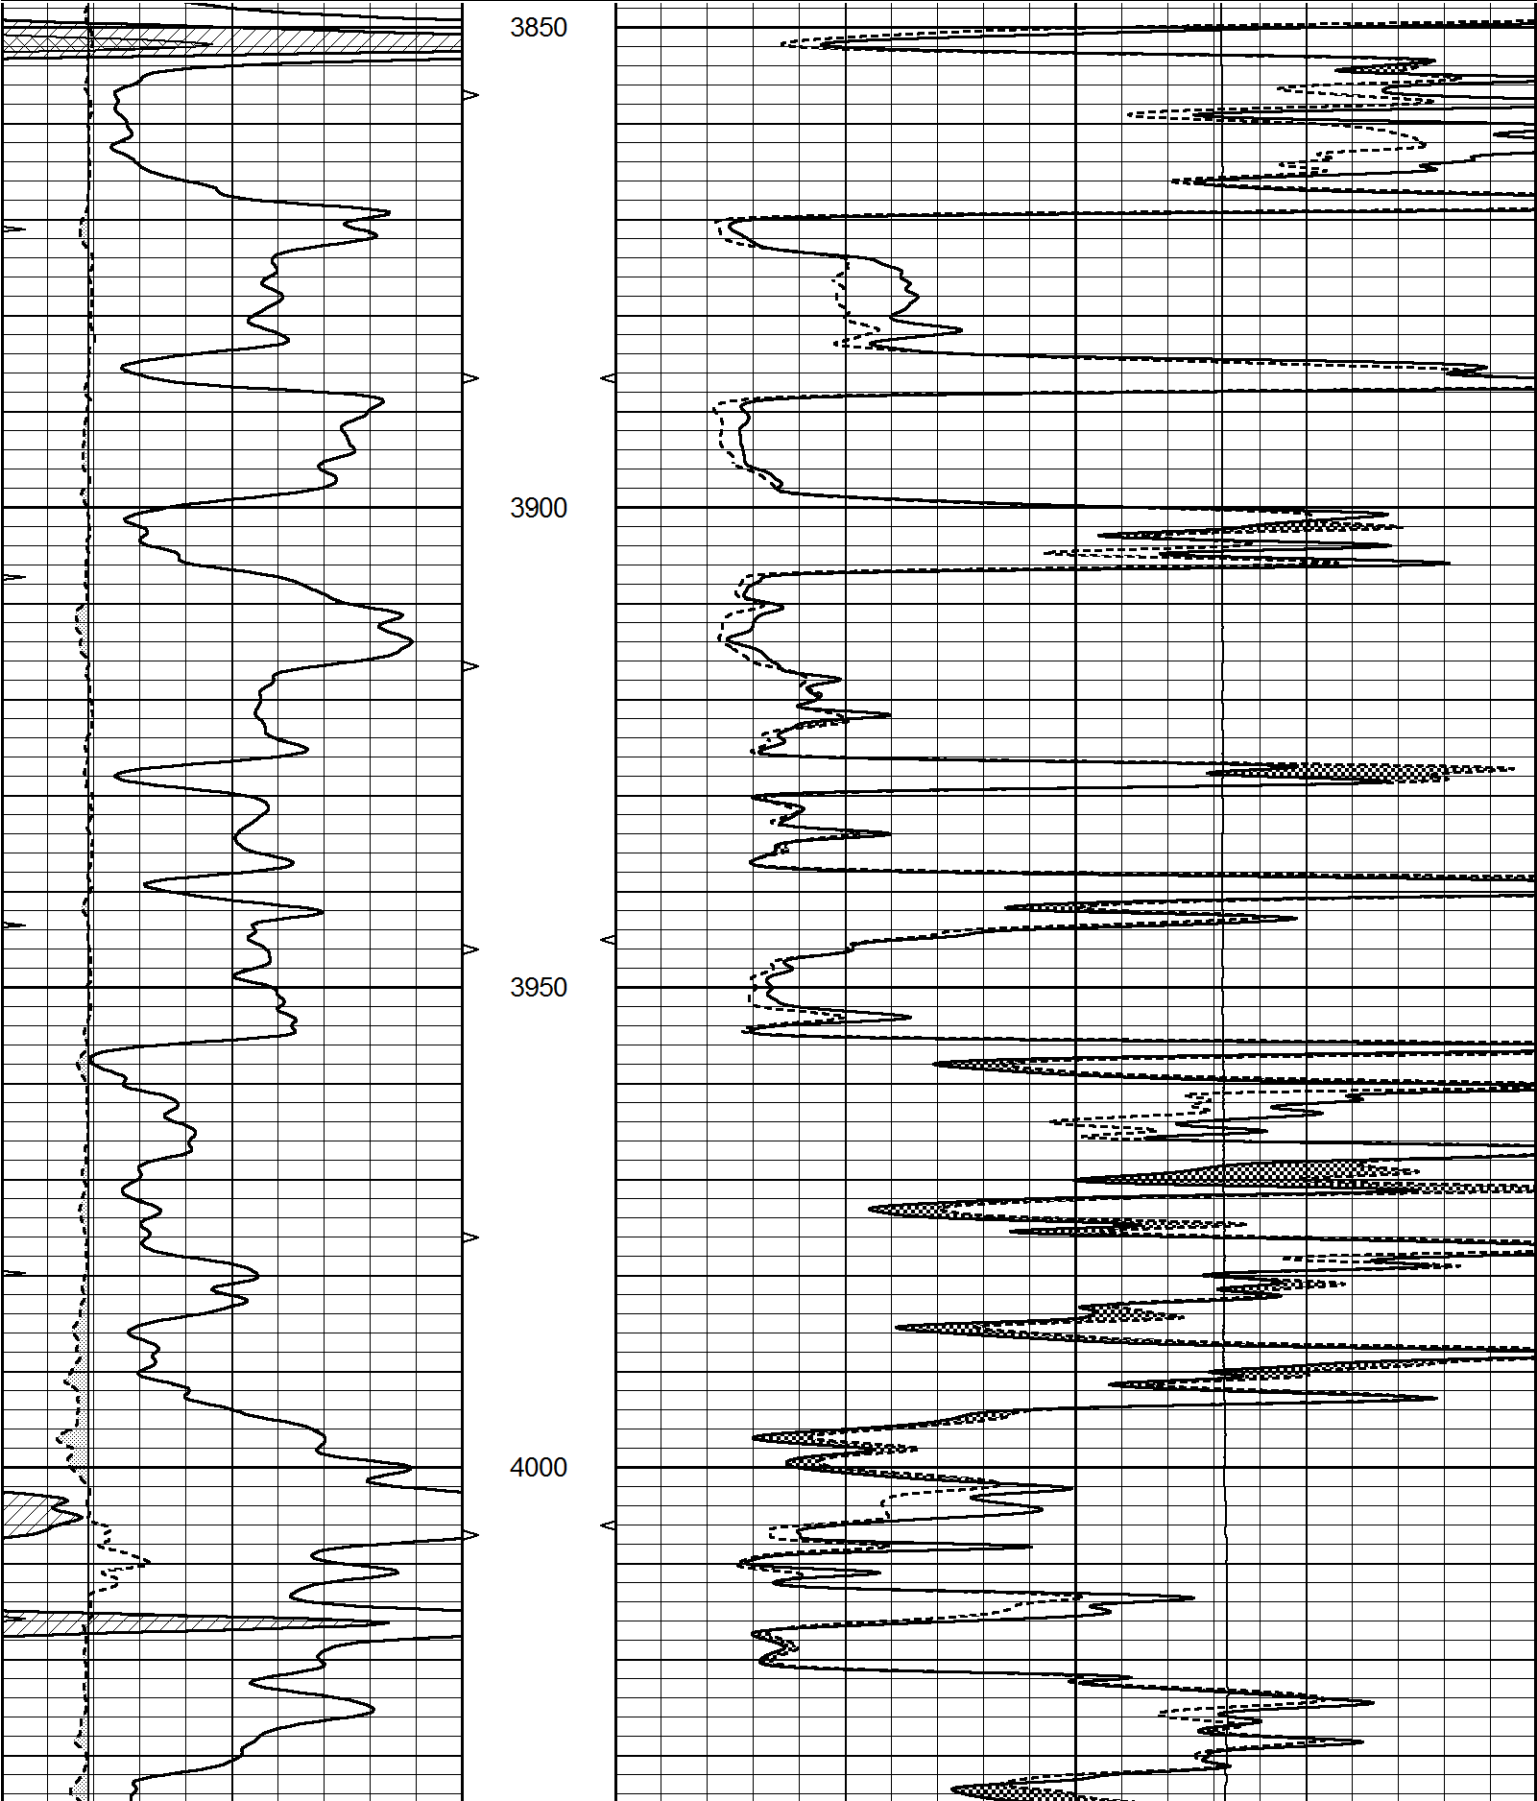

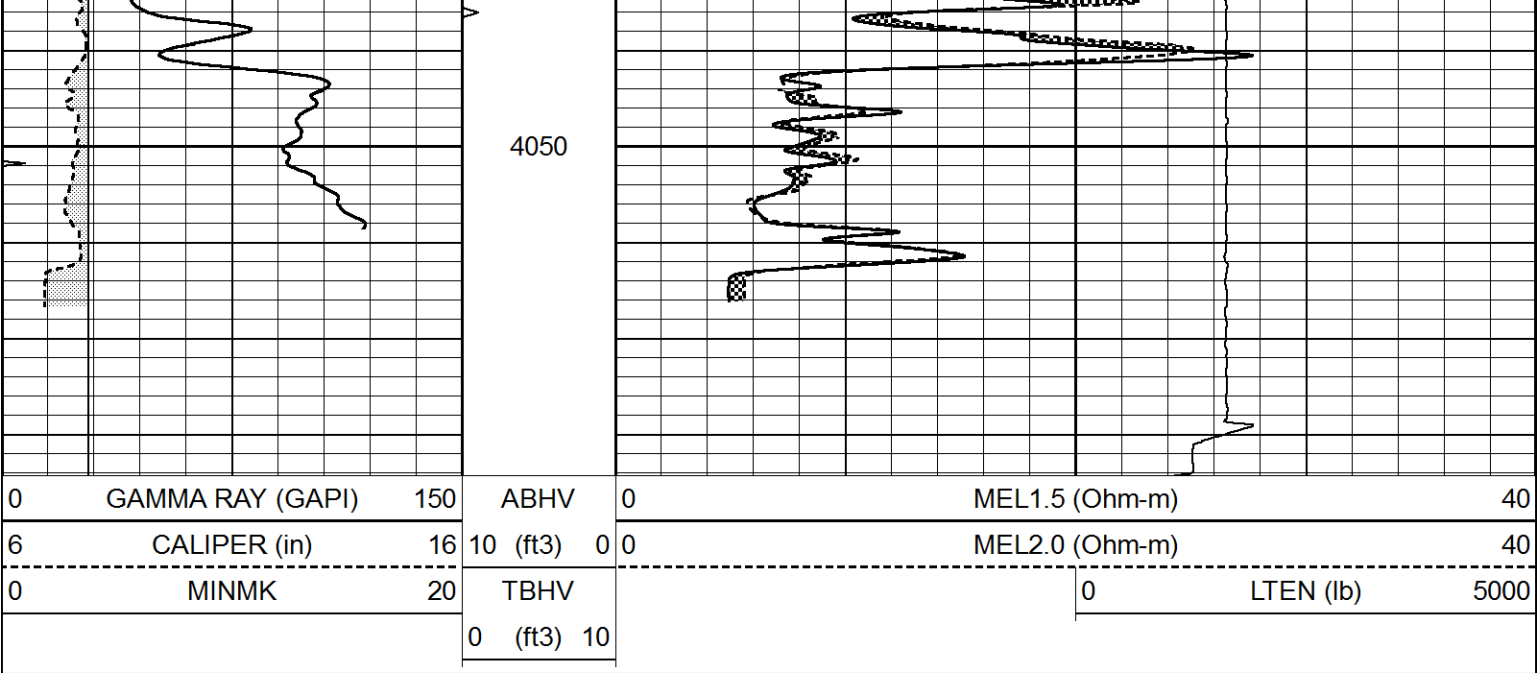

Calibration Report			
Database File	8486pe.db		
Dataset Pathname	pass6.2		
Dataset Creation	Fri Apr 12 09:37:02 2024		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Fri Apr 12 03:28:22 2024		
Caliper Calibration:	Gain=3.419	Offset=2.325	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.660	4.000	
1.5" Calibration:	Gain=60.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	1.216	
2" Calibration:	Gain=70.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Sun Mar 31 16:20:41 2024		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3000	GAPI/cps	